



2-Way Splitter T-Splitter RKM 50-FSM 4-RSM 50/S1055/CS16562

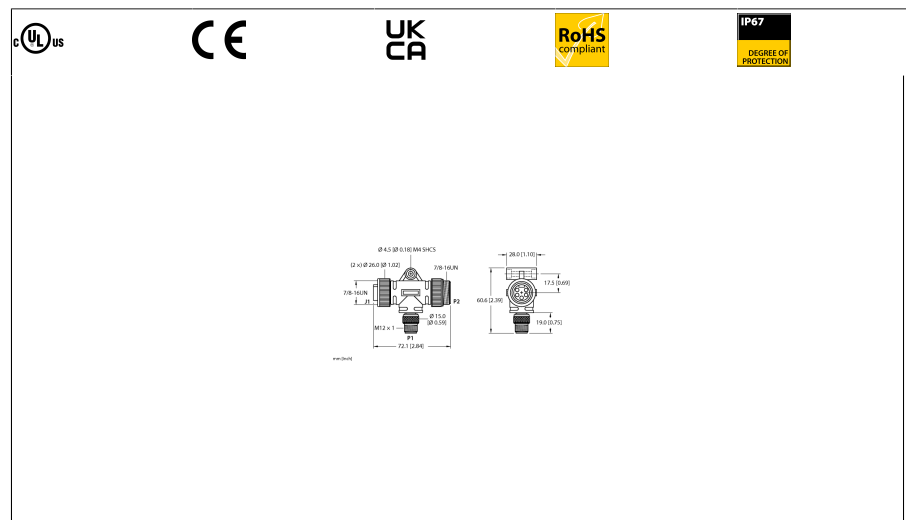


7/8" female connector, 5-pin
M12 × 1 male connector, 4-pin
7/8" male connector, 5-pin
Ampacity: 4 A
Rated voltage: 40 V
Protection class NEMA 1, 3, 4, 6, 6P and IEC
IP67
Temperature range: -40 °C...+75 °C

Type	RKM 50-FSM 4-RSM 50/S1055/CS16562
ID	U2-32009
Special version	S1055 = Red mold body CS16561 = customer-specific wiring with diode
Distributed I/O	T-splitter, 2-port
Housing	Plastic, TPU, Red
Connector A	Female, 7/8"-16 UN
Design specification	Acc. to ANSI/B93.55M
Number of contacts	5
Contact carriers	Plastic, TPU, Yellow
Coupling nut	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, When coupled
Connector B	Male, M12 × 1
Design specification	Acc. to IEC 61076-2-101
Number of contacts	4
Contact carriers	Plastic, TPU, Yellow
Coupling nut	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Pollution degree	3
Connector C	Male, M12 × 1, A-code
Design specification	Acc. to ANSI/B93.55M
Number of contacts	5
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Yellow
Coupling nut	Brass, CuZn, Nickel-plated
Tightening torque	0.8 ... 1 Nm
Mechanical lifespan	> 300 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67



Circuit Diagram

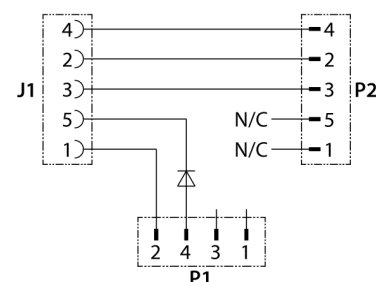

Electrical properties at +20 °C

Rated voltage	40V
---------------	-----

Mechanical and chemical properties

Ambient temperature range (dynamic)	-40...+105°C
-------------------------------------	--------------

Note

- We reserve the right to make technical alterations without prior notice.
