


RSMC 42-0

Power Field Wireable – Field-Wireable Connector

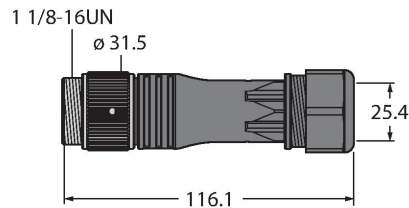

Technische Daten


Type	RSMC 42-0
ID	U2-32308
Connector A	Male, 1 1/8"-16 UN, Straight
Number of contacts	4
Contacts	Metal, CuSn, Gold-plated
Contact carriers	Plastic, PA, Black
Connector body	Plastic, PA, Black
Coupling nut	Brass, CuZn, Nickel-plated
Acceptable cable diameter	13...18 mm
Core cross-section/Clamping ability	12 mm ²
Connection mode	Screw/clamp connection
Mechanical life	> 50 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67
Conductor size	12 AWG [Similar to 4.00 mm ²]
Electrical properties at +20 °C	
Rated voltage	600 V
Current	25 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+105 °C
Note	
- CAUTION: RISK OF ELECTRICAL SHOCK. DO NOT DISCONNECT UNDER LOAD.	

Features



- Straight Male 1 1/8" powerfast Field Wireable
- 4 pins
- Screw termination
- Plastic housing
- Screw terminal Wire Termination
- Plastic housing
- 1 1/8-16UN, minifast, Male, Straight, 4-pin

Contact assignment



Technische Daten

- We reserve the right to make technical alterations without prior notice.

- We reserve the right to make technical alterations without prior notice.