


RSF RKF 57/22

DeviceNet™ Receptacle – Panel Feed-through



Features


- Male 7/8" minifast Receptacle
- Female 7/8" minifast Receptacle
- Design: 7/8" adapter
- 5-pin feedthrough male/female
- For use in CAN (DeviceNet, CANopen) applications
- Ampacity: 9 A
- Rated voltage: 600 V
- Temperature range: -40 °C...+105 °C
- Protection class: NEMA 1, 3, 4 and IEC IP67

Technische Daten

Type	RSF RKF 57/22
ID	U2309-6
Connector A	Male, 7/8"-16 UN, Straight
Number of contacts	5
Contacts	Brass
Contact carriers	TPU, Blue
Connector body	Metal, CuZn, nickel-plated
Housing material/finish	Brass, CuZn, Nickel-plated
Mounting orientation	Front mount
Panel seal	Gasket
Mounting thread	7/8"-16 UN
Locknut	Brass, CuZn, Nickel-plated
Connector B	Female, 7/8"-16 UN
Number of contacts	5
Housing material/finish	Brass, CuZn, Nickel-plated
Mounting type	Rear mount
Panel seal	Gasket
Mounting Thread B	7/8"-16 UN
Locknut	Brass, CuZn, Nickel-plated
Cable data	
Fieldbus	DeviceNet
Electrical properties at +20 °C	
Rated voltage	600 V



Circuit Diagram

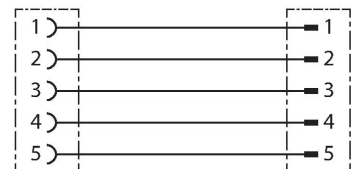

Technische Daten

Current 9 A

Mechanical and chemical properties

Ambient temperature range (static) -40...+105 °C

Note

- We reserve the right to make technical alterations without prior notice.