


RSV-2RKV 49


2-Way Splitter – T-splitter

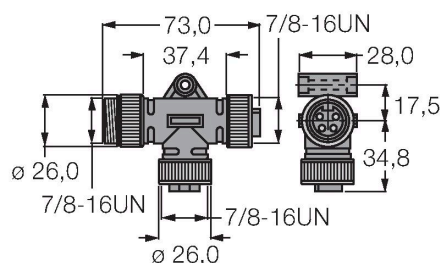


Features

- 7/8" minifast
- For use in FOUNDATION™ fieldbus applications

FOUNDATION™ fieldbus Connection



Wiring Diagram

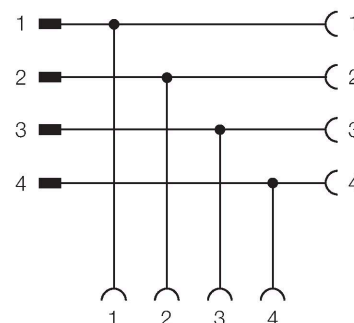

Technische Daten

Type	RSV-2RKV 49
ID	U2385-7
Distributed I/O	T-splitter, 2 -port
Connector A	Male, 7/8"-16 UN, Straight
Number of contacts	4
Connector body	Plastic, PUR, Yellow
Mechanical life	> 100 Mating cycles
Pollution degree	3/2
Protection class (When coupled)	IP67, When coupled
Connector B	2 x Female, 7/8"-16 UN, Straight
Contacts	Metal, CuZn, Gold-plated
Contact carriers	Plastic, PUR, Black
Connector body	Plastic, PUR, Yellow
Coupling nut	Stainless Steel, 1.4404
Seal	Plastic
Mechanical life	> 100 Mating cycles
Pollution degree	3/2
Protection class (When coupled)	IP67, Only when plugged
Fieldbus	FOUNDATION fieldbus
Electrical properties at +20 °C	
Rated voltage	300 V
Current	4 A
Insulation resistance	≥ 10 ⁸ Ω

Technische Daten

forward resistance $\leq 5 \text{ m}\Omega$

Mechanical and chemical properties

Ambient temperature range (static) $-40 \dots +80 \text{ }^{\circ}\text{C}$

Ambient temperature range (dynamic) $-40 \dots +80 \text{ }^{\circ}\text{C}$

Note

- We reserve the right to make technical alterations without prior notice.