


RSV-2RKV 48


2-Way Splitter – T-splitter

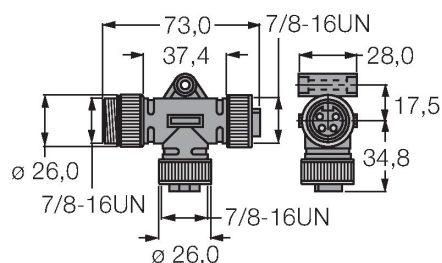

Features

- 7/8" minifast
- For use in PROFIBUS-PA applications


PROFIBUS-PA Connection



Technische Daten

Type	RSV-2RKV 48
ID	U2385-8
Distributed I/O	T-splitter, 2 -port
Connector A	Male, 7/8"-16 UN, Straight
Number of contacts	4
Connector body	Plastic, PUR, Black
Mechanical life	> 100 Mating cycles
Pollution degree	3/2
Protection class (When coupled)	IP67, When coupled
Connector B	2 x Female, 7/8"-16 UN, Straight
Contacts	Metal, CuZn, Gold-plated
Contact carriers	Plastic, PUR, Black
Connector body	Plastic, PUR, Black
Coupling nut	Stainless Steel, 1.4404
Seal	Plastic
Mechanical life	> 100 Mating cycles
Pollution degree	3/2
Protection class (When coupled)	IP67, Only when plugged
Fieldbus	PROFIBUS-PA
Electrical properties at +20 °C	
Rated voltage	300 V
Current	4 A
Insulation resistance	≥ 10 ⁸ Ω

Wiring Diagram

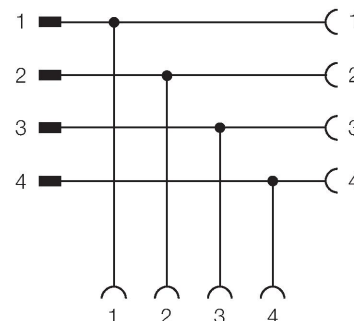

Technische Daten

forward resistance	$\leq 5 \text{ m}\Omega$
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+80 °C
Ambient temperature range (dynamic)	-40...+80 °C
Note	
- We reserve the right to make technical alterations without prior notice.	