


B 5141-0

Actuator and Sensor Field Wireable – M8 × 1 Female Connector, Straight



Features

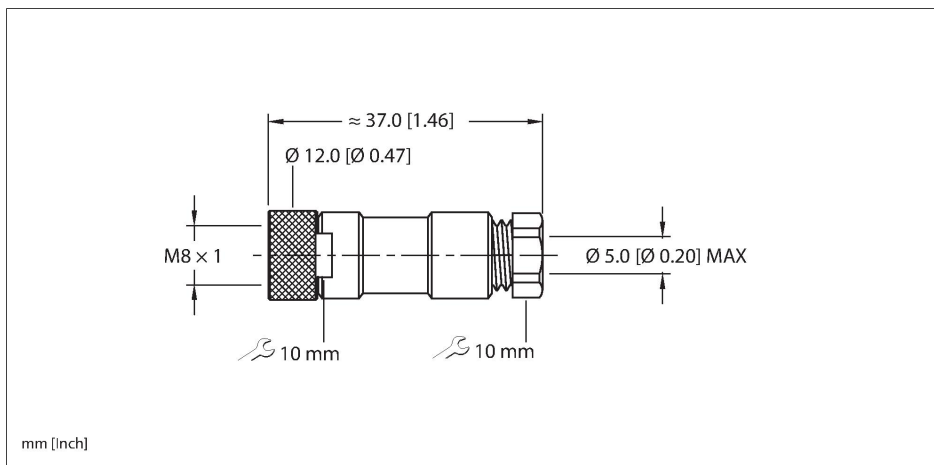

- Straight Female M8 picofast Field Wireable
- 4 pins
- Solder termination
- Plastic housing
- 4 Pins
- Solder Wire Termination
- Plastic Housing

Contact assignment



Technische Daten

Type	B 5141-0
ID	U6525
Connector A	Female, M8 × 1, Straight
Design specification	Acc. to IEC 61076-2-104
Number of contacts	4
Contacts	Brass, CuSn, Gold-plated
Connector body	Plastic, PA, Black
Coupling nut	Brass, CuZn, Nickel-plated
Connector seal	O-ring, Plastic, FKM/FPM
Tightening torque (range)	0.4 ... 0.8 Nm (note max. torque of mating connector!)
Acceptable cable diameter	3...5 mm
Core cross-section/Clamping ability	24 mm ²
Connection mode	Solder contact
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67
	NEMA: 1, 3, 4, 6P
Conductor size	24 AWG [Similar to 0.25 mm ²]
Electrical properties at +20 °C	
Rated voltage	30 V _{AC} /36 V _{DC}
Current	4 A

Technische Daten

Mechanical and chemical properties

Ambient temperature range (static)	-40...+85 °C
------------------------------------	--------------

Approvals	RoHS
-----------	------

Note

- We reserve the right to make technical alterations without prior notice.