


RKP46PT-2 Power Cordset – Connection Cable



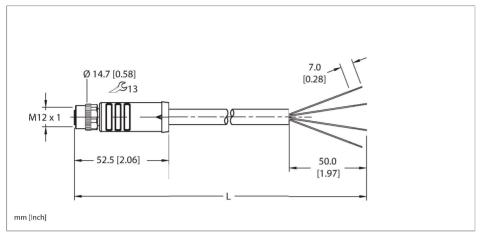

Technical data


Type	RKP46PT-2
ID	UX14865
Connector A	Female, M12 × 1, Straight, T-code
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA 66/6, Black
Connector body	Plastic, PVC, Black
Coupling nut	Brass, CuZn, Nickel-plated
Connector seal	O-ring, Plastic, FKM/FPM
Tightening torque	0.8 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	2
Protection class (When coupled)	IP67, IP68
	NEMA: 1, 3, 4, 6P
	, -, , -
Cable data	,,,,,
Cable data Total number of conductors	4
Total number of conductors	4
Total number of conductors Cable diameter	4 Ø 9.14 mm 2 m, (+50mm or 4% of length/-0.0,
Total number of conductors Cable diameter Length (L)	4 Ø 9.14 mm 2 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Total number of conductors Cable diameter Length (L) Cable jacket	4 Ø 9.14 mm 2 m, (+50mm or 4% of length/-0.0, Whichever is greater) PVC, Black
Total number of conductors Cable diameter Length (L) Cable jacket Conductor diameter	4 Ø 9.14 mm 2 m, (+50mm or 4% of length/-0.0, Whichever is greater) PVC, Black 0.105 "
Total number of conductors Cable diameter Length (L) Cable jacket Conductor diameter Conductor material	4 Ø 9.14 mm 2 m, (+50mm or 4% of length/-0.0, Whichever is greater) PVC, Black 0.105 " BC (bare copper)

Features



- ■M12 Power, Female, Straight, 4-pin, T-code, IP67, IP68
- Power Tray/Exposed Run/Direct Burial
- ■Black PVC jacket, 4X16 AWG
- ■Sunlight Resistant
- ■-40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, CSA FT1, CSA FT4, IEC 60332-3-22

Cable cross section



Contact assignment



Technical data

Conductor colors	BN, WH, BU, BK
Electrical properties at +20 °C	
Rated voltage	63 VDC
Current	12 A
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40+90 °C
Ambient temperature range (dynamic)	5+90 °C
Temperature range (installation)	-10+90 °C
Approval	
Additional Approvals	IEC 60332-3-22
Approvals	RoHS
Note	
	- CAUTION: RISK OF ELECTRICAL SHOCK. DO NOT DISCONNECT UNDER LOAD.
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.

Connector A



Circuit Diagram

1)	BN
12	WH
	BU
3)	ВК
4)	

M12-CORDSETS-MOUNTIN	G-
ø 14 ø 1.4	
22	3
11.5	
-2.5	
Ø 4.3 4 26	

1-CLIP-(10/BAG) 100016882

10 Pack of black mounting clips and M4x8mm mounting screws, used to secure cable to cable connection points.