


TB-8M8M-4-0.3

Junction Box - Actuator/Sensor, 8-port – M8, 4 pole I/O port with cable homerun

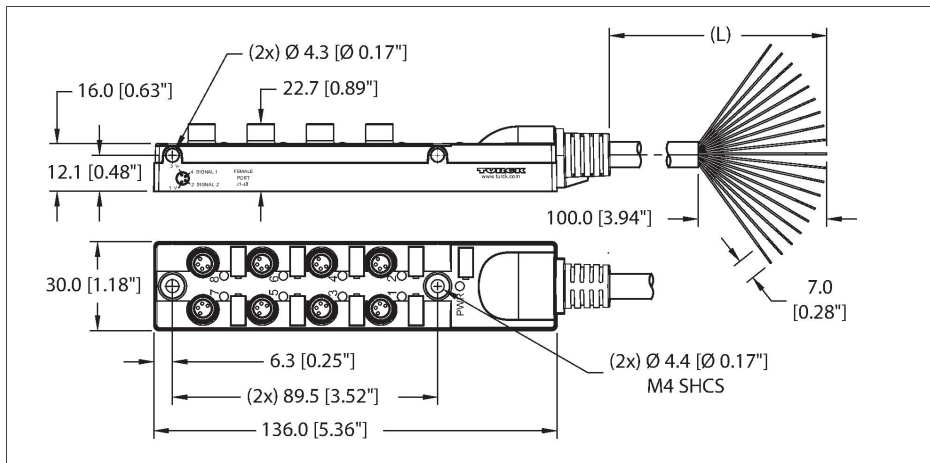

Technical data


Type	TB-8M8M-4-0.3
ID	UX17224
Distributed I/O	Junction box, 8, with integral homerun cable
Housing	Plastic, PA 6 GF30, Black
I/O Port	Female, M8 × 1
Design specification	Acc. to IEC 61076-2-104
Number of contacts	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA 4.6 GF30, Black
Connector seal	O-ring, Plastic, FKM/FPM
Housing material/finish	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12
Homerun connector	Cable, Side exit
Cable data	
Cable ID	RF50995
Total number of conductors	19
Cable diameter	Ø 8.51 mm
Length (L)	0.3 m, (+50mm or 4% of length/-0.0, Whichever is greater)

Features



- Housing material: Nylon
- Housing color: Black
- Fully encapsulated
- Protection class: IP67, IP68, IP69, IP69K; NEMA 1, 3, 4, 6P, 12
- RoHS compliant
- CE compliant
- I/O port: 4-pin
- Instrumentation Tray Cable
- Black PVC jacket, shielded, 19X22 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- Cable length: 0.3 m

Cable cross section

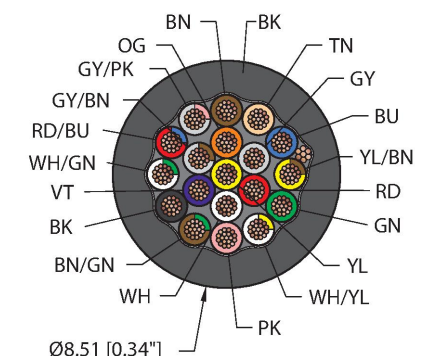

Technical data

Cable jacket	PVC, Black
Shield	Aluminum/polyester (IN)
Cable drain	24 AWG, TC (Tinned Copper)
Conductor diameter	0.048 "
Conductor material	TC (tinned copper)
Conductor insulation material	SR-PVC
Conductor size	19 x 22 AWG [Similar to 0.34 mm ²]
Number of strands x O.D.	19 x 0.0058 "
Conductor colors	YL, OG, GY, RD, WH, VT, GY/BN, RD/BU, GY/PK, BN, TN, BU, YL/BN, GN, WH/YL, PK, BN/GN, BK, WH/GN

Electrical properties at +20 °C

Rated voltage	30 VDC
Rated voltage	DC VDC
Current	2 A per signal contact, total current 6 A

Mechanical and chemical properties

Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø
UL cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+85 °C
Ambient temperature range (dynamic)	5 °C...+85 °C
Temperature range (installation)	-10 °C...+85 °C

Approval

Approvals	CE UKCA RoHS
-----------	--------------------

Note

- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.

- We reserve the right to make technical alterations without prior notice.

Contact assignment

I/O Connector



