


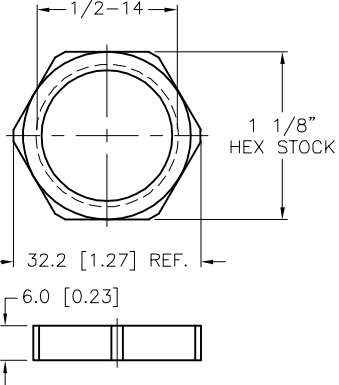


FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS	
 1 = GREEN/YELLOW 2 = BLACK 3 = WHITE 			CONTACT CARRIER MATERIAL	PVC
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			HOUSING MATERIAL/PLATING	BRASS/NICKEL
			GASKET MATERIAL	NITRILE
			RATED CURRENT [A]	26 A
			RATED VOLTAGE [V]	600 VAC
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	3x12 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
			MAXIMUM PANEL THICKNESS	6.0mm [.236]
			APPROVALS AND CERTIFICATIONS	UL 2237

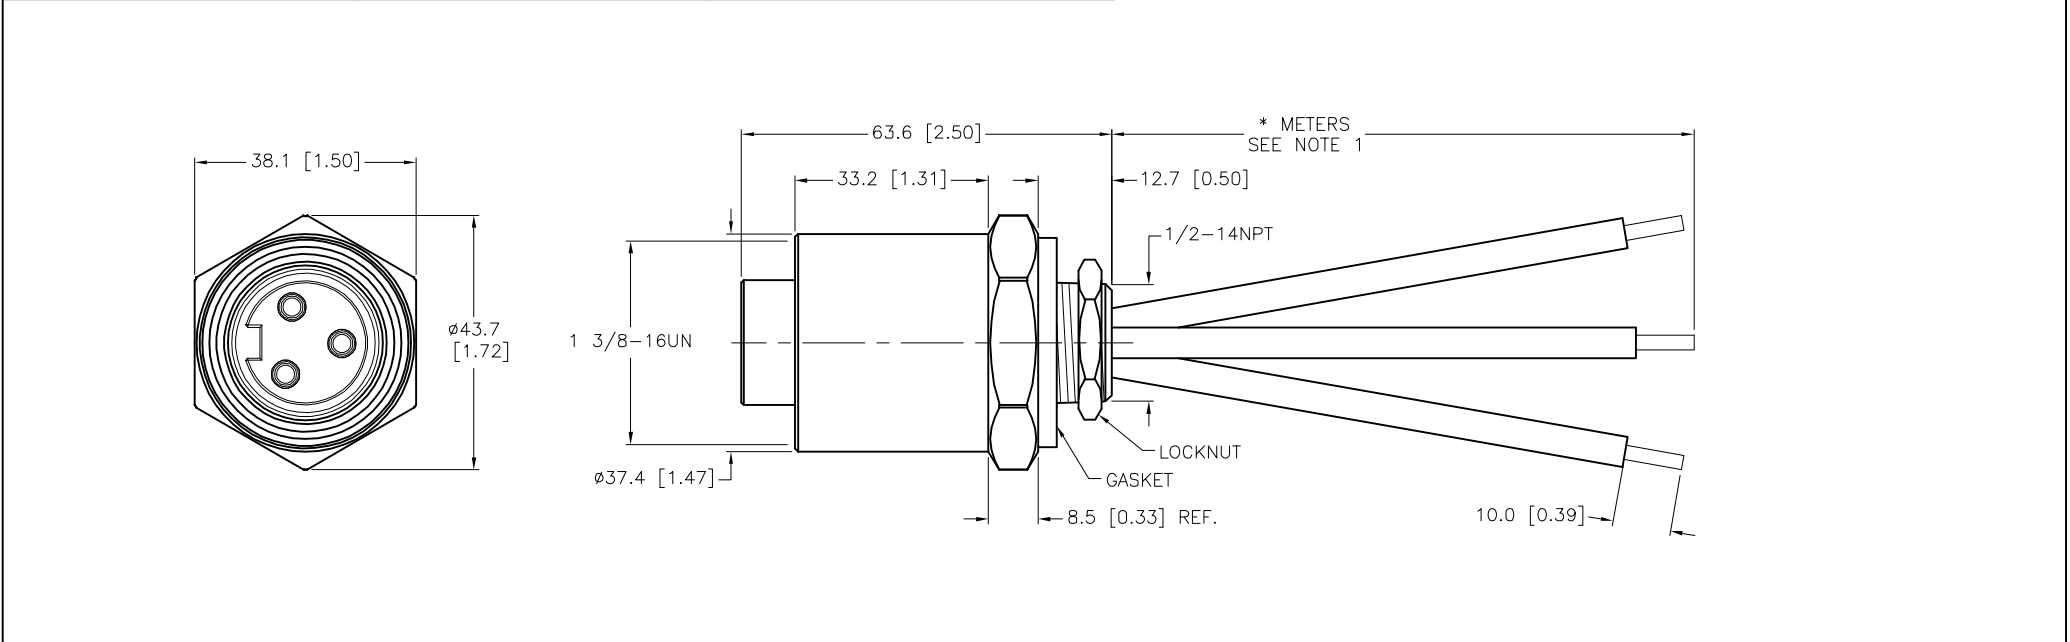

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	


- NOTES:
- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S3158" CUSTOM WIRE ROTATION

C	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	09/20/17	62050
REV	DESCRIPTION	BY	DATE	ECO NO.



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT NF		DATE 11/12/15		DESCRIPTION	
SEE SPECIFICATIONS				APVD D.C.		SCALE 1=1.3		GKDF 32-*M/14.5/NPT/S3158	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
SEE SPECIFICATIONS				MILLIMETER [INCH]				REV	
				DO NOT SCALE THIS DRAWING				C	
						FILE: 777036590		SHEET 1 OF 1	