




FEMALE END VIEW (J1)		MALE END VIEW (P1)		SPECIFICATIONS	
				DEUTSCH CONNECTOR (J1)	DT06-2S-E008
1 = WHITE 2 = BLACK		1 = WHITE 2 = BLACK		DEUTSCH WEDGELOCK (J1)	W2S
				DEUTSCH TERMINALS (J1)	0462-201-1631
				DEUTSCH CONNECTOR (P1)	DT04-2P
				DEUTSCH WEDGE LOCK (P1)	W2P
				DEUTSCH TERMINALS (P1)	0460-202-1631
				RATED CURRENT [A]	12.0 A
				OPERATING VOLTAGE [V]	250 V
				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				OUTER JACKET MATERIAL/COLOR	TPE/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	2x18 AWG
				PROTECTION CLASS	IP67, IP69K

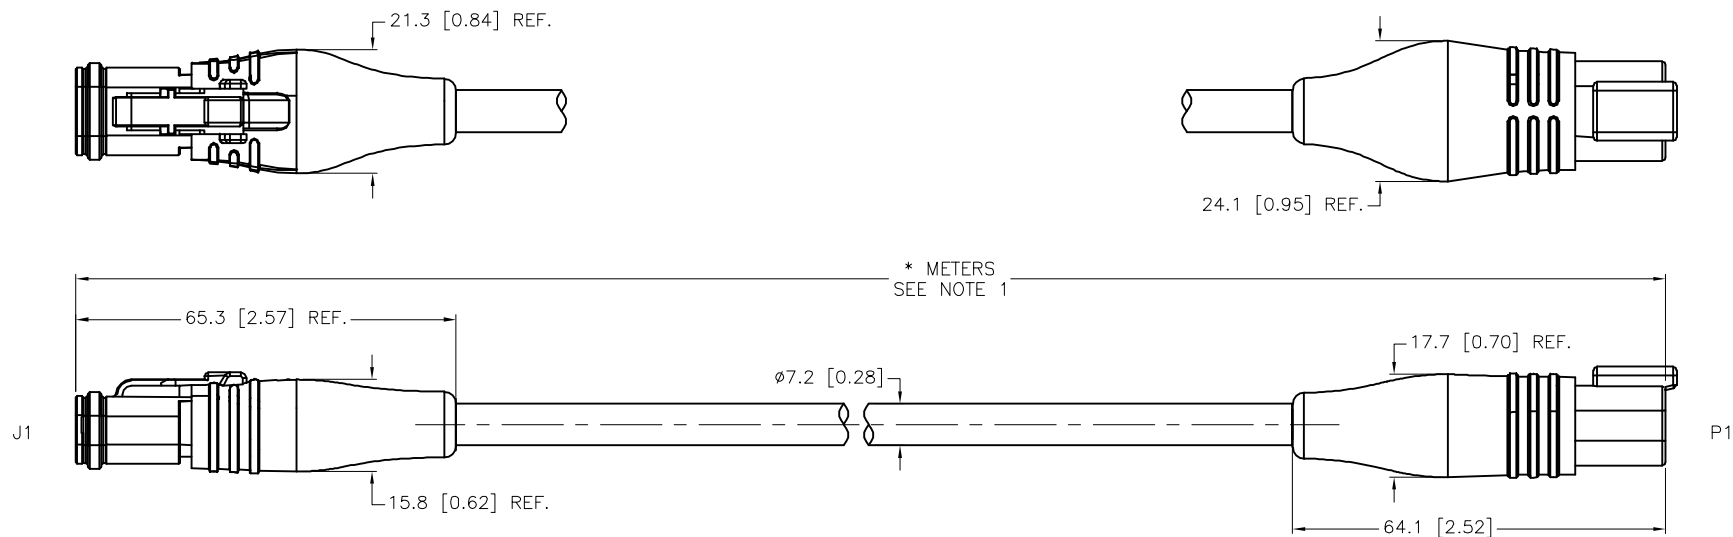

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S2000" DESIGNATES GOLD PLATED TERMINALS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT TV		DATE 02/28/17		DESCRIPTION	
SEE SPECIFICATIONS					APVD D.N.		SCALE 1=1.3		DT06-2S-2125-*M-DT04-2P/S2000	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		D	
					DO NOT SCALE THIS DRAWING		FILE: 777039229		SHEET 1 OF 1	

D	ADD OPERATING VOLTAGE	NF	04/25/22	77568
REV	DESCRIPTION	BY	DATE	ECO NO.