


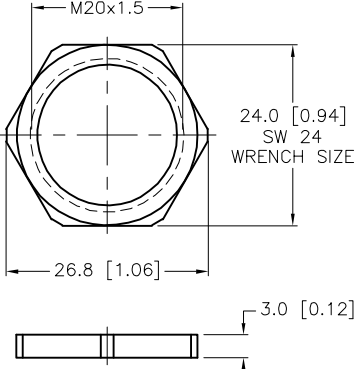


FEMALE END VIEW	PANEL CUTOUT	METAL LOCK NUT	SPECIFICATIONS	
 1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW 			CONTACT CARRIER MATERIAL/COLOR	PVC
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			HOUSING MATERIAL/PLATING	BRASS/NICKEL
			O-RING MATERIAL	NITRILE
			RATED CURRENT [A]	17.0 A
			RATED VOLTAGE [V]	600 V
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	NEMA 1,3,4,6P,12 & IEC IP67, IP68,IP69,IP69K
			APPROVALS AND CERTIFICATIONS	UL 2237, UL 2238, CE

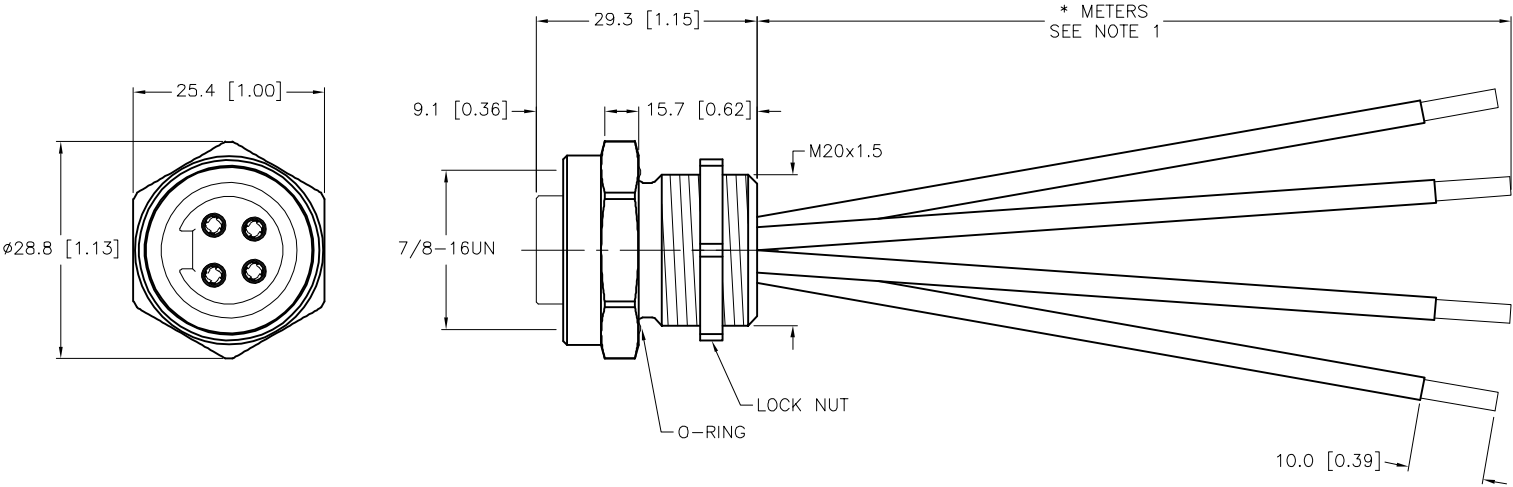

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. PANEL CUTOUT RECOMMENDATION: 21MM

H	UPDATED NOTES	ER	05/21/21	76759
REV	DESCRIPTION	BY	DATE	ECO NO.



CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		MATERIAL		DRFT TV		DATE 05/17/17		DESCRIPTION P-PWR-RKF 44-*M/M20	
2.		SEE SPECIFICATIONS		APVD L.H.		SCALE 1=1.0			
3.		FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV H	
4.									
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY							
		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: 777039663		SHEET 1 OF 1	