


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
OUTER CABLE JACKET MATERIAL/COLOR	CPE/YELLOW				
CONDUCTOR INSULATION MATERIAL	EPDM				
NUMBER OF CONDUCTORS [AWG]	3x18 AWG				
TEMPERATURE RANGE	-50°C to +105°C (-58°F to 221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68				

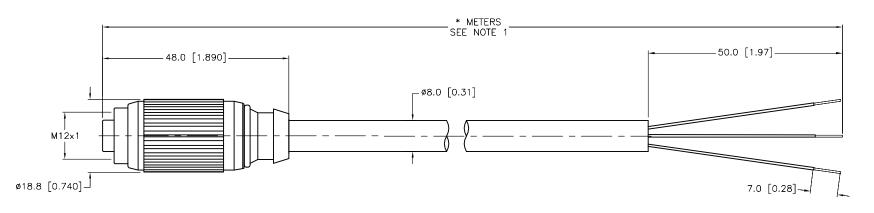

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

CK 08/15/11

DATE

36196

ECO NO.

NOTES:

REV DESCRIPTION

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S600" DESIGNATES HEAVY DUTY RUBBER JACKET AND CONDUCTOR INSULATION.

D UPDATE INSULATION AND JACKET MATERIAL

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL		DRFT RWC	DATE 10/26/06	DESCRIPTION DIVIDING AT # /CCCOO		
SEE SPECIFICATIONS	ALL DIMENSIONS SPECIFICATIONS DISPLAYED ON THIS		SCALE 1=1.0	RKG 4T-*/S600		
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		
FINISH	CONTACT TURCK	MILLIMETER [INCH]				
	FOR MORE	I WILLIAM I	71 [II 40 1 1])
SEE SPECIFICATIONS	INFORMATION					
		DO NOT SCALE	THIS DRAWING	FILE: 777000134	SHEET	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY