






FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 3 = BLUE 4 = BLACK</p>	 <p>1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK</p>	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
		LOCKING SLEEVE MATERIAL/COLOR (J1)	POM, SNAP LOCK/BLACK
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	125 VAC/VDC
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x24 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

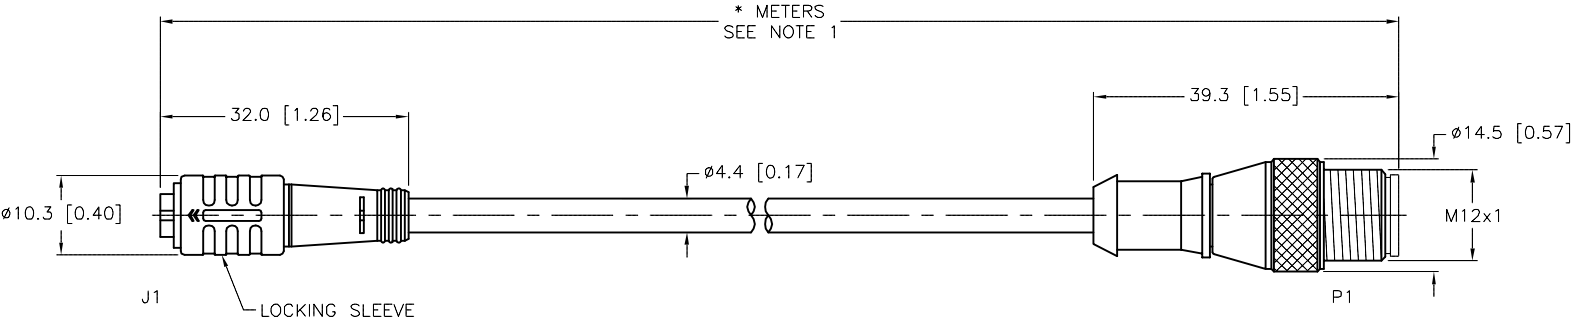1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL					DRFT CBM APVD		DATE 04/28/99 SCALE 1=1.0		DESCRIPTION PKG 3Z--RS 4T	
FINISH					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
C DRAWING PROCESSED AS PART OF ECO 33971 REV DESCRIPTION					CBM 04/06/11 33971 BY DATE ECO NO.		DO NOT SCALE THIS DRAWING		FILE: 777000516 SHEET 1 OF 1	
									REV C	