
MALE END VIEW	FEMALE END VIEW
1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE 5 = GREEN/YELLOW 6 = ORANGE 7 = YELLOW 8 = GRAY 9 = PINK 10 = RED 11 = BROWN/WHITE 12 = BLACK 1	1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE 5 = GREEN/YELLOW 6 = ORANGE 7 = YELLOW 8 = GRAY 9 = PINK 10 = RED 11 = BROWN/WHITE 12 = BLACK 13 = BLUE/WHITE 14 = VIOLET 15 = GREEN/WHITE 16 = N/C
M23 connector	M23 connector

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	6.0 A
RATED VOLTAGE [V]	150 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	14x18 AWG
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

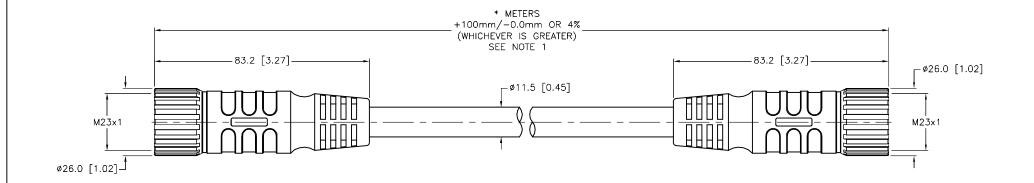