


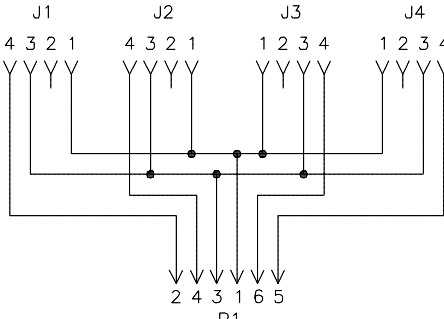


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS		
			CONTACT CARRIER MATERIAL	NYLON OR TPU	
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
			CONTACT MATERIAL/PLATING	BRASS/GOLD	
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	
			RATED CURRENT [A]	2.0 A	
			RATED VOLTAGE [V]	60 VAC/75 VDC	
			OUTER JACKET MATERIAL/COLOR	PVC/GREY (P1), PVC/YEL (J1-J4))	
			CONDUCTOR INSULATION MATERIAL	PVC	
			NUMBER OF CONDUCTOR [AWG]	6x24 AWG (P1), 3x24 AWG (J1-J4)	
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	

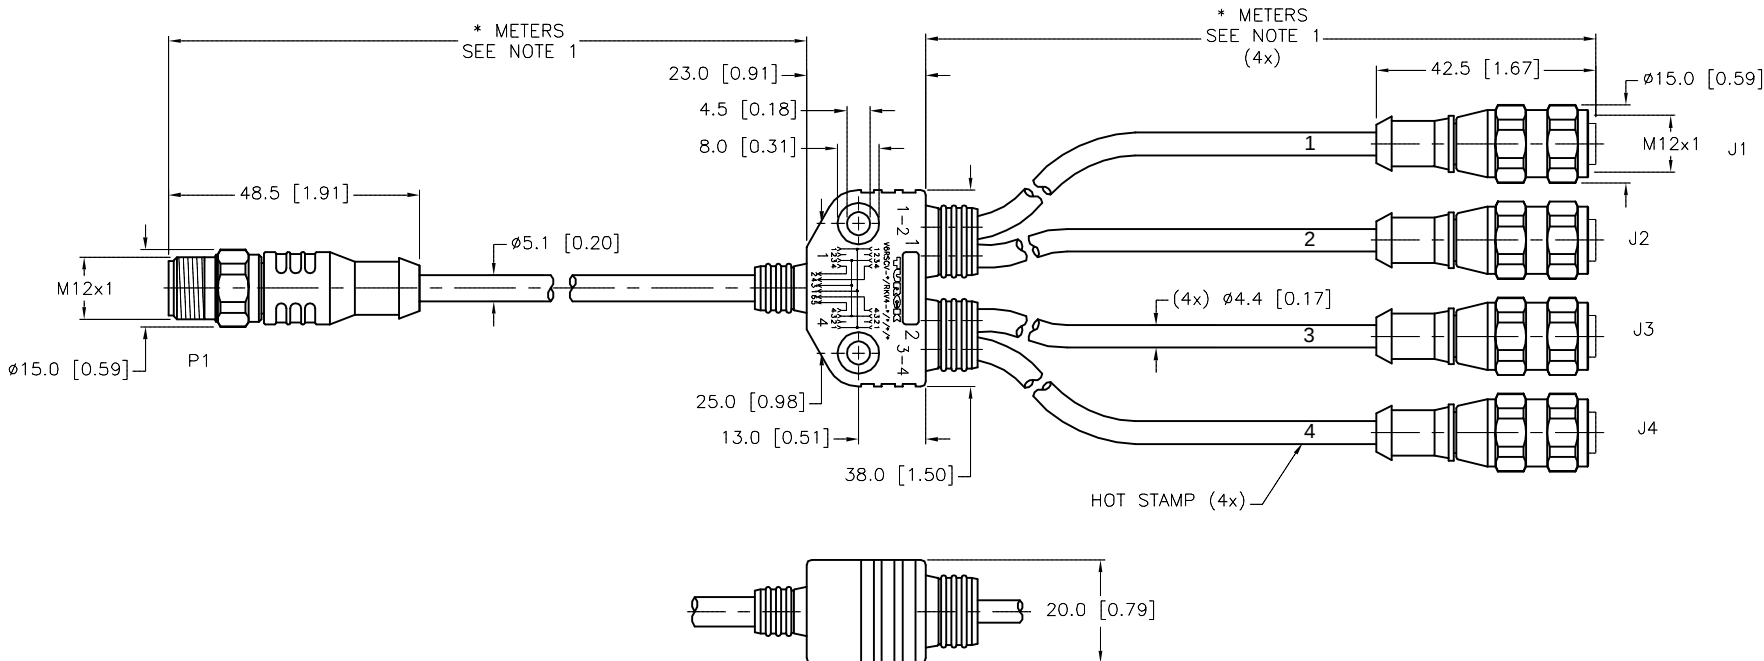


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
						
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	TH	DATE	09/28/05	DESCRIPTION V6RSCV-*/RKV4-*/**/*
		APVD		SCALE	1=1.5	
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.
					FILE: 777012132	SHEET 1 OF 1

D	UPDATE TRUNK CABLE OD	CK	07/01/11	34921
REV	DESCRIPTION	BY	DATE	ECO NO.