



MALE END VIEW



1 = BROWN	14 = WHITE
2 = WHITE/GREY	15 = BLUE
3 = BLUE/GREY	16 = BLACK/GREY
4 = BROWN/GREY	17 = BROWN/ORANGE
5 = BLACK/YELLOW	18 = WHITE/ORANGE
6 = WHITE/YELLOW	19 = BLACK/ORANGE
7 = BLUE/YELLOW	20 = BLACK/GREEN
8 = BROWN/YELLOW	21 = WHITE/GREEN
9 = BLACK/RED	22 = BLUE/GREEN
10 = WHITE/RED	23 = BROWN/GREEN
11 = BLUE/RED	24 = BLUE/ORANGE
12 = BROWN/RED	25 = GREEN/YELLOW
13 = BLACK	26 = N/C

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
RECEPTACLE HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG DRAIN/ALUMINUM POLYESTER SHIELD
TEMPERATURE	-30°C TO +80°C (-22°F TO +176°F)
PROTECTION CLASS	IEC IP67
MOUNTING	Ø28.5 [1.122] HOLE or PG 21 THRD.

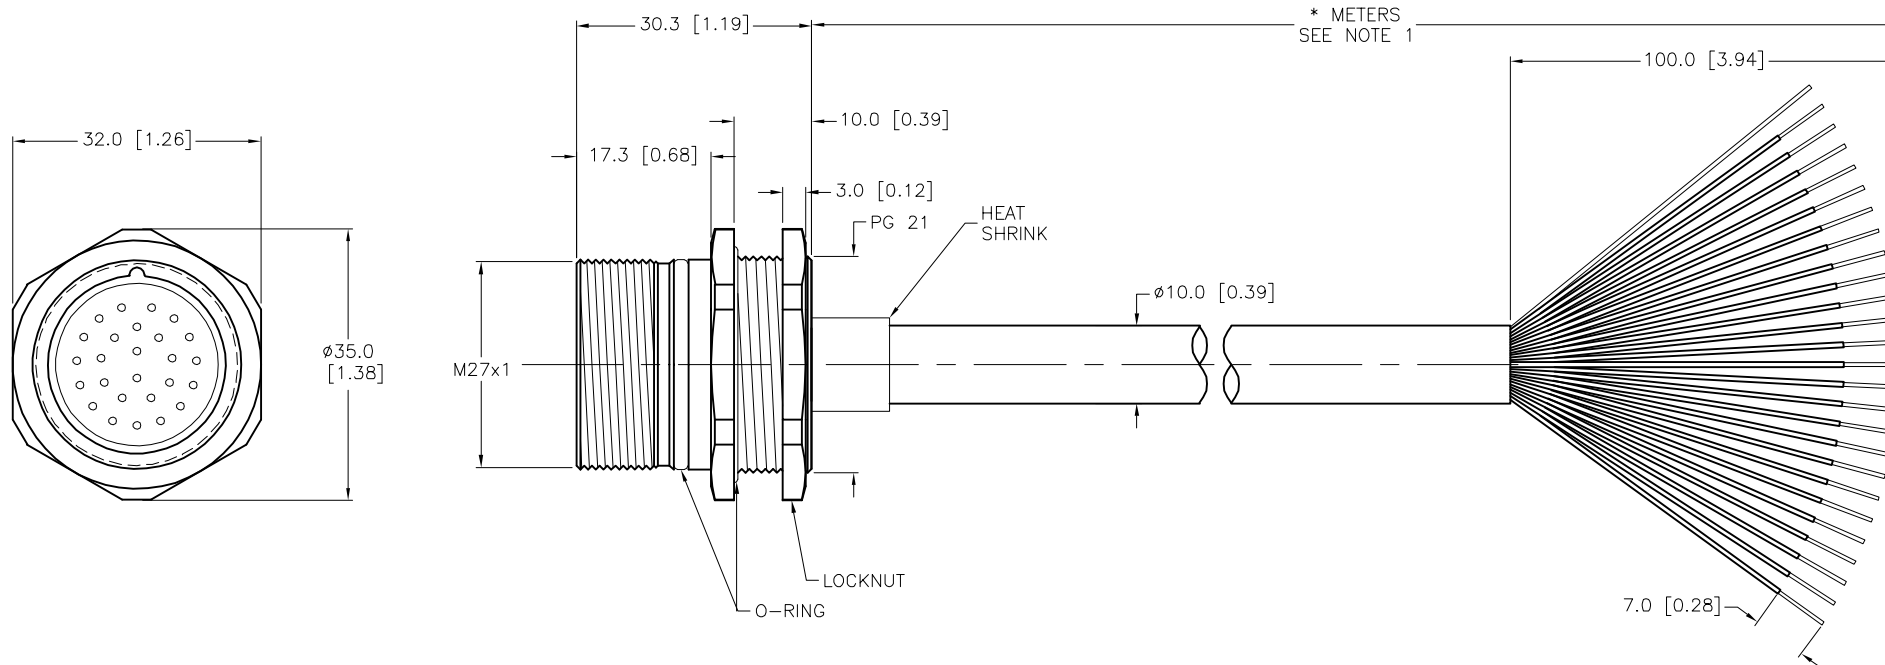


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S717" DESIGNATES STANDARD JACKET CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	03/28/06	DESCRIPTION DSF 26-25-*/S717		
SEE SPECIFICATIONS		APVD		SCALE	1=1.0			
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV D
SEE SPECIFICATIONS			MILLIMETER [INCH]					
		DO NOT SCALE THIS DRAWING			FILE: 777012583		SHEET 1 OF	

D	UPDATE RATED CURRENT SPECIFICATIONS	KMY	12/26/13	44390
REV	DESCRIPTION	BY	DATE	ECO. NO.