




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	NYLON
1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE	1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x18 AWG
		TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

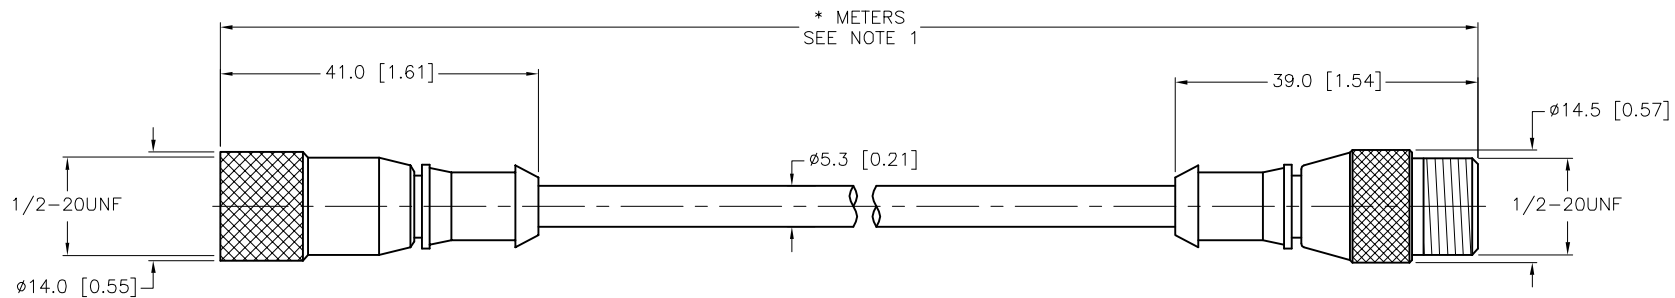


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

G	UPDATE CONDUCTOR COLOR	NF	08/17/17	60866
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	DJW	DATE	10/01/07	DESCRIPTION KBV 3T-*--SBV 3T/S90		
			APVD		SCALE	1=1.0			
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT			IDENTIFICATION NO.			REV G
FINISH		MILLIMETER [INCH]							
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING			FILE: 777015565			SHEET 1 OF 1	