




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE 	 1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE 	CONTACT CARRIER MATERIAL	NYLON
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	3x22 AWG
		DRAIN/SHIELD	BRAIDED COPPER
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

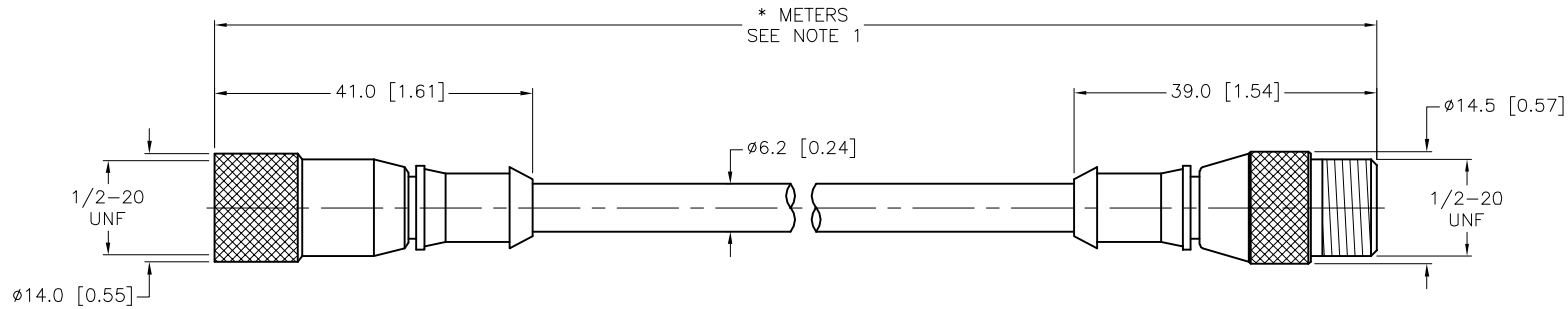


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S105 DESIGNATES PVC JACKET WITH BRAIDED SHIELD.
- "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.
- MAX. LENGTH FOR VENDING MACHINE: 2.0 METERS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS					DRFT DJW DATE 09/24/07		DESCRIPTION KB 3T-*--SB 3T/S105/SV			
FINISH SEE SPECIFICATIONS					APVD SCALE 1=1.0		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
CONTACT TURCK FOR MORE INFORMATION					DO NOT SCALE THIS DRAWING		REV E		FILE: 777016985	
ECO NO.					BY		DATE		SHEET 1 OF 1	
ECO NO.					DESCRIPTION		TV		09/07/17	
ECO NO.					DESCRIPTION		TV		09/07/17	
ECO NO.					DESCRIPTION		TV		09/07/17	