




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON
1 = RED/WHITE		1 = RED/WHITE		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
2 = RED		2 = RED		CONTACT MATERIAL/PLATING	BRASS/GOLD
3 = GREEN/YELLOW		3 = GREEN/YELLOW		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
4 = RED/YELLOW		4 = RED/YELLOW		RATED CURRENT [A]	4.0 A
5 = RED/BLACK		5 = RED/BLACK		RATED VOLTAGE [V]	250 V
				OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
				INNER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	5x22 AWG
				SHIELD	BRAIDED SHIELD
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

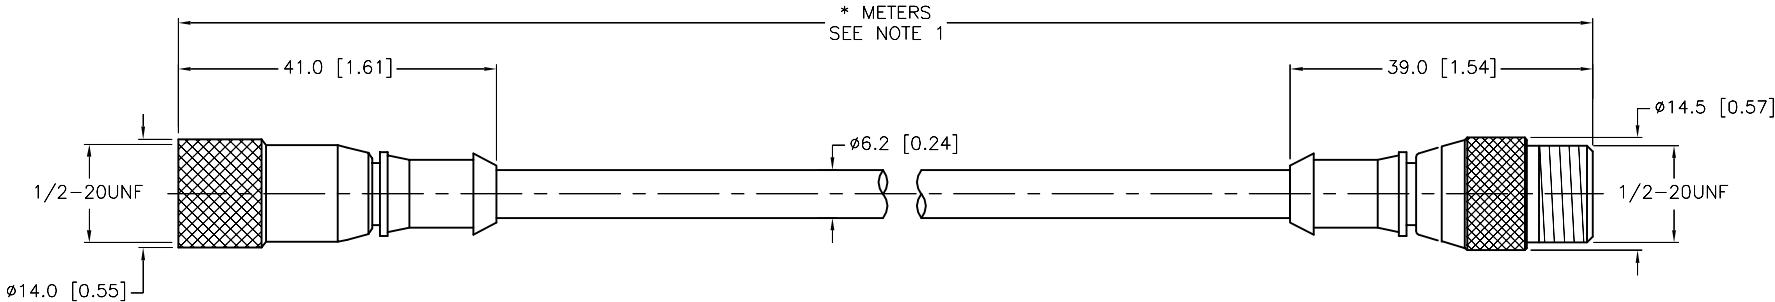


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S105" DESIGNATES HEAVY DUTY CABLE WITH BRAIDED SHIELD.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S105" DESIGNATES HEAVY DUTY CABLE WITH BRAIDED SHIELD.					<table><tr><td colspan="2">20-49mm</td><td>±3.0mm</td></tr><tr><td colspan="2">70-100mm</td><td>±4.0mm</td></tr><tr><td colspan="2">OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="3">*UNLESS OTHERWISE SPECIFIED</td></tr></table>		20-49mm		±3.0mm	70-100mm		±4.0mm	OVER 100mm		±5.0mm	*UNLESS OTHERWISE SPECIFIED		
					20-49mm		±3.0mm											
70-100mm		±4.0mm																
OVER 100mm		±5.0mm																
*UNLESS OTHERWISE SPECIFIED																		
<table><tr><td>D</td><td>UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO</td><td>TV</td><td>08/15/17</td><td>60914</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>					D	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	08/15/17	60914	REV	DESCRIPTION	BY	DATE	ECO NO.				
D	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	08/15/17	60914														
REV	DESCRIPTION	BY	DATE	ECO NO.														

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1. 2. 3. 4.										
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 09/03/08		DESCRIPTION KB 5T-*--SB 5T/S105		
SEE SPECIFICATIONS				APVD		SCALE 1=1.0				
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV
SEE SPECIFICATIONS										D
				DO NOT SCALE THIS DRAWING				FILE: 777022771		SHEET 1 OF 1