



MALE END VIEW (P1)




- | | |
|-------------------|-------------------|
| 1 = VIOLET | 15 = PINK |
| 2 = RED | 16 = GREY/BROWN |
| 3 = GREY | 17 = N/C |
| 4 = RED/BLUE | 18 = N/C |
| 5 = GREEN | 19 = N/C |
| 6 = GREY/PINK | 20 = N/C |
| 7 = WHITE/GREEN | 21 = N/C |
| 8 = WHITE/YELLOW | 22 = N/C |
| 9 = WHITE/GREY | 23 = N/C |
| 10 = BLACK | 24 = N/C |
| 11 = YELLOW/BROWN | 25 = BLUE |
| 12 = BROWN/GREEN | 26 = GREEN/YELLOW |
| 13 = WHITE | |
| 14 = YELLOW | |

FEMALE END VIEW (J1)



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
GASKET	RUBBER (NBR or FPM)
RATED CURRENT [A]	5.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	TPE/YELLOW
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	3x18 AWG, 18x22 AWG
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)



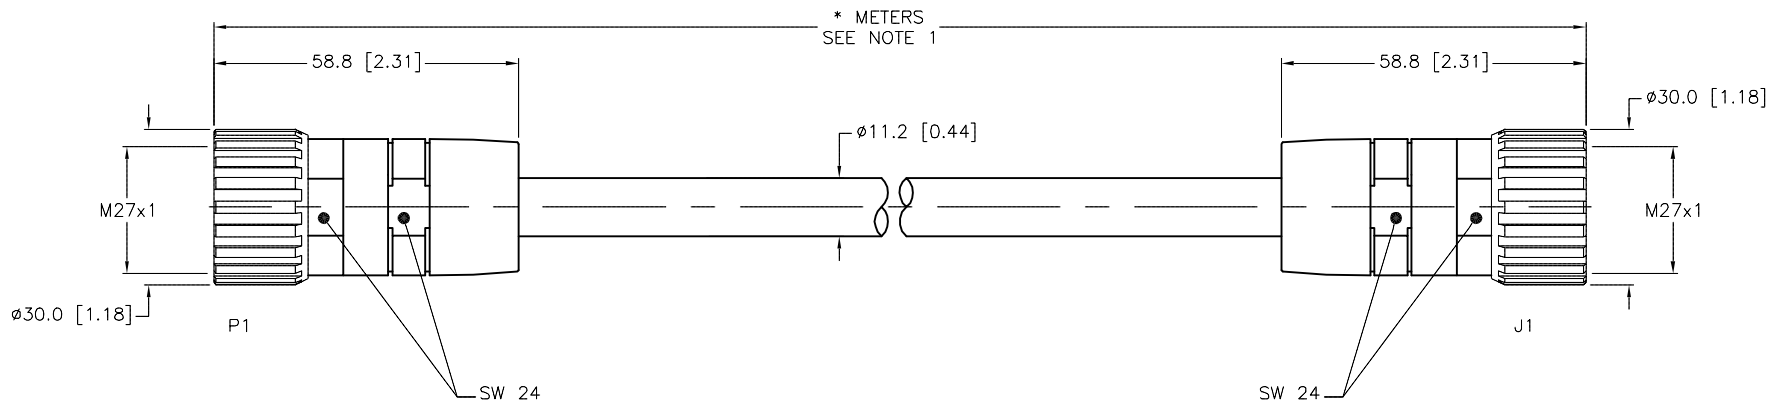


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- UNUSED CONDUCTORS TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	RWC	DATE	12/30/09	DESCRIPTION DS DK 26-916-*/SMC
SEE SPECIFICATIONS			APVD		SCALE	1=1.5	
FINISH			CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		
SEE SPECIFICATIONS	MILLIMETER [INCH]						
			DO NOT SCALE THIS DRAWING			FILE: 777025734	SHEET 1 OF