



FEMALE END VIEW

1 = VIOLET
2 = RED
3 = GRAY
4 = RED/BLUE
5 = GREEN
6 = BLUE
7 = GRAY/PINK
8 = WHITE/GREEN
9 = WHITE/YELLOW
10 = WHITE/GRAY
11 = BLACK
12 = GREEN/YELLOW
13 = YELLOW/BROWN
14 = BROWN/GREEN
15 = WHITE
16 = YELLOW
17 = PINK
18 = GRAY/BROWN
19 = BROWN

M23 connector

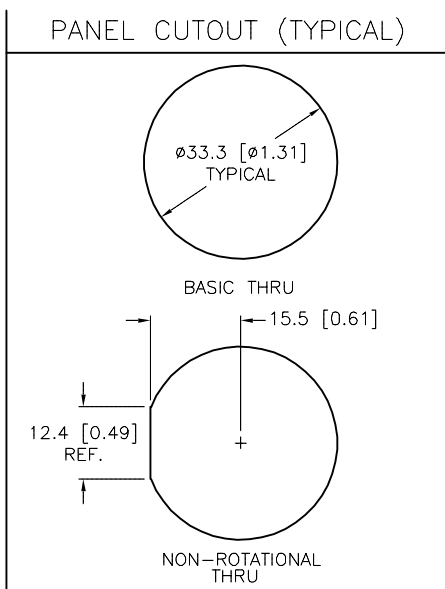

CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
O-RING/GASKET MATERIAL	RUBBER (NITRILE or FPM)
RATED CURRENT [A]	9.0 A(PINS 6,12,19), 2.0 A(ALL OTHERS)
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x18 AWG, 16x22 AWG
DRAIN/SHIELD	20 AWG DRAIN/POLYESTER FOIL SHIELD
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	IEC IP67
MAXIMUM PANEL THICKNESS (J2)	3.5 [0.138]



RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RDS	DATE 08/28/13	DESCRIPTION CKWM CKFD 19-19-*		
	FINISH SEE SPECIFICATIONS		APVD C.K.	SCALE 1=1.3			
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C	
		DO NOT SCALE THIS DRAWING		FILE: 777032229		SHEET 1 OF 1	

C	UPDATE GASKET MATERIAL	NF	11/20/19	75416
REV	DESCRIPTION	BY	DATE	ECO NO.