




FEMALE END VIEW		SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		CONTACT CARRIER MATERIAL NYLON or TPU	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		MOLDED HEAD MATERIAL/COLOR TPU/YELLOW	
		CONTACT MATERIAL/PLATING BRASS/GOLD	
		COUPLING NUT MATERIAL/PLATING BRASS/NICKEL	
		RATED CURRENT [A] 4.0 A	
		RATED VOLTAGE [V] 250 V	
		OUTER CABLE JACKET MATERIAL/COLOR PVC/GRAY	
		CONDUCTOR INSULATION MATERIAL PVC	
		NUMBER OF CONDUCTORS [AWG] 4x22 AWG	
		TEMPERATURE RANGE -40°C to +105°C (-40°F to +221°F)	
		PROTECTION CLASS MEETS NEMA 1,3,4,6P AND IEC IP67	

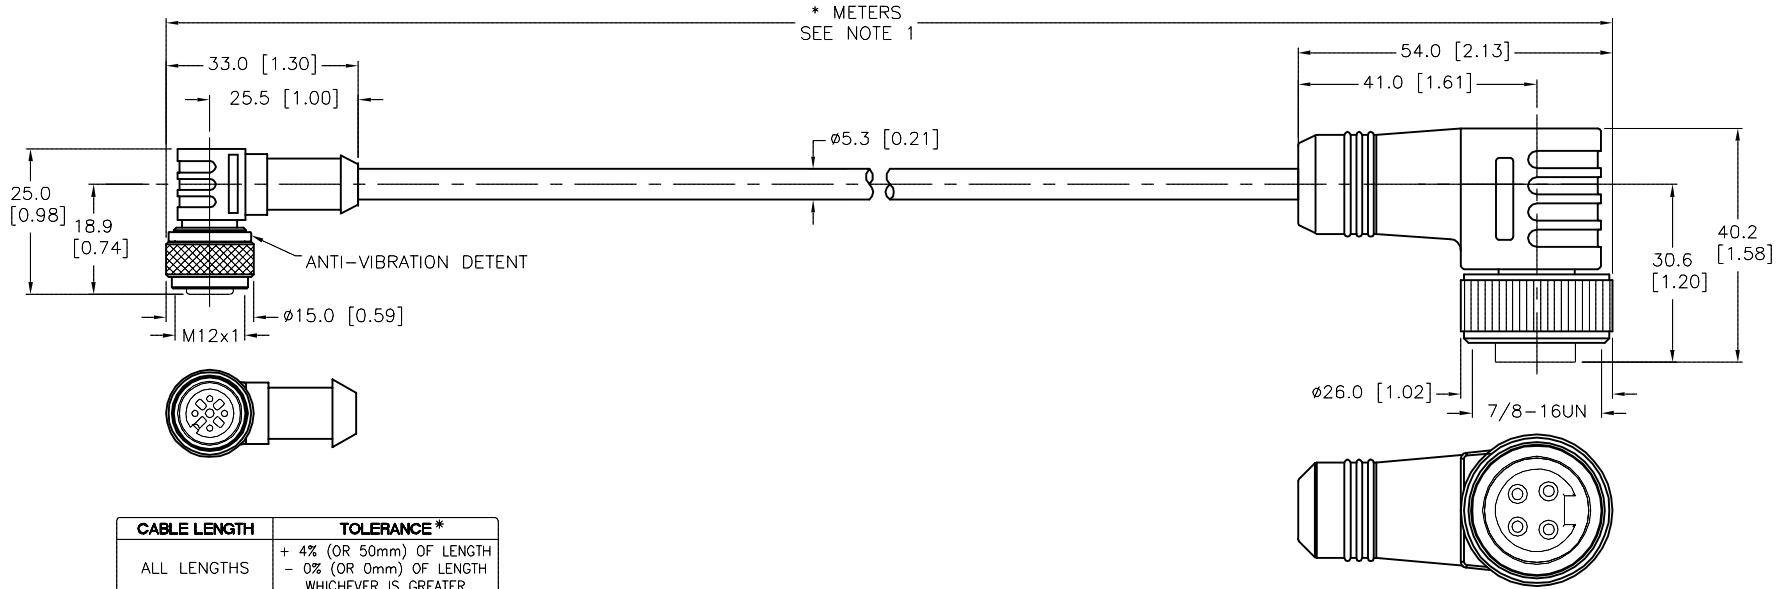


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.						DRFT RDS APVD L.H.		DATE 01/24/14 SCALE 1=1.3	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WK 4.4T-*--WKM 40	
FINISH				CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. FILE: 777032842	
SEE SPECIFICATIONS				SEE SPECIFICATIONS		REV A		SHEET 1 OF 1	
A DRAWING RELEASE				RDS 01/27/14					
REV DESCRIPTION				BY DATE ECO NO.					