





FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 PAIR 1 < 1 = WHITE 2 = BROWN PAIR 2 < 3 = GREEN 4 = YELLOW PAIR 3 < 5 = GRAY 6 = PINK PAIR 4 < 7 = BLUE 8 = RED 	 PAIR 1 < 1 = WHITE 2 = BROWN PAIR 2 < 3 = GREEN 4 = YELLOW PAIR 3 < 5 = GRAY 6 = PINK PAIR 4 < 7 = BLUE 8 = RED 	CONTACT CARRIER MATERIAL MOLDED HEAD MATERIAL/COLOR CONTACT MATERIAL/PLATING COUPLING NUT MATERIAL/PLATING RATED CURRENT [A] RATED VOLTAGE [V] OUTER CABLE JACKET MATERIAL/COLOR CONDUCTOR INSULATION MATERIAL NUMBER OF CONDUCTORS [AWG] DRAIN/SHIELD TEMPERATURE RANGE PROTECTION CLASS	NYLON OR TPU TPU/YELLOW BRASS/GOLD BRASS/NICKEL 2.0 A 60 VAC/75 VDC PVC/BLACK PVC 8x24 AWG (4 TWISTED PAIRS) 24 AWG/TINNED-COPPER BRAIDED -40°C to +105°C (-40°F to +221°F) NEMA 1,3,4,6P AND IEC IP68

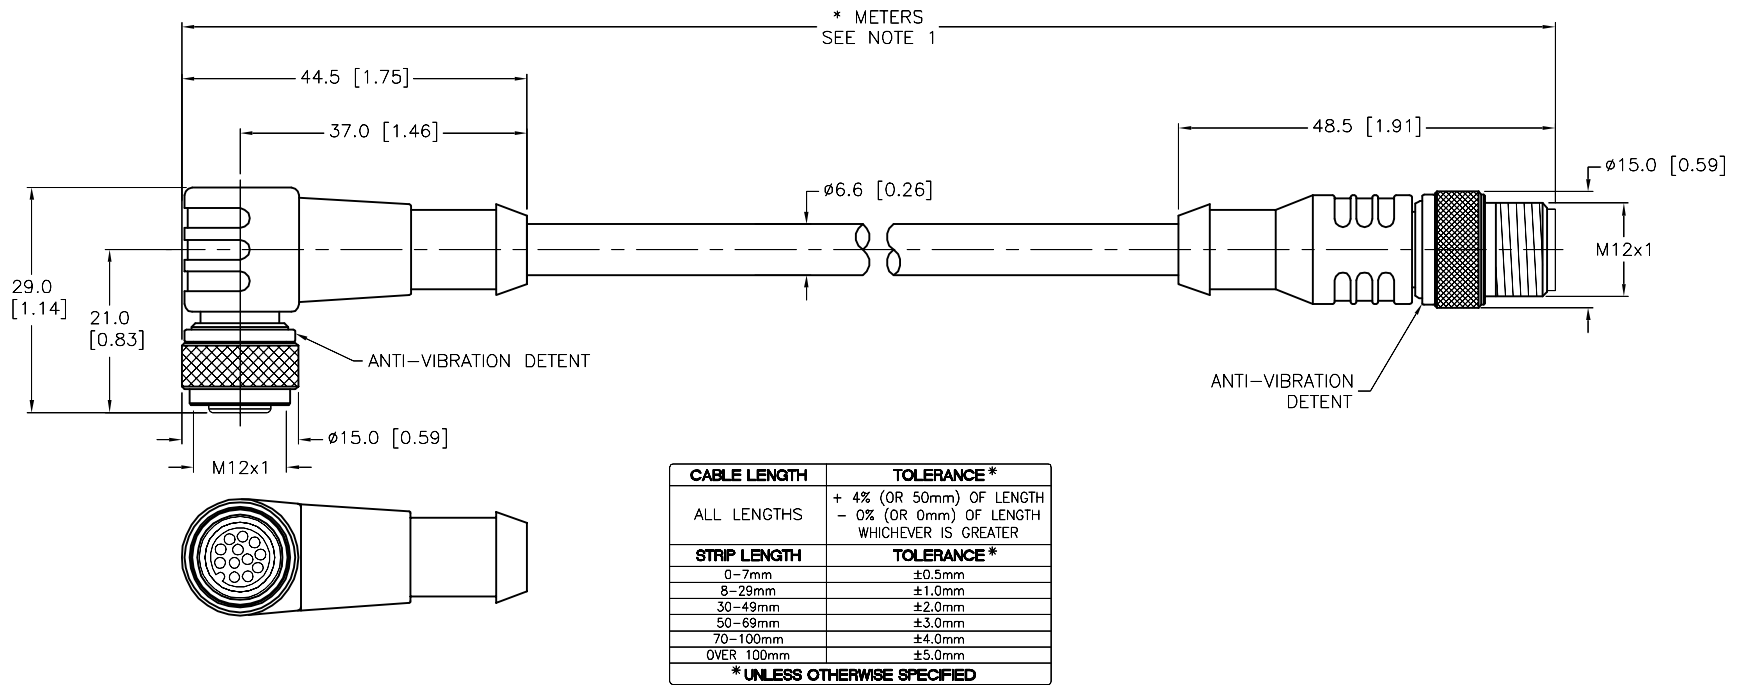

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.									
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT	RDS	DATE	09/11/14
SEE SPECIFICATIONS						APVD	T.S.	SCALE	1=1.0
FINISH						UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		E-WKC 8T-264-*--RSC 8T	
								IDENTIFICATION NO.	
								REV	
								A	
A	DRAWING RELEASE	KMY	09/17/14			DO NOT SCALE THIS DRAWING		FILE: 777033938	
REV	DESCRIPTION	BY	DATE	ECO NO.					SHEET 1 OF 1