


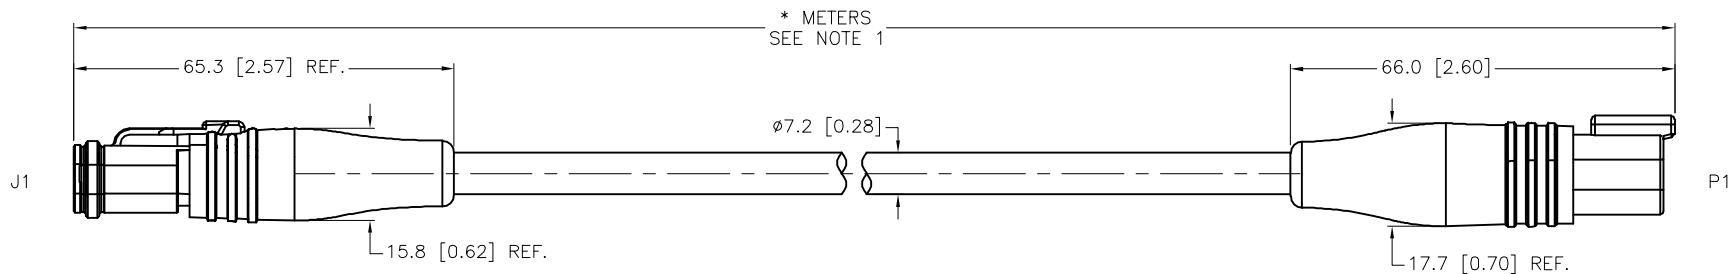
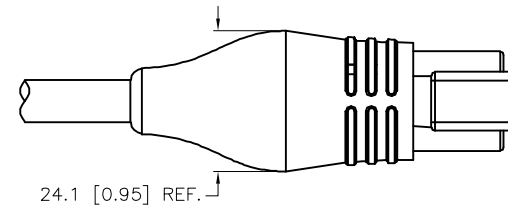


FEMALE END VIEW (J1)		MALE END VIEW (P1)		SPECIFICATIONS	
				DEUTSCH CONNECTOR (J1)	DT06-2S-E008
1 = WHITE 2 = BLACK		1 = WHITE 2 = BLACK		DEUTSCH WEDGELOCK (J1)	W2S
				DEUTSCH TERMINALS (J1)	0462-201-16141
				DEUTSCH CONNECTOR (P1)	DT04-2P
				DEUTSCH WEDGE LOCK (P1)	W2P
				DEUTSCH TERMINALS (P1)	0460-202-16141
				RATED CURRENT [A]	12.0 A
				OPERATING VOLTAGE [V]	250 V
				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				OUTER JACKET MATERIAL/COLOR	TPE/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	2x18 AWG
				PROTECTION CLASS	IP67, IP69K

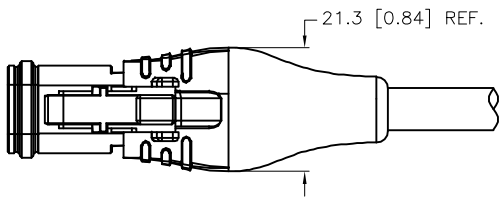


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT NF		DATE 12/08/14	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.3	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		DT06-2S-2125-*M-DT04-2P	
SEE SPECIFICATIONS					IDENTIFICATION NO.		REV		F	
F ADD OPERATING VOLTAGE					FILE: 777034308		SHEET 1 OF 1			
REV DESCRIPTION										
NF 04/25/22 77566										
BY DATE ECO NO.										