




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 A = WHITE B = BLACK C = GREEN/YELLOW D = ORANGE E = RED F = BLUE	 A = WHITE B = BLACK C = GREEN/YELLOW D = ORANGE E = RED F = BLUE	CONTACT CARRIER MATERIAL	NEOPRENE
CONNECTOR TYPE/STYLE - MS 3106M SHELL SIZE - 14S INSERT ARRANGEMENT - 6S		MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONNECTOR TYPE/STYLE - MS 3106M SHELL SIZE - 14S INSERT ARRANGEMENT - 6P		CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
		COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
		MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
		RATED CURRENT [A]	13.0 A
		RATED VOLTAGE [V]	200 V
		OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS	6x16 AWG
		TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
		CONNECTOR TYPE	MIL-DTL-5015

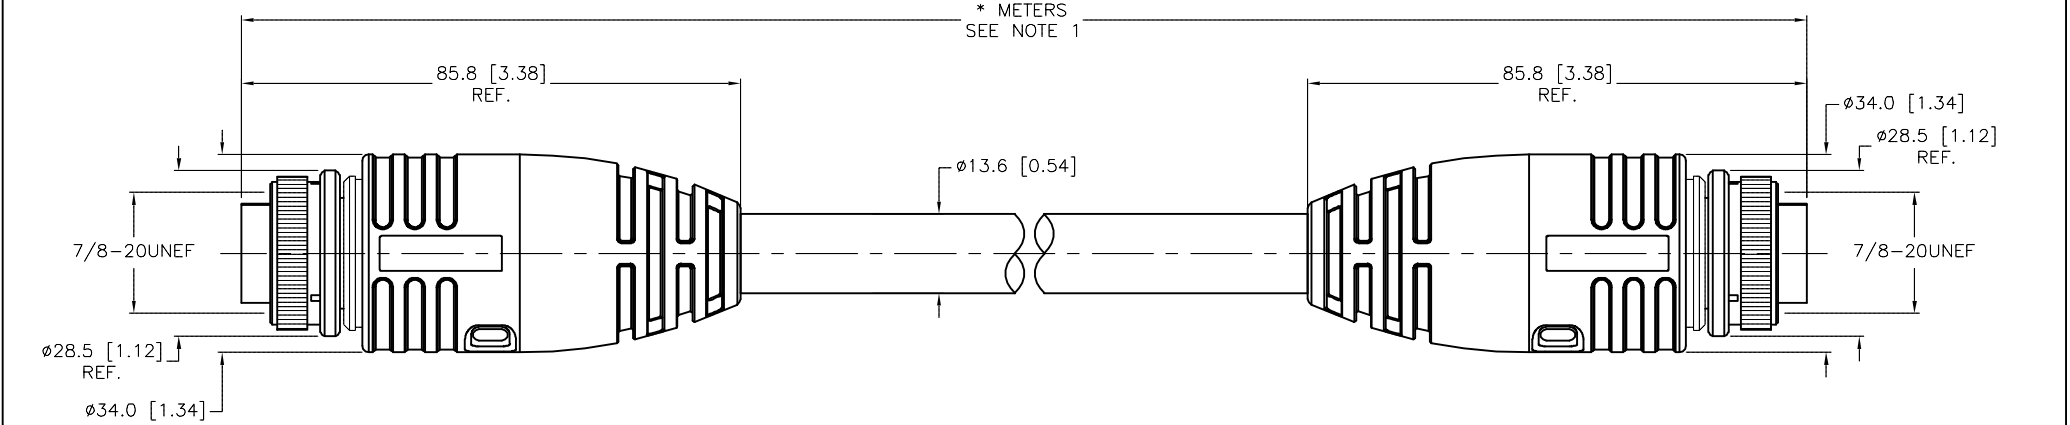


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

2. "/S1366" DESIGNATES OVERMOLDED MIL-SPEC CONNECTOR MOLDED IN LARGER BODY SIZE TO ACCOMMODATE LARGE CABLE DIAMETER.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						TURCK			
MATERIAL				SEE SPECIFICATIONS		DRFT	RDS	DATE	06/09/15
FINISH				SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=1.3
				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
						MILLIMETER [INCH]		MS 3106M-14S-6S-565-* -14S-6P/S1366	
						DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
								REV	
								B	
								FILE: 777035587	
								SHEET 1 OF 1	