



FEMALE END VIEW



1 = YELLOW
2 = GREEN

SPECIFICATIONS

DEUTSCH CONNECTOR	DT06-2S-CE04
DEUTSCH WEDGELOCK	W2S
DEUTSCH TERMINALS	0462-201-16141
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	EX60/BLACK
CONDUCTOR INSULATION MATERIAL	XLPE
NUMBER OF CONDUCTORS [AWG]	2x20 AWG
RATED CURRENT	8.0 A
OPERATING VOLTAGE	250 V
CABLE CONSTRUCTION	TWISTED PAIR MEETING J1939 ELECTRICAL REQUIREMENTS
PROTECTION CLASS	IP67

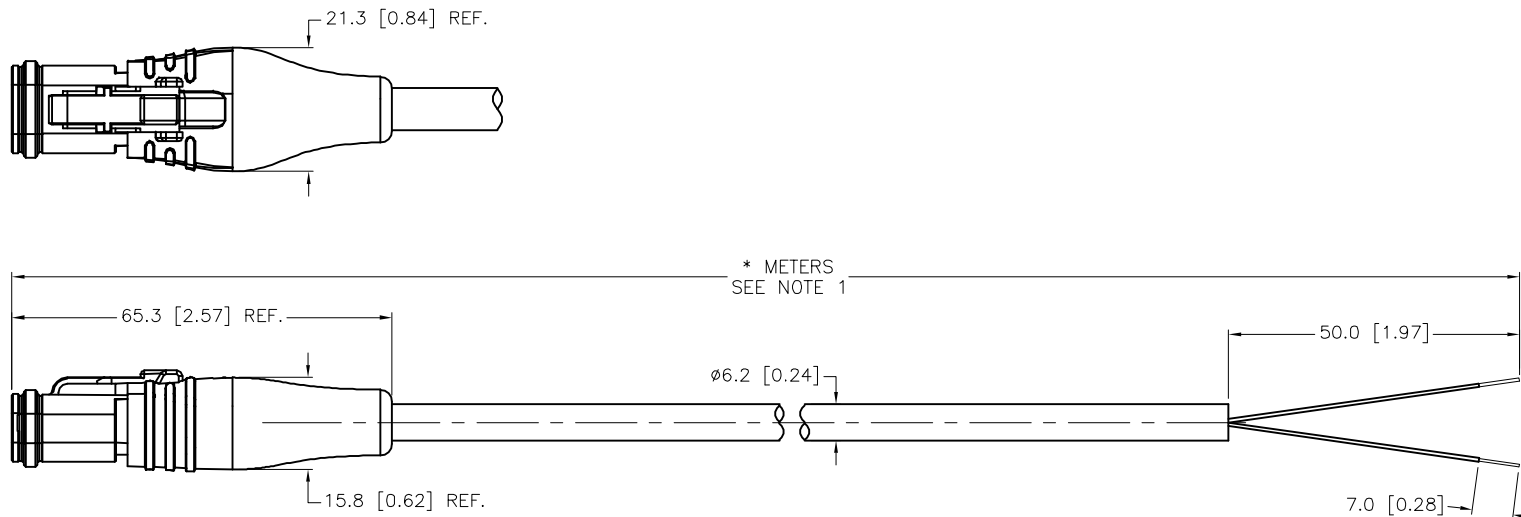

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT TV	DATE 08/18/15	 DESCRIPTION DT06-2S-2322XL -*M	
		APVD C.K.	SCALE 1=1.3		
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV D
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DO NOT SCALE THIS DRAWING		FILE: 777036714	SHEET 1 OF 1
FINISH SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION			

D	ADDED OPERATING VOLTAGE	ER	04/25/22	77567
REV	DESCRIPTION	BY	DATE	ECO NO.