




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		DEUTSCH CONNECTOR (J1)	DT06-3S-P032
A = YELLOW B = GREEN C = DRAIN	A = YELLOW B = GREEN C = DRAIN	DEUTSCH WEDGELOCK (J1)	W3S-1939
		DEUTSCH TERMINALS (J1)	0462-201-16141
		DEUTSCH CONNECTOR (P1)	DT04-3P-CE02
		DEUTSCH WEDGELOCK (P1)	W3P-1939
		DEUTSCH TERMINALS (P1)	0460-202-16141
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		OUTER JACKET MATERIAL/COLOR	EX60/BLACK
		CONDUCTOR INSULATION MATERIAL	XLPE
		NUMBER OF CONDUCTORS [AWG]	2x20 AWG
		PROTECTION CLASS	IP67
		RATED CURRENT [A]	8.0 A
		OPERATING VOLTAGE [V]	250 V
		DRAIN/SHIELD	20 AWG/ALUM-POLYESTER FOIL
		CABLE CONSTRUCTIONS	1 TWISTED PAIR WITH DRAIN MEETING J1939 ELECTRICAL REQUIREMENTS

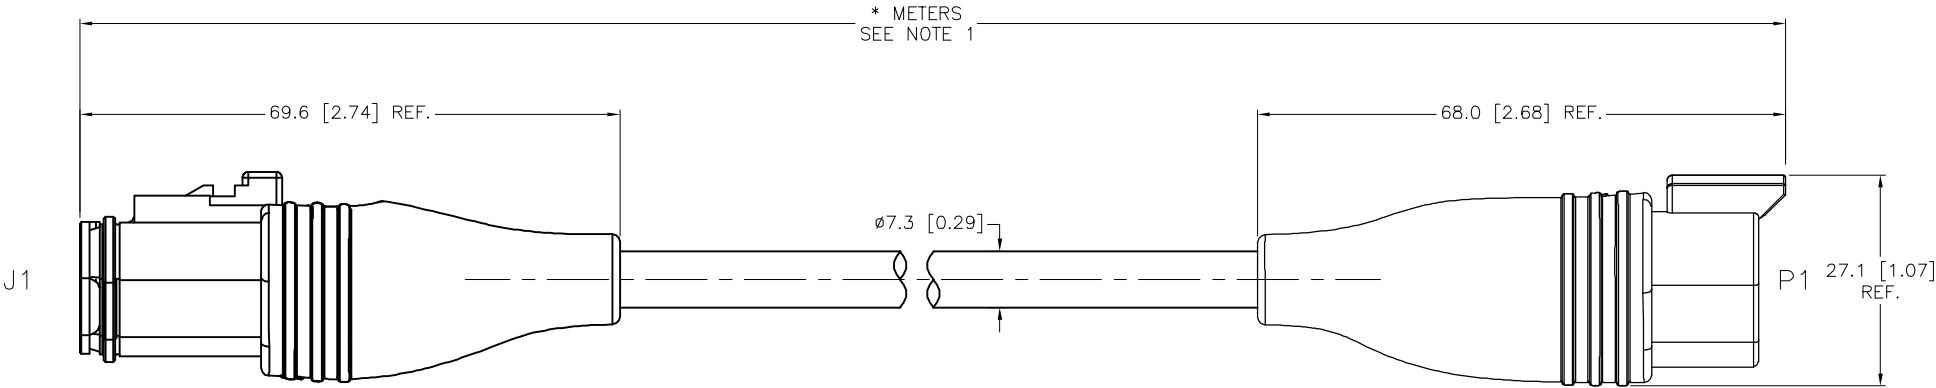


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT TV		DATE 08/18/15		DESCRIPTION	
SEE SPECIFICATIONS					APVD C.K.		SCALE 1=1.0		DT06-3S-2323XL-*M-DT04-3P	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		C	
					DO NOT SCALE THIS DRAWING		FILE: 777036769		SHEET 1 OF 1	

C	ADD OPERATING VOLTAGE	NF	04/25/22	77568
REV	DESCRIPTION	BY	DATE	ECO NO.