



FEMALE END VIEW




1 = GREEN
2 = BLACK
3 = WHITE

MALE END VIEW



1 = GREEN
2 = BLACK
3 = WHITE

SPECIFICATIONS	
DEUTSCH CONNECTOR	DTM06-3S-E007 (J1), DTM04-3P (P1)
DEUTSCH WEDGELOCK	WM-3S (J1), WM-3P (P1)
DEUTSCH TERMINALS	0462-201-20141 (J1), 0460-202-20141 (P1)
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
RATED CURRENT [A]	6.0 A
NUMBER OF CONDUCTORS [AWG]	3x22 AWG
PROTECTION CLASS	IP67
CABLE APPROVALS	(UL) ITC 105C, SUNLIGHT RESISTANT, OR PLTC 105C OIL RES I & II OR AWM 105C 600V OR CSA CMX-OUTDOOR-CMG 105C OR CSA AWM I/II A/B 105C 600V FT4

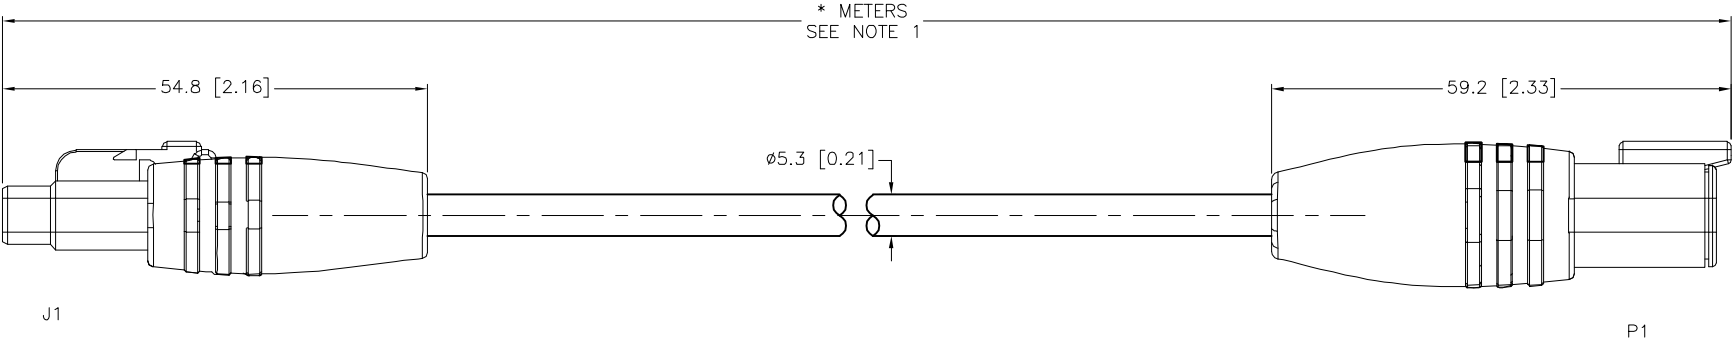


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1.		DRFT NF	DATE	07/11/16	
2.			SCALE	1=1.0	
3.			DESCRIPTION		
4.			DTM06-3S-2303-*M-DTM04-3P		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.	REV
SEE SPECIFICATIONS		MILLIMETER [INCH]			
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		FILE: 777036833	SHEET 1 OF 1
SEE SPECIFICATIONS					