

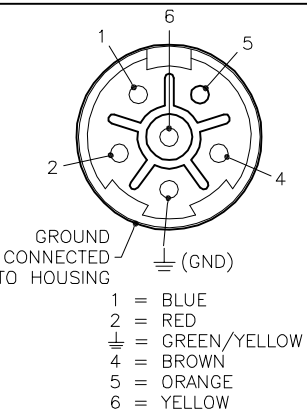



FEMALE END VIEW	PANEL CUTOUT	LOCKNUT	SPECIFICATIONS	
 GROUND CONNECTED TO HOUSING 1 = BLUE 2 = RED 3 = GREEN/YELLOW 4 = BROWN 5 = ORANGE 6 = YELLOW	 $\varnothing 20.0+0.1$ $[\varnothing 0.79+ [.004]]$		CONTACT CARRIER MATERIAL	NYLON
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			HOUSING MATERIAL/PLATING	ZINC & BRASS/CHROME
			ADAPTER MATERIAL/PLATING	BRASS/NICKEL
			O-RING MATERIAL	FPM or BUNA-N
			MANUFACTURER RATED CURRENT [A]	25 A
			UL RATED CURRENT [A]	16 A
			RATED VOLTAGE [V]	600 V
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	6x12 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS IEC IP67

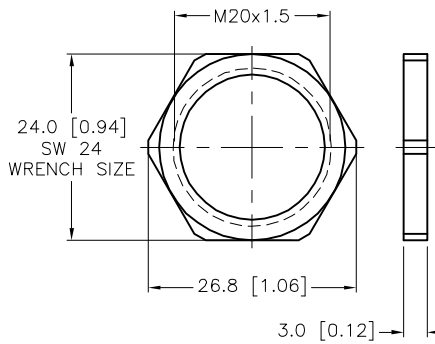

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

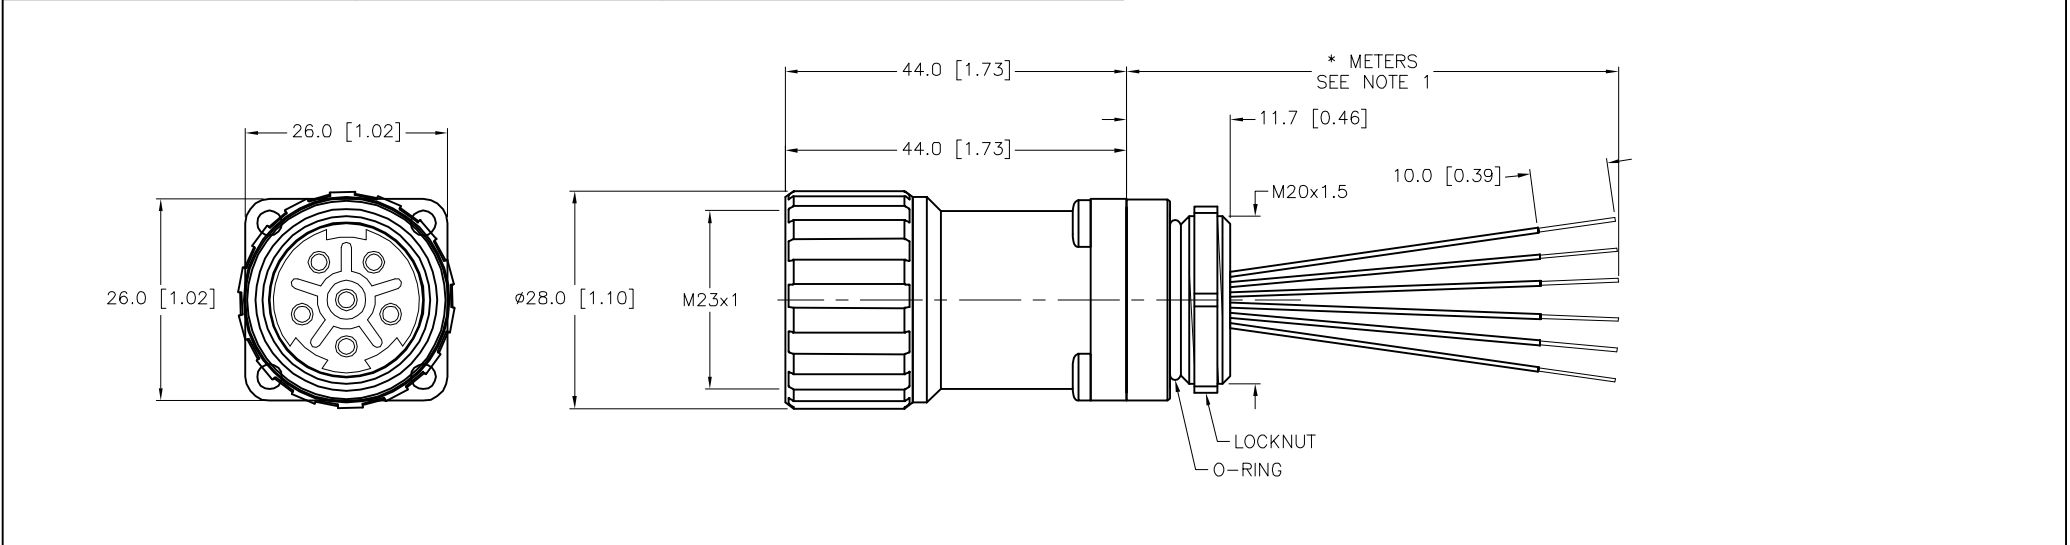


CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT TV APVD L.H.		DATE 04/14/16 SCALE 1=1.0		DESCRIPTION CKFMF 622-6-*/M20	
FINISH SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV D	
D UPDATE END VIEW REV DESCRIPTION					TR 03/30/20 75770 BY DATE ECO NO.		DO NOT SCALE THIS DRAWING		FILE: 777037414		SHEET 1 OF 1	