


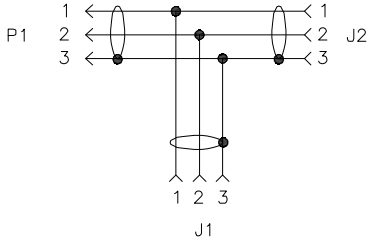


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			DEUTSCH CONNECTOR	DT04-3P-CE02(P1), DT06-3S-P032 (J1,J2)
			DEUTSCH WEDGE LOCK	W3P-1939 (P1), W3S-1939 (J1,J2)
			DEUTSCH TERMINALS	0460-202-16141 (P1), 0462-201-16141 (J1,J2)
			MOLDED HEAD MATERIALS/COLOR	TPU/BLACK
			RATED CURRENT [A]	8.0 A
			OUTER JACKET MATERIAL/COLOR	EX60/BLACK
			CONDUCTOR INSULATION MATERIAL	FOAMED XLPE
			NUMBER OF CONDUCTORS [AWG]	2x20 AWG
			DRAIN/SHIELD	20 AWG/ALUM-POLYESTER FOIL
			PROTECTION CLASS	MEETS IEC IP67
			CABLE CONSTRUCTIONS	1 TWISTED PAIR WITH DRAIN MEETING J1939 ELECTRICAL REQUIREMENTS

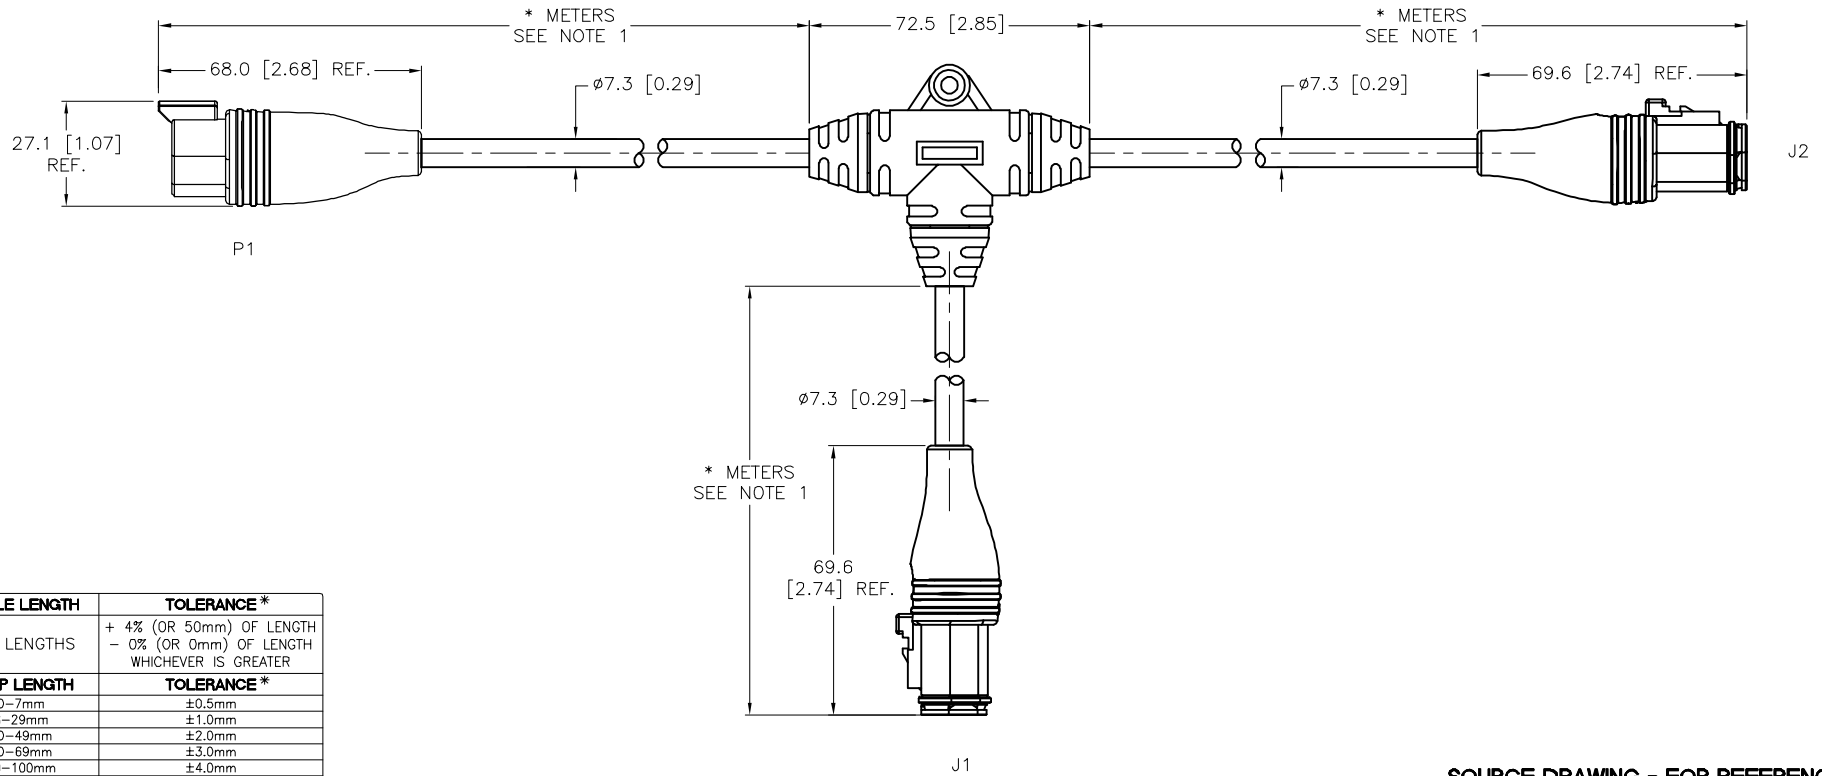


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT TV		DATE 08/18/15	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD C.K.		SCALE 1=2.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION DT043P-2323XL-*/2DT063S-2323XL-*/*	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV B	
SEE SPECIFICATIONS					FILE: 777037427		SHEET 1 OF 1			

B	UPDATE DESCRIPTION	TR	04/04/17	59099
REV	DESCRIPTION	BY	DATE	ECO NO.