




SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	15.0 A
RATED VOLTAGE [V]	600 VAC
OUTER JACKET MATERIAL/COLOR	TPE/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC/NYLON
NUMBER OF CONDUCTORS [AWG]	5x14 AWG
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

MALE END VIEW	FEMALE END VIEW
(LONG)  1 = WHITE 2 = RED 3 = GREEN/YELLOW 4 = ORANGE 5 = BLACK	 1 = WHITE 2 = RED 3 = GREEN/YELLOW 4 = ORANGE 5 = BLACK

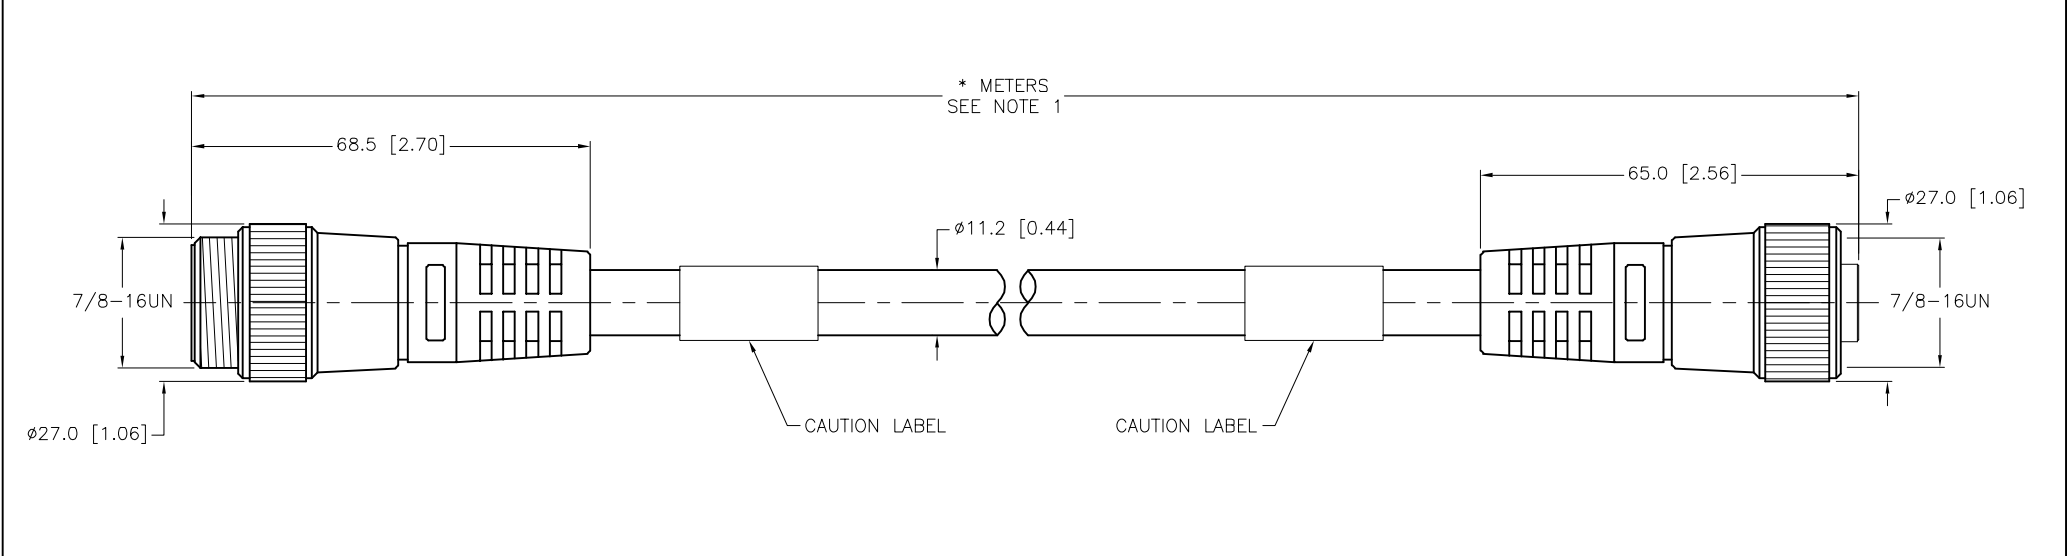


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S715" DESIGNATES YELLOW CABLE JACKET.
- "/S3278" DESIGNATES TPE CABLE JACKET MATERIAL.
- "/S4000" DESIGNATES TC-ER CABLE.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT TV APVD E.S.		DATE 05/25/16 SCALE 1=1.3	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION RSM RKM 54-*M/S715/S3276/S4000	
FINISH					CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.		REV E	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		FILE: 777037627		SHEET 1 OF 1	
SEE SPECIFICATIONS										

E	UPDATE RATED CURRENT	NF	03/01/22	500000004346
REV	DESCRIPTION	BY	DATE	ECO NO.