

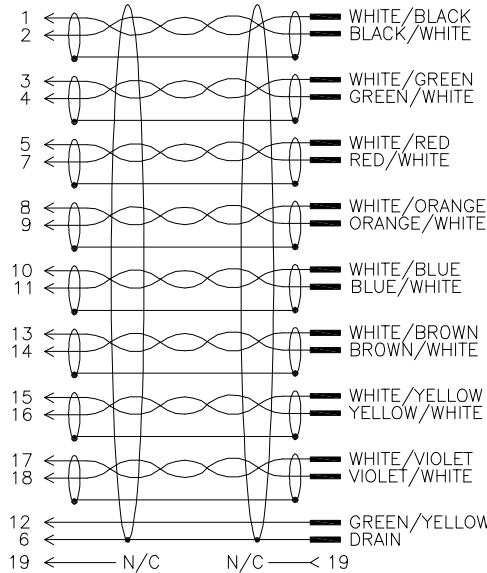
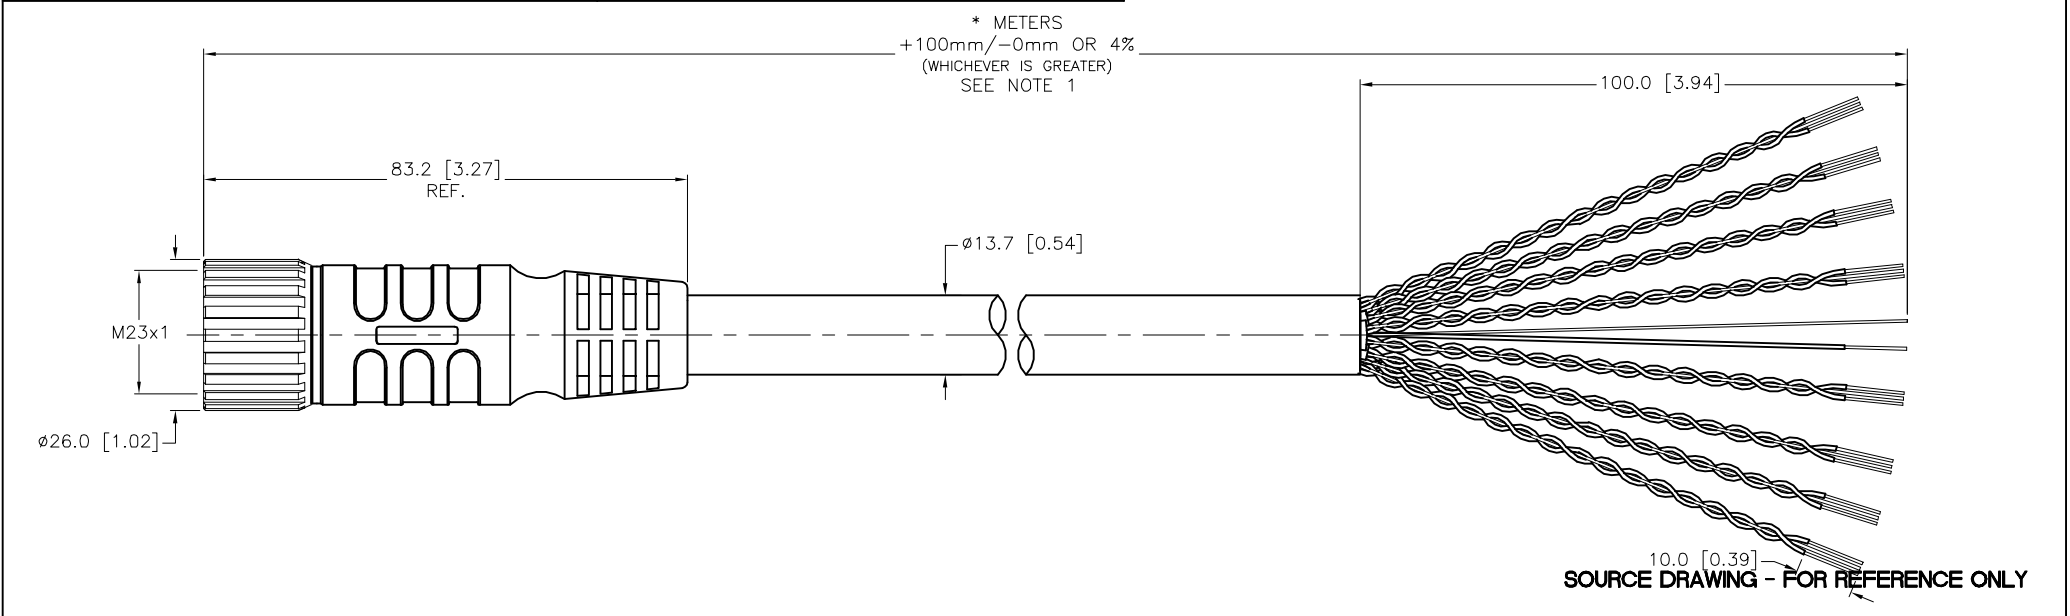


MALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON or PBT
PAIR — 1 = WHITE/BLACK 2 = BLACK/WHITE PAIR — 3 = WHITE/GREEN 4 = GREEN/WHITE PAIR — 5 = WHITE/RED 6 = DRAIN 7 = RED/WHITE PAIR — 8 = WHITE/ORANGE 9 = ORANGE/WHITE PAIR — 10 = WHITE/BLUE 11 = BLUE/WHITE PAIR — 12 = GREEN/YELLOW 13 = WHITE/BROWN 14 = BROWN/WHITE PAIR — 15 = WHITE/YELLOW 16 = YELLOW/WHITE PAIR — 17 = WHITE/VIOLET 18 = VIOLET/WHITE 19 = N/C  M23 connector				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	9.0 A (PIN 12), 2.0 A (ALL OTHERS)
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	EX60/BLUE
				CONDUCTOR INSULATION MATERIAL	XLPE
				NUMBER OF CONDUCTORS [AWG]	16x22 AWG, 1x18 AWG GROUND
				DRAIN/SHIELD	9x22 AWG/ALUM.-POLYESTER FOIL (PAIRS & OVERALL)
				CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIRS W/DRAIN, 1 GND, 1 DRAIN
				TEMPERATURE RANGE	-60°C to +105°C (-76°F to +221°F)
				PROTECTION CLASS	IEC IP67
				CABLE RATINGS	UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C, -60C COLD BEND CSA: CIC, 90C, 300V



NOTES: 1. "A" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT TV		DATE 11/29/17		DESCRIPTION P-CSMV 19-2168XL-*	
					SEE SPECIFICATIONS				APVD L.H.		SCALE 1=1.3			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV B				
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING				FILE: 777040823		SHEET 1 OF 1				
B	ADD PAIR CALLOUTS TO END VIEW				TR	10/29/19	75382							
REV	DESCRIPTION				BY	DATE	ECO NO.							