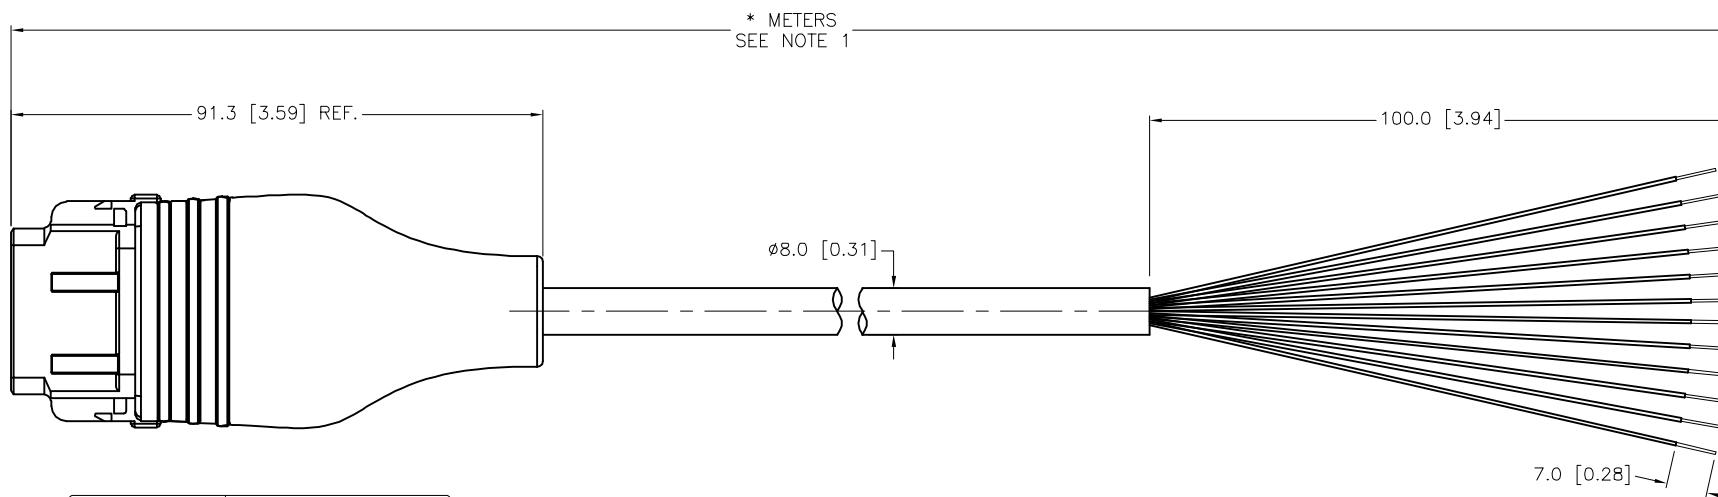
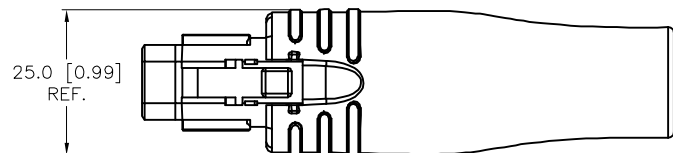
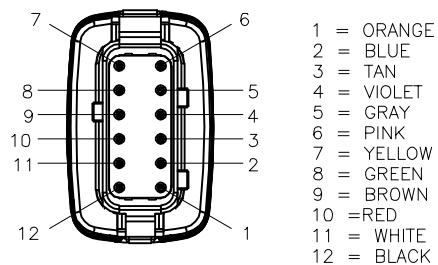


## FEMALE END VIEW



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	



## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

## SPECIFICATIONS

DEUTSCH CONNECTOR	DTM06-12SB-E007
DEUTSCH WEDGELOCK	WM-12S
DEUTSCH TERMINALS	0462-201-20141
RATED CURRENT [A]	4.0 A
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	12x22 AWG
PROTECTION CLASS	IP67

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL  SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT TV	DATE 12/11/17	DESCRIPTION  DTM06-12SB-0999-*M				
APVD A.A.		SCALE 1=1.3						
FINISH  SEE SPECIFICATIONS		UNIT OF MEASUREMENT  MILLIMETER [ INCH ]  DO NOT SCALE THIS DRAWING	IDENTIFICATION NO.		REV  B			
	CONTACT TURCK FOR MORE INFORMATION	FILE: 777040882		SHEET 1 OF 1				

B	UPDATE END VIEW	RDS	04/15/22	77548
REV	DESCRIPTION	BY	DATE	ECO. NO.