



FEMALE END VIEW



- | | |
|-----------------------|-------------------------|
| 1 = WHITE w/BLACK #1 | 10 = YELLOW w/BLACK #10 |
| 2 = WHITE w/BLACK #2 | 11 = PINK w/BLACK #11 |
| 3 = WHITE w/BLACK #3 | 12 = PINK w/BLACK #12 |
| 4 = WHITE w/BLACK #4 | 13 = PINK w/BLACK #13 |
| 5 = WHITE w/BLACK #5 | 14 = PINK w/BLACK #14 |
| 6 = YELLOW w/BLACK #6 | 15 = PINK w/BLACK #15 |
| 7 = YELLOW w/BLACK #7 | 16 = ORANGE w/BLACK #16 |
| 8 = YELLOW w/BLACK #8 | 17 = ORANGE w/BLACK #17 |
| 9 = YELLOW w/BLACK #9 | 18 = ORANGE w/BLACK #18 |


MALE END VIEW



- | |
|----------------------------|
| 19 = ORANGE w/BLACK #19 |
| 20 = ORANGE w/BLACK #20 |
| 21 = LT. BLUE w/BLACK #21 |
| 22 = LT. BLUE w/BLACK #22 |
| 23 = LT. BLUE w/BLACK #23 |
| 24 = LT. BLUE w/BLACK #24 |
| GND = LT. BLUE w/BLACK #25 |

SPECIFICATIONS

OUTER CABLE JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	35x20 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)

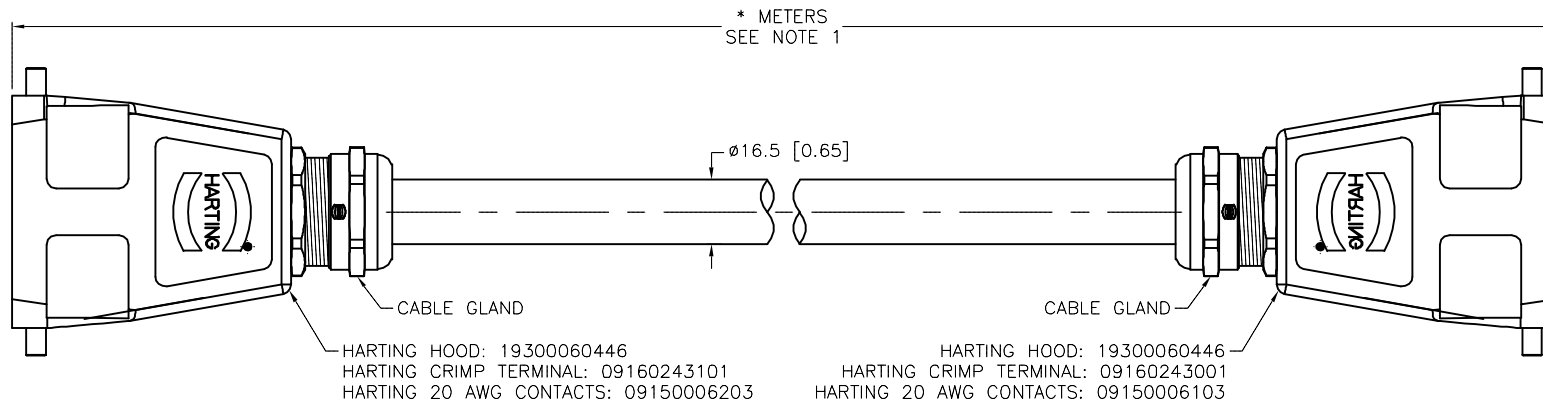


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- UNUSED CONDUCTORS TRIMMED FLUSH WITH CABLE JACKET; BOTH ENDS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	02/09/18	DESCRIPTION HAN 24DDM/F-2028-*M			
FINISH		APVD	E.S.	SCALE	1=2.0				
		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV A	
		DO NOT SCALE THIS DRAWING							
	CONTACT TURCK FOR MORE INFORMATION	FILE: 777041050				SHEET 1 OF 1			