




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	NYLON OR TPU
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	TPU/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

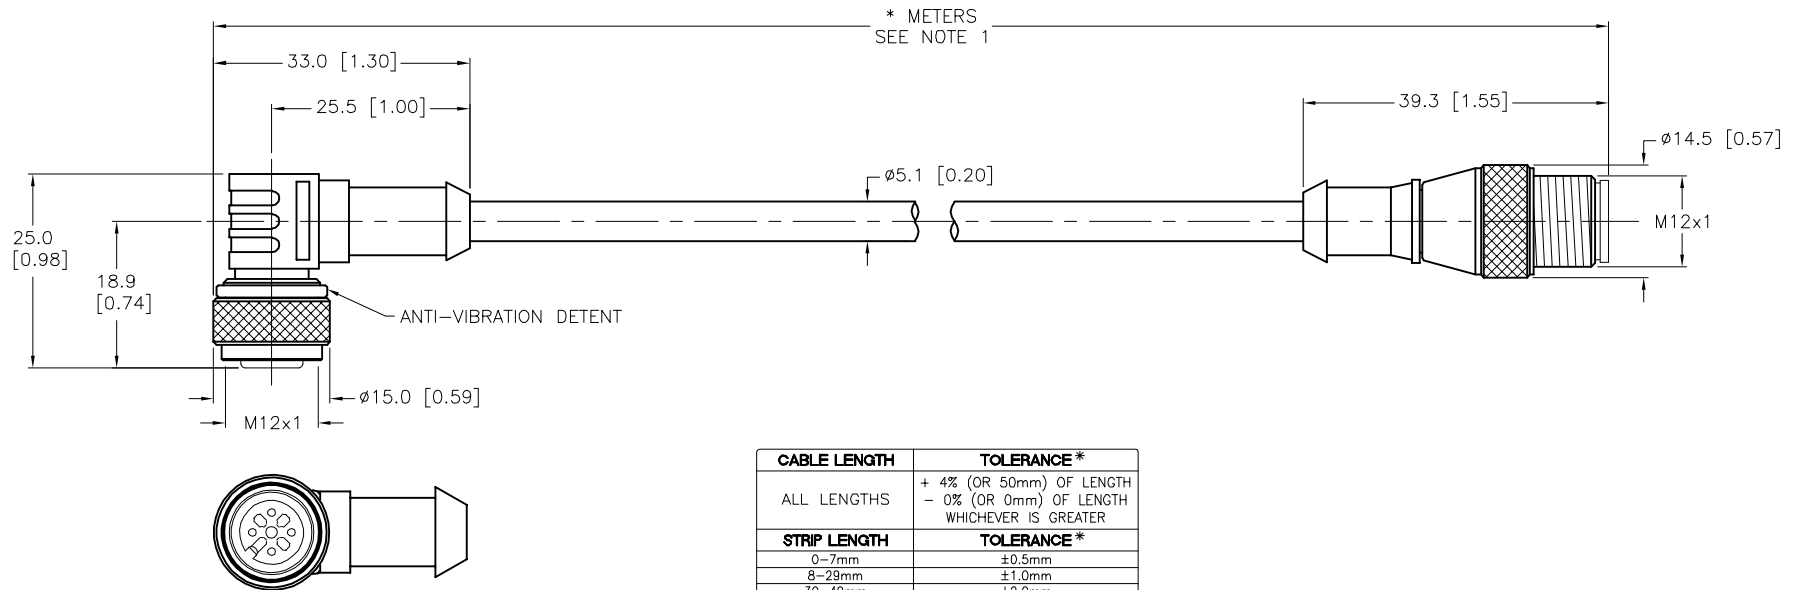


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
3. "/S760" DESIGNATES BLACK CABLE JACKET.
4. "/S771" DESIGNATES BLACK MOLDED PLUG BODY MATERIAL.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT NF		DATE 06/13/18	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD T.V.		SCALE 1=1.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WK 4.4T-*--RS 4.4T/S90/S760/S771	
A		DRAWING RELEASE		NF		IDENTIFICATION NO.	
REV		DESCRIPTION		BY		DATE	
		ECO NO.				REV A	
				DO NOT SCALE THIS DRAWING		FILE: 777041714	
						SHEET 1 OF 1	