

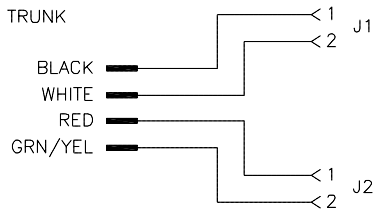



FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHITE 2 = BLACK	TRUNK 	DEUTSCH CONNECTOR	DT06-2S-SDT-CE28 (J1,J2)
		DEUTSCH WEDGELock	W2S-SDT-24V (J1,J2)
		DEUTSCH TERMINALS	0462-201-16141 (J1,J2)
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	24 V
		OUTER JACKET MATERIAL/COLOR	TPE/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x18 AWG (TRUNK) 2x18 AWG (J1,J2)
		TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	IP67

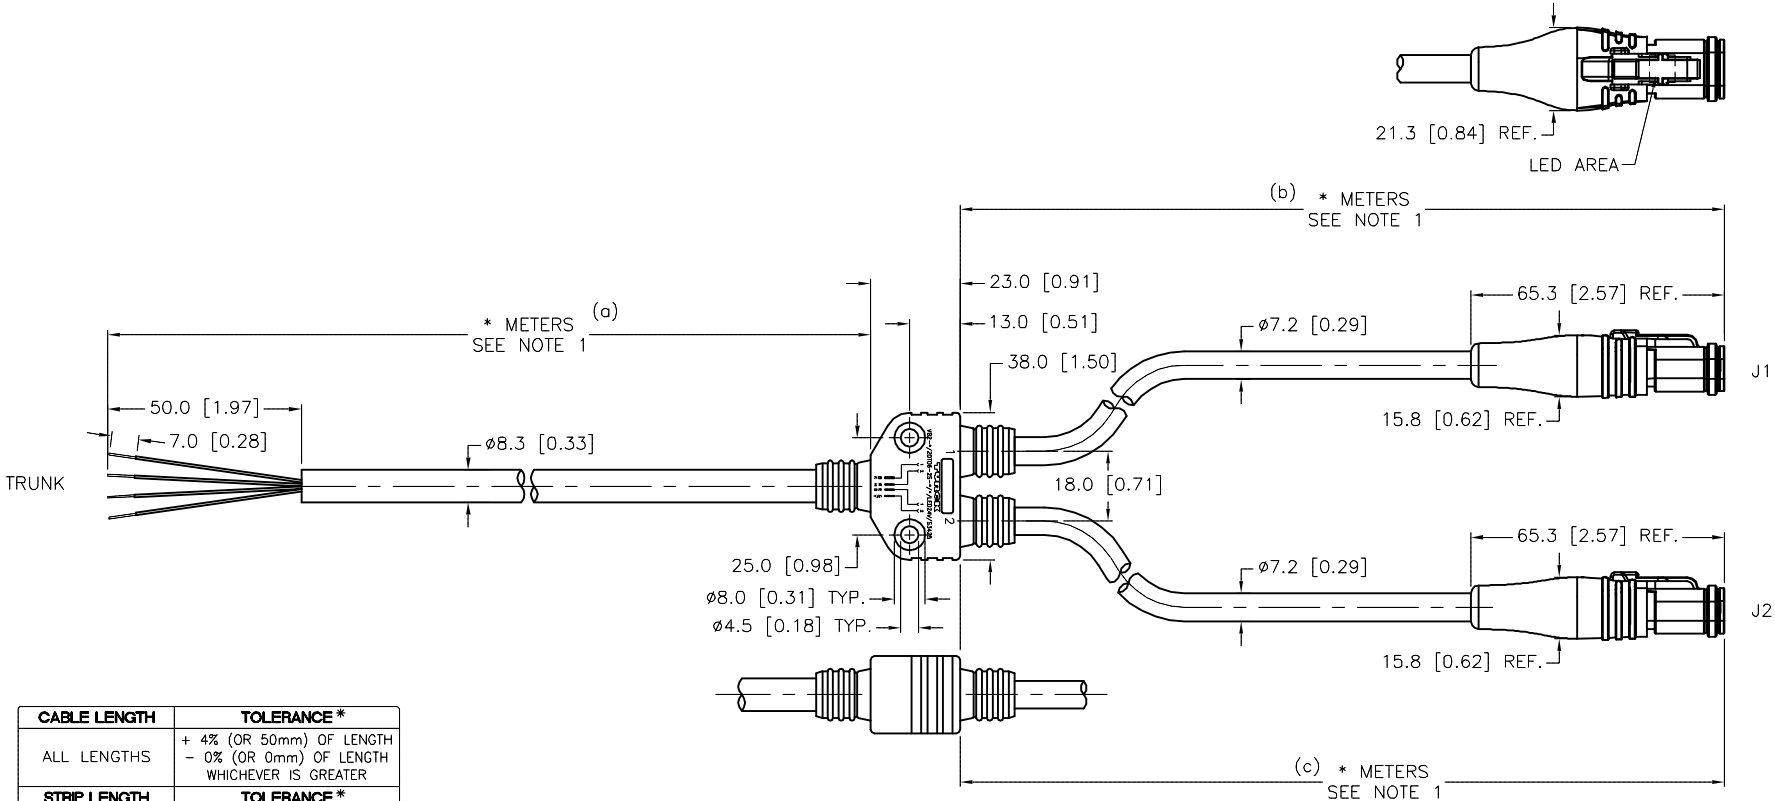

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S3425" DESIGNATES SPECIAL SERIES WIRED SPLITTER.

A	DRAWING RELEASE	NF	07/24/18	
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	NF	DATE	03/09/18
MATERIAL	SEE SPECIFICATIONS	APVD	M.A.	SCALE	1=2.0
FINISH	SEE SPECIFICATIONS	UNIT OF MEASUREMENT		IDENTIFICATION NO.	
		MILLIMETER [INCH]		REV	
		DO NOT SCALE THIS DRAWING		FILE: 777041871	
				SHEET 1 OF 1	