


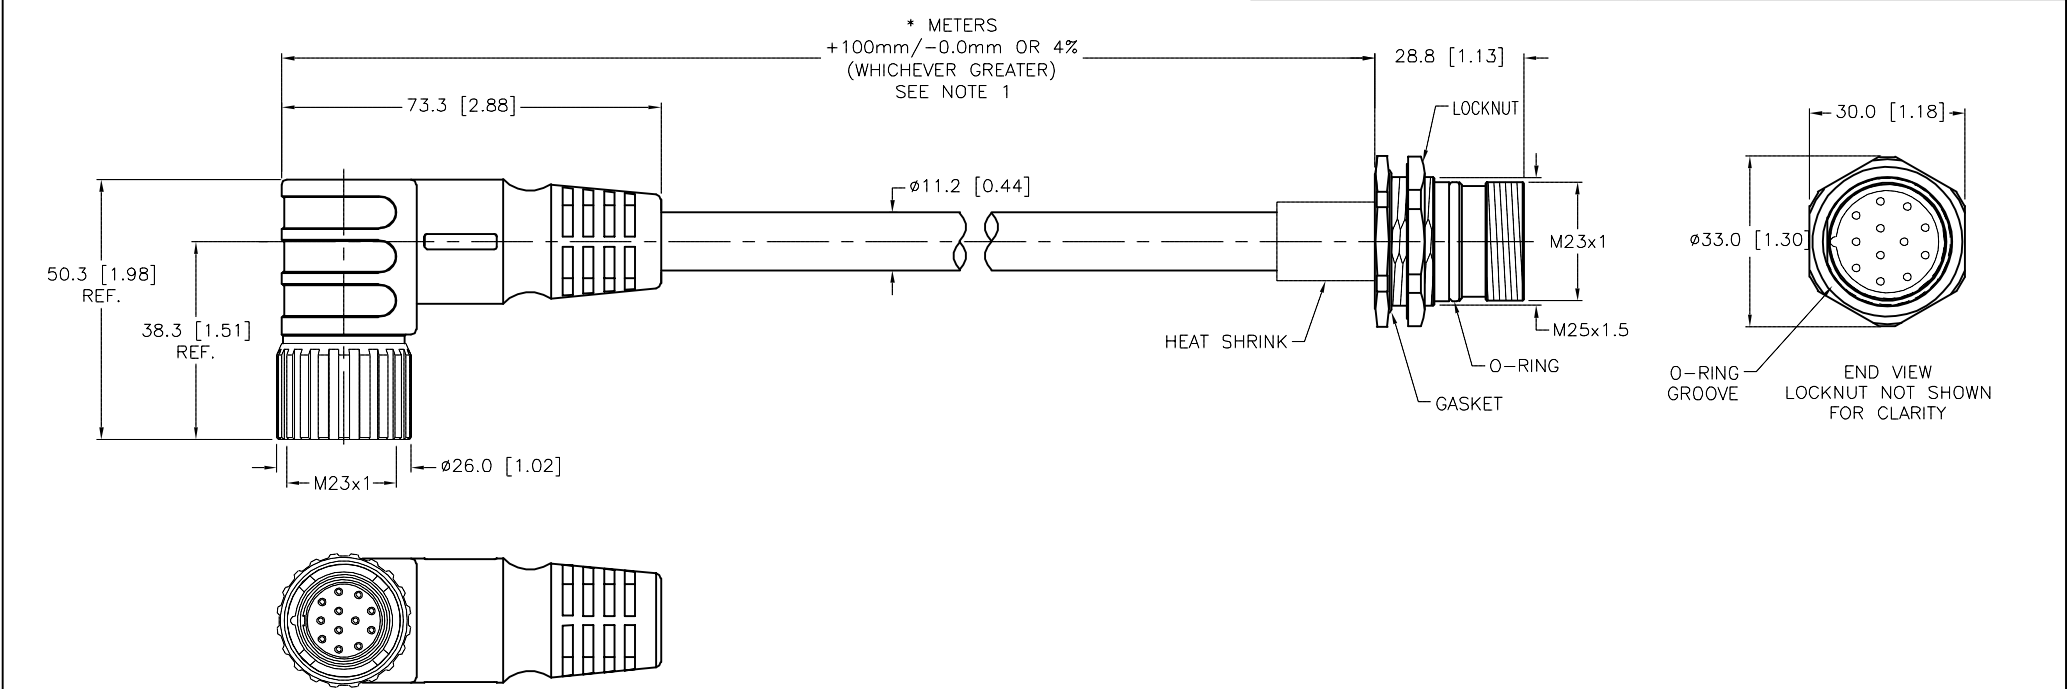


FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 1 = BROWN 2 = BLUE 3 = WHITE 4 = GREEN/YELLOW 5 = ORANGE 6 = YELLOW 7 = GRAY 8 = PINK 9 = RED 10 = BROWN/WHITE 11 = BLUE/WHITE 12 = GREEN/WHITE		 1 = BROWN 2 = BLUE 3 = WHITE 4 = GREEN/YELLOW 5 = ORANGE 6 = YELLOW 7 = GRAY 8 = PINK 9 = RED 10 = BROWN/WHITE 11 = BLUE/WHITE 12 = GREEN/WHITE		CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				GASKET/O-RING MATERIAL	RUBBER (NITRILE OR FPM)
				RATED CURRENT [A]	6.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	12x18 AWG
				DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S817" DESIGNATES SPECIAL COLOR CODE.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT NF		DATE 01/24/20		DESCRIPTION CKWM CSFD 12-12-*/S817	
					SEE SPECIFICATIONS				APVD T.S.		SCALE 1=1.5			
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: 777043997			SHEET 1 OF 1					
A	DRAWING RELEASE				NF	02/10/20								
REV	DESCRIPTION				BY	DATE	ECO NO.							