

**TURCK**

**PROCESS  
AUTOMATION**

**THE FULL RANGE FOR  
PROCESS  
AUTOMATION**

[www.turck.com](http://www.turck.com)



**TURCK**

**PROCESS  
AUTOMATION**

**[www.turck.com](http://www.turck.com)**

## **ASSET MANAGEMENT ENABLED**



**.....Sense It!.....Connect It!.....Bus It!**

### **FOUNDATION™ fieldbus Diagnostic Power Conditioner System**

- Segment, System and HSE Diagnostics
- Self Diagnostics of the FF-HSE Network
- Standard FF Function Block Library for Diagnostic Alarms
- Diagnostics Accessed via DTM and/or DD

### **Redundant Power Supply**

- High Output Power for Extended fieldbus Segments (800 mA, 30 VDC)
- Complete Galvanic Isolation

Call us with your next application:  
**1-800-553-0016**  
email: [process@turck.com](mailto:process@turck.com)  
[www.turck.com/process](http://www.turck.com/process)

<b>Introduction . . . . .</b>	<b>A2 - A8</b>
<b>IS Interface Technology . . . . .</b>	<b>B1 - B92</b>
<b>IP 20 Remote I/O</b>	
<b>BL20 General Purpose Remote I/O . . . . .</b>	<b>C1 - C62</b>
<b>excom® IS Remote I/O. . . . .</b>	<b>D1 - D24</b>
<b>Networks</b>	
<b>FOUNDATION™ fieldbus . . . . .</b>	<b>E1 - E70</b>
<b>Ethernet . . . . .</b>	<b>F1 - F50</b>
<b>AS-interface® . . . . .</b>	<b>G1 - G154</b>
<b>PROFIBUS®-DP / PROFIBUS®-PA . . . . .</b>	<b>H1 - H106</b>
<b>DeviceNet™ . . . . .</b>	<b>J1 - J148</b>
<b>Process Wiring. . . . .</b>	<b>K1 - K258</b>
<b>Sensors</b>	
<b>Valve Position . . . . .</b>	<b>L1 - L46</b>
<b>Hazardous Area Proximity Sensors . . . . .</b>	<b>L47 - L54</b>
<b>Instrumentation</b>	
<b>Pressure. . . . .</b>	<b>M3 - M37</b>
<b>Flow . . . . .</b>	<b>M39 - M79</b>
<b>Temperature . . . . .</b>	<b>M81 - M102</b>
<b>Level. . . . .</b>	<b>M103 - M130</b>
<b>Glossary, Index . . . . .</b>	<b>N1 - N29</b>

**Process Automation – Quick Selection Guide**

**IS Interface Technology**



<b>IM1</b>	.....	<b>B11</b>
<b>IM31</b>	.....	<b>B31</b>
<b>IM33</b>	.....	<b>B45</b>
<b>IM34</b>	.....	<b>B53</b>
<b>IM35</b>	.....	<b>B71</b>
<b>IM72</b>	.....	<b>B77</b>

**BL20 General Purpose Remote I/O**



**BL20 Gateways**

<b>DeviceNet™</b>	.....	<b>C7</b>
<b>PROFIBUS®-DP</b>	.....	<b>C8</b>
<b>Ethernet</b>	.....	<b>C9</b>
<b>Ethernet IP</b>	.....	<b>C10</b>

**BL20 Modules**

<b>Discrete</b>	.....	<b>C13</b>
<b>Analog</b>	.....	<b>C19</b>
<b>Serial</b>	.....	<b>C41</b>
<b>Counter</b>	.....	<b>C43</b>
<b>Power Feed</b>	.....	<b>C45</b>
<b>Motor Starter</b>	.....	<b>C49</b>
<b>Base Modules</b>	.....	<b>C58</b>
<b>Accessories</b>	.....	<b>C63</b>

**Process Automation – Quick Selection Guide**

**excom®**



**excom Gateways**

**PROFIBUS®-DP . . . . . D4**

**excom Modules**

**Discrete . . . . . D5**

**Analog . . . . . D11**

**Frequency/Counter . . . . . D15**

**Accessories . . . . . D19**

**FOUNDATION® fieldbus**



**Power Conditioner . . . . . E7**

**Cable . . . . . E17**

**Junctions . . . . . E25**

**Adapters . . . . . E51**

**Tees . . . . . E55**

**Receptacles . . . . . E59**

**Process Automation – Quick Selection Guide**

**Ethernet**



<b>BL67 Gateway</b>	.....	F5
<b>AS-I Gateway</b>	.....	F9
<b>8-Wire Media</b>	.....	F17
<b>4-Wire Media</b>	.....	F31

**AS-interface®**



<b>High Level Masters</b>	.....	G11
<b>AIM Stations</b>	.....	G37
<b>IP 20 Slice</b>	.....	G49
<b>IP 65 Block</b>	.....	G63
<b>OEM</b>	.....	G81
<b>Media</b>	.....	G112

**Process Automation – Quick Selection Guide**

**PROFIBUS®-DP / PROFIBUS®-PA**



<b>BL67 Gateways</b> . . . . .	<b>H47</b>
<b>BL20 Gateways</b> . . . . .	<b>H49</b>
<b>AS-i Gateways</b> . . . . .	<b>H39</b>
<b>FDP20</b> . . . . .	<b>H33</b>
<b>AIM Stations</b> . . . . .	<b>H11</b>
<b>Media</b> . . . . .	<b>H52</b>

**DeviceNet™**



<b>BL67 Gateways</b> . . . . .	<b>J76</b>
<b>BL20 Gateways</b> . . . . .	<b>J78</b>
<b>AS-i Gateways</b> . . . . .	<b>J81</b>
<b>FDN20</b> . . . . .	<b>J59</b>
<b>AIM Stations</b> . . . . .	<b>J11</b>
<b>Media</b> . . . . .	<b>J84</b>

**Process Automation – Quick Selection Guide**

**Process Wiring**



**2-Wire Analog or HART Control Circuits**

<b>M12 eurofast®</b> · · · · ·	<b>K12</b>
<b>7/8" minifast®</b> · · · · ·	<b>K43</b>
<b>M23 multifast®</b> · · · · ·	<b>K85</b>

**Additional Analog or Discrete Control Circuits**

<b>M12 eurofast</b> · · · · ·	<b>K12</b>
<b>7/8" minifast</b> · · · · ·	<b>K43</b>
<b>M23 multifast</b> · · · · ·	<b>K85</b>

<b>NAMUR Circuits</b> · · · · ·	<b>K175</b>
---------------------------------	-------------

<b>extremelife™ Cordsets</b> · · · · ·	<b>K194</b>
--	-------------

<b>General Accessories</b> · · · · ·	<b>K206</b>
--------------------------------------	-------------

<b>reelfast® Cable Selection Guide</b> · · · · ·	<b>K236</b>
--	-------------

<b>Reference-Standards</b> · · · · ·	<b>K245</b>
--------------------------------------	-------------

<b>Installation Instructions</b> · · · · ·	<b>K252</b>
--	-------------

**Process Automation – Quick Selection Guide**

**Sensors**



**Valve Position Sensors** · · · · · L3

**Hazardous Area Proximity Sensors** · · · · L47

**Instrumentation**



**Pressure Sensors** · · · · · M3

**Flow Monitors** · · · · · M39

**Temperature Sensors** · · · · · M81

**Level Sensors** · · · · · M103

## Interface Modules

**TURCK's** IM series of Isolating Intrinsically Safe Barriers is designed to be a simple and safe way to solve the problems associated with the installation of equipment that is used in potentially explosive atmospheres. **TURCK's** IM series utilizes the intrinsically safe concept that is universally accepted, easy to apply and the safest way to install electronic measuring, monitoring and control equipment in potentially explosive atmospheres.

The IM series uses state of the art circuitry and the latest technology to produce an unsurpassed product that provides the best explosion protection interfaces on the market.

The IM series of Intrinsically Safe Interface Devices is application specific: Each device is designed to work in a specific application, be it analog input, analog output, discrete input, discrete output or others. The series was designed to handle the vast majority of applications where instrumentation and control in potentially explosive atmospheres is typically installed. A small number of interface devices will cover a large number of applications. This is a huge benefit, as limiting the number of different types of interfaces can significantly reduce the number of spares. Reducing the number of model variations of those spares makes replacement or expansion much easier, while also consolidating stock and making inventory easier to manage.

Intrinsic safety has come of age with the introduction of the IM series of Intrinsically Safe Isolating Barriers, making IS applications in potentially explosive atmospheres safe, simple and economically attractive.

Choosing an appropriate IM series Isolator is made simple with the help of this guide. The interface devices outlined within this guide allow you to make the appropriate selection for the corresponding field devices or connections with ease.




**IM Series Cabinet**

# IS INTERFACE TECHNOLOGY



## Generic Specifications for IM Series

**Housing** . . . . . 18 mm, Single or Multi-Channel, 12-Pin Connector  
Connector Configuration  
27 mm, Multi-Channel, 20-Pin Connector Connector Configuration

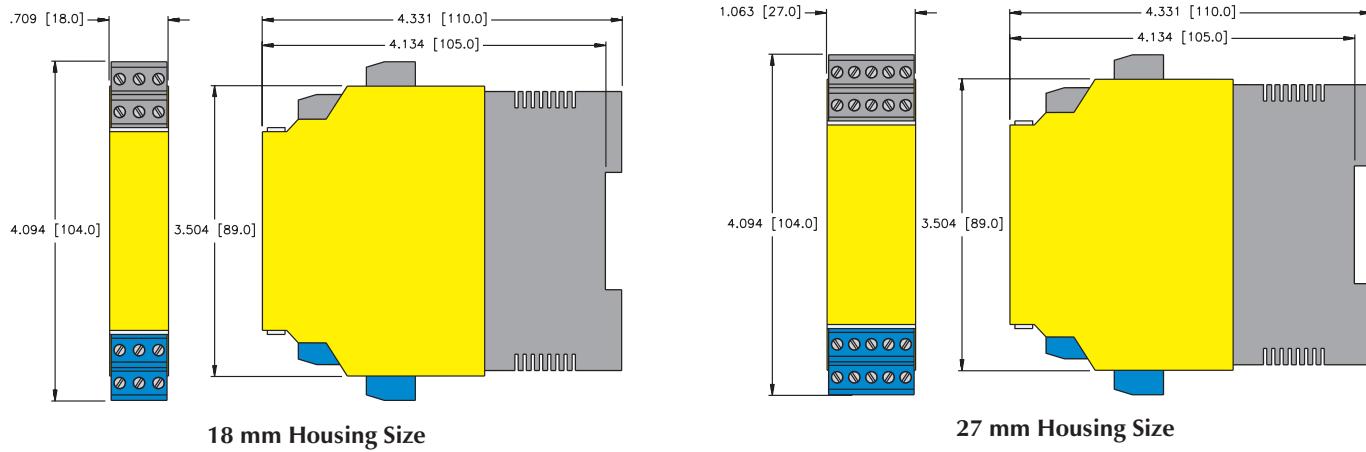

**Material** . . . . . Polycarbonate/ABS Flammability Class V-0 UL94

**Protection Level** . . . . . IP 20

**Operating Temperature** . . . -25 to +60°C (-13 to +140°F)

**Storage Temperature** . . . . -40 to +80°C (-40 to +176°F)

**Mounting** . . . . . 35 mm Top Hat Rail

Units are Class I, Division 2 groups A, B, C or D hazardous area mountable in an appropriate enclosure.

Units may be mounted side by side without spacing requirements.

*interface*  
*modul*

## Selection Guide

Function	IM Series	Part Number	Pages
<p>INPUT NAMUR SENSOR Mechanical Switch Wire Break and Short Circuit with Resistor Network WM1</p> <p>OUTPUT R Relay (Dry Contact) T Transistor Output M Mosfet (Field Effect Transistor)</p>	<b>Isolation Switch Relays</b>	IM1-121Ex-R IM1-121-Ex-T IM1-22Ex-R IM1-22Ex-T IM1-22Ex-MT IM1-12Ex-R IM1-12Ex-T IM1-12Ex-MT IM1-451Ex-R IM1-451Ex-T	B5 - B30
<p>INPUT Voltage Current</p> <p>OUTPUT Current Voltage Current</p>	<b>Analog Data Transmitters</b>	IM31-11Ex-I IM31-11Ex-U IM31-12Ex-I IM31-22Ex-I IM31-22Ex-U	B31 - B43
<p>INPUT HART or Non-HART Transmitter</p> <p>OUTPUT</p>	<b>Analog Input Repeaters/Supplies</b>	IM33-11Ex-Hi/24 VDC IM33-12Ex-Hi/24 VDC IM33-22Ex-Hi/24 VDC	B45 - B52
<p>INPUT RTD 2,3,4-wire Thermocouple mV</p> <p>OUTPUT Current</p>	<b>Temperature Converters</b>	IM34-11Ex-I IM34-12Ex-Ri IM34-11Ex-Ci IM34-12Ex-CRi	B53 - B70
<p>INPUT HART or Conventional I/P Device</p> <p>OUTPUT</p>	<b>Analog Output Isolators</b>	IM35-11Ex-Hi/24 VDC IM35-22Ex-Hi/24 VDC	B71 - B76
<p>INPUT IS Solenoid driver LED driver IS sounder</p> <p>OUTPUT Voltage</p>	<b>Solenoid Driver/Discrete Output Isolators</b>	IM72-11Ex/L IM72-22Ex/L	B77 - B83



## Isolation Switch Relays

### For Use with NAMUR Proximity Sensors and Mechanical Switches

TURCK offers a wide range of isolating switch relays. These devices can serve various applications ranging from a single dry contact switch input with a complimentary dry contact switch output, to four NAMUR proximity inputs and four transistor outputs, while also providing open and short-circuit protection in addition to alarm functionality.

Isolation switch relays may be used in general purpose applications, and most are certified for use in hazardous (explosive atmospheres) areas by various approvals bodies. These devices carry U.S., Canadian and European approvals that may be required in order to cover projects being engineered for use in locations throughout the world. The devices share many common attributes, such as housings and removable terminal connectors. Most are also available with the universal voltage (20-250 VAC/20-125 VDC) required to power the unit. All units have the option for short-circuit and open-circuit (wire-break) protection: a simple series of switches that can be manually configured by the user if the function is to be implemented. A resistor network (WM1 shown in Figure 1) is required to incorporate these functions when using a mechanical (dry contact) switch for the hazardous area inputs.

The IM series of isolation switch relays is designed to handle the vast majority of applications where mechanical switches or NAMUR proximity sensors are used. Short-circuit and open-circuit (wire-break) functions are available for most devices. This function can be implemented by appropriately configuring the switches located on the top of the units. NAMUR proximity switches have no special requirements in order to incorporate this function, simply set the switches to the appropriate positions.

Dry contact (mechanical switches) however, require the use of a resistor network in order for the additional functions to operate properly. The incorporation of a ready made resistor network module (WM1 see Figure 1) is recommended.

This section highlights the devices and provides a simple approach for installing the various models available. Examples of common applications are provided along with simple connection diagrams that allow any user to easily and safely install these devices.

Typical and specific functions for each individual device are highlighted in the "Features" portion of the specification pages. A handy pin-out reference chart is also provided for each device. Input and output common configurations for use with NAMUR proximity sensors and dry contact mechanical switches, are also highlighted in this section.

## Common Input Configuration for Proximity Sensors

NAMUR 2-wire proximity sensors are specifically designed to work with **TURCK** isolation switch relays. No entity calculations are required, as all NAMUR proximity sensors and associated apparatus with NAMUR inputs (**TURCK** isolation switch relays) are designed to be 100% compatible without the requirement to calculate entity parameters. These calculations are accounted for in the design of both the field devices (proximity sensors) and the interfaces (barriers). All NAMUR proximity sensors are compatible with NAMUR interface devices in all classified areas.

The 2-wire configuration is standardized so the blue wire is always negative and the brown wire is always positive. Reversing these connections will not damage the device, however it will not function.

Connection diagrams for individual devices are shown in the product specification description pages.

## Common Input Configurations for Dry Contact Mechanical Switches

Simple switch inputs are easily accommodated by the NAMUR input interface units. Switches are not required to be approved as intrinsically safe devices. Simple switches are defined as "simple apparatus" by the national electrical code as: (NEC 504-2)

A device that will neither generate nor store more than 1.2 V, 0.1 A, 25 mW, or 20  $\mu$ .

Using a simple switch does require the use of a resistor network (WM1) if the short-circuit and open-circuit (wire-break) functions are not used. These functions are not required and can be disabled by simply switching the function "OFF" using the configuration switches on the top of the units.




Figure 1

**Isolation Switch Relays****Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.



**Interface Module**

**Function Group**

1 = Isolation Switch Relay

**Number of Inputs**

**Number of Non-Hazardous Area Outputs  
Reflecting Hazardous Area Input Status**

**Non-Hazardous Area Switching Circuits**

R = Relay Switch

T = Transistor Switch

MT = MOSFET Switch

**Intrinsically Safe Associated Apparatus**

**Number of Additional Non-Hazardous Area Alarm Outputs**

### Extension Examples:

**IM1-121Ex-R**

Isolation Switch Relay  
Interface Module  
Single Input  
Two Non-Hazardous Area Relay Switches  
One Non-Hazardous Area Alarm Switch  
Intrinsically Safe Associated Apparatus  
Relay Switch

**IM1-22Ex-MT**

Isolation Switch Relay  
Interface Module  
Two Inputs  
Two Non-Hazardous Area Relay Switches  
Intrinsically Safe Associated Apparatus  
MOSFET Switch

**IM1-451Ex-T**

Isolation Switch Relay  
Interface Module  
Four Inputs  
Five Non-Hazardous Area Relay Switches  
One Non-Hazardous Area Alarm Switch  
Intrinsically Safe Associated Apparatus  
Transistor Switch

## All IM1-xxx Modules are Equipped With:

### Intrinsically Safe Field Terminals

This feature allows the use of any certified NAMUR sensor or dry contact mechanical switch (simple apparatus) to be used in any area classification without risk of explosion.

### Universal Input Voltage

This feature allows any power supply with an output of 20-250 VAC or 20-125 VDC to be used to power the units. This provides extreme flexibility in the source power required to operate the units.

### Removable "Keyed" Terminals

This feature allows easy wiring. The keyed connectors assure safe and accurate installation. Terminals can be removed and wired without physically making the connections in tight quarters. Cable harnesses that incorporate these connectors can actually be wired outside cabinets, and assembly is completed by plugging in the terminals to the corresponding barrier. A bus power configuration is also available. That allows several barrier's power connections to be bussed in a daisy-chain configuration, further reducing installation time and wiring. Replacement of units when necessary is also simplified.

### Short-circuit and Open-circuit Detection

This feature allows monitoring of field circuits for wire faults. The function is selectable and can be disabled if not required or desired. NAMUR sensors need no accessory to provide the function. Dry contact mechanical switches require a resistor network to properly function. The WM1 resistor network module will provide this function, or a network of discrete resistors can be added by the user. Utilization of a common non-hazardous area alarm circuit signifies a fault in the hazardous area wiring.

### N.O./N.C. Configuration

This feature allows the input function to be selected as a normally open or normally closed output. Each channel can be separately configured depending on module type.

### Galvanic Isolation

This feature provides isolation between inputs, outputs and the power supply. In some cases, individual outputs are also isolated from each other.

### Switching Status and Power Indication LEDs

This feature provides a visual indication for the switching status of each channel. The green LED indicates that the unit is powered. The dual color LEDs indicate switching (yellow) and fault status (red). A fault status on an input disables the corresponding output relay.

### Housing Sizes

The size depends on the number of channels. All 4-channel devices utilize the wider 27 mm housing, while the 1 and 2-channel devices are housed in the 18 mm style. Both are the same height, and can be mounted on a DIN-rail or flush mounted on a panel.

### Hazardous (Classified) Area

The hazardous area terminals of the IM series switch input isolators are suitable for use with mechanical switch or NAMUR inputs in ALL area classifications.

Shown here is the common input configuration for a NAMUR proximity sensor. The wires are color coded and blue is always the (-) terminal and brown is always the (+) terminal.

Open-circuit (wire-break) and short-circuit can be configured by the switch settings on the top of the unit, if the unit is equipped with this function. No special conditions are required to incorporate the function when using NAMUR proximity sensors.

### Division 2/Zone 2 or Non-Hazardous Areas


IM units are certified to be mounted in a Division 2/Zone 2 area. Units must be housed in an appropriate enclosure suitable for the environment in which they will be installed.

Explosion-proof or purged enclosures are not required for use in this area classification with the **TURCK** IM series.




### Non-Hazardous (Non-Classified) Area

Non-hazardous area terminals are designed to be connected to apparatus in a non-classified area.

The equipment may consist of alarm circuits, PLC or DCS controllers or other similar types of equipment.

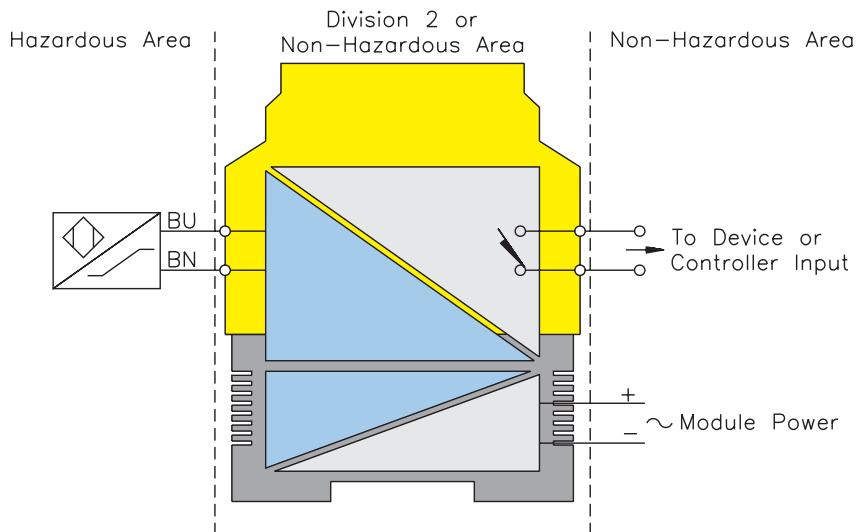


# Process Automation

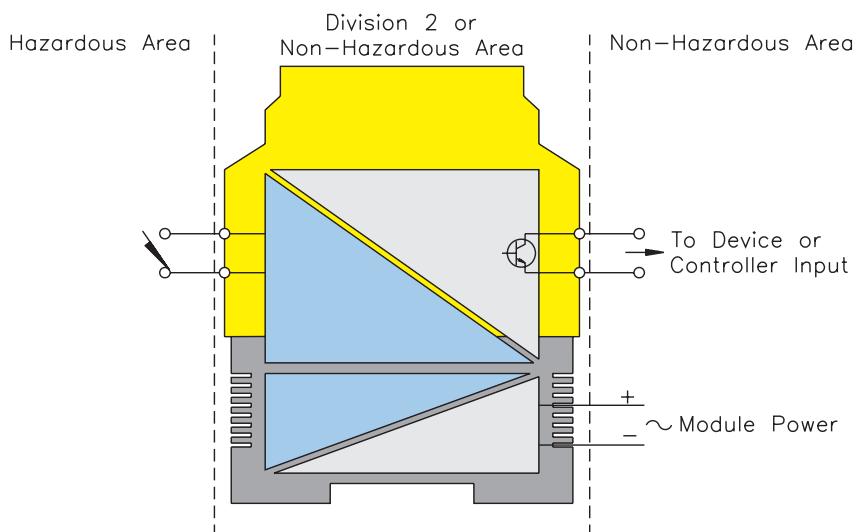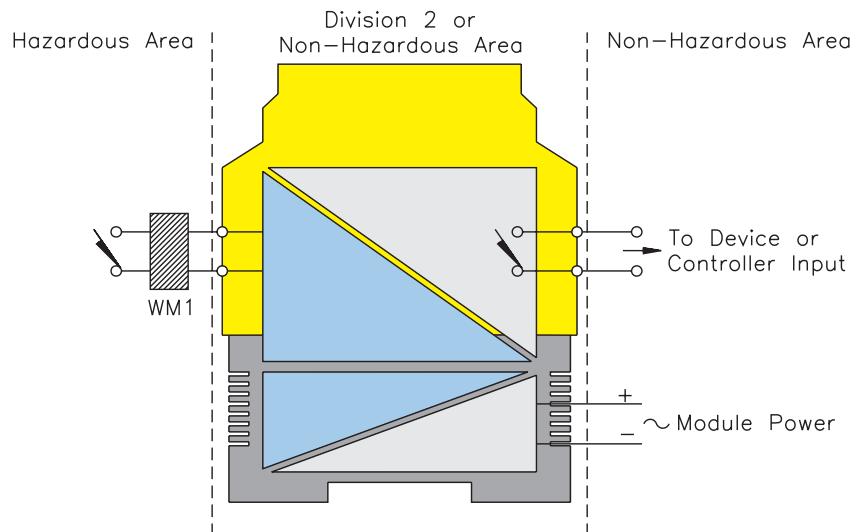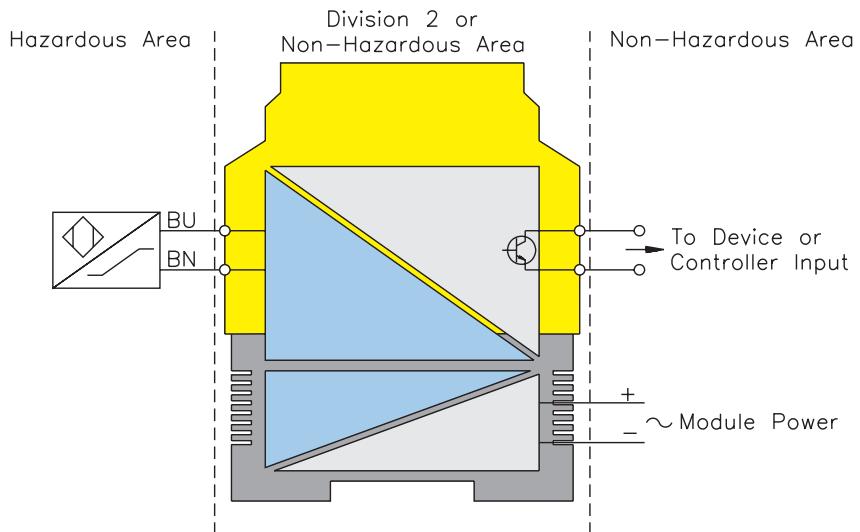

## IM1-121Ex-R

## Isolation Switch Relays

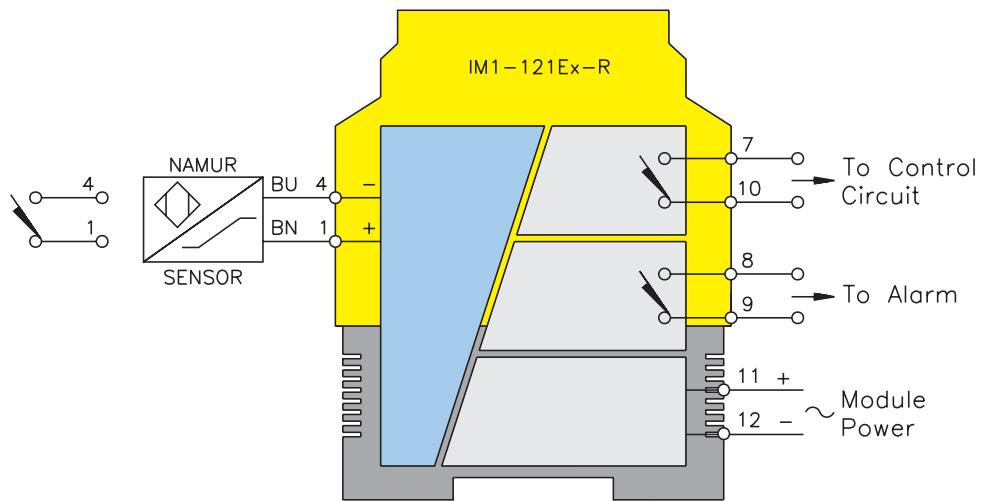**Functional Description:**

This 1 channel intrinsically safe interface device is designed to accommodate 1 switch or NAMUR proximity sensor input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area output is a SPST switch reflecting the corresponding input change of state from the field circuit.

The device also incorporates a separate SPST Non-Hazardous area alarm switch for monitoring open or short-circuits in the hazardous area.

**Features:**

- 1 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 non-hazardous area switch outputs, 1 for alarm function
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . ≤0.1 mA
Short-circuit Threshold . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



2 Relays, 1 N.O. Contact Each
Voltage . . . . . ≥250 VAC/120 VDC
Current . . . . . ≥2 A per channel
Capacity . . . . . ≥500 VA/60 W per channel
Switch Frequency . . . . ≥10 Hz
Contacts . . . . . Silver-Alloy + Au (3 micro µ)

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-121Ex-R**

Pin #	Terminal Function
1	(+) to Field Device
2	No Connection
3	No Connection
4	(-) to Field Device
5	No Connection
6	No Connection
7	Non-Hazardous Area Switch #1
8	Non-Hazardous Area Switch #2 Alarm
9	Non-Hazardous Area Switch #2 Alarm
10	Non-Hazardous Area Switch #1
11	Module Power (+) or AC
12	Module Power (-) or AC

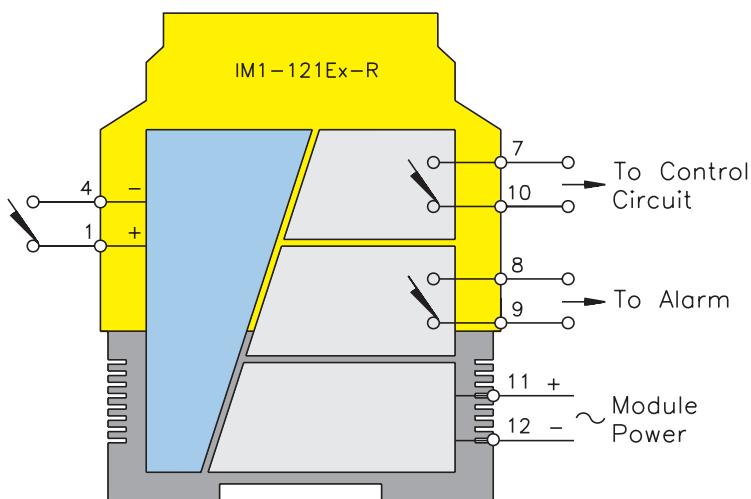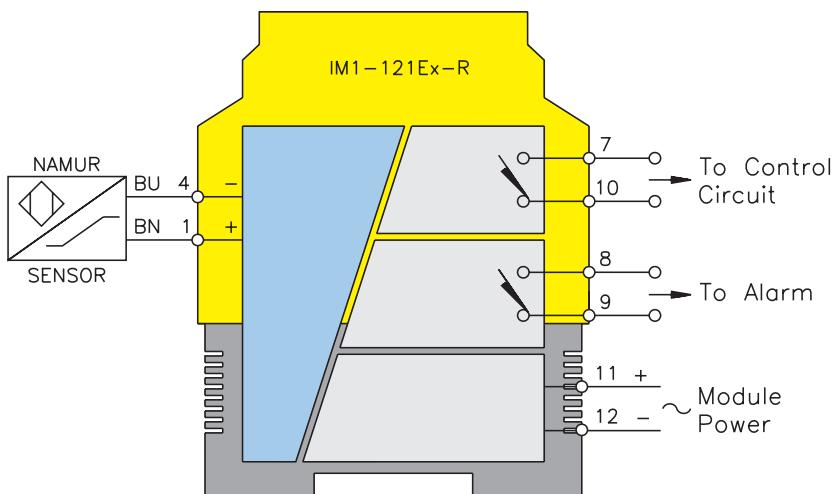

## IM1-121Ex-T

## Isolation Switch Relays

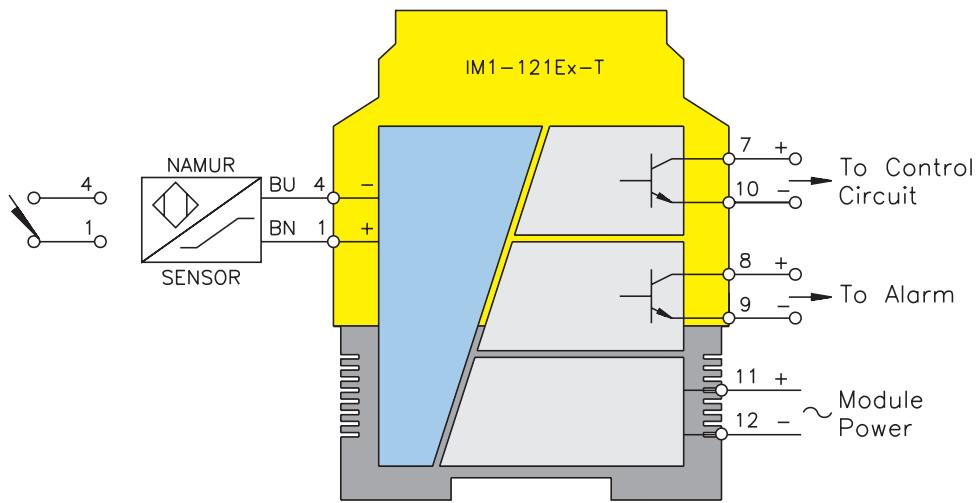**Functional Description:**

This 1 channel intrinsically safe interface device is designed to accommodate 1 switch or NAMUR proximity sensor input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area output is an open collector transistor reflecting the corresponding input change of state from the field circuit when properly configured.

An alarm output is also incorporated.

**Features:**

- 1 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 isolated short-circuit protected non-hazardous area open collector transistor outputs, 1 for alarm function
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . . ≤0.1 mA
Short-circuit Threshold . . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



2 Transistors, Potential Free Short-Circuit Protected
Switching Voltage . . . . . ≤30 VDC
Switch Current . . . . . ≤50 mA per channel
Switch Frequency . . . . . ≤5 kHz
Voltage Drop. . . . . ≤1.3 V

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-121Ex-T**

Pin #	Terminal Function
1	(+) to Field Device
2	No Connection
3	No Connection
4	(-) to Field Device
5	No Connection
6	No Connection
7	Non-Hazardous Area Transistor (+)
8	Non-Hazardous Area Trans Alarm (+)
9	Non-Hazardous Area Trans Alarm (-)
10	Non-Hazardous Area Transistor (-)
11	Module Power (+) or AC
12	Module Power (-) or AC

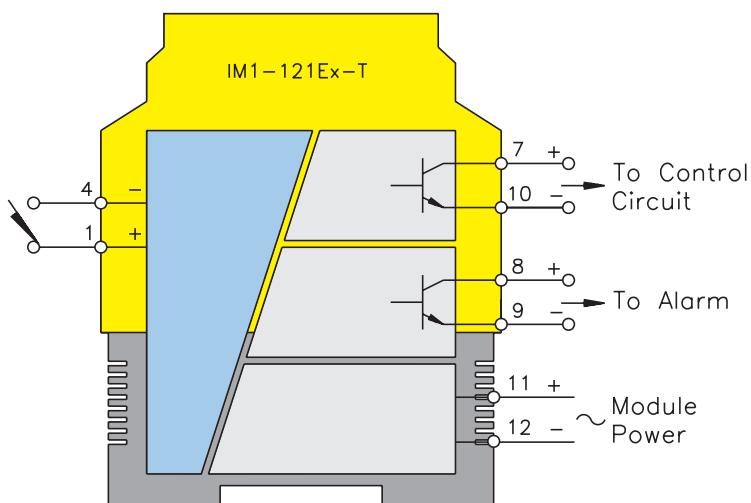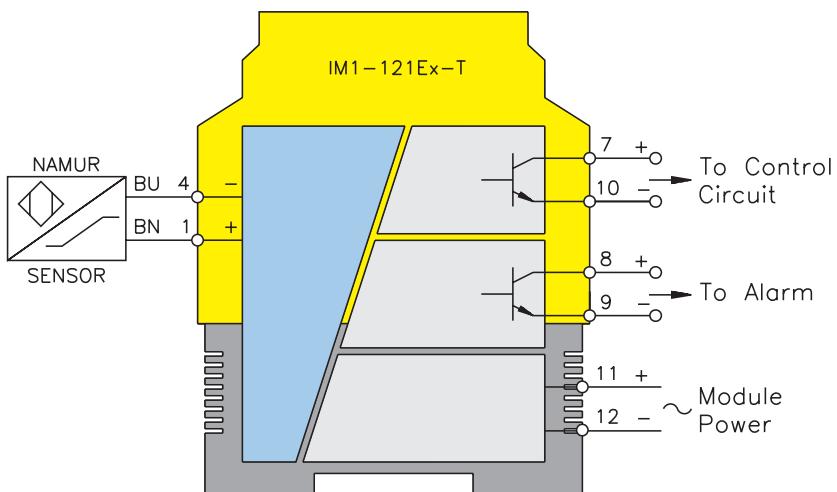

## IM1-22Ex-R

## Isolation Switch Relays

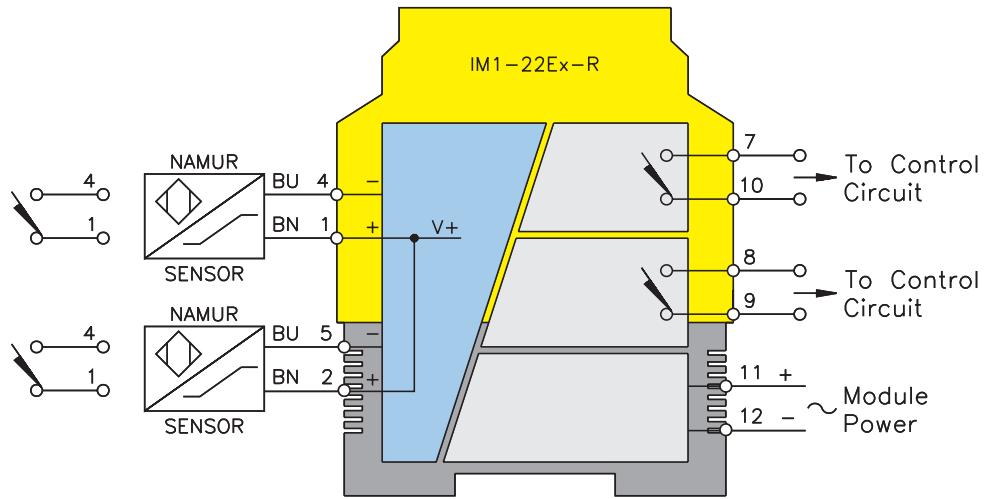**Functional Description:**

This 2 channel intrinsically safe interface device is designed to accommodate two switches or NAMUR proximity sensor inputs from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are two separate SPST switches reflecting the corresponding change of state from each individual input of the field circuit.

**Features:**

- 2 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 SPST non-hazardous area outputs; 1 for each channel
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . ≤0.1 mA
Short-circuit Threshold . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



2 Relays, 1 N.O. Contact Each
Voltage. . . . . ≥250 VAC/120 VDC
Current . . . . . ≥2 A per channel
Capacity . . . . . ≥500 VA / 60 W per channel
Switch Frequency . . . . . ≥10 Hz
Contacts . . . . . Silver-Alloy + Au (3 micro µ)

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-22Ex-R**

Pin #	Terminal Function
1	(+) to Field Device #1
2	(+) to Field Device #2
3	No Connection
4	(-) to Field Device #1
5	(-) to Field Device #2
6	No Connection
7	Non-Hazardous Area Switch #1
8	Non-Hazardous Area Switch #2
9	Non-Hazardous Area Switch #2
10	Non-Hazardous Area Switch #1
11	Module Power (+) or AC
12	Module Power (-) or AC

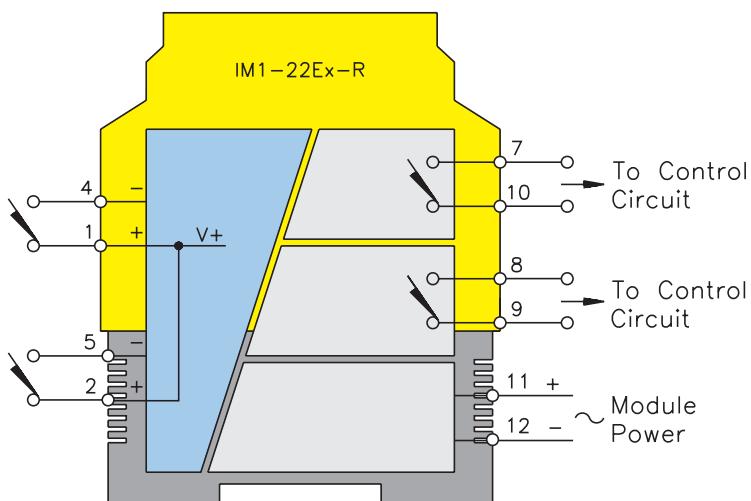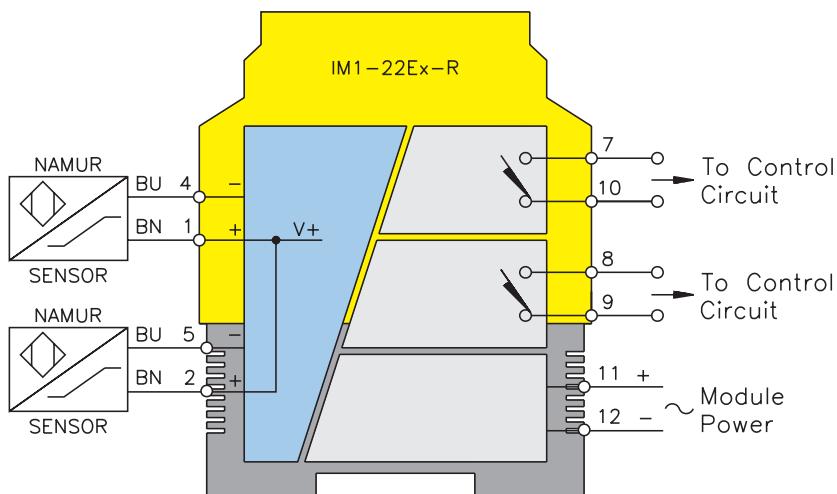

## IM1-22Ex-T

## Isolation Switch Relays

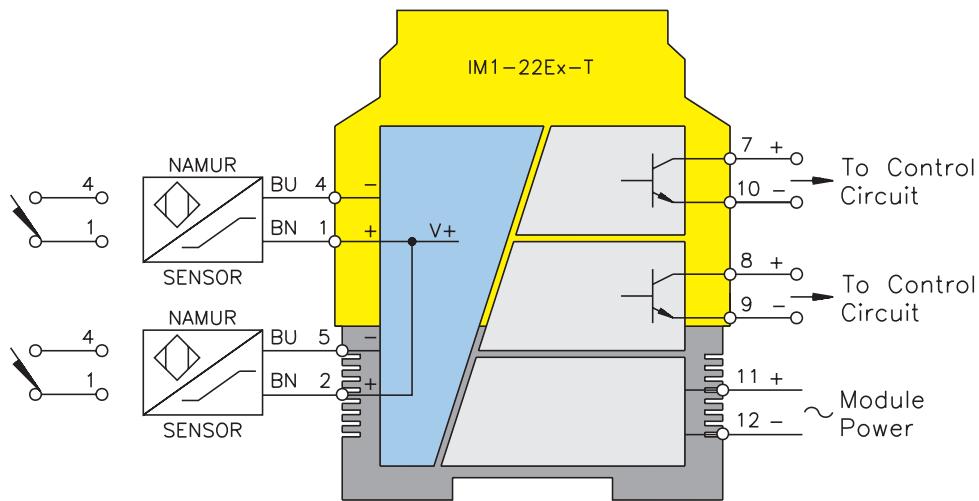**Functional Description:**

This 2 channel intrinsically safe interface device is designed to accommodate two switches or NAMUR proximity sensors input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are two separate open collector transistors reflecting the corresponding change of state from each individual input of the field circuit when properly configured.

**Features:**

- 2 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 isolated short-circuit protected open collector transistor non-hazardous area outputs; 1 for each channel
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

<u>Supply Voltage - (20-250 VAC or 20-125 VDC)</u>
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . . ≤0.1 mA
Short-circuit Threshold . . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



<u>2 Transistors, Potential Free Short-Circuit Protected</u>
Switching Voltage . . . . . ≤30 VDC
Switch Current. . . . . ≤50 mA per channel
Switch Frequency . . . . . ≤5 kHz
Voltage Drop. . . . . ≤1.3 V

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-22Ex-T**

Pin #	Terminal Function
1	(+) to Field Device #1
2	(+) to Field Device #2
3	No Connection
4	(-) to Field Device #1
5	(-) to Field Device #2
6	No Connection
7	Non-Hazardous Area Transistor #1 (+)
8	Non-Hazardous Area Transistor #2 (+)
9	Non-Hazardous Area Transistor #2 (-)
10	Non-Hazardous Area Transistor #1 (-)
11	Module Power (+) or AC
12	Module Power (-) or AC

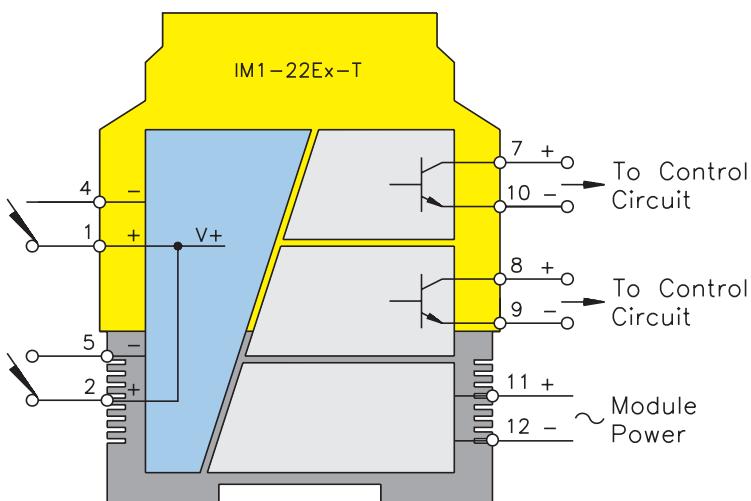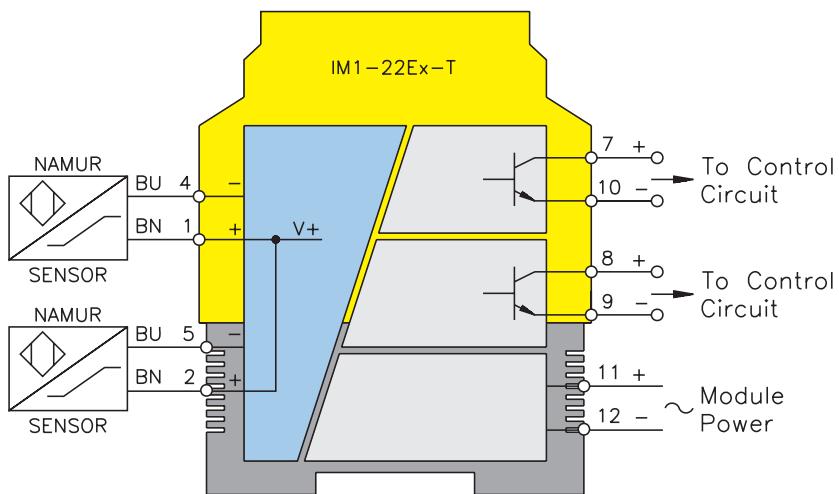

## IM1-22Ex-MT

## Isolation Switch Relays

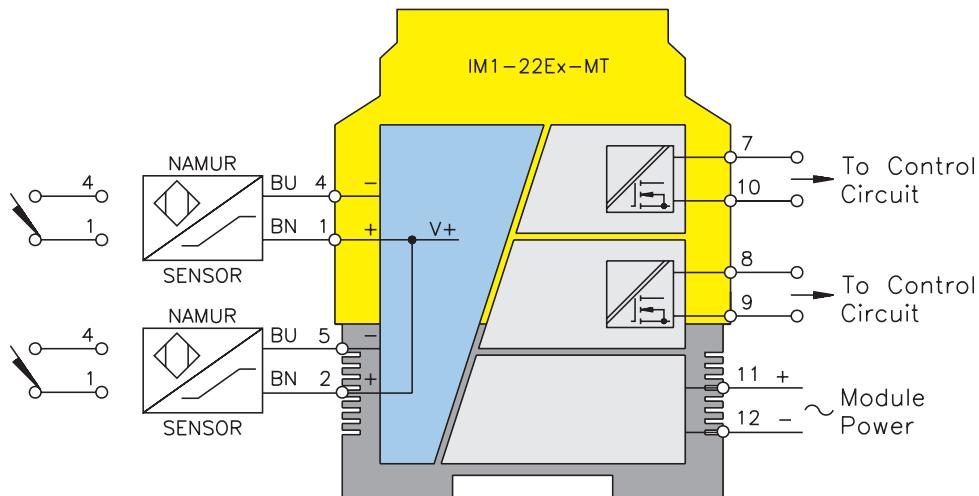**Functional Description:**

This 2 channel intrinsically safe interface device is designed to accommodate two switches or NAMUR proximity sensors input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are two separate MOSFET transistors reflecting the corresponding change of state from each individual input of the field circuit when properly configured.

**Features:**

- 2 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 isolated non-hazardous area unipolar MOSFET outputs allow switching voltages up to 250 VAC at a maximum frequency of 1 kHz, 1 for each channel
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

<u>Supply Voltage - (20-250 VAC or 20-125 VDC)</u>
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open Circuit Threshold . . ≤0.1 mA
Short Circuit Threshold. . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



<u>2 MOSFET, Potential Free</u>
Switching Voltage . . . . . ≥250 VAC/120 VDC
Switch Current. . . . . ≤90 mA per channel
Switch Capacity . . . . . 22.5 VA/10.8 W per channel
Switch Capacity . . . . . ≤1 kHz

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-22Ex-MT**

Pin #	Terminal Function
1	(+) to Field Device
2	(+) to Field Device
3	No Connection
4	(-) to Field Device
5	(-) to Field Device
6	No Connection
7	Non-Hazardous Area MOSFET #1 D
8	Non-Hazardous Area MOSFET #2 D
9	Non-Hazardous Area MOSFET #2 S
10	Non-Hazardous Area MOSFET #1 S
11	Module Power (+) or AC
12	Module Power (-) or AC

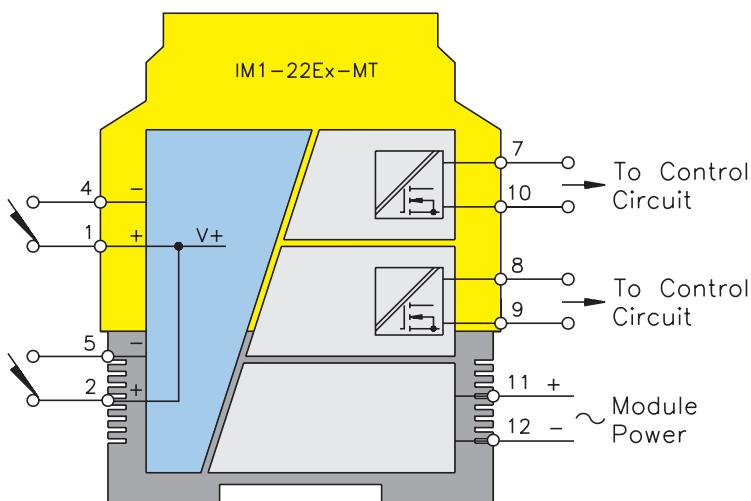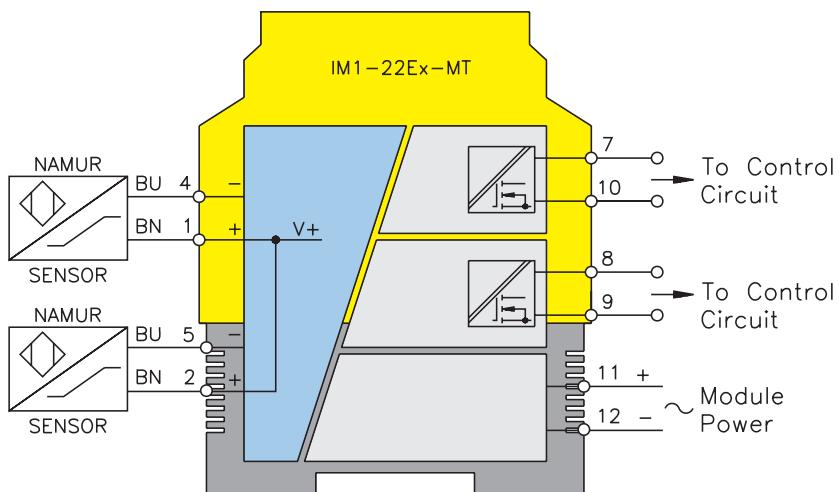

## IM1-12Ex-R

## Isolation Switch Relays

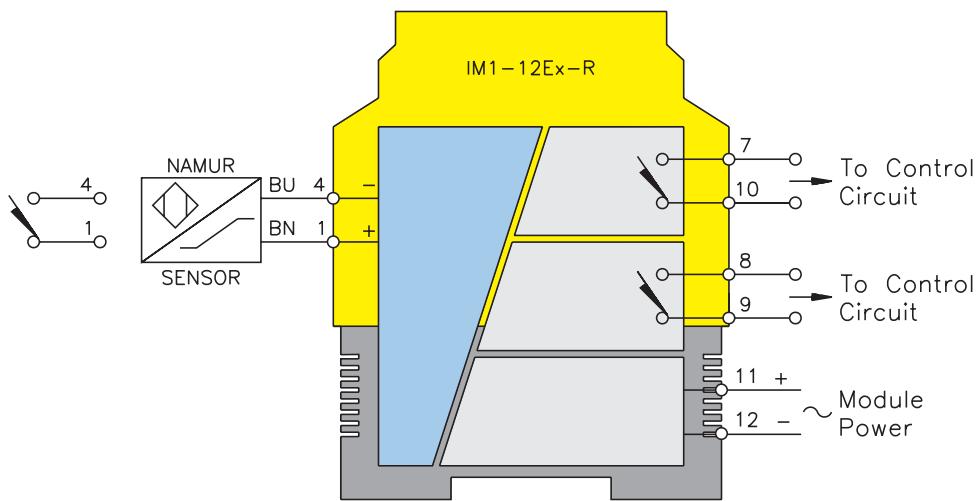**Functional Description:**

This 1 channel intrinsically safe interface device is designed to accommodate 1 switch or NAMUR proximity sensor input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are two separate SPST switches reflecting the corresponding input change of state from the field circuit.

**Features:**

- 1 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 non-hazardous area switch outputs; 1 for alarm function
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . ≤0.1 mA
Short-circuit Threshold . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



2 Relays, 1 N.O. Contact Each
Voltage. . . . . ≥250 VAC/120 VDC
Current . . . . . ≥2 A per channel
Capacity . . . . . ≥500 VA /60 W per channel
Switch Frequency . . . . ≥10 Hz
Contacts . . . . . Silver-Alloy + Au (3 micro µ)

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-12Ex-R**

Pin #	Terminal Function
1	(+) to Field Device
2	No Connection
3	No Connection
4	(-) to Field Device
5	No Connection
6	No Connection
7	Non-Hazardous Area Switch #1
8	Non-Hazardous Area Switch #2
9	Non-Hazardous Area Switch #2
10	Non-Hazardous Area Switch #1
11	Module Power (+) or AC
12	Module Power (-) or AC

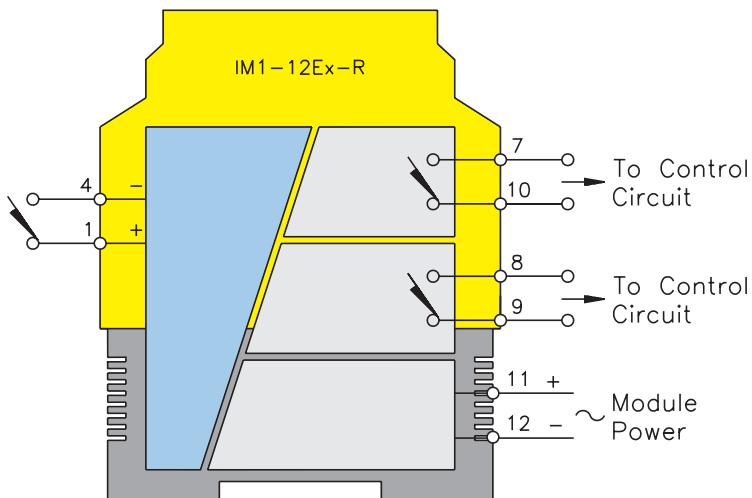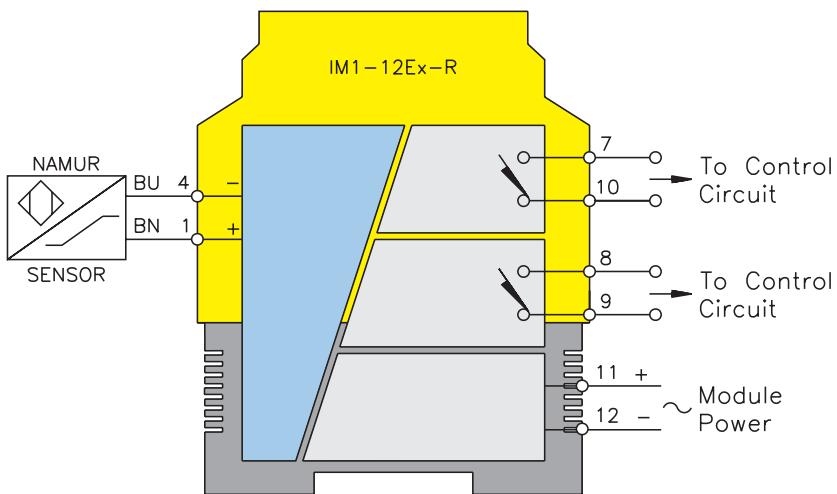

## IM1-12Ex-T

## Isolation Switch Relays

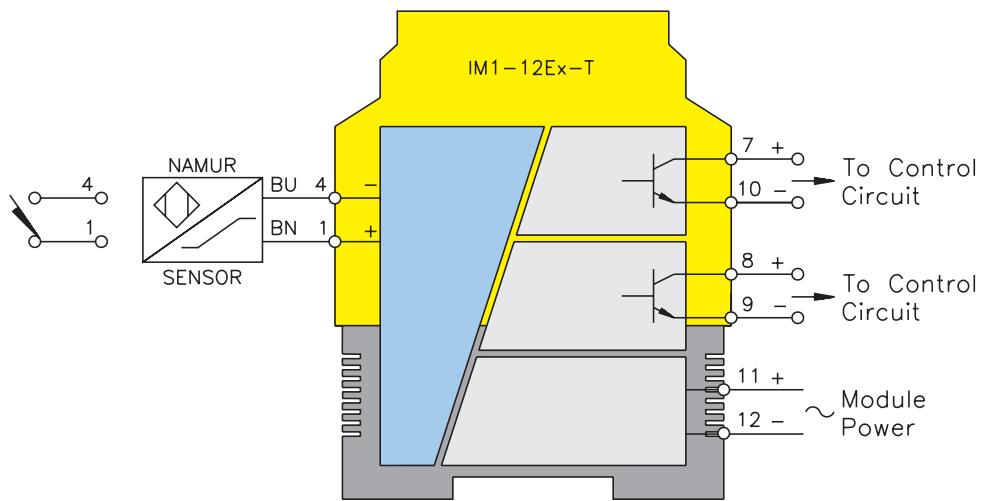**Functional Description:**

This 1 channel intrinsically safe interface device is designed to accommodate 1 switch or NAMUR proximity sensor input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are two separate open collector transistors reflecting the corresponding input change of state from the field circuit when properly configured.

**Features:**

- 1 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 isolated short-circuit protected non-hazardous area open collector transistor outputs; 1 for Alarm function
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . . ≤0.1 mA
Short-circuit Threshold . . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



2 Transistors, Potential Free Short-Circuit Protected
Switching Voltage . . . . . ≤30 VDC
Switch Current . . . . . ≤50 mA per channel
Switch Frequency . . . . . ≤5 Hz
Voltage Drop. . . . . ≤1.3 V

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-12Ex-T**

Pin #	Terminal Function
1	(+) to Field Device
2	No Connection
3	No Connection
4	(-) to Field Device
5	No Connection
6	No Connection
7	Non-Hazardous Area Transistor #1
8	Non-Hazardous Area Transistor #2
9	Non-Hazardous Area Transistor #2
10	Non-Hazardous Area Transistor #1
11	Module Power (+) or AC
12	Module Power (-) or AC

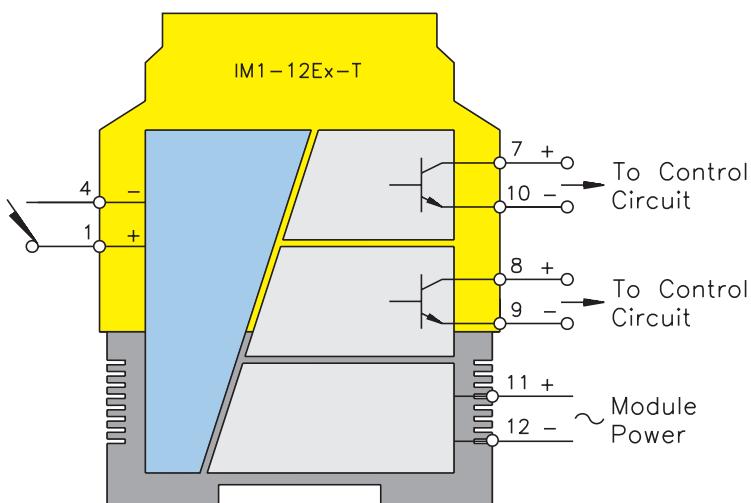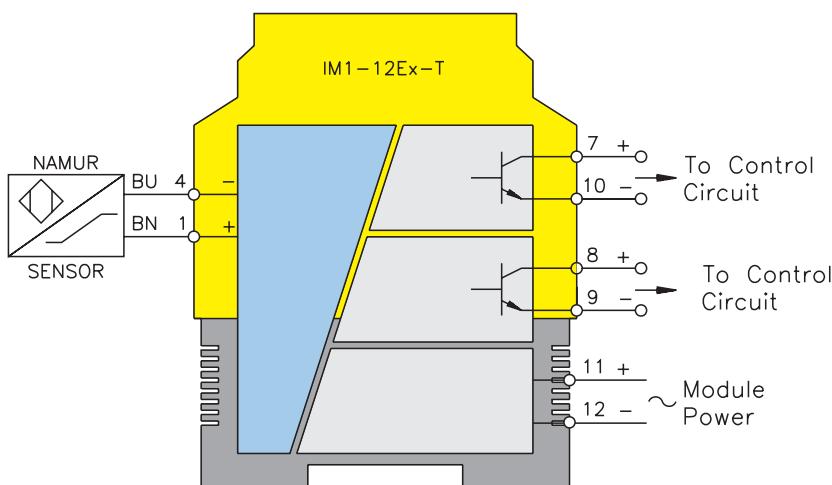

## IM1-12Ex-MT

## Isolation Switch Relays

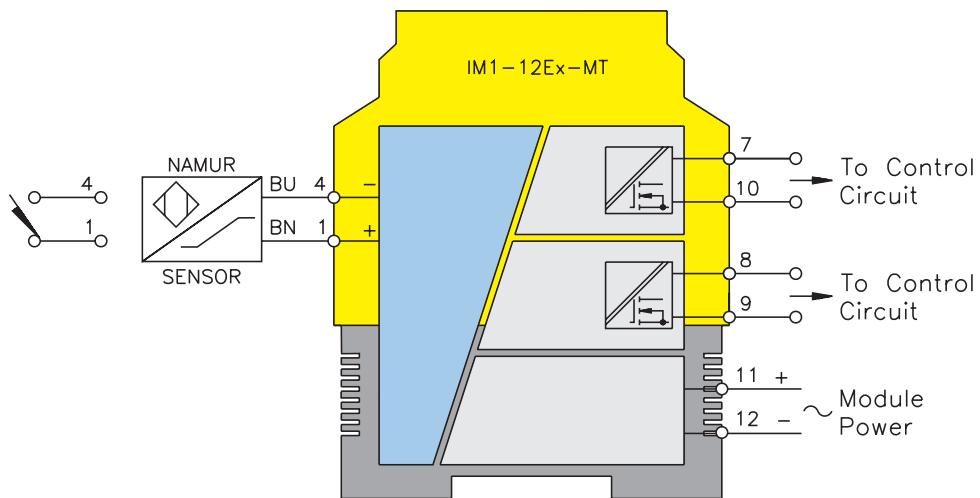**Functional Description:**

This 1 channel intrinsically safe interface device is designed to accommodate 1 switch or NAMUR proximity sensor input from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are two separate MOSFET Transistors reflecting the corresponding input change of state from the field circuit when properly configured.

**Features:**

- 1 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 2 isolated non-hazardous area unipolar MOSFET outputs allow switching voltages up to 250 VAC at a maximum frequency of 1 kHz
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . . ≤0.1 mA
Short-circuit Threshold . . . ≥6.0 mA

**Outputs: Non-Hazardous Area**



2 MOSFET, Potential Free
Switch Current . . . . . ≤90 mA per channel
Switch Capacity . . . . . 22.5 VA/10.8 W per channel
Switch Capacity . . . . . ≤1 kHz

For entity parameters see control drawings on pages B86 - B91.

**Isolation Switch Relays**


**IM1-12Ex-MT**

Pin #	Terminal Function
1	(+) to Field Device
2	No Connection
3	No Connection
4	(-) to Field Device
5	No Connection
6	No Connection
7	Non-Hazardous Area MOSFET #1 D
8	Non-Hazardous Area MOSFET #2 D Alarm
9	Non-Hazardous Area MOSFET #2 S Alarm
10	Non-Hazardous Area MOSFET #1 S
11	Module Power (+) or AC
12	Module Power (-) or AC

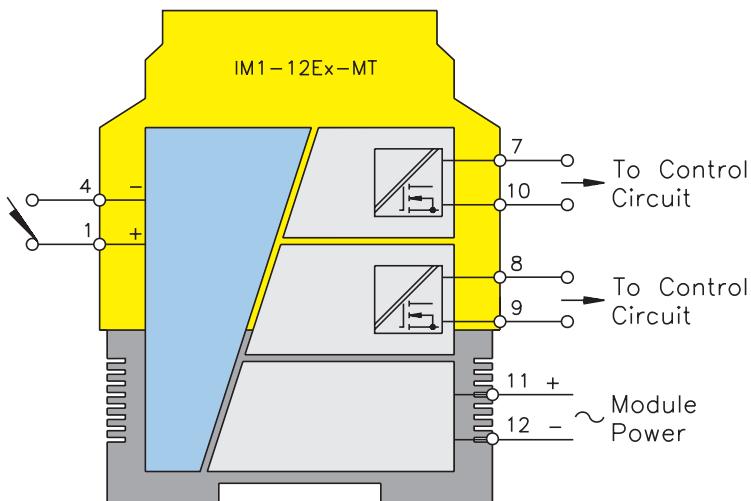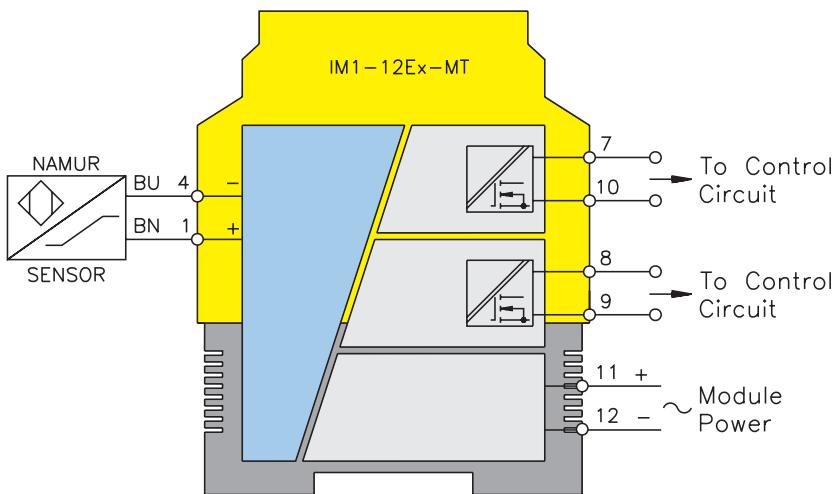

## IM1-451Ex-R

## Isolation Switch Relays

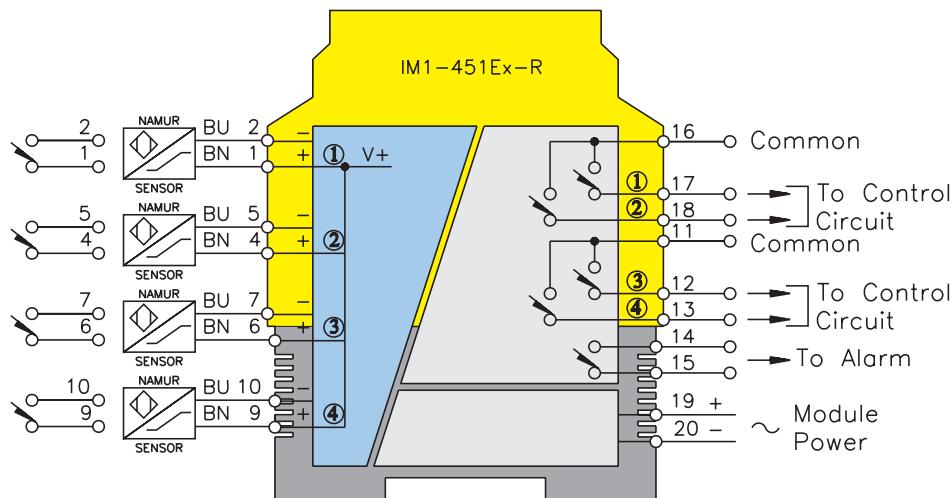**Functional Description:**

This 4 channel intrinsically safe interface device is designed to accommodate four switches or NAMUR proximity sensor inputs or any combination of the two from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are four separate SPST switches reflecting the corresponding change of state from each individual input of the field circuit, to its appropriate corresponding output.

A common alarm switch for all four channels is also incorporated.

**Features:**

- 4 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 4 SPST non-hazardous area outputs; 1 for each channel and 1 common alarm
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . . ≤0.1 mA
Short-circuit Threshold . . . ≥6.0 mA

**Outputs: Non-Hazardous Area**

5 Relays, 1 N.O. Contact Each
Switching Voltage . . . . . ≤250 VAC/120 VDC
Switch Current . . . . . ≤3 A per channel
Switch Capacity . . . . . ≤750 VAC per channel
Switch Frequency . . . . . ≤10 kHz
Contacts . . . . . . . Silver-Alloy + Au (3 micro µ)



For entity parameters see control drawings on pages B86 - B91.

## Isolation Switch Relays

**IM1-451Ex-R**


Pin #	Terminal Function
1	(+) to Field Device #1
2	(-) to Field Device #1
3	No Connection
4	(+) to Field Device #2
5	(-) to Field Device #2
6	(+) to Field Device #3
7	(-) to Field Device #3
8	No Connection
9	(+) to Field Device #4
10	(-) to Field Device #4

Pin #	Terminal Function
11	Non-Hazardous Area Sw 3 & 4 common
12	Non-Hazardous Area Switch #3 (-)
13	Non-Hazardous Area Switch #4 (-)
14	Non-Hazardous Area Switch Alarm
15	Non-Hazardous Area Switch Alarm
16	Non-Hazardous Area Sw 1 & 2 common
17	Non-Hazardous Area Switch #1 (-)
18	Non-Hazardous Area Switch #2 (-)
19	Module Power (+) or AC
20	Module Power (-) or AC

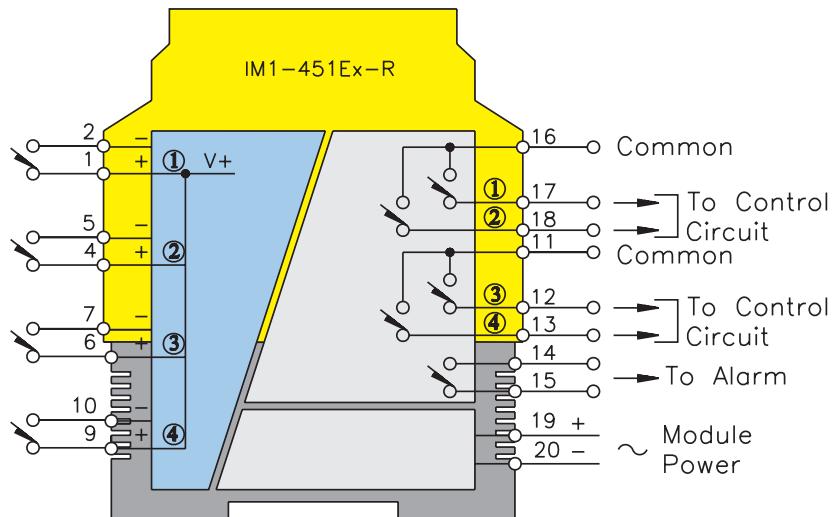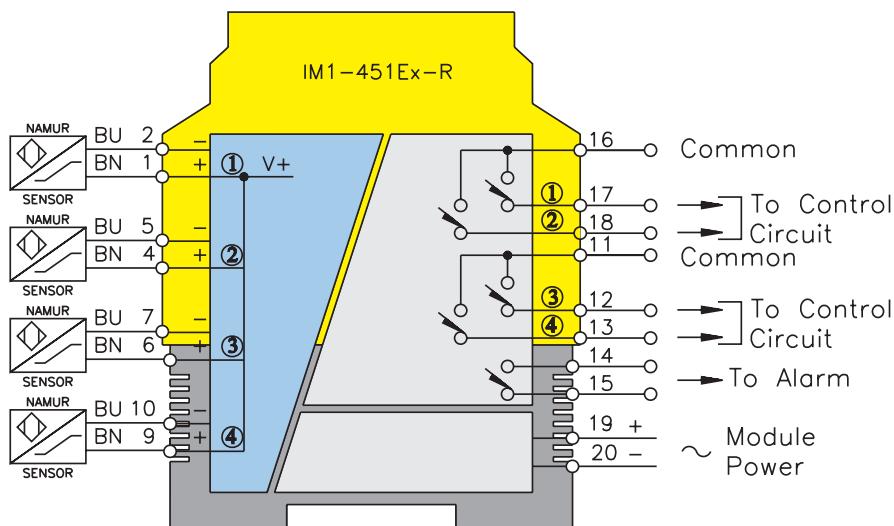

## IM1-451Ex-T

## Isolation Switch Relays

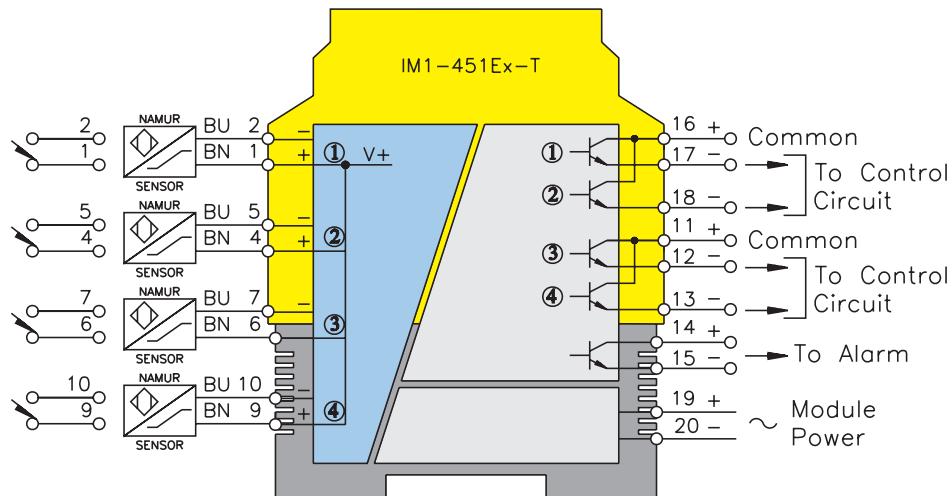**Functional Description:**

This 4 channel intrinsically safe interface device is designed to accommodate four switches or NAMUR proximity sensor inputs or any combination of the two from a hazardous area and repeat the change of state of the field circuits to a control system located in a non-hazardous area.

The non-hazardous area outputs are four open collector transistors reflecting the corresponding change of state from each individual input of the field circuit, to its appropriate corresponding output when appropriately configured.

A common alarm transistor for all four channels is also incorporated.

**Features:**

- 4 channel input for NAMUR sensors or mechanical switches
- Monitoring of field wiring for open or short-circuit (if required)
- Configuration switches on top of unit for easy access
- 4 short-circuit protected open collector transistor non-hazardous area outputs; 1 for each channel and 1 alarm
- Selectable N.O./N.C. outputs

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)
Inputs . . . . . (8.2 V, 8.2 mA)
Switching Threshold . . . . . 1.55 mA
Hysteresis . . . . . Typical 0.2 mA
Open-circuit Threshold . . . ≤0.1 mA
Short-circuit Threshold . . . ≥6.0 mA

**Outputs: Non-Hazardous Area**

5 Transistors, Potential Free Short-Circuit Protected
Switching Voltage . . . . . ≤30 VDC
Switch Current . . . . . ≤50 mA per channel
Switch Frequency . . . . . ≤3 kHz
Voltage Drop. . . . . ≤2.5 V



For entity parameters see control drawings on pages B86 - B91.

## Isolation Switch Relays

**IM1-451Ex-T**

Pin #	Terminal Function
1	(+) to Field Device #1
2	(-) to Field Device #1
3	No Connection
4	(+) to Field Device #2
5	(-) to Field Device #2
6	(+) to Field Device #3
7	(-) to Field Device #3
8	No Connection
9	(+) to Field Device #4
10	(-) to Field Device #4

Pin #	Terminal Function
11	(+) Non-Hazardous Area Trans 3 & 4
12	Non-Hazardous Area Transistor #3 (-)
13	Non-Hazardous Area Transistor #4 (-)
14	Non-Hazardous Area Trans Alarm (+)
15	Non-Hazardous Area Trans Alarm (-)
16	(+) Non-Hazardous Area Trans 1 & 2
17	Non-Hazardous Area Transistor #1 (-)
18	Non-Hazardous Area Transistor #2 (-)
19	Module Power (+) or AC
20	Module Power (-) or AC

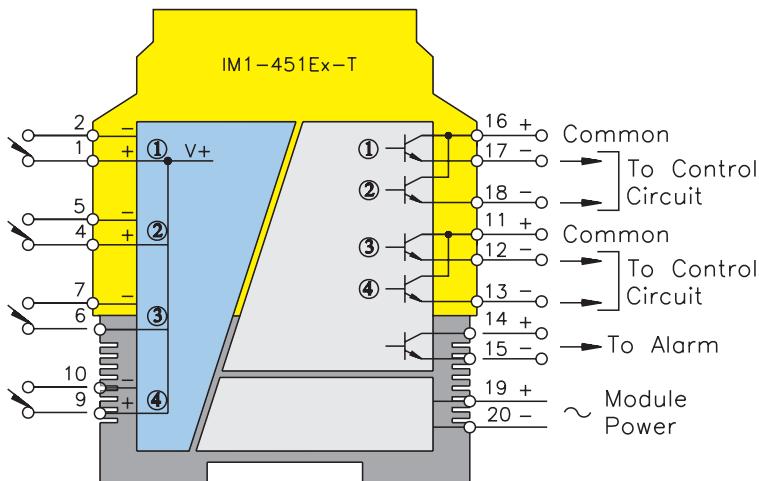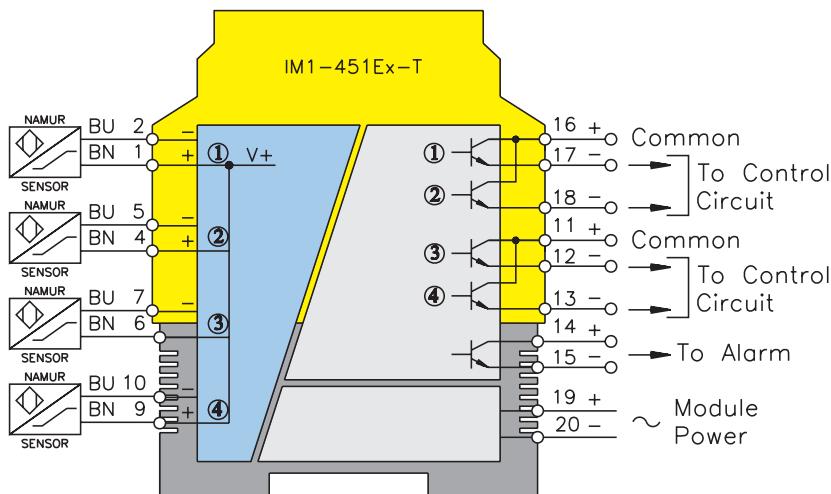



## Analog Data Transmitters

Analog data transmitters are a selection of devices that allow the transmission of hazardous area analog signals to a non-hazardous area as a direct one-to-one, or with a slight variation that is sometimes desired for specific applications.

The Analog Isolating Transmitters can transfer 4-20 mA, 0-20 mA, 0-10 V or 2-10 V signals from a hazardous area and repeat the signal in the non-hazardous area either as a current or a voltage signal; 2 current signals or a 2 channel one-to-one combination, depending on the module.

These devices offer a much requested and much desired mix of inputs and outputs that are sometimes difficult to achieve with conventional intrinsically safe interface devices. Flexibility is a key feature of these devices, with the option to convert from voltage to current or from current to voltage where required. The multi-channel device also provides a compact high-density solution for applications where space is an issue.

## Analog Data Transmitters

## Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.



**Interface Module**

**Function Group**

31 = Analog Data Transmitter

**Number of Non-Hazardous Area Outputs**

I = Non- Hazardous Area Current Output  
U = Non- Hazardous Area Voltage Output  
(Blank) = Universal Input Output

**Intrinsically Safe Associated Apparatus**

**Number of Non-Hazardous Area Outputs**

### Extension Examples:

#### **IM31-12Ex-I**

Interface Module  
Analog Data Transmitter  
Single Channel Input  
2 Non-Hazardous Area Current Outputs  
Intrinsically Safe Associated Apparatus  
Non-Hazardous Area Current Output

#### **IM31-11Ex-U**


Interface Module  
Analog Data Transmitter  
Single Channel Input  
1 Non-Hazardous Area Current Outputs  
Intrinsically Safe Associated Apparatus  
Non-Hazardous Area Voltage Output

#### **IM31-22Ex-U**

Interface Module  
Analog Data Transmitter  
2 Channel Input  
2 Non-Hazardous Area Current Outputs  
Intrinsically Safe Associated Apparatus  
Non-Hazardous Area Current Output

## IM31-11Ex-I

## Analog Data Transmitters

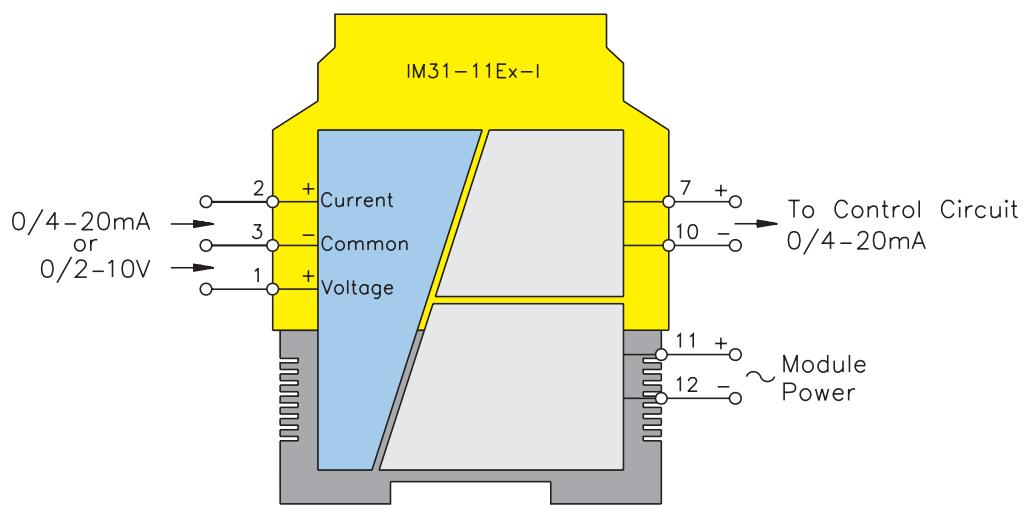**Functional Description:**

This 1 channel intrinsically safe interface will receive either a 0/4-20 mA or 0/2-10 V signal from a hazardous area and repeat the signal in the non-hazardous area as either a 0-20 mA or 4-20 mA signal reflecting the hazardous area input. It will drive a non-hazardous area load of up to 500 Ω.

In switch position "1:1" the hazardous area inputs are reflected one-to-one in the non-hazardous area. In position "LZ" a dead-zero signal (0-10 V or 0-20 mA) input is reflected as a live-zero signal (4-20 mA) output.

**Features:**

- 1 channel analog data transfer/converter
- Choice of input signal voltage or current
- Choice of output signal voltage or current
- Short-circuit protected output

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)	
Inputs . . . . .	0-10 V ( $\leq$ 20 V)
Input Resistance . . . . .	50 K Ω
Current . . . . .	0-20 mA ( $\leq$ 40 mA)
Input Resistance . . . . .	50 Ω

**Outputs: Non-Hazardous Area**



0/4-20 mA	
Load . . . . .	$\leq$ 500 Ω

For entity parameters see control drawings on pages B86 - B91.

**Analog Data Transmitters**


**IM31-11Ex-I**

Pin #	Terminal Function
1	(+) 0/2-10 V Field Input
2	(+) 0/4-20 mA Field Input
3	(-) 0/2-10 V Field Input
4	(-) 0/4-20 mA Field Input
5	No Connection
6	No Connection
7	(+) 0/4-20 mA Non-Hazardous Area Output
8	No Connection
9	No Connection
10	(-) 0/4-20 mA Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

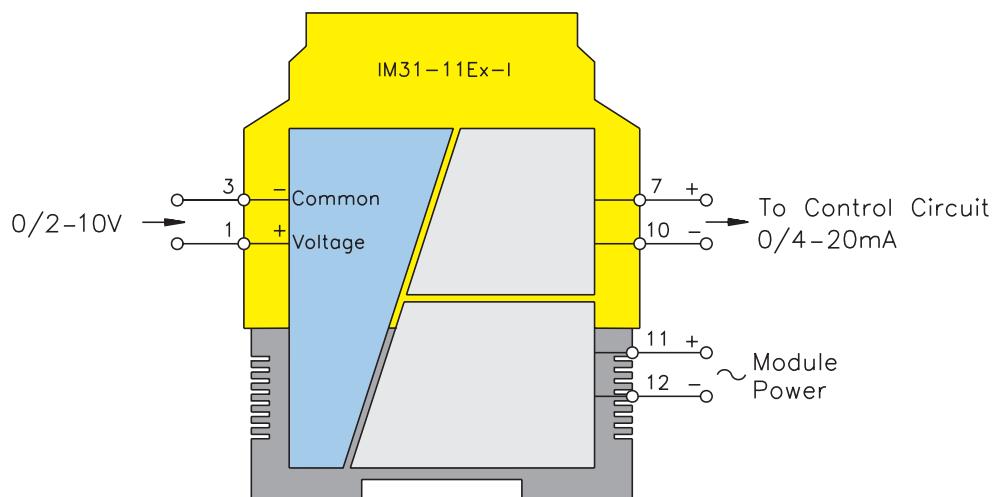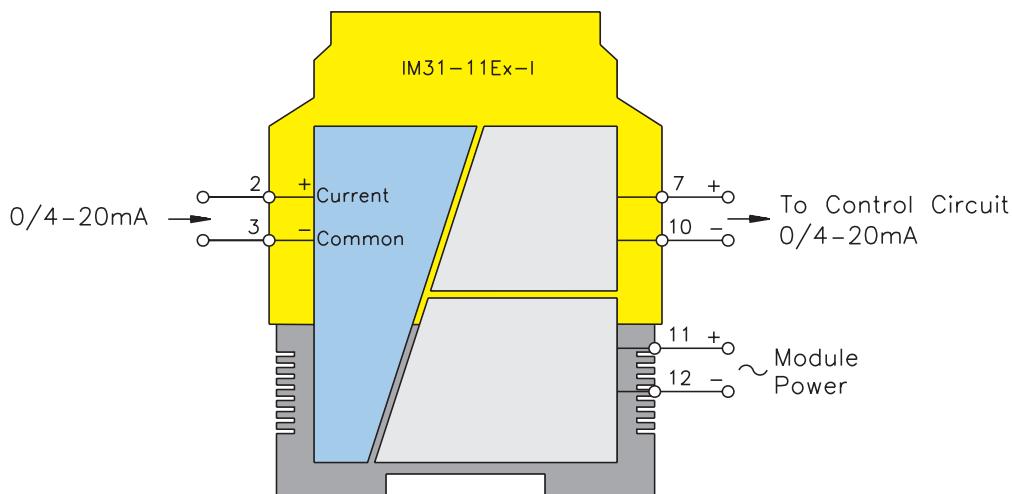

## IM31-11Ex-U

## Analog Data Transmitters

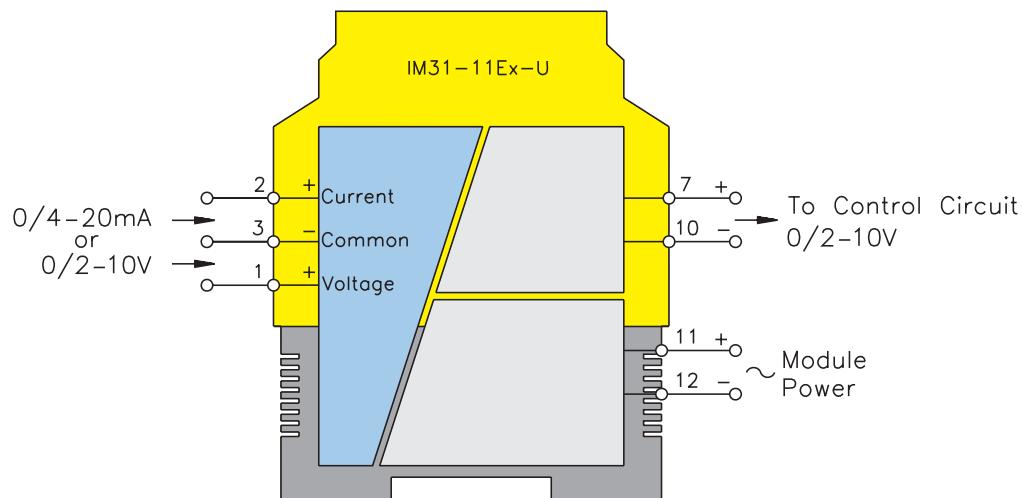**Functional Description:**

This 1 channel intrinsically safe interface will receive either a 0/4-20 mA or 0/2-10 V signal from a hazardous area and repeat the signal in the non-hazardous area as a 0-10 V signal reflecting the hazardous area input. It will drive a non-hazardous area load of up to 500  $\Omega$ .

In switch position "1:1" the hazardous area inputs are reflected one-to-one in the non-hazardous area. In position "LZ" a dead-zero signal (0/2-10 V or 0/4-20 mA) input is reflected as a live-zero signal (0/2-10 V) output.

**Features:**

- 1 channel analog data transfer/converter
- Choice of input signal voltage or current
- 0/2-10 V output signal
- Short-circuit protected output

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)	
Inputs . . . . .	0/2-10 V ( $\leq$ 20 V)
Input Resistance . . . . .	50 K $\Omega$
Current . . . . .	0-20 mA ( $\leq$ 40 mA)
Input Resistance . . . . .	50 $\Omega$

**Outputs: Non-Hazardous Area**



0/2-10 V
Load . . . . . $\leq$ 500 $\Omega$

For entity parameters see control drawings on pages B86 - B91.

## Analog Data Transmitters


**IM31-11Ex-U**

Pin #	Terminal Function
1	(+) 0/2-10 V Field Input
2	(+) 0/4-20 mA Field Input
3	(-) 0/2-10 V Field Input
4	(-) 0/4-20 mA Field Input
5	No Connection
6	No Connection
7	(+) 0/2-10 V Non-Hazardous Area Output
8	No Connection
9	No Connection
10	(-) 0/2-10 V Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

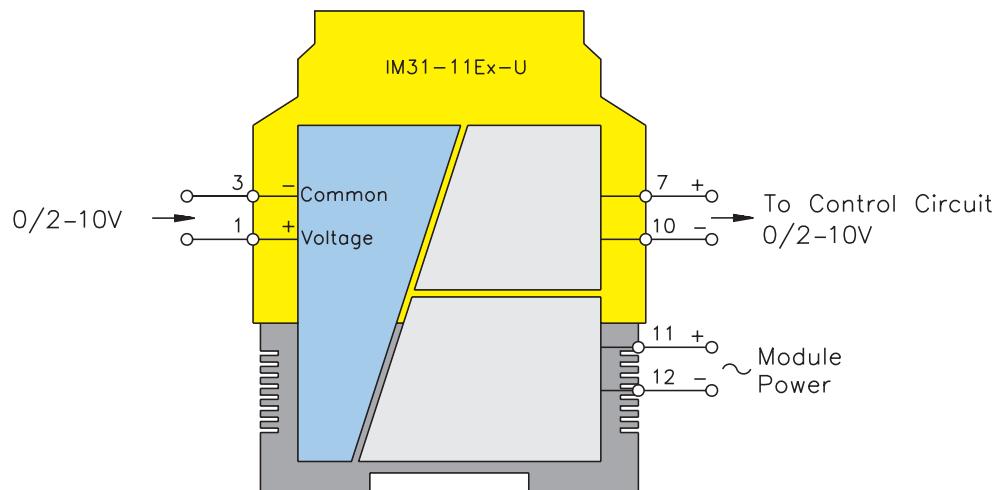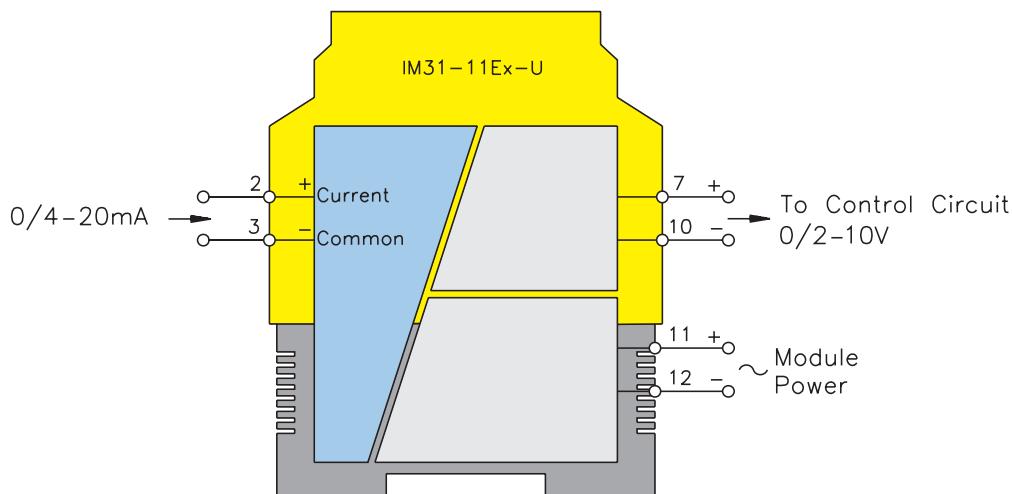

## IM31-12Ex-I

## Analog Data Transmitters

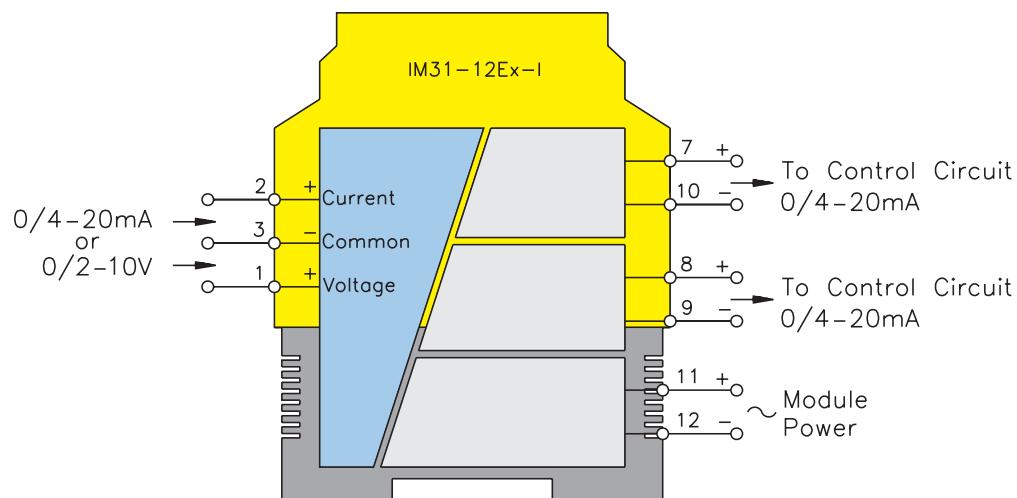**Functional Description:**

This 1 channel intrinsically safe interface will receive either a 0/4-20 mA or 0/2-10 V signal from a hazardous area and repeat the signal in the non-hazardous area as 2 separate 0-20 mA or 4-20 mA signals reflecting the hazardous area input. It will drive 2 separate non-hazardous area loads of up to 500  $\Omega$  each.

In switch position "1:1" the hazardous area inputs are reflected one-to-one in the non-hazardous area. In position "LZ" a dead-zero signal (0-10 V or 0-20 mA) input is reflected as 2 separate live-zero signal (4-20 mA) outputs.

**Features:**

- 1 channel analog data transfer/converter
- Choice of input signal voltage or current
- Two, 0/4-20 mA current output signals
- Short-circuit protected outputs

**Electrical Parameters:****Inputs: Hazardous Area**

<u>Supply Voltage - (20-250 VAC or 20-125 VDC)</u>
Inputs . . . . . 0-10 V ( $\leq$ 20 V)
Input Resistance . . . . . 50 K $\Omega$
Current . . . . . 0-20 mA ( $\leq$ 40 mA)
Input Resistance . . . . . 50 $\Omega$

**Outputs: Non-Hazardous Area**



<u>0/4-20 mA</u>
Load . . . . . $\leq$ 500 $\Omega$

For entity parameters see control drawings on pages B86 - B91.

**Analog Data Transmitters**


**IM31-12Ex-I**

Pin #	Terminal Function
1	(+) 0/2-10 V Field Input
2	(+) 0/4-20 mA Field Input
3	(-) 0/2-10 V Field Input
4	(-) 0/4-20 mA Field Input
5	No Connection
6	No Connection
7	(+) 0/4-20 mA Non-Hazardous Area Output #1
8	(+) 0/4-20 mA Non-Hazardous Area Output #2
9	(-) 0/4-20 mA Non-Hazardous Area Output #2
10	(-) 0/4-20 mA Non-Hazardous Area Output #1
11	Module Power (+) or AC
12	Module Power (-) or AC

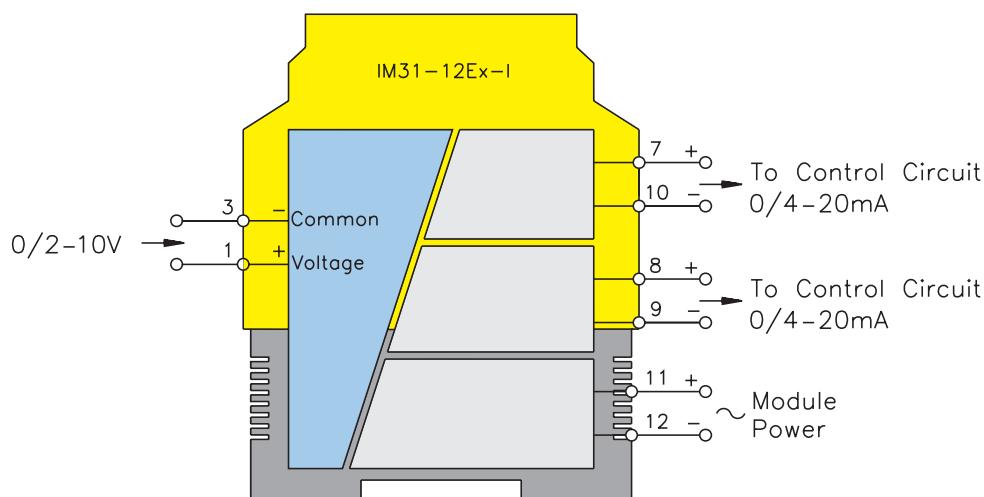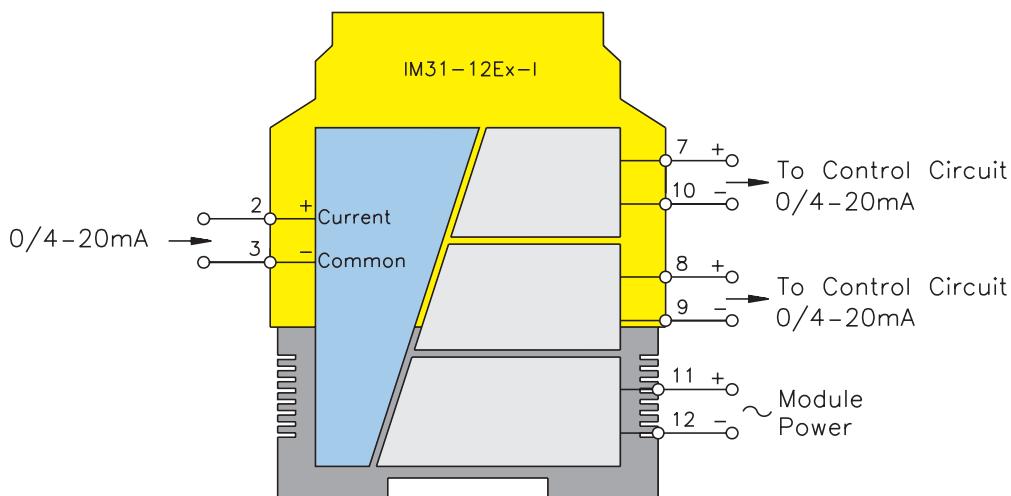

## IM31-22Ex-I

## Analog Data Transmitters

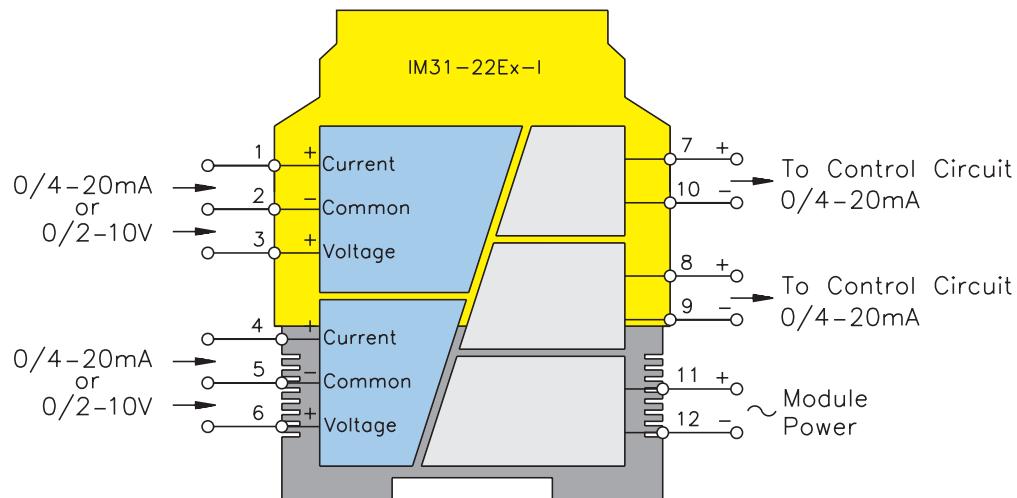**Functional Description:**

This 2 channel intrinsically safe interface will receive either a 0/4-20 mA or 0/2-10 V signal from 2 separate hazardous area signals and repeat the signal in the non-hazardous area as either a 0-20 mA or 4-20 mA signal reflecting its corresponding hazardous area input. It will drive a non-hazardous area load of up to 500  $\Omega$  for each for each channel.

In switch position "1:1" the hazardous area inputs are reflected one-to-one in the non-hazardous area. In position "LZ" a dead-zero signal (0-10 V or 0-20 mA) input is reflected as a live-zero signal (4-20 mA) output, 1 for each separate channel.

**Features:**

- 2 channel analog data transfer/converter
- Choice of input signals voltage, current or combination
- 0/4-20 mA outputs, 1 per input
- Short-circuit protected outputs

**Electrical Parameters:****Inputs: Hazardous Area**

<u>Supply Voltage - (20-250 VAC or 20-125 VDC)</u>
Inputs . . . . . 0-10 V ( $\leq$ 20 V)
Input Resistance . . . . . 50 K $\Omega$
Current . . . . . 0-20 mA ( $\leq$ 40 mA)
Input Resistance . . . . . 50 $\Omega$

**Outputs: Non-Hazardous Area**



<u>0/4-20 mA</u>
Load . . . . . $\leq$ 500 $\Omega$


For entity parameters see control drawings on pages B86 - B91.

## Analog Data Transmitters

**IM31-22Ex-I**

Pin #	Terminal Function
1	(+) 0/2-10 V Field Input
2	(-) 0/4-20 mA Field Input
3	(-) 0/2-10 V Field Input
4	(+) 0/4-20 mA Field Input
5	(-) 0/4-20 mA Field Input
6	(+) 0/2-10 V Field Input
7	(-) 0/4-20 mA Non-Hazardous Area Output
8	(+) 0/4-20 mA Non-Hazardous Area Output
9	(-) 0/4-20 mA Non-Hazardous Area Output
10	(+) 0/4-20 mA Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

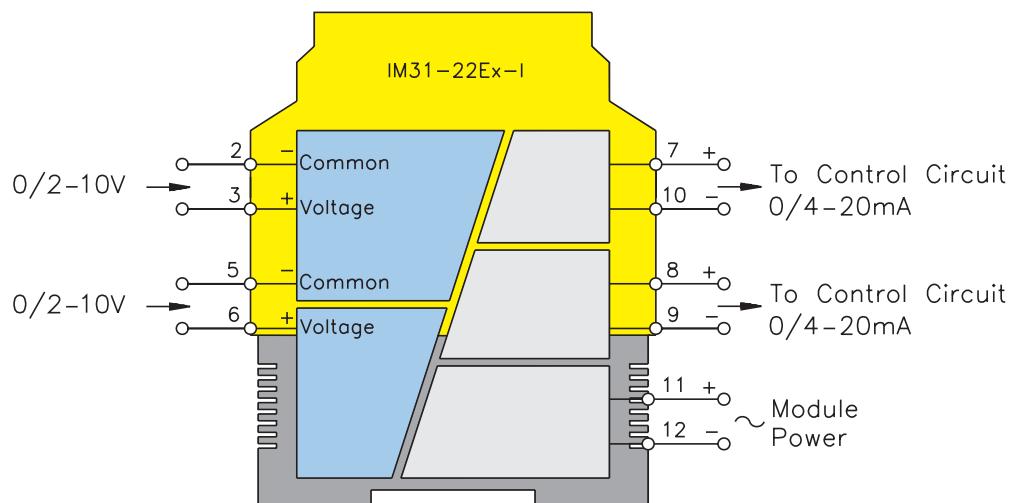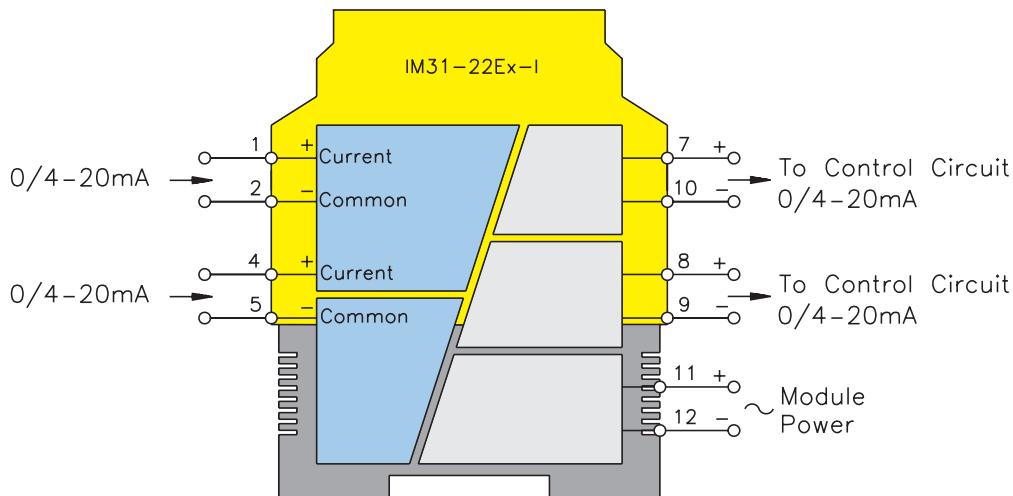

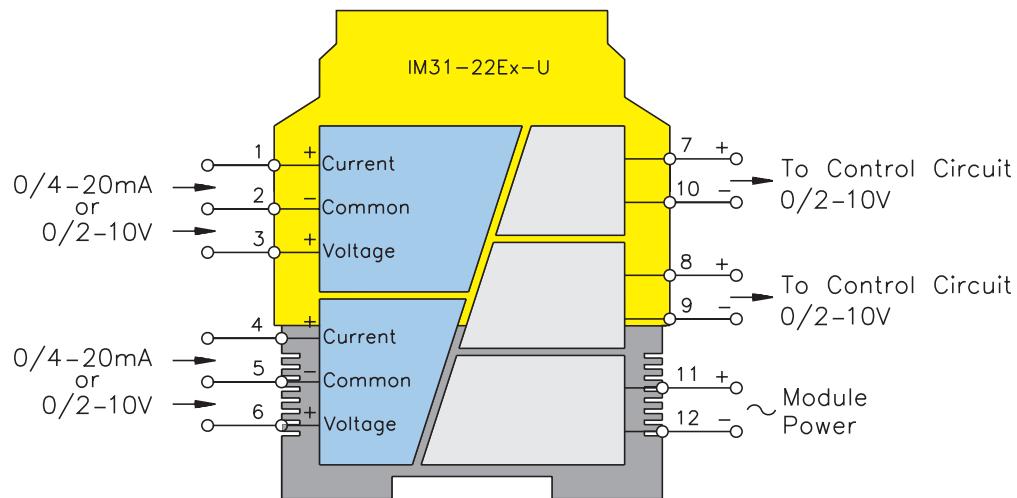

#### Functional Description:

This 2 channel intrinsically safe interface will receive either a 0/4-20 mA or 0/2-10 V signal from 2 separate hazardous area signals and repeat the signal in the non-hazardous area, as either a 0-10 V or 2-10 V signal reflecting its corresponding hazardous area input. It will drive a non-hazardous area load of up to 500  $\Omega$  for each for each channel.

In switch position "1:1" the hazardous area inputs are reflected one-to-one in the non-hazardous area. In position "LZ" a dead-zero signal (0-10 V or 0-20 mA) input is reflected as a live-zero signal (2-10 V) output, 1 for each separate channel.

#### Features:

- 2 channel analog data transfer/converter
- Choice of input signals voltage, current or combination
- 0/2-10 V outputs, 1 per input
- Short-circuit protected outputs

#### Electrical Parameters:

##### Inputs: Hazardous Area

Supply Voltage - (20-250 VAC or 20-125 VDC)	
Inputs . . . . .	0/2-10 V ( $\leq 20$ V)
Input Resistance . . . . .	50 K $\Omega$
Current . . . . .	0-20 mA ( $\leq 40$ mA)
Input Resistance . . . . .	50 $\Omega$

##### Outputs: Non-Hazardous Area



0/2-10 V	
Load . . . . .	$\leq 500 \Omega$

For entity parameters see control drawings on pages B86 - B91.

**Analog Data Transmitters**

**IM31-22Ex-U**



Pin #	Terminal Function
1	(+) 0/2-10 V Field Input
2	(-) 0/4-20 mA Field Input
3	(-) 0/2-10 V Field Input
4	(+) 0/4-20 mA Field Input
5	(-) 0/4-20 mA Field Input
6	(-) 0/2-10 V Field Input
7	(-) 0/2-10 V Non-Hazardous Area Output
8	(+) 0/2-10 V Non-Hazardous Area Output
9	(-) 0/2-10 V Non-Hazardous Area Output
10	(+) 0/2-10 V Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

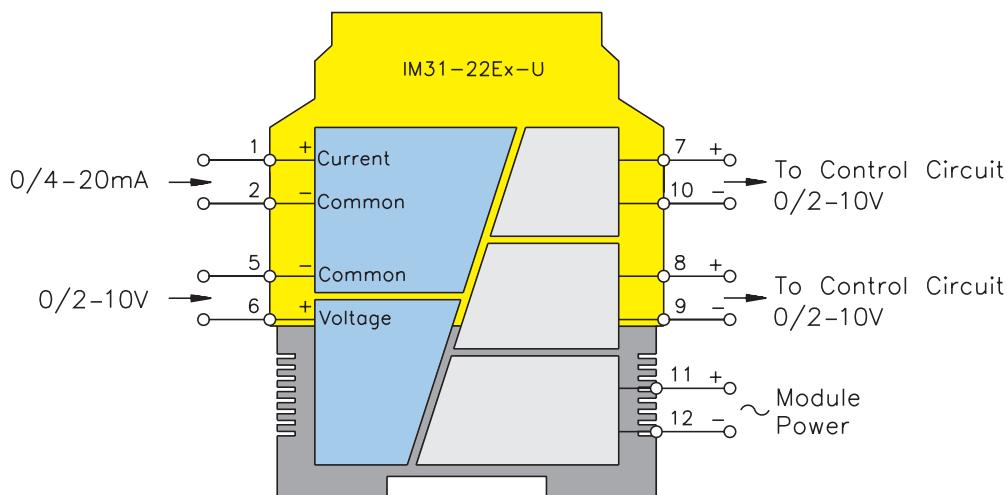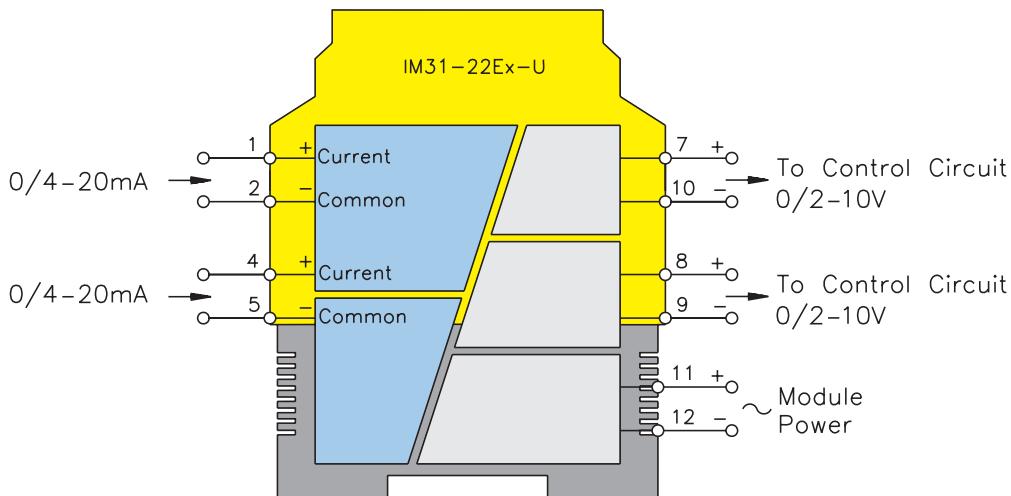

## IM31-22Ex-U

## Analog Data Transmitters

Pin #	Terminal Function
1	(+) 0/2-10 V Field Input
2	(-) 0/4-20 mA Field Input
3	(-) 0/2-10 V Field Input
4	(+) 0/4-20 mA Field Input
5	(-) 0/4-20 mA Field Input
6	(-) 0/2-10 V Field Input
7	(-) 0/2-10 V Non-Hazardous Area Output
8	(+) 0/2-10 V Non-Hazardous Area Output
9	(-) 0/2-10 V Non-Hazardous Area Output
10	(+) 0/2-10 V Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

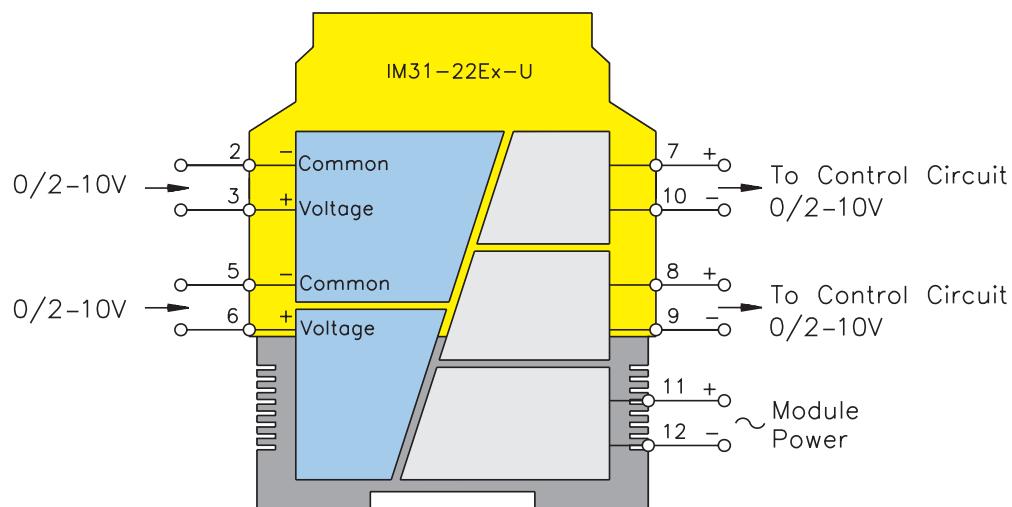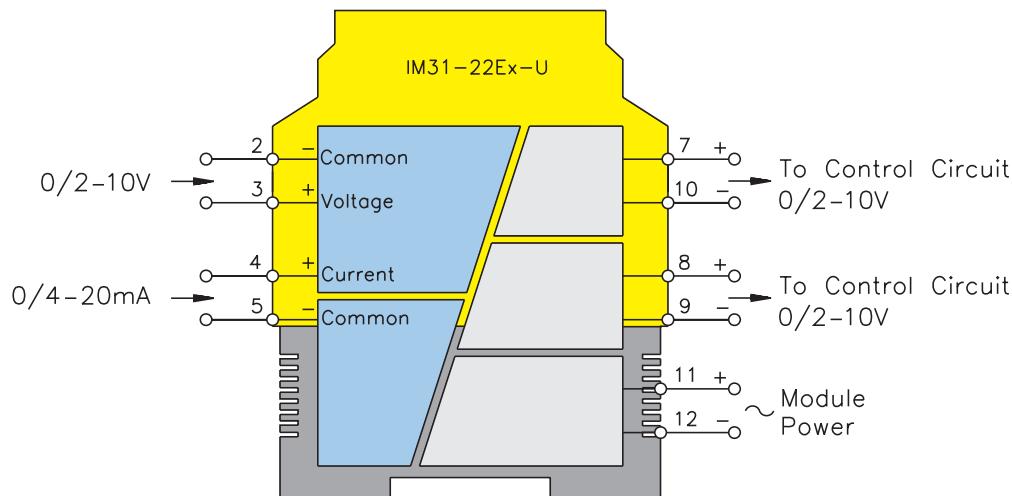

**Notes:**



## Analog Input Repeaters/Supplies

The analog input repeaters/supplies interfaces in this section are designed to work with the vast majority of analog input field devices. Field devices can range from a simple 2-wire 4-20 mA transmitter to a 3-wire HART smart device requiring the interface to provide operating power and a bi-directional path for the digital HART information along with the 4-20 mA control signal. The analog input units will also accept a source signal from a separately powered field device, or other source generated by an "IS" device in a hazardous area. The unit can also be used to receive a source "IS" signal from a 0/4-20 mA driver with "IS" outputs in another non-hazardous area. The "IS" driver/"IS" receiver combination render the cable connections intrinsically safe thus allowing the driver/reciever cable to be used with other "IS" signals in multi-core cables or in an "IS" cable tray.

The analog input units versatility allows easy selection for most transmitter applications, thus reducing stock and inventory further simplifying the selection process. The control system can also be configured to provide alarm functions for certain states indicating the short or open-circuit conditions for the units.

Ease of installation is inherent when applying these devices.

## Analog Input Repeaters/Supplies

## Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

IM 33 - 12Ex - Hi / 24 VDC

**Interface Module**

**Function Group**

33 = Analog Input Repeaters/Suppliers

**Number of Non-Hazardous Area Outputs**

Supply Voltage (19-29 VDC)

HART Compatible

Intrinsically Safe Associated Apparatus

**Number of Non-Hazardous Area Outputs**

### Extension Examples:

**IM33-12Ex-Hi/24 VDC**

Interface Module

Analog Input Repeaters/Suppliers

Single Channel Input

Two Non-Hazardous Area Current Outputs

Intrinsically Safe Associated Apparatus

HART Compatible

24 VDC Supply Voltage

**IM33-11Ex-Hi/24 VDC**

## Analog Input Repeaters/Supplies



<b>Pin #</b>	<b>Terminal Function</b>
1	(+) 2-wire or 3-wire Field Power
2	(+) 2-wire or 3-wire Field Power
3	(-) Field Power for 2,3 Wire Device
4	N/C
5	N/C
6	N/C
7	(+) 4/20 mA Non-Hazardous Area Output
8	N/C
9	N/C
10	(-) 4/20 mA Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

## **Functional Description:**

This 1 channel intrinsically safe interface will power a 2 or 3-wire HART transmitter or a separately powered field device. It will retransmit the 0-20 mA or 4-20 mA signal from a hazardous area, and repeat the signal in the non-hazardous area as a 0-20 mA or 4-20 mA signal reflecting the hazardous area input. The device will also accept a source 0-20 mA or 4-20 mA signal from a separately powered field device and repeat this signal in the non-hazardous area. It will drive a non-hazardous area load of up to 500  $\Omega$ .

Due to the "1:1" transmission characteristic, open circuit or short circuit conditions can be indicated by a 0 mA or 22.5 mA reading indicating the condition for alarm implementation.

HART or conventional transmitters can be accommodated by this device with bi-directional communications of digital information with HART field devices.

## Features:

- 1 channel HART or "IS" compatible Analog Input
  - 2, 3 or 4-wire configurations for sinking or sourcing field devices
  - Constant field voltage
  - Short-circuit protected field circuit
  - Over/under current indication of 0 or 22.5 mA
  - SIL 2 rated

### **Electrical Parameters:**

## Inputs: Hazardous Area

Supply Voltage - (19-29 VDC)

**Input Resistance** 250  $\Omega$

#### Operating Characteristics:

Voltage: . . . . . 17 V @ 20 mA

Current 0-22 mA

Short-circuit Current (short-term) 60 mA (for 50 ms)

### **Outputs: Non-Hazardous Area**

0/4-20 mA

Load  $\leq 500 \Omega$




Open-circuit Indication . . 0 mA

Closed-circuit Indication . . ≥22.5 mA

For entity parameters see control drawings on pages B86 - B91.

**Analog Input Repeaters/Supplies**

**IM33-11Ex-Hi/24 VDC**

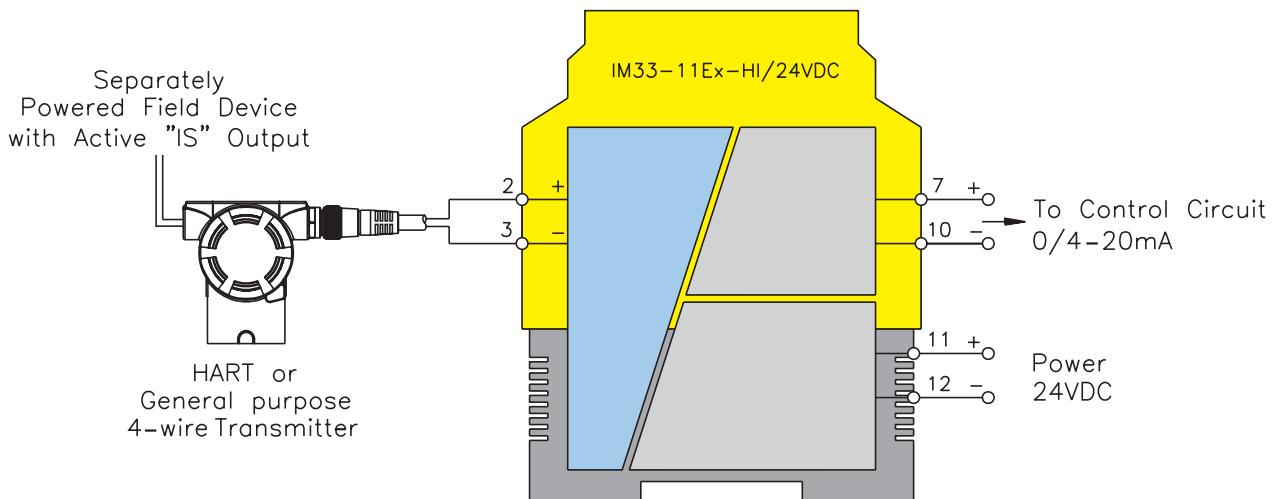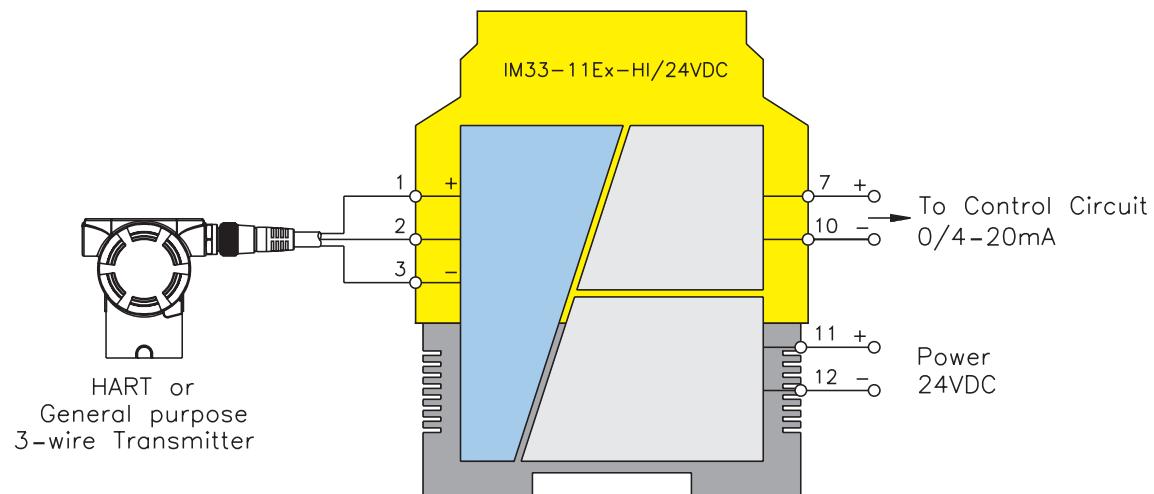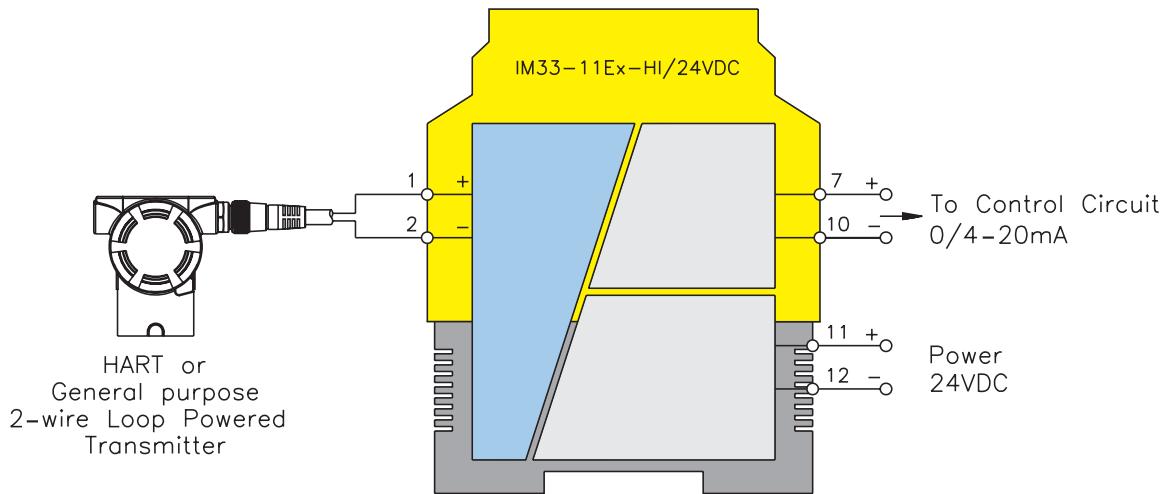

IM33-12Ex-Hi/24 VDC

Analog Input Repeaters/Supplies



Pin #	Terminal Function
1	(+) 2-wire or 3-wire Field Power
2	4/20 mA Input from Field Device
3	(-) Field Power for 2, 3-wire Device
4	N/C
5	N/C
6	N/C
7	(+) 4/20 mA Non-Hazardous Area Output
8	(+) 4/20 mA Non-Hazardous Area Output
9	(-) 4/20 mA Non-Hazardous Area Output
10	(-) 4/20 mA Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

**Functional Description:**

This 1 channel intrinsically safe interface will power a 2 or 3-wire HART transmitter or a separately powered field device and retransmit the 0-20 mA or 4-20 mA from a hazardous area and repeat the signal in the non-hazardous area as two 0-20 mA or 4-20 mA signals reflecting the hazardous area input. The device will also accept a source 0-20 mA or 4-20 mA signal from a separately powered field device and repeat this signal as two non-hazardous area signal. It will drive two separate non-hazardous area loads of up to 500 Ω each.

Due to the "1:1" transmission characteristic, open-circuit or short-circuit conditions can be indicated by a 0 mA or 22.5 mA reading indicating the condition for alarm implementation.

**Features:**

- 1 channel HART or "IS" compatible analog inputs
- 2, 3, or 4-wire configurations for sinking or sourcing field devices in any combination
- 2 independent 0/4-20 mA outputs reflecting a single hazardous area input
- Constant field voltage
- Short-circuit protected field circuits
- Over/under current indication of 0 or 22.5 mA
- SIL 2 rated

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (19-29 VDC)

Input Resistance . . . . . 250 Ω

Operating Characteristics:

Voltage. . . . . 17 V @ 20 mA

Current . . . . . 0-22 mA

Short-circuit Current (short-term) 60 mA (for 50 ms)

**Outputs: Non-Hazardous Area**

0/4-20 mA

Load . . . . . ≤500 Ω




Open-circuit Indication . . . 0 mA

Closed-circuit Indication . . ≥22.5 mA

For entity parameters see control drawings on pages B86 - B91.

**Analog Input Repeaters/Supplies**

**IM33-12Ex-HI/24 VDC**

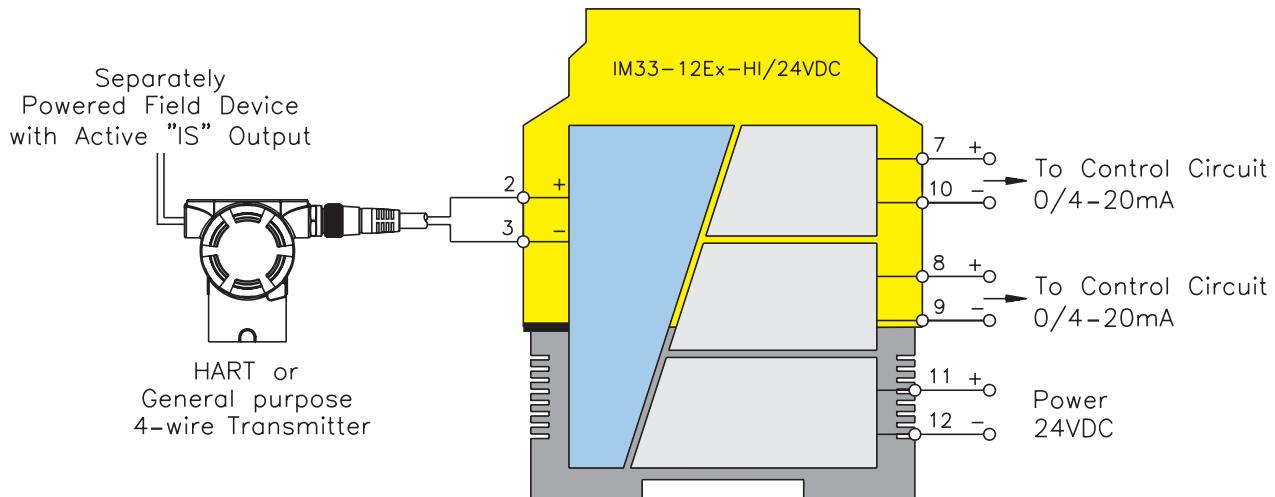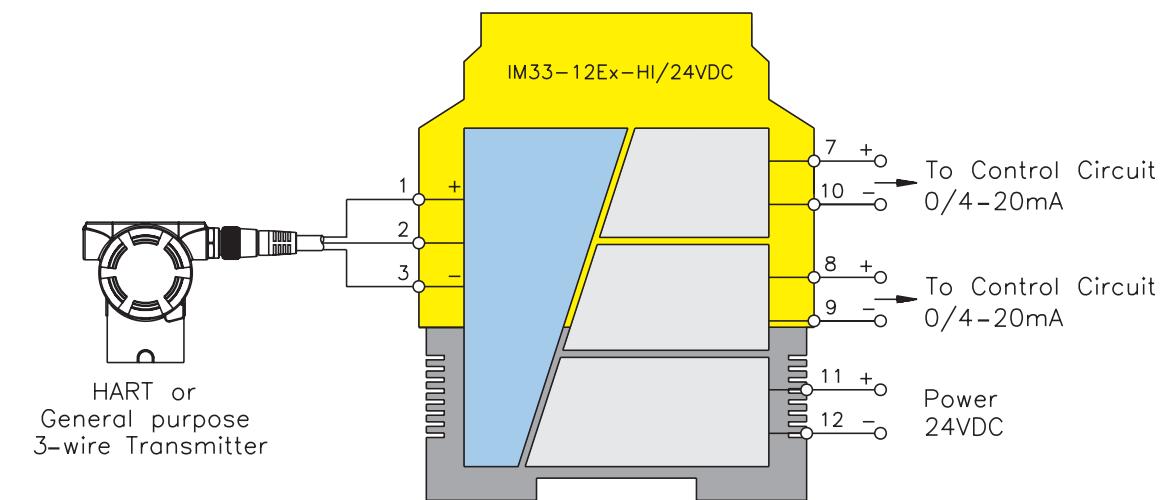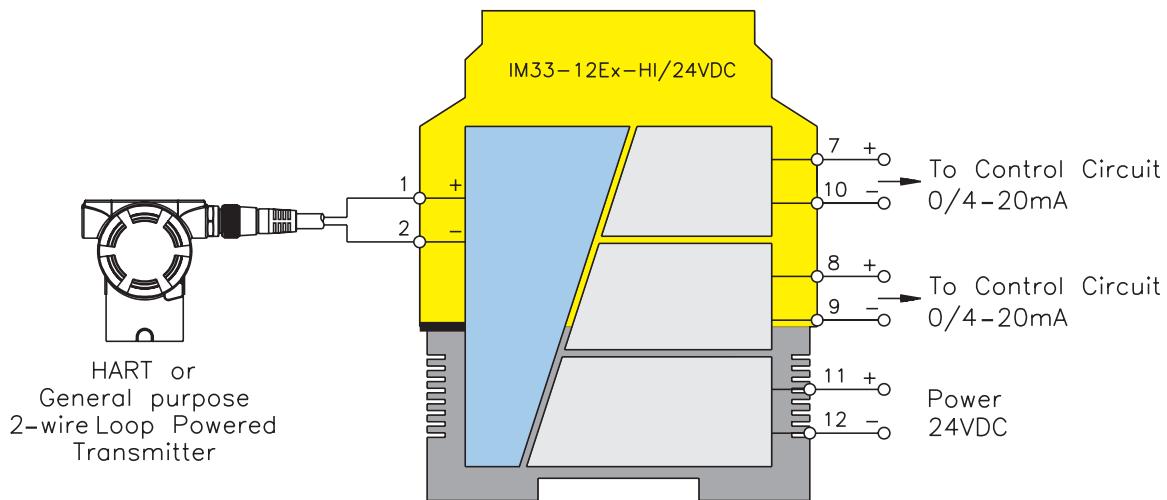

**IM33-22Ex-Hi/24 VDC**

## Analog Input Repeaters/Supplies



<b>Pin #</b>	<b>Terminal Function</b>
1	(+) 2-wire or 3-wire Field Power
2	4/20 mA Input from Field Device
3	(-) Field Power for 2, 3-wire Device
4	(+) 2-wire or 3-wire Field Power
5	4/20 mA Input from Field Device
6	(-) Field Power for 2,3-wire Device
7	(+) 4/20 mA Non-Hazardous Area Output
8	(+) 4/20 mA Non-Hazardous Area Output
9	(-) 4/20 mA Non-Hazardous Area Output
10	(-) 4/20 mA Non-Hazardous Area Output
11	Module Power (+) or AC
12	Module Power (-) or AC

## **Functional Description:**

This 2 channel intrinsically safe interface will power two separate 2 or 3-wire HART Transmitters or separately powered field devices or any combination of these devices and retransmit the 0-20 mA or 4-20 mA from a hazardous area and repeat the signal in the non-hazardous area as two separate 0-20 mA or 4-20 mA signals reflecting the hazardous area input. The device will also accept two separate source 0-20 mA or 4-20 mA signals from separately powered field devices and repeat these signals as two non-hazardous area signals. It will drive two separate non hazardous-area loads of up to 500  $\Omega$  each.

Due to the "1:1" transmission characteristic, open circuit or short-circuit conditions can be indicated by a 0 mA or 22.5 mA reading indicating the condition for alarm implementation.

HART or conventional "IS" transmitters can be accommodated by this device with bi-directional communications of digital information with HART field devices.

## Features:

- 2 independent channel HART or "IS" compatible analog Inputs
  - 2, 3, or 4-wire configurations for sinking or sourcing field devices in any combination
  - Constant field voltage for each channel
  - Short-circuit protected field circuits
  - Over/under current indication of 0 or 22.5 mA
  - SIL 2 rated

### **Electrical Parameters:**

## Inputs: Hazardous Area

Supply Voltage - (19-29 VDC)

Input Resistance . . . . . 250  $\Omega$

#### Operating Characteristics:

Current . . . . . 0-22 mA

Short-circuit Current (short-term) 60 mA (for 50 ms)

For entity parameters see control drawings on pages B86 - B91.

## Outputs: Non-Hazardous Area

0/4-20 mA




Load . . . . . ≤500 Ω


Open-circuit Indication . . 0 mA

Closed-circuit Indication . . ≥22.5 mA

**Analog Input Repeaters/Supplies**

**IM33-22Ex-Hi/24 VDC**

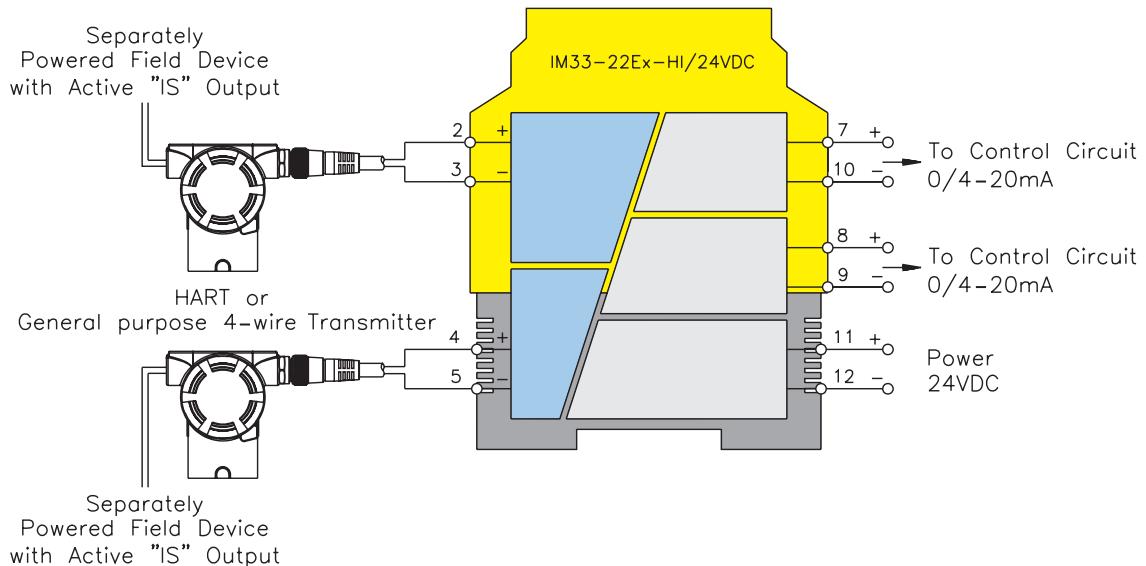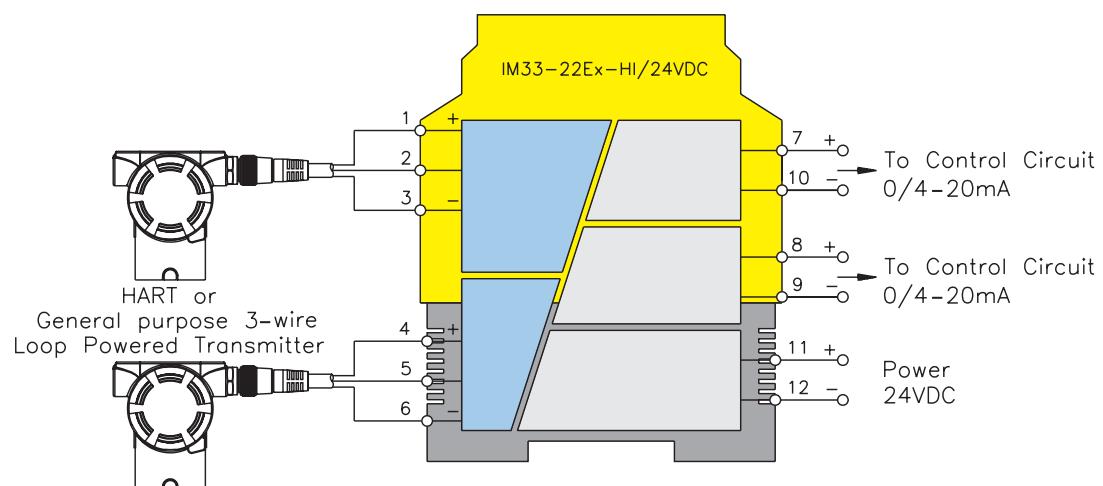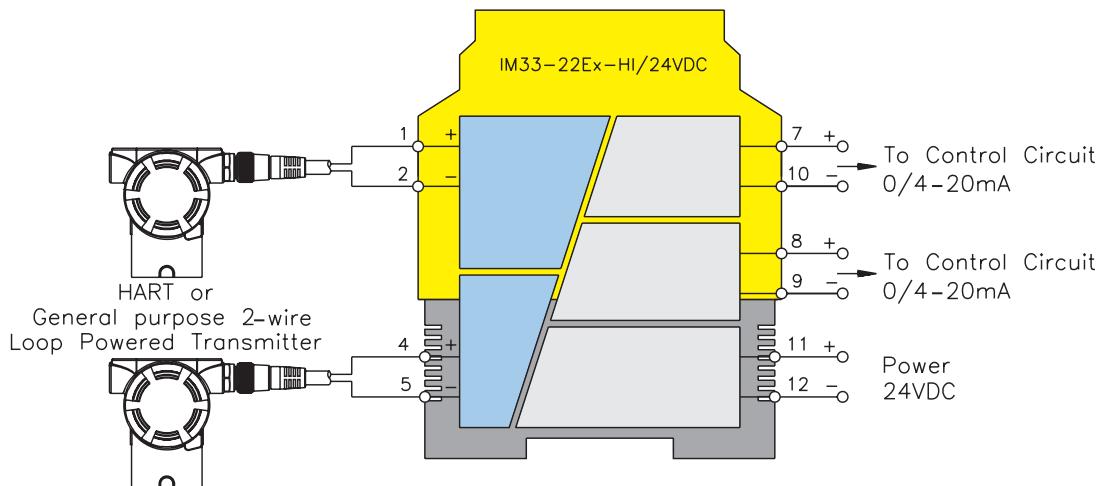

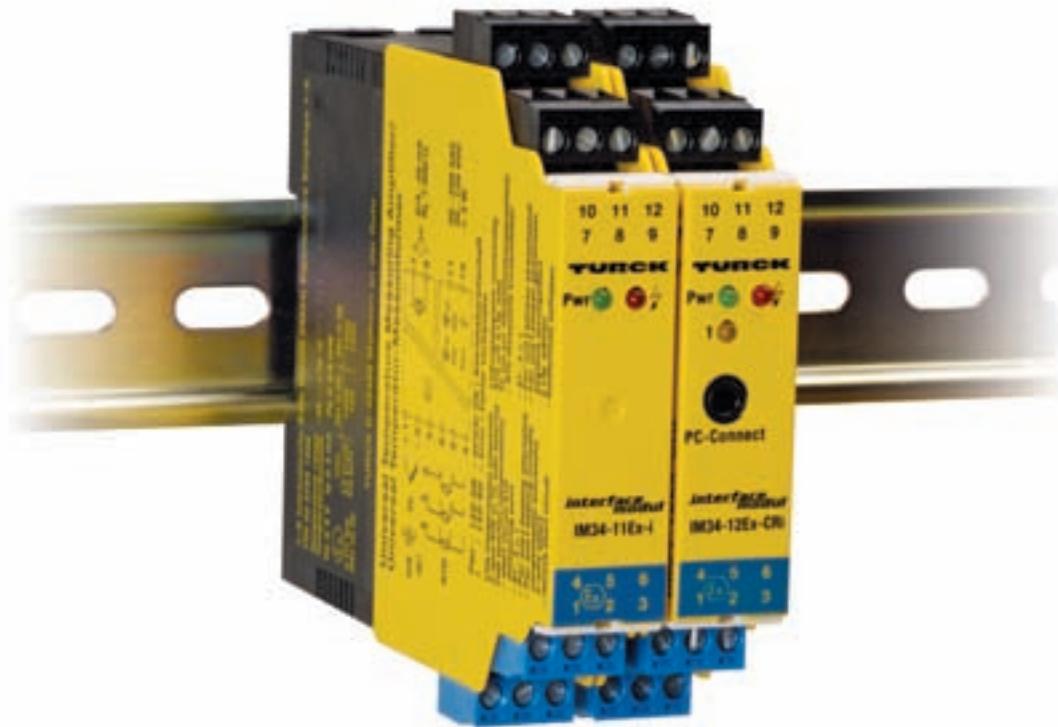

## Temperature Converters

Temperature measurement is a very common application, even in hazardous areas. The IM34 temperature converting device provides advanced diagnostics, versatility and convenience in an easy-to-use device.

The IM34 will convert a 2, 3 or 4-wire RTD, mV signal, or T/C in a hazardous area, to an analog 0/4-20 mA signal in a non-hazardous area. This pushbutton or software (FDT/DTM, free shareware) configurable unit is simple to use and saves time and money on installations.

This diverse unit allows several different input types to be configured and used with common 0/4-20 mA analog input control cards. Elimination of separate RTD, T/C and mV input cards may consolidate inventory, as well as allow the use of off-the-shelf "Simple Apparatus" components in even the most explosive atmospheres; further reducing costs for installation and maintenance.

Temperature measurement in hazardous areas has never been easier, or as safe, than this.

## Temperature Converters

## Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.



**Interface Module**

**Function Group**

34 = Temperature Converter

**Number of Hazardous Area Inputs**

C = Configuration Type

R = Special Functions

I = Safe Area Current Output

(Blank) = Universal Input Output

**Intrinsically Safe Associated Apparatus**

**Number of Non-Hazardous Area Outputs**

### Extension Examples:

**IM34-12Ex-CRi**

Interface Module

Temperature Converter

Single Channel Input

Two Non-Hazardous Area Current Outputs

Intrinsically Safe Associated Apparatus

Computer or Remote Configuration

Alarm Contacts

Non-Hazardous Current Output

Universal Voltage Input

## IM34-11Ex-I

## Temperature Converters

**Functional Description:**

This single channel device is designed to provide an analog 0/4-20 mA signal to a control system that is converted from an RTD, T/C, or mV signal in a hazardous area.

The measuring range and device functions are set via rotary switches or slide switches on the side of the device.

**Features:**

- 1 channel temperature input
- Accepts 2, 3, or 4-wire RTD's, T/C's or mV
- Switch configurable by user
- Temperature range adjustable
- Over/under current indication of 0 or 22 mA
- Internal or external CJC configurable

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)

2, 3 or 4-wire 100 Ω Ni or Pt RTD's

Range -200°K to +800°K (Pt100), -60°K to +250°K (Ni100)

T/C's B, E, J, K, N, R, S, T

Low Voltage -160 mV to +160 mV

Resistor current approx. 200 microamps

**Outputs: Non-Hazardous Area**

0/4-20 mA (Load 600 Ω max)

Relay: 250 VAC/120 VDC, 2A


500 VA/60 W 10Hz

For entity parameters see control drawings on pages B86 - B91.

## Temperature Converters

**IM34-11Ex-I**

Pin #	Terminal Function
1	(+) T/C or mV Input
2	(-) T/C or mV Input
3	3 or 4-wire RTD Connection
4	4-wire RTD Connection
5	2, 3 or 4-wire RTD Connection
6	2, 3 or 4-wire RTD Connection
7	(+) 0/4-20 mA Output
8	(-) 0/4-20 mA Output
9	No Connection
10	No Connection
11	Module Power (+) or AC
12	Module Power (-) or AC

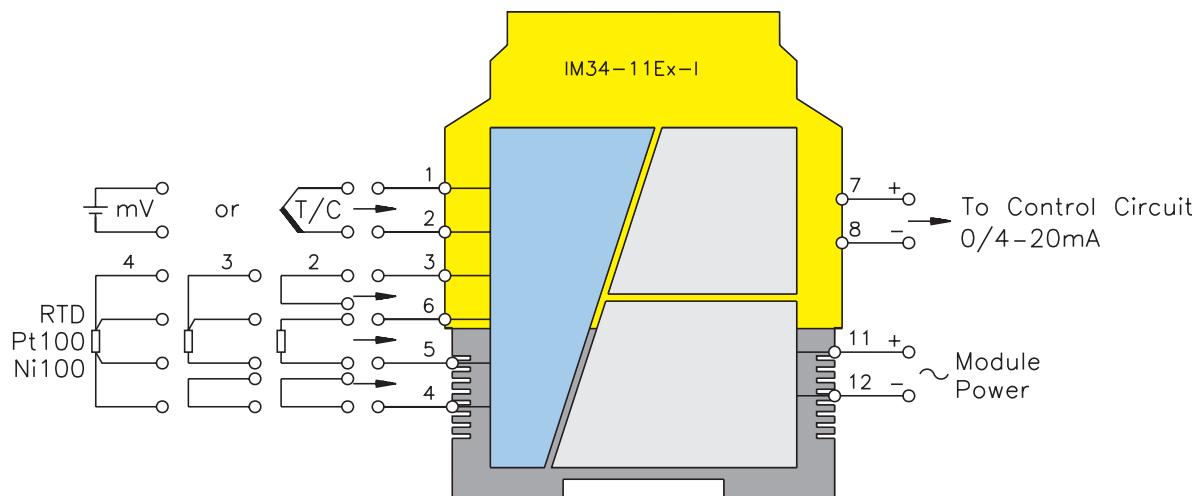

**IM34-12Ex-Ri****Temperature Converters****Functional Description:**

This single channel device is designed to provide an analog 0/4-20 mA signal to a control system that is converted from an RTD, T/C, or mV signal in a hazardous area.

This device has the added function of a relay output that can be used for under/over range conditions or to monitor a limit value.

The measuring range and device functions are set via rotary switches or slide switches on the side of the device.

**Features:**

- 1 channel temperature input
- Accepts 2, 3, or 4-wire RTD's, T/C's or mV
- Switch configurable by user
- Temperature range adjustable
- Configurable limit value relay output
- Over/under current indication of 0 or 22 mA
- Internal or external CJC configurable

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)

2, 3 or 4-wire 100 Ω Ni or Pt RTD's

Range -200°K to +800°K (Pt100), -60°K to +250°K (Ni100)

T/C's B, E, J, K, N, R, S, T

Low Voltage -160 mV to +160 mV

Resistor current approx. 200 microamps

**Outputs: Non-Hazardous Area**

0/4-20 mA (Load 600 Ω max)

Relay: 250 VAC/120 VDC, 2A


500 VA/60 W 10Hz

For entity parameters see control drawings on pages B86 - B91.

## Temperature Converters

**IM34-12Ex-Ri**

Pin #	Terminal Function
1	(+) T/C or mV Input
2	(-) T/C or mV Input
3	3 or 4-wire RTD Connection
4	4-wire RTD Connection
5	2, 3 or 4-wire RTD Connection
6	2, 3 or 4-wire RTD Connection
7	(+) 0/4-20 mA Output
8	(-) 0/4-20 mA Output
9	Alarm Contact
10	Alarm Contact
11	Module Power (+) or AC
12	Module Power (-) or AC

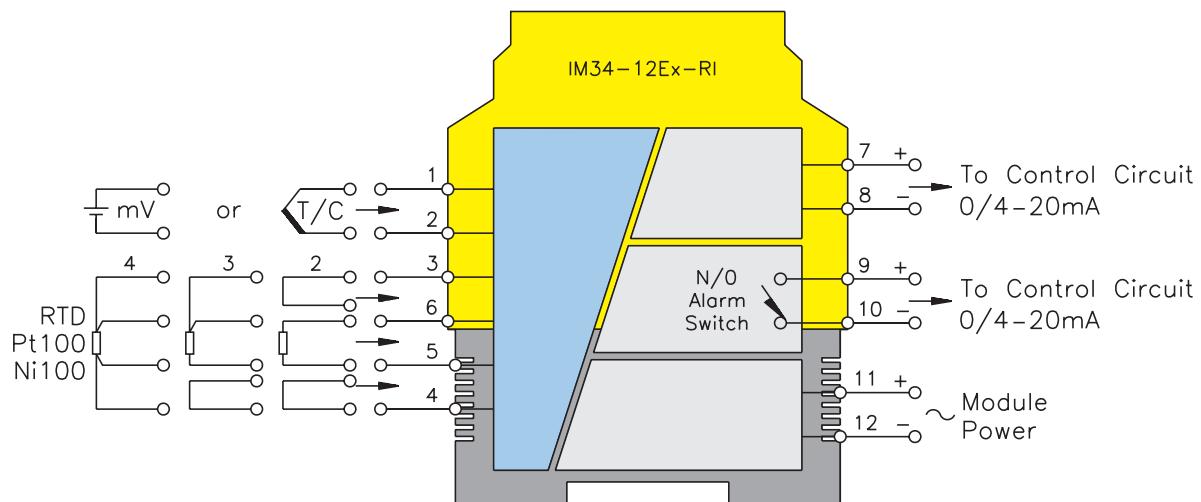

**Functional Description:**

This single channel device is designed to provide an analog 0/4-20 mA signal to a control system that is converted from an RTD, T/C or mV signal in a hazardous area.

This device is software configurable using the PACTware software tool and a configuration cable that allows configuration to be achieved through your laptop or PC.

**Features:**

- 1 channel temperature input
- Accepts 2, 3 or 4-wire RTD's, T/C's or mV
- Software configurable by user via PC using PACTware with software tool "Device Type Manager" (DTM)
- Temperature range adjustable
- Over/under current indication of 0 or 22 mA
- Internal or external CJC configurable

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)

2, 3 or 4-wire 100 Ω Ni or Pt RTD's

Range -200°K to +800°K (Pt100), -60°K to +250°K (Ni100)

T/C's B, E, J, K, N, R, S, T

Low Voltage -160 mV to +160 mV

Resistor current approx. 200 microamps

**Outputs: Non-Hazardous Area**


0/4-20 mA (Load 600 Ω max)

For entity parameters see control drawings on pages B86 - B91.

**Temperature Converters**

**IM34-11Ex-Ci**

Pin #	Terminal Function
1	(+) T/C or mV Input
2	(-) T/C or mV Input
3	3 or 4-wire RTD Connection
4	4-wire RTD Connection
5	2, 3 or 4-wire RTD Connection
6	2, 3 or 4-wire RTD Connection
7	(+) 0/4-20 mA Output
8	(-) 0/4-20 mA Output
9	No Connection
10	No Connection
11	Module Power (+) or AC
12	Module Power (-) or AC
Prog Port	Top of Unit to PC

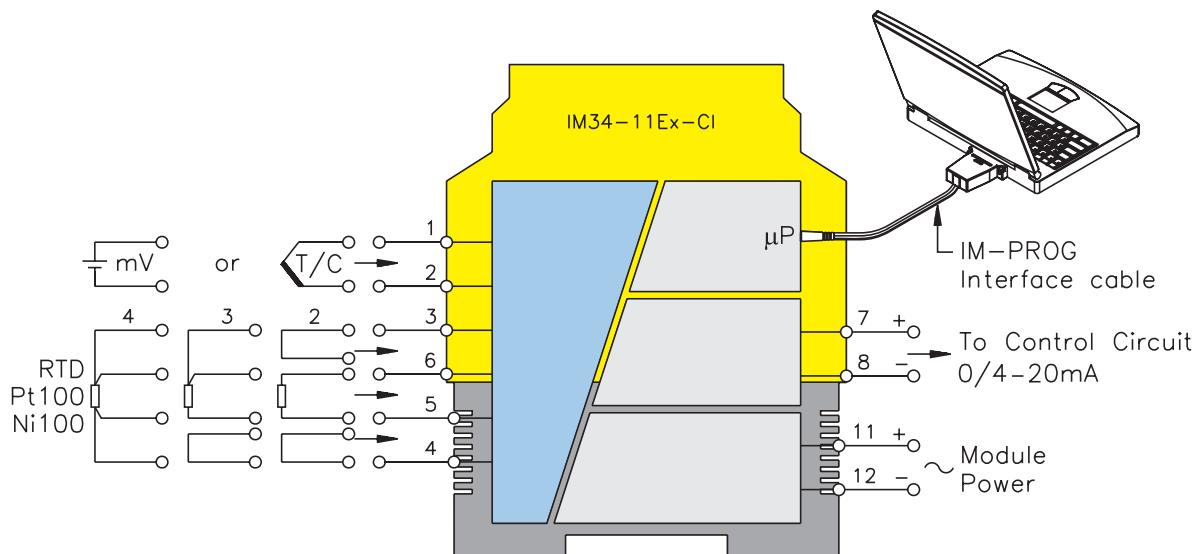



#### **Functional Description:**

This single channel device is designed to provide an analog 0/4-20 mA signal to a control system that is converted from an RTD, T/C or mV signal in a hazardous area.

This device is software configurable using the PACTware software tool and a configuration cable that allows configuration to be achieved through your laptop or PC.

This device has the added function of a relay output that can be used for under/over range conditions or to monitor a limit value.

#### **Features:**

- 1 channel temperature input
- Accepts 2, 3 or 4-wire RTD's, T/C's or mV
- Software configurable by user via PC using PACTware with software tool "Device Type Manager" (DTM)
- Temperature range adjustable
- Configurable limit value relay output
- Over/under current indication of 0 or 22 mA
- Internal or external CJC configurable

#### **Electrical Parameters:**

##### **Inputs: Hazardous Area**

Supply Voltage - (20-250 VAC or 20-125 VDC)

2, 3 or 4-wire 100 Ω Ni or Pt RTD's

Range -200°K to +800°K (Pt100), -60°K to +250°K (Ni100)

T/C's B, E, J, K, N, R, S, T

Low Voltage -160 mV to +160 mV

Resistor current approx. 200 microamps

##### **Outputs: Non-Hazardous Area**

0/4-20 mA (Load 600 Ω max)

Relay: 250 VAC/120 VDC, 2A


500 VA/60 W 10Hz

For entity parameters see control drawings on pages B86 - B91.

## Temperature Converters

**IM34-12Ex-CRi**

Pin #	Terminal Function
1	(+) T/C or mV Input
2	(-) T/C or mV Input
3	3 or 4-wire RTD Connection
4	4-Wire RTD Connection
5	2, 3 or 4-wire RTD Connection
6	2, 3 or 4-wire RTD Connection
7	(+) 0/4-20 mA Output
8	(-) 0/4-20 mA Output
9	Alarm Contact
10	Alarm Contact
11	Module Power (+) or AC
12	Module Power (-) or AC
Prog Port	Top of Unit to PC

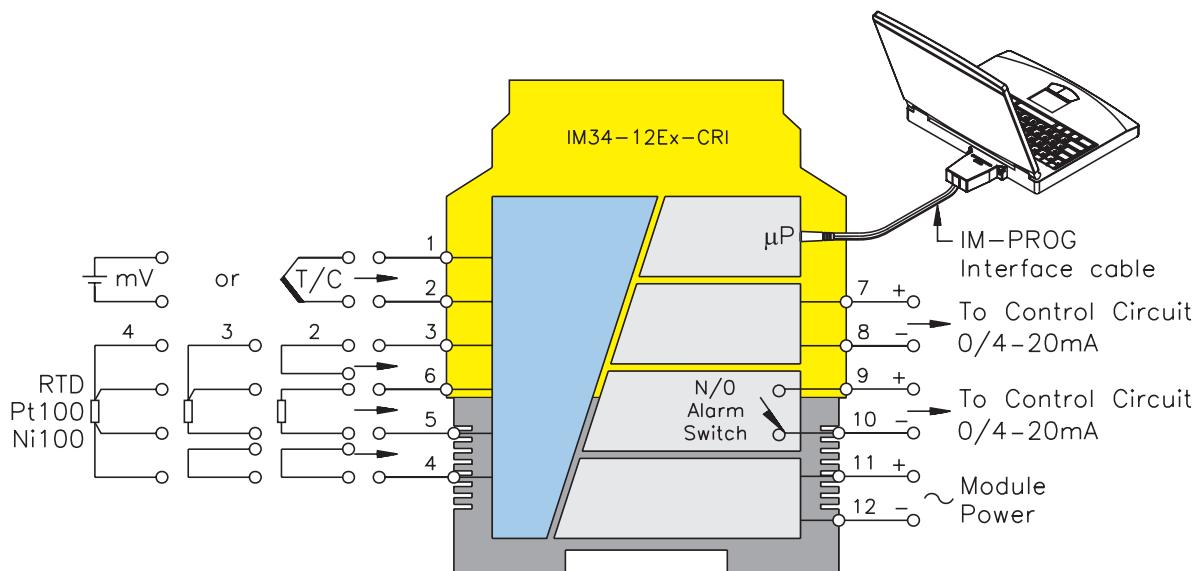

## Temperature Converters

**IM34-11Ex-I**

**IM34-12Ex-Ri**

### Short Description

- Inputs for Ni100 or Pt100 acc. to IEC 751, thermoelements acc. to IEC 584 and for low voltages (mV range)
- Intrinsically safe input circuit [EEx ia] IIC
- Area of application acc. to ATEX: II (1) GD
- Wire-break monitoring
- Short-circuit monitoring of Pt100 or Ni100 components
- Galvanic isolation between input and output circuits and supply
- Analogue current output 0/4-20 mA
- Limit value relay (IM34-12Ex-Ri only)
- Temperature linear conversion
- Device configuration on side of housing
- Housing with coded and removable terminal blocks

### Terminal Configuration

Intrinsically safe inputs at terminals 1-6

- |       |  |
|-------|--|
| 1, 2  | Thermoelement and mV input                               |
| 3-6   | Ni100 or Pt100 input                                     |
| 7, 8  | Analogue current output                                  |
| 9,10  | Limit value relay (IM34-12Ex-Ri only)                    |
| 11,12 | Supply voltage connection<br>20-250 VAC/20-125 VDC, ≤3 W |

Connection via flat screw terminals with self-lifting pressure plates, connection profile  $\leq 1 \times 2.5 \text{ mm}^2$ ,  $2 \times 1.5 \text{ mm}^2$  or  $2 \times 1.0 \text{ mm}^2$  with wire sleeves.

### LED Indications

- |     |   |
|-----|---|
| Pwr | green power on (1)                                |
| ⚡   | red error (2)                                     |
| 1   | yellow relay energized (3)<br>(IM34-12Ex-Ri only) |

**Attention:** Status indications, see table on page B64.

### Adjustments

The device settings are accomplished with 4 rotary switches and 10 slide switches (IM34-12Ex-Ri: 7 rotary switches and 13 slide switches) located on the right side of the housing.

- **High Temperature Value  $T_H$ :** the upper temperature range value according to an output current of 20 mA is set with the two rotary switches (1, 2). Rotary switch 2 serves to set temperature values in increments of a hundred degrees celsius. Switch 1 serves to set the temperature in steps of ten degrees. Thus, the temperature values can be set in steps of 10 K. (Example for switch position: 53  $\Rightarrow$  530°C). If the slide switch S6 is in position 1, the temperature range is automatically increased by a 1000°C to 1000-1990°C. Add a 1000°C to the temperature value adjusted with rotary switches 1 and 2. (Examples for switch position: 53  $\Rightarrow$  1530°C; 00  $\Rightarrow$  1000°C).
- **Low Temperature Value  $T_L$ :** the two rotary switches (3, 4) serve to set the temperature which accords to an output current of 0 or 4 mA (determined by slide switch S8). If slide switch S5 is in position 1, rotary switch number 4 is used to adjust the temperature in hundreds, while switch 3 adjusts the tens place. Adjustment takes place in a temperature range of 0 to +990°C in increments of 10 K (e.g. rotary switch setting 23 accords to a temperature of 230°C). If slide switch S5 is in position 0, rotary switch 4 adjusts the negative tens places and rotary switch 3 adjusts the ones. Adjustments are possible in a temperature range of -100 to -1°C in increments of 1 K. (Examples for rotary switch position: 23  $\Rightarrow$  -23°C; 00  $\Rightarrow$  -100 °C).
- **Switching Threshold for Relay**  
(IM34-12Ex-Ri only)  
Rotary switch 5 = hundred degree values  
Rotary switch 6 = ten degree values  
Rotary switch 7 = one degree values  
S11 and S12 = 1: add 1000°C to the adjusted value. S11 = 0: the adjusted value is negative. The output mode is adjusted with S13.

## Temperature Converters

**IM34-11Ex-I**

**IM34-12Ex-Ri**

Switch Position				Functions of slide switches S1-S4: The 4 switches serve to select the following functions:			
S1	S2	S3	S4				
0	0	0	0	Thermoelement Type B (IEC 584)			
0	0	0	1	Type E			
0	0	1	0	Type J			
0	0	1	1	Type K			
0	1	0	0	Type N			
0	1	0	1	Type R			
0	1	1	0	Type S			
0	1	1	1	Type T (IEC 584)			
1	0	0	0	Type L (DIN 43710)			
1	0	1	0	Voltage input: the input for thermoelements can be used for linear conversion of low voltages from -100 to +160 mV. In this case the rotary switches are used to adjust mV values while the slides switches operate with different range indications:  S5 = 0: -100 to -1 mV or S5 = 1: 0 to +99 mV for the lower range; S6 = 0: 0 to +99 mV or S6 = 1: +100 to +160 mV for the upper range;			
1	1	0	0	Pt100 or Ni100 components with 4-wire connection;			
1	1	0	1	Pt100 or Ni100 components with 3-wire connection, observe bridge;			
1	1	1	0	Pt100 or Ni100 components with 2-wire connection, observe bridge;			
1	1	1	1	Line compensation: when using 2-wire connections, the line length resistance must be adjusted. Line compensation is also necessary when using thermo-elements with an external cold junction. For this it is necessary to short-circuit the measuring point and to select the code for line compensation as shown on the left. The Pwr and the LED flash alternately. Successful line compensation is indicated by mutual flashing of both LEDs. Please select a different function and remove the short-circuit.			

## Temperature Converters

### IM34-11Ex-I

### IM34-12Ex-Ri

Functions of slide switches **S5-S10** (IM34-12Ex-Ri: **S5-S13**):

The following functions can be selected with the switches:

- **S5** Lower range selection: selection of temperature range of low temp. value $T_L$   
 S5 = 0: -100 to -1°C  
 S5 = 1: 0 to +990°C
- **S6** Upper range selection: selection of temperature range of high temp. value  $T_H$ :  
 S6 = 0: 0 to +990°C  
 S6 = 1: +1000 to +1990°C
- **S7** output current during an error condition:  
 If an input circuit error is detected, the output current is as follows  
 S7 = 0: 0 mA  
 S7 = 1: >22 mA
- **S8** output current range:  
 S8 = 0: 0-20 mA  
 S8 = 1: 4-20 mA
- **S9** Reference point compensation: when using thermoelements, reference point compensation is carried out as follows:  
 - **externally** via 2-wire Ni100 or Pt100 in S9 = 0 or  
 - **internally**: S9 = 1

With **internal** reference point compensation, care must be taken that heat is conducted away from the housing. Heat accumulation can corrupt measuring data.

- **S10** resistor type: indication of the connected resistor type:  
 S10 = 0: Pt100  
 S10 = 1: Ni100

With a voltage input or in case of thermoelement operation, the type of resistor does not have to be adjusted.

### Referring to IM34-12Ex-Ri only:

- **S11, S12 and S13** Selection of switching threshold for limit value relay:  
 S11 = 0: -100 to -1°C  
 S11 = 1: >0°C

Only if S11 = 1  
 S12 = 0: 0 to +999°C  
 S12 = 1: +1000 to +1990°C

### S13 Output performance of relay:

S13 = 0: relay energized, if measuring value > switching threshold  
 S13 = 1: relay energized, if measuring value < switching threshold

## Mounting and Installation

The connected apparatus (Ni100/Pt100, thermoelements) must meet the requirements for use in explosion hazardous areas (EN60079-14). The device is suited for snap-on clamps for hat rail mounting (EN 50022) or for screw panel mounting. Devices **of the same type** may be mounted directly next to each other. It must be ensured that heat is conducted away from the device. Mounting and installation must be carried out in accordance with the applicable regulations. The removable terminal blocks are coded and may only be plugged into the designated sockets. The coding system may not be altered or damaged. The device must be protected against dust, dirt, moisture and other environmental influences as well as against strong electro-magnetic emissions. It should also be protected against the risks of mechanical damaging, unauthorized access and incidental contact. All installations must be carried out observing the regulations of EMC protection.

## General information on use of devices with "IS" circuits

This device is equipped with circuits featuring protection type "intrinsic safety" for explosion protection per EN 50020 at terminals 1-6 which are marked in blue. The intrinsically safe circuits are approved by the authorised bodies for use in those countries to which the approval applies.

For **correct usage** in explosion hazardous areas it is required to **observe and follow the national regulations and directives strictly**. Following please find some guidelines referring to the framework directive of the European Union 94/9/EC (ATEX 100a).

This device is classified as an associated apparatus which is equipped with intrinsically safe and non-intrinsically safe circuits. Therefore it may not be installed in explosion hazardous areas. It is permitted to connect intrinsically safe equipment to the intrinsically safe connections of this device, provided the equipment complies with the regulations applying to use in the respective zone of the explosion hazardous area. When interconnecting devices within

### IM34-11Ex-I

### IM34-12Ex-Ri

such an assembly it is required to keep and provide a proof of intrinsic safety (EN 60079-14). Once that intrinsically safe circuits have been connected to the non-intrinsically safe circuit, it is not permitted to use the device subsequently as intrinsically safe equipment.

The governing regulations cover installation of intrinsically safe circuits, mounting to external connections, cable characteristics and cable installation. Cables and terminals with intrinsically safe circuits must be marked and separated from non-intrinsically safe circuits or feature appropriate isolation (EN 60079-14). It is required to observe the specified clearances between the intrinsically safe connections of this device and the earthed components and connections of other devices. The approval expires if the device is repaired, modified or opened by a person other than the manufacturer or an expert, unless the device specific instruction manual explicitly permits such interventions.

Visible damages of the device's housing (e. g. black-brown discoloration due to heat accumulation, perforation or

deformation) indicate a serious error and the device must be turned off immediately. When using associated apparatus it is required to check the connected intrinsically safe equipment too. This inspection may only be carried out by an expert or the manufacturer. Operation of the device must conform to the data printed on the side of the housing.

Prior to initial set-up or after every alteration of the interconnection assembly it must be assured that the relevant regulations, directives and framework regulations are observed, that operation is error-free and that all safety regulations are fulfilled. Mounting and connection of the device should only be carried out by qualified and trained staff familiar with the relevant national and international regulations of explosion protection.

The **most important data from the EC type examination certificate** are listed overleaf. All valid national and international approvals covering **TURCK** devices can be downloaded from our website [www.turck.com](http://www.turck.com). Further information can be provided on request.

### Short Description

- Inputs for Ni100 or Pt100 acc. to IEC 751, thermo-elements acc. to IEC 584 and for low voltages (mV range)
- Intrinsically safe input circuit EEx ia
- Area of application acc. to ATEX: II (1) GD
- Wire-break monitoring
- Short-circuit monitoring only of Pt100 or Ni100 components
- Galvanic isolation between input and output circuits and supply
- Analogue current output 0/4-20 mA
- Voltage proof up to 4 kV (IM34-11Ex-Ci/K51 only)
- Fast temperature measurement from a temperature gradient of 200 mV/s (IM34-11Ex-Ci/K60 only)
- Limit value relay (IM34-12Ex-CRi only)
- Temperature linear conversion
- Parameterization via PC via programming adapter IM-PROG (to be ordered additionally – ident-no.: 6890422)
- Housing with coded and removable terminal blocks
- Simulation of outputs

### Terminal Configuration

Intrinsically safe inputs at terminals 1–6

- |       |  |
|-------|--|
| 1, 2  | thermoelement and mV input                               |
| 3 – 6 | Ni100 or Pt100 input                                     |
| 7, 8  | analog current output (0/4-20 mA)                        |
| 9, 10 | Limit value relay (IM34-12Ex-CRi only)                   |
| 11,12 | supply voltage connection<br>20-250 VAC/20-125 VDC, <3 W |

Connection via lifting cages with captive screws, connection profile:

≤1 x 2.5 mm<sup>2</sup>, 2 x 1.5 mm<sup>2</sup> or 2 x 1 mm<sup>2</sup> with wire sleeves

### LED Indications

- |     |  |
|-----|--|
| Pwr | green power on                                 |
| ⚡   | red error                                      |
| 1   | yellow relay energized<br>(IM34-12Ex-CRi only) |

**Attention:** Status Indications, see table on page 67.

## Temperature Converters

**IM34-11Ex-I**

**IM34-12Ex-Ri**

### Status Indications

LED Pwr	LED	Only IM34-12Ex-CRi	Description	
The values agree with the switch-on phase in % 0=0%, 10=10%, 50=50%, 100=100%		Output of error current, moreover relay is de-energized.		
100	0	–	Operation	
100	10	•	Input error	
10	100	•	Software error	
0	100	•	Hardware error	
100	50	•	Measuring span too short	
100	50	–	Thermoelements/Measuring range/Switching threshold outside the operating range of the RTD or thermo-element	
50	50	•	Line compensation (LEDs flashing alternately)	
50	50	•	Line compensation finished	
100	50	•	Line compensation not correct	
50	0	–	Current output and limit value relay in simultaneous operation	

**IM34-11Ex-I**

**IM34-12Ex-Ri**

### Parameterization and Adjustments

The IM34... is parameterized and adjusted via the Device Type Manager (see also "PACTware™ and devices DTM software installation"). The **TURCK** adapter IM-PROG is needed to establish the connection between the device and your PC.

For this it is necessary to connect the 3.5 mm connector to the measuring amplifier (PCConnect) and the RS232 connector to the serial interface of your PC. The following settings are available as an entry or numerical setting via the DTM:

- **Mode**

Selection of the connection element: Pt/Ni100, thermo-element, mV input and selection of line compensation. The following settings depend on the selections made in the "Mode" menu:

- **Thermo-element**

Type selection: E, J, K, N, R, S, T, L, B

- **Connection Mode of Temperature Resistor**

2, 3 or 4-wire connection technology

- **Measuring Range**

The measuring range is composed of the lower and upper temperature value. After selecting the connecting type, the measuring range is indicated in the lower section of the DTM. These indications accord to the adjusted analogue output signal of 0/4-20 mA. The lower temperature depends on the type of thermoelement/temperature resistor and accords to an output signal of 0/4 mA. The upper limit temperature also depends on the type of thermo-element/temperature resistor. The adjusted upper limit temperature accords to an analogue output signal of 20 mA.

- **Output Signal**

The selection comprises 0-20 mA, 4-20 mA signals. The adjusted values correspond to the adjusted lower and upper limit temperatures.

#### – Line Compensation

In case of 2-wire connections, the resistor can be adapted to the connection cable. For this it is necessary to short the measuring point.

The LEDs Pwr and  flash alternately. If they start flashing mutually line compensation has been carried out. Continue by selecting another function and removing the short-circuit. If the LED  continues to flash, line compensation has not been accomplished successfully. Line compensation must also be carried out if thermo-elements with external cold junction are used.

#### – Error Current

Either 0 mA or >22 mA

#### – Switching Threshold (IM34-12Ex-CRi only)

Entry of a temperature value or a low voltage value at which the limit value relay is activated.

### Mounting and Installation

The connected apparatus (Ni100/Pt100, thermo-elements) must meet the requirements for use in explosion hazardous areas (EN 60079-14). The device is suited for snap-on clamps for hat rail mounting (EN 50022) or for screw panel mounting. Devices **of the same type** may be mounted directly next to each other. It must be ensured that heat is conducted away from the device. Mounting and installation must be carried out in accordance with the applicable regulations. The operator is responsible for compliance with the regulations. The removable terminal blocks are coded and may only be plugged into the designated sockets. The coding system may not be altered or damaged. The device must be protected against dust, dirt, moisture and other environmental influences as well as against strong electromagnetic emissions. It should also be protected against the risks of mechanical damaging, unauthorized access and incidental contact. All installations must be carried out observing the regulations of EMC protection.

## Temperature Converters

**IM34-11Ex-I**

**IM34-12Ex-Ri**

### **Important information on use of devices with "IS" circuits**

This device is equipped with circuits featuring protection type intrinsic safety for explosion protection per EN 50020 at terminals 1– 6 which are marked in blue. The intrinsically safe circuits are approved by the authorised bodies for use in those countries to which the approval applies.

For **correct usage** in explosion hazardous areas please **observe and follow the national regulations and directives strictly**.

Following please find some guidelines referring to the frame-work directive of the European Union 94/9/EC (ATEX 100a).

This device is classified as an associated apparatus which is equipped with intrinsically safe and nonintrinsically safe circuits. Therefore it may only be installed in the non-explosion hazardous area in dry clean and well monitored locations. It is permitted to connect intrinsically safe equipment to the intrinsically safe connections of this device.

All electrical equipment must comply with the regulations applying to use in the respective zone of the explosion hazardous area. If the intrinsically safe circuits lead into explosion hazardous areas subject to dust hazards, i.e. zone 20 or 21, it must be ensured that the devices which are to be connected to these circuits, meet the requirements of category 1D or 2D and feature an according approval.

When interconnecting devices within such an assembly it is required to keep and provide a proof of intrinsic safety (EN 60079-14). Once that intrinsically safe circuits have been connected to the non-intrinsically safe circuit, it is not permitted to use the device subsequently as intrinsically safe equipment. The governing regulations cover installation of intrinsically safe circuits, mounting to external connections, cable characteristics and cable

installation. Cables and terminals with intrinsically safe circuits must be marked and separated from nonintrinsically safe circuits or feature appropriate isolation (EN 60079-14). Please observe the specified clearances between the intrinsically safe connections of this device and the earthed components and connections of other devices.

The approval expires if the device is repaired, modified or opened by a person other than the manufacturer or an expert, unless the device-specific instruction manual explicitly permits such interventions.

Visible damages of the device's housing (e. g. black brown discoloration due to heat accumulation, perforation or deformation) indicate a serious error and the device must be turned off immediately. When using associated apparatus it is required to check the connected intrinsically safe equipment too. This inspection may only be carried out by an expert or the manufacturer.

Operation of the device must conform to the data printed on the side of the housing. Prior to initial set-up or after every alteration of the interconnection assembly it must be assured that the relevant regulations, directives and framework conditions are observed, that operation is error-free and that all safety regulations are fulfilled. Mounting and connection of the device may only be carried out by qualified and trained staff familiar with the relevant national and international regulations of explosion protection.

The **most important data from the EC type examination certificate** are listed overleaf. All valid national and international approvals covering TURCK devices are obtainable via the Internet ([www.turck.com](http://www.turck.com)). Further information on explosion protection is available on request.



## PACTware™ and Devices DTM Software Installation

You will require the following software components on your computer for the installation of PACTware:

- **PACTware software for parameterizing of interface modules and excom®**
- **DTM**

These software components are available on the Internet at [www.turck.com](http://www.turck.com) as a free-of-charge download.

- Select the homepage: [www.turck-usa.com](http://www.turck-usa.com) → Download → Software → Various Software

Your PC then requests the name of a directory at which it should save the files on the hard drive of your computer. The files are self-extracting archives, ZIP files, which extract independently when accessed.

- Simply double click on the ZIP archive to extract the files.
- You commence extraction of the file when you click on "Extract".

The "TURCK\_FILES" directory is created on the current drive (e.g. C:\). Extract both file archives: (PACTware and DTM) before you commence with the actual software installation.

### 1. Installation of PACTware

Now start the installation of PACTware on your computer.

- Start Windows Explorer and change over to the "TURCK\_FILES\PACTware...SetupTurck\PACTware" directory.
- Start the "setup.exe" file located there.

Follow the self-explanatory instructions displayed by the installation program and complete the installation.

### 2. Installation of the HART® Communication Driver

After the installation of PACTware has been successfully completed, the HART communication driver must now be installed.

Start the "setup.exe" file located at "TURCK\_FILES\...Dtm\Hart"

Follow the self-explanatory instructions displayed by the installation program and complete the installation.

### 3. Installing of the Devices DTM

After the installation of the HART communication driver been successfully completed, the devices DTM must be installed. A directory has been created to reflect the DTM which you have

downloaded. The name commences with the first 4 or 5 letters of the device type which you have selected.

- Start for example "setup.exe" in the "TURCK\_FILES\IM34...Setup..." directory in order to install the devices DTM for the IM34.

#### Configuration of PACTware

Please restart your PC after installation in order to update the Windows registry. Then open PACTware and carry out configuration:

#### Make the following entries:

- User: "Administrator"
- Password: "manager"

Prior to parameterizing a device, a project has to be created. For this, please select the device catalogue from the "View" menu or the < F3 > key. A new window with the name "Device catalogue" will open. This window contains all available "Device Type Managers - DTMs". Should a required DTM not be listed, please click on the button "Re-initialize the device catalogue"

- First add the HART protocol driver from the company Codewrights GmbH
- Then add the DTMs from TURCK

#### Parameter entries for HART protocol driver parameters:

(Open the window by a double click):

- Communication-Interface:  
"HART Multiplexer"
- Select serial interface
- Baud rate: "9600"

#### Possible error sources:

- RS232 port not addressable or being used by another application, Remedy: use different port or exit the application causing problems
- RS232 line too long (max. line length approx. 10 m), Remedy: shorten line

After successful installation and configuration it is now possible to communicate with the IM34....



## Analog Output Isolators

Analog output isolators are for use with conventional 0/4-20 mA or HART smart "IS" devices and are available in 1 and 2 channel versions. These devices are designed to provide a convenient way to transfer 0/4-20 mA signals, generated in a non-hazardous area, to a hazardous area intrinsically safe device, such as a valve positioner or I/P device.

HART capabilities allow bi-directional communications for HART devices if this function is being utilized. The same devices are also applicable for non-HART smart devices.

One device can be used for all applications of this type, which makes applying these devices simple. Stocking spares only requires one type of unit adding to the convenience.

## Analog Input Repeaters/Supplies

## Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

IM 35 - 1 2 Ex - Hi / 24 VDC

Interface Module

Function Group

35 = Analog Output Isolator

Number of Hazardous Area Inputs

Supply Voltage (19-29 VDC)

HART Compatible or General Purpose

Intrinsically Safe Associated Apparatus

Number of Non-Hazardous Area Outputs

### Extension Examples:

**IM35-11Ex-Hi/24 VDC**

Interface Module

Analog Output Isolator

Single Channel Input

One Non-Hazardous Area Current Output


Intrinsically Safe Associated Apparatus

HART Compatible

24 VDC Supply Voltage

## IM35-11Ex-HI/24 VDC

## Analog Output Isolators

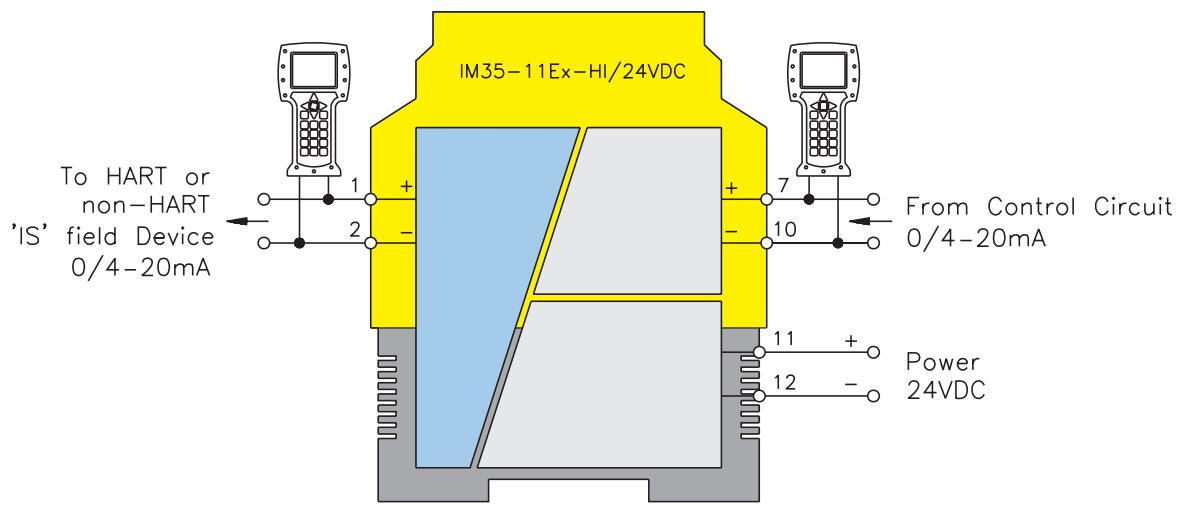**Functional Description:**

This single channel device will allow a controller in a non-hazardous area to provide a 1:1 transfer of a 0/4-20 mA signal to a device in a hazardous area. Valve controllers or I/P devices that are intrinsically safe, as well as signals that are "IS" originating from another non-hazardous area, may be accommodated. Bi-directional HART communications capability is also incorporated.

**Features:**

- 1 channel 0/4-20 mA current driver
- HART or non-HART compatible
- Allows bi-directional HART communications
- Facilities for non-hazardous area HART monitoring
- Linearity of less than 0.1%
- Temperature drift less than 0.01% /K

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage (19-29 VDC)

0-20 mA

24 mA can be transferred max load of 430  $\Omega$

Input Resistance 110  $\Omega$

**Outputs: Non-Hazardous Area**

0/4-20 mA (Load 600  $\Omega$  max.)

Relay: 250 VAC/120 VDC, 2A


500 VA/60 W 10Hz

For entity parameters see control drawings on pages B86 - B91.

## Analog Output Isolators


**IM35-11Ex-Hi/24 VDC**

Pin #	Terminal Function
1	(+) 0/4-20 mA Field Output
2	(-) 0/4-20 mA Field Output
3	No Connection
4	No Connection
5	No Connection
6	No Connection
7	(+) 0/4-20 mA Non-Hazardous Area Input
8	No Connection
9	No Connection
10	(-) 0/4-20 mA Non-Hazardous Area Input
11	Module Power (+)
12	Module Power (-)

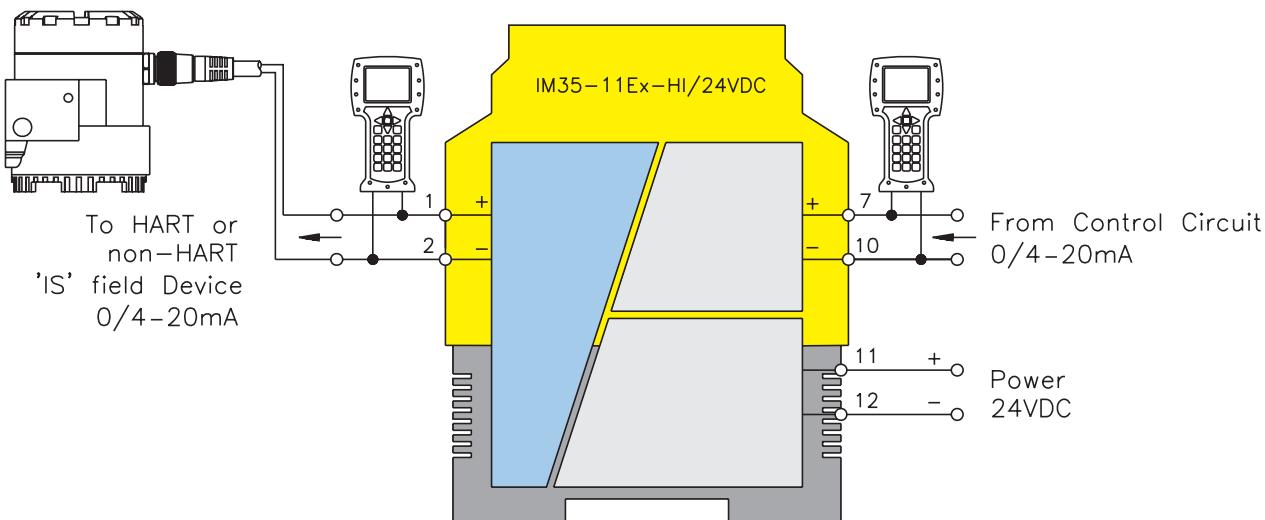

## IM35-22Ex-Hi/24 VDC

## Analog Output Isolators

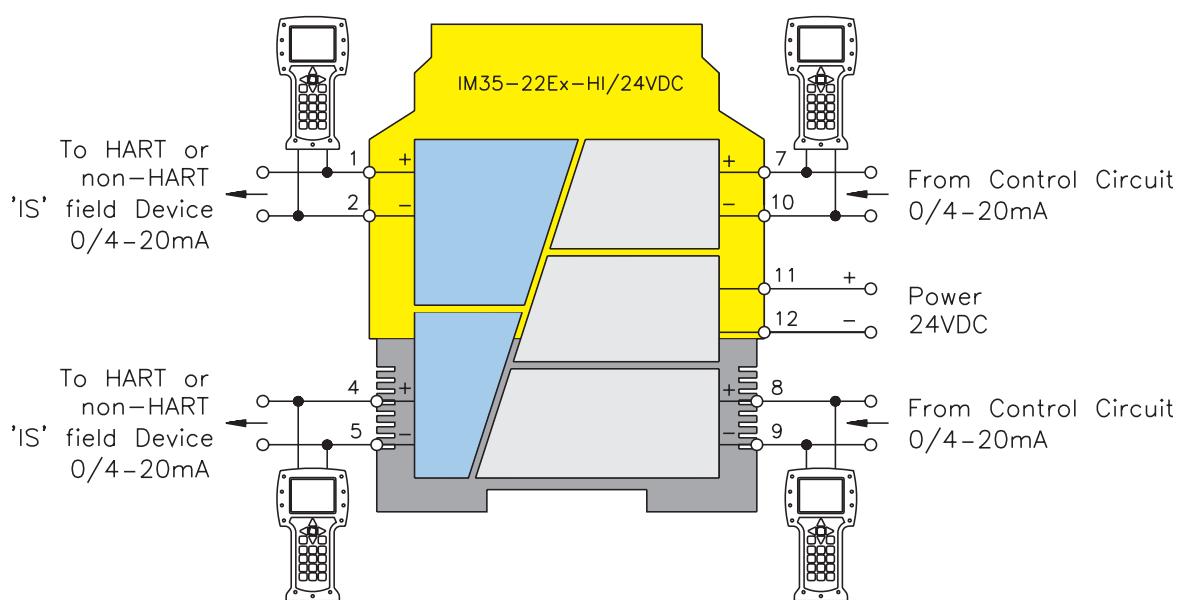**Functional Description:**

This dual channel device will allow a controller in a non-hazardous area to provide a 1:1 transfer of 2 separate 0/4-20 mA signals to two separate devices in the hazardous area. Valve controllers or I/P devices that are intrinsically safe, as well as signals that are "IS" originating from another non-hazardous area, or any combination of these signals, may be accommodated. Bi-directional HART communications capability is also incorporated for both channels.

**Features:**

- 2 channel 0/4-20 mA current driver
- HART or non-HART compatible
- Allows bi-directional HART communications
- Facilities for non-hazardous area HART monitoring
- Linearity of less than 0.1%
- Temperature drift less than 0.01% /K

**Electrical Parameters:****Inputs: Hazardous Area**

Supply Voltage (19-29 VDC)

0-20 mA

24 mA can be transferred max load of 430 Ω

Input Resistance 110 Ω

**Outputs: Non-Hazardous Area**

0/4-20 mA(Load 600 Ω max)

24 mA with a max load of 430 Ω


Load is 600 Ω max

For entity parameters see control drawings on pages B86 - B91.

## Analog Output Isolators

**IM35-22Ex-Hi/24 VDC**

Pin #	Terminal Function
1	(+) 0/4-20 mA Field Output
2	(-) 0/4-20 mA Field Output
3	No Connection
4	(+) 0/4-20 mA Field Output
5	(-) 0/4-20 mA Field Output
6	No Connection
7	(+) 0/4-20 mA Non-Hazardous Area Input
8	(+) 0/4-20 mA Non-Hazardous Area Input
9	(-) 0/4-20 mA Non-Hazardous Area Input
10	(-) 0/4-20 mA Non-Hazardous Area Input
11	Module Power (+)
12	Module Power (-)

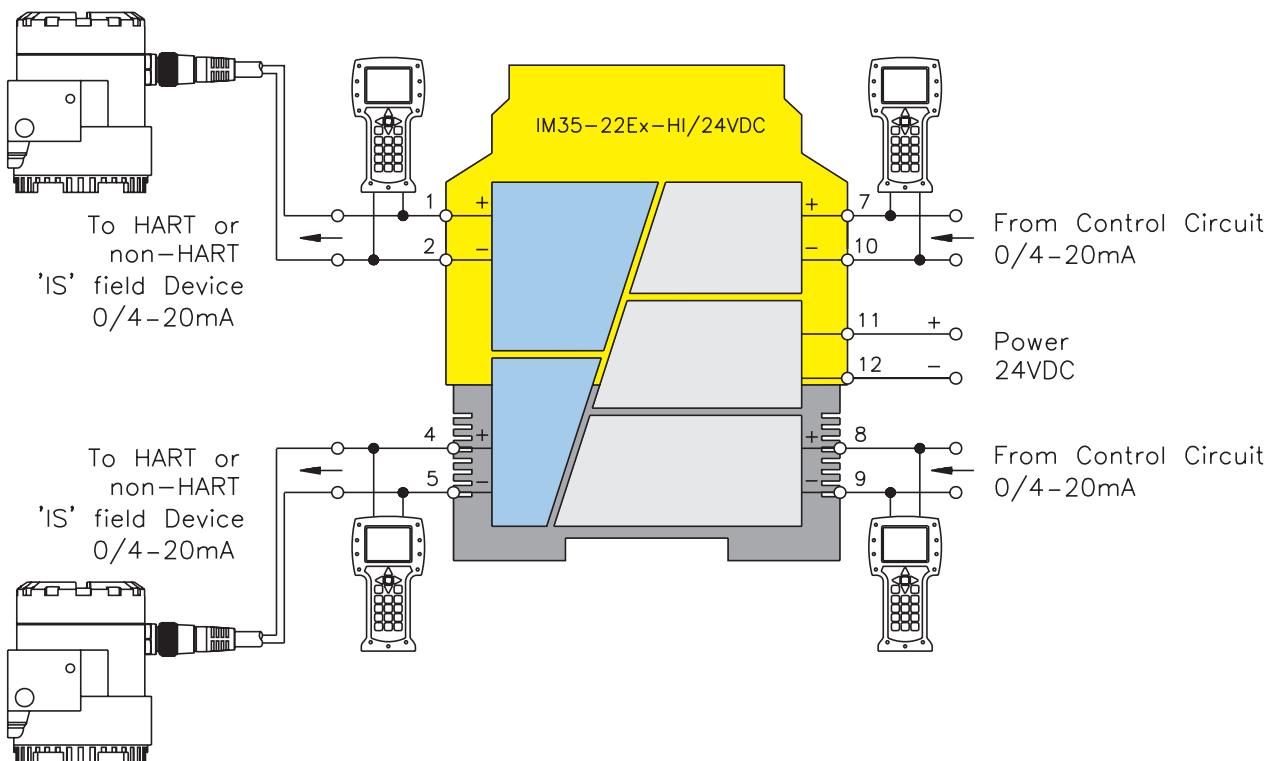



## Solenoid Driver/Discrete Output Isolators

These loop powered "IS" interface devices provide power for "IS" solenoids in a hazardous area to be actuated from a controller in the non-hazardous area.


The IM72 solenoid drivers are uniquely designed devices that allow them to drive the vast majority of "IS" solenoids available in today's marketplace with a single type of interface device. Gone are the days when a wide variety of isolators were needed to drive specific solenoids with specific requirements. A single device will now allow you to use a single model for most applications, eliminating the need to do complicated and tedious calculations.

The design of these 1 and 2 channel devices make it extremely simple to choose the appropriate interface. Either choose a 1 channel or 2 channel interface, that's all there is to it. Stock can be significantly reduced, and installation and maintenance made easier. With a single unit for most applications, the IM72 makes choosing the appropriate interface as easy as it gets.

## Solenoid Driver/Discrete Output Isolators

## Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

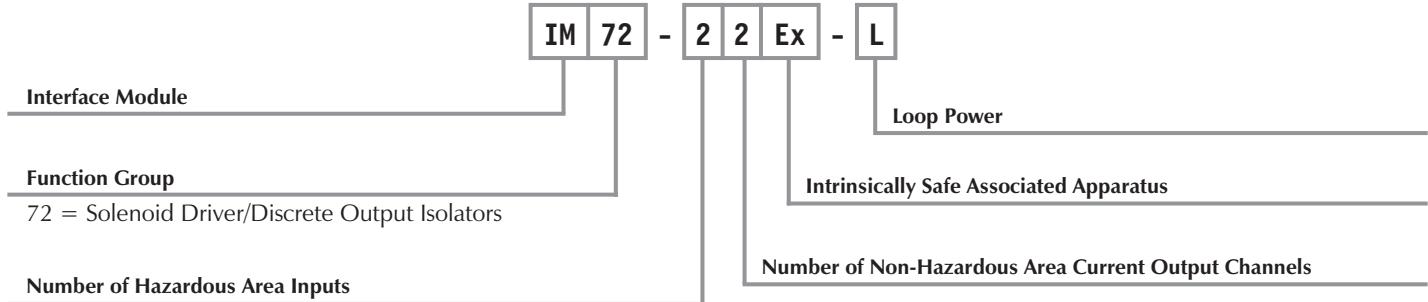

### Extension Examples:

**IM72-22Ex/L**

Interface Module

Solenoid Driver/Discrete Output Isolators

Two Input Channels


Two Non-Hazardous Area Current Outputs

Intrinsically Safe Associated Apparatus

Looped Power

## IM72-11Ex/L

## Solenoid Driver/Discrete Output Isolators

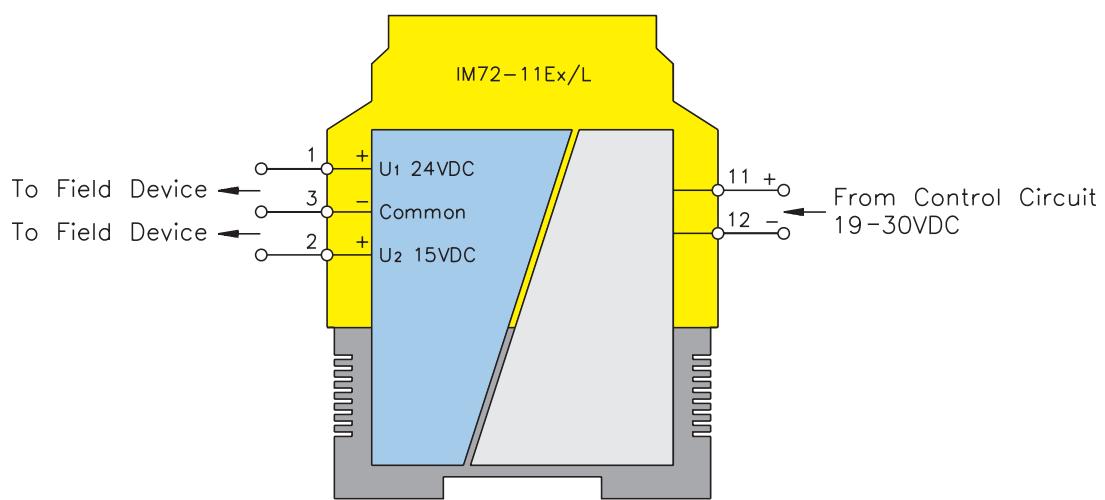**Functional Description:**

This single channel device is designed to drive the vast majority of intrinsically safe solenoids available, as well as "IS" displays and other field devices that may require a separate "IS" power source. The unique design allows different configurations to be implemented depending on the specific field device being used.

Loop power is applied from a non-hazardous area source directly to the non-hazardous area inputs eliminating the requirement for additional power supply connections.

**Features:**

- 1 channel solenoid driver or "IS" supply
- Loop powered
- 2 output levels
- Switching frequency up to 500 Hz

**Electrical Parameters:****Inputs: Hazardous Area**Supply (Loop Power)

Signal "OFF" . . . . .	<5 V
Signal "ON" . . . . .	19-30 VDC
Switch-on delay . . . . .	<400 $\mu$

**Outputs: Non-Hazardous Area**

## In accordance with Output Curve:


U1=24 V (Pins 1 &amp; 3)

U2=15 V (Pins 2 &amp; 3)

I1 = 45 mA (Pins 1 &amp; 3)

I2=45 mA (Pins 2 &amp; 3)

Switching Frequency . . . . &lt;500 Hz


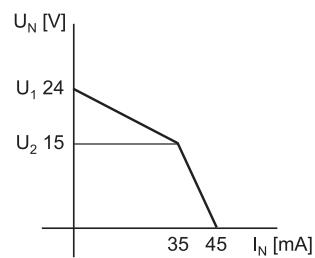


For entity parameters see control drawings on pages B86 - B91.

## Solenoid Driver/Discrete Output Isolators


**IM72-11Ex/L**

Pin #	Terminal Function
1	U1 Field Output
2	U2 Field Output
3	Common Field Output
4	No Connection
5	No Connection
6	No Connection
7	No Connection
8	No Connection
9	No Connection
10	No Connection
11	(+) Non-Hazardous Area Input
12	(-) Non-Hazardous Area Input

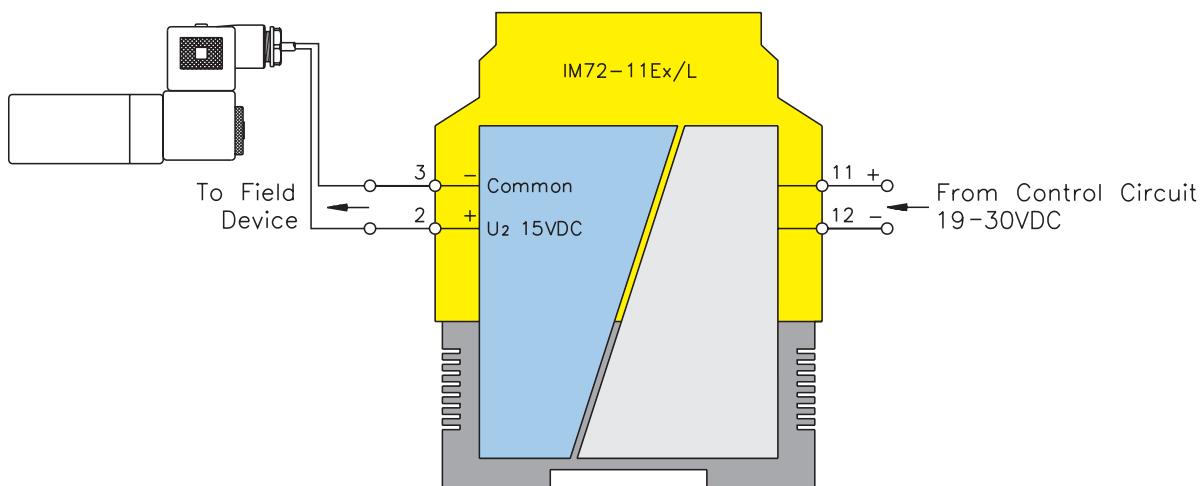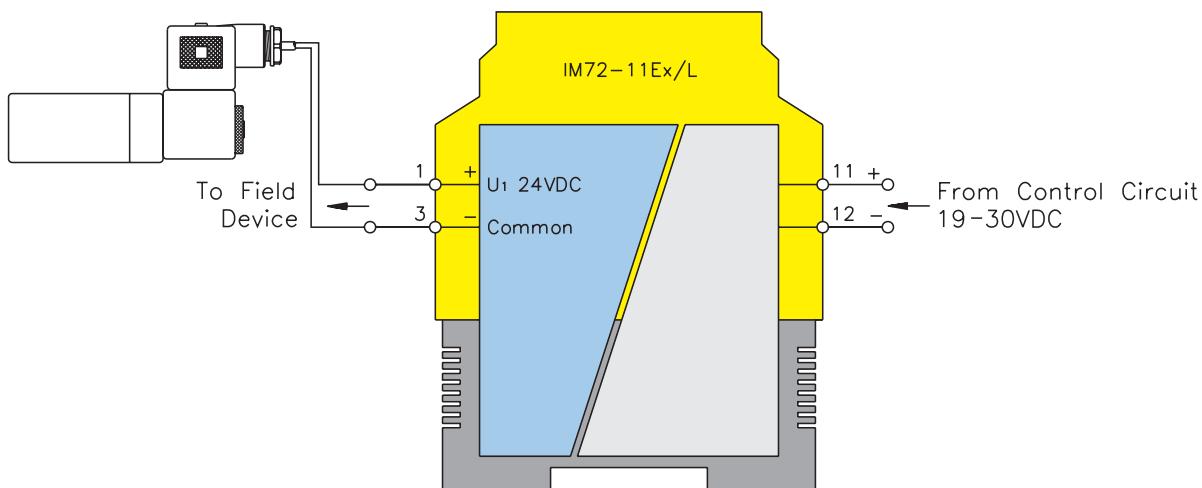

## IM72-22Ex/L

## Solenoid Driver/Discrete Output Isolators

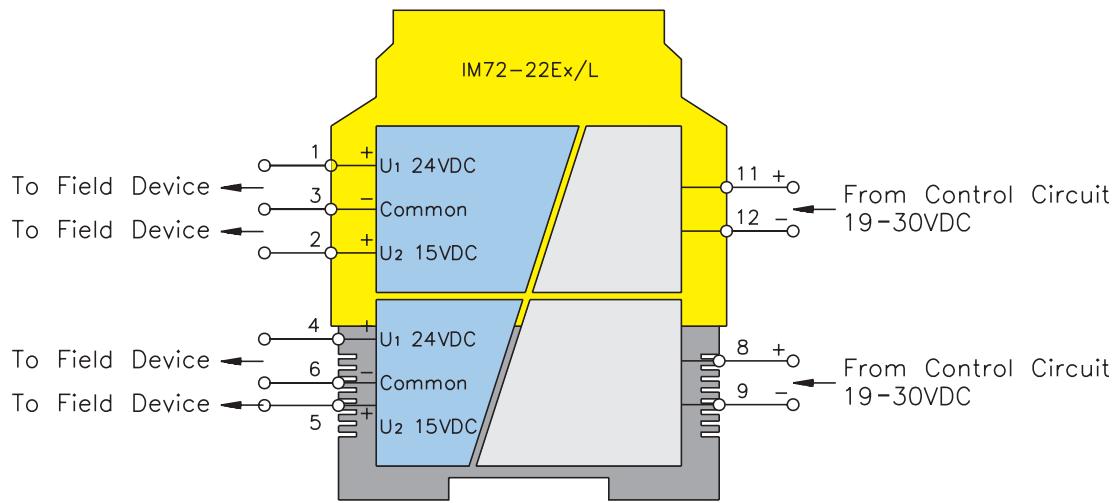**Functional Description:**

This dual channel device is designed to drive 2 separate intrinsically safe solenoids, "IS" displays or other field devices that may require a separate "IS" power source, or any combination of these devices. The unique design allows different configurations to be implemented depending on the specific field device or devices being applied.

Loop power is applied from a non-hazardous area source directly to the non-hazardous area inputs of each channel eliminating the requirement for additional power supply connections.

**Features:**


- 2 channel solenoid driver or "IS" supply
- 2 isolated loop powered circuits
- 2 output levels per channel
- Switching frequency up to 500 Hz

**Electrical Parameters:****Inputs: Hazardous Area**Supply (Loop Power)

- Signal "OFF" . . . . . <5 V  
 Signal "ON" . . . . . 19-30 VDC  
 Switch-on delay . . . . . <400  $\mu$ s

**Outputs: Non-Hazardous Area**In accordance with Output Curve:

- $U_1 = 24$  V (Pins 1 & 3, 4 & 6)  
 $U_2 = 15$  V (Pins 2 & 3, 5 & 6)  
 $I_1 = 45$  mA (Pins 1 & 3, 4 & 6)  
 $I_2 = 45$  mA (Pins 2 & 3, 5 & 6)  
 Switching Frequency . . . . . <500 Hz


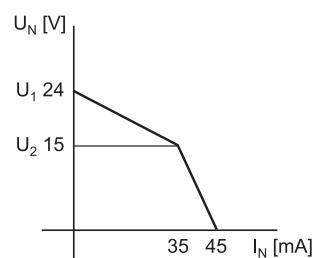


For entity parameters see control drawings on pages B86 - B91.

**Solenoid Driver/Discrete Output Isolators**

**IM72-22Ex/L**



Pin #	Terminal Function
1	U1 Field Output
2	U2 Field Output
3	Common Field Output
4	U1 Field Output
5	U2 Field Output
6	Common Field Output
7	No Connection
8	(+) Non-Hazardous Area Input
9	(-) Non-Hazardous Area Input
10	No Connection
11	(+) Non-Hazardous Area Input
12	(-) Non-Hazardous Area Input

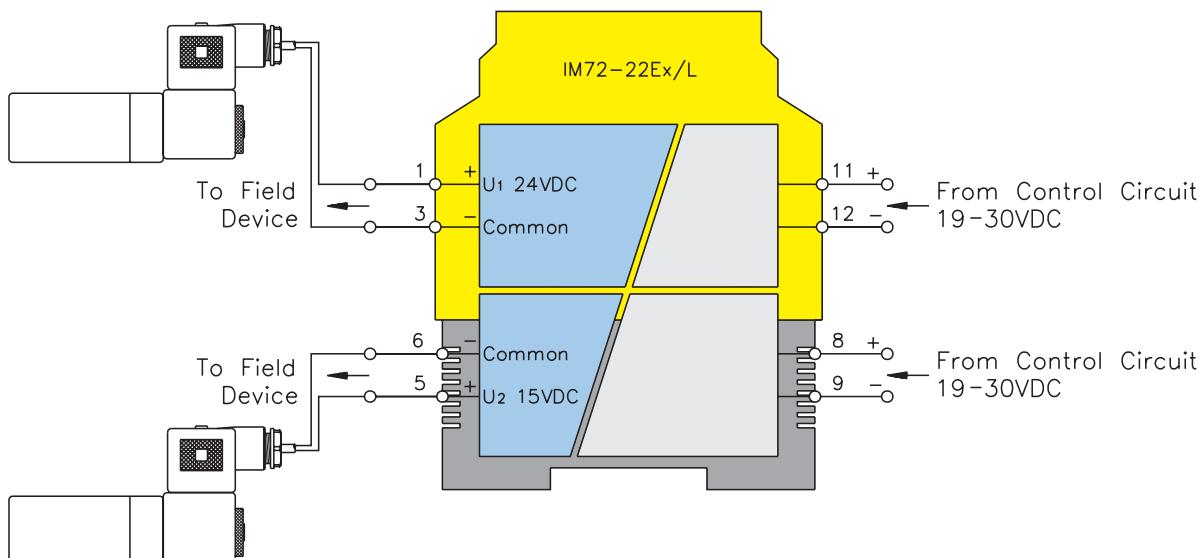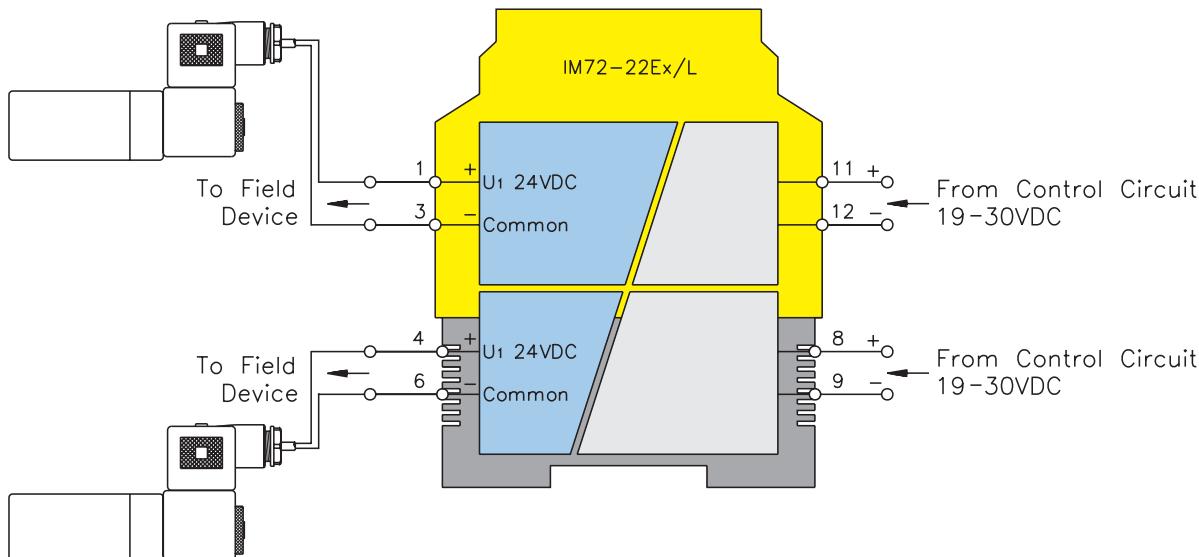

## IM72-22Ex/L

## Solenoid Driver/Discrete Output Isolators

Pin #	Terminal Function
1	U1 Field Output
2	U2 Field Output
3	Common Field Output
4	U1 Field Output
5	U2 Field Output
6	Common Field Output
7	No Connection
8	(+) Non-Hazardous Area Input
9	(-) Non-Hazardous Area Input
10	No Connection
11	(+) Non-Hazardous Area Input
12	(-) Non-Hazardous Area Input

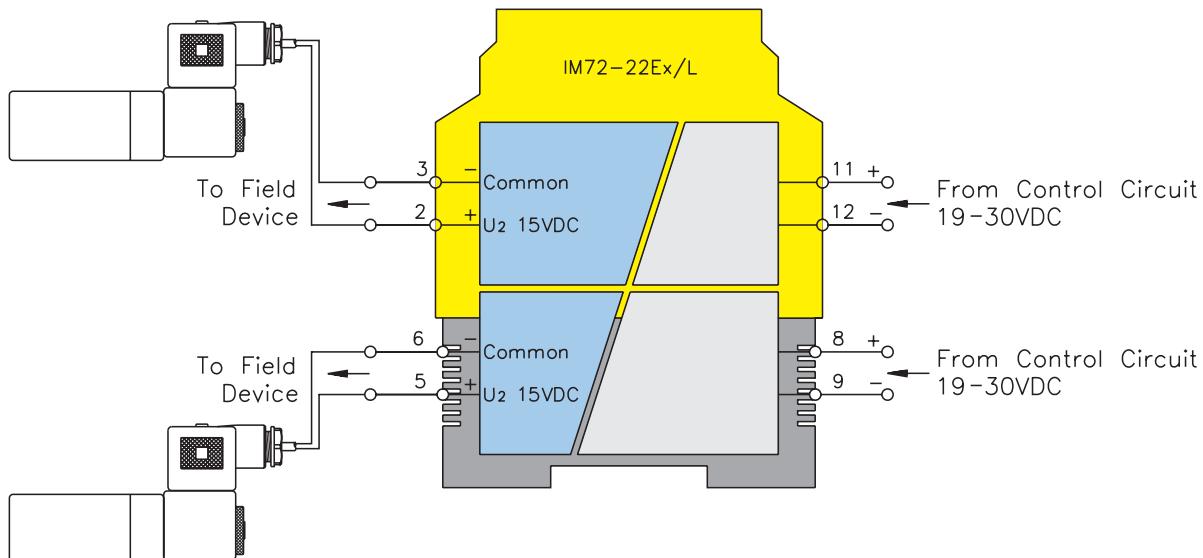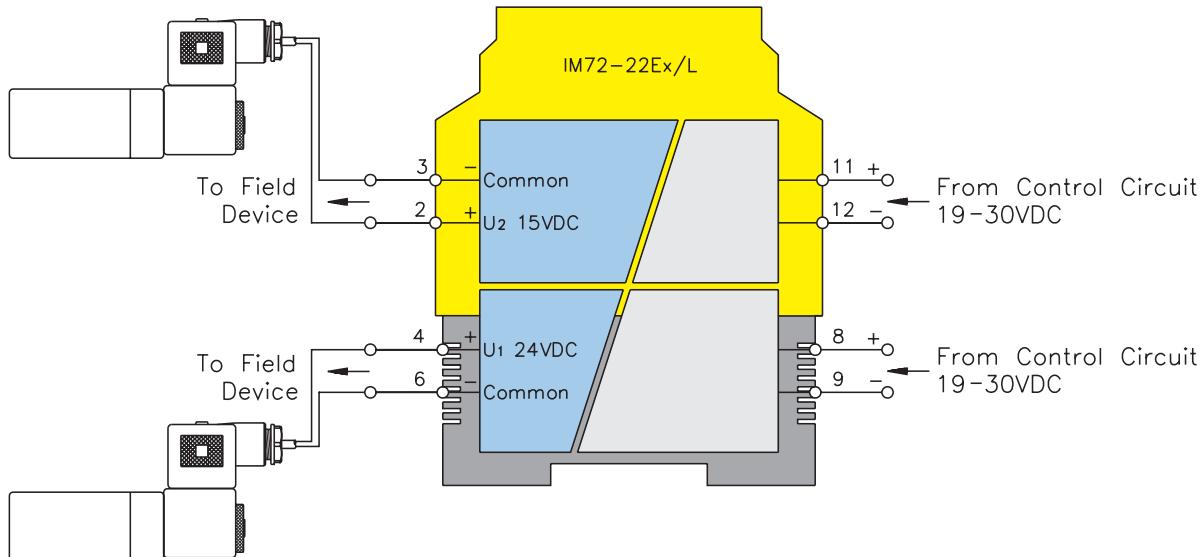

**Notes:**

## Approvals

Part Number	IECEx Approval Number 	ATEX Approval Number 
	http://domino.iec.ch/IECEx/IECExWeb.nsf	www.turck.com/IMATEX
IM1-121EX-R	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-121EX-T	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-12EX-MT	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-12EX-R	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-12EX-T	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-22EX-MT	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-22EX-R	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-22EX-T	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM1-451EX-R	IECEx TUN 06.0007X	PTB 00 ATEX 2033
IM1-451EX-T	IECEx TUN 06.0007X	PTB 00 ATEX 2033
IM12-22EX-R	IECEx TUN 06.0006X	PTB 00 ATEX 2033
IM31-11EX-I	IECEx TUN 06.0006X	TÜV 04 ATEX 2679
IM31-11EX-U	IECEx TUN 06.0006X	TÜV 04 ATEX 2679
IM31-12EX-I	IECEx TUN 06.0006X	TÜV 04 ATEX 2679
IM31-22EX-I	IECEx TUN 06.0006X	TÜV 04 ATEX 2679
IM31-22EX-U	IECEx TUN 06.0006X	TÜV 04 ATEX 2679
IM33-11EX-HI/24VDC	IECEx TUN 06.0001X	TÜV 00 ATEX 1595
IM33-12EX-HI/24VDC	IECEx TUN 06.0001X	TÜV 00 ATEX 1595
IM33-22EX-HI/24VDC	IECEx TUN 06.0001X	TÜV 00 ATEX 1595
IM34-11EX-CI	IECEx TUN 06.0010X	TÜV 02 ATEX 1898
IM34-11EX-I	IECEx TUN 06.0010X	TÜV 02 ATEX 1898
IM34-12EX-CRI	IECEx TUN 06.0010X	TÜV 02 ATEX 1898
IM34-12EX-RI	IECEx TUN 06.0010X	TÜV 02 ATEX 1898
IM34-14EX-CDRI	IECEx TUN 05.0014X	TÜV 02 ATEX 1898
IM35-11EX-HI/24VDC	IECEx TUN 06.0012X	TÜV 03 ATEX 2311
IM35-22EX-HI/24VDC	IECEx TUN 06.0012X	TÜV 03 ATEX 2311
IM72-11EX/L	IECEx TUN 05.0011X	TÜV 05 ATEX 2846
IM72-22EX/L	IECEx TUN 05.0011X	TÜV 05 ATEX 2846

**Note:**

UL Approvals are pending on all of the models listed here.

FM Approval Control Drawings are included on pages B86 - B91 in this guide.

# FM Approved Isolator Barriers

## Discrete Input Devices with Intrinsically Safe Field Circuits



NON-HAZARDOUS LOCATION, OR  
Class I, Division 2, Groups A,B,C or D


HAZARDOUS (CLASSIFIED) LOCATION

Class I, Div. 1, Group A, B, C or D;


Class II, Div. 1, Group E, F or G;

Class III, Div. 1; or


Class I, Zone 0, 1 or 2, Group IIC, IIB or IIA

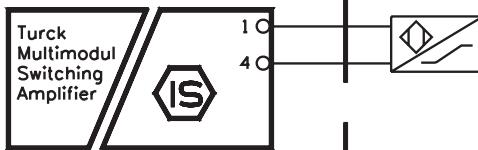

IM1 - a Ex - b  
a = 12, or 121  
b = R, T, or MT

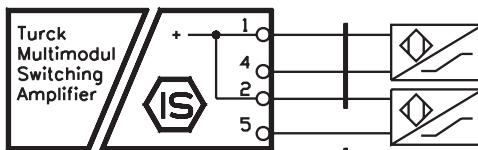

IM1 - 22Ex - b  
IM12 - 22Ex - b  
b = R, T, or MT

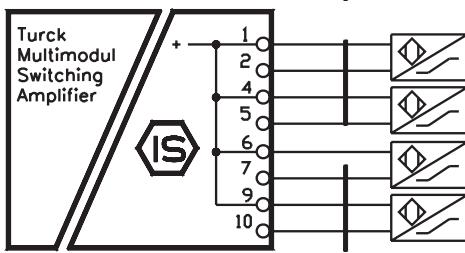

IM1 - c Ex - d  
c = 44 or 451  
d = R or T

Entity Parameters: Class I, Division 1; Class II, Division 1; Class III, Division 1  
Circuit Characteristic: Linear

Model	Terminals	V <sub>oc</sub> (V)	I <sub>sc</sub> (mA)	P <sub>0</sub> (mW)	C <sub>o</sub> (uF) AB/CE/DFG	L <sub>o</sub> (mH) AB/CE/DFG
IM1-12Ex-.	1-4	9.6	11	27	3.6/26.0/210	250/922/1H
IM1-121Ex-.						
IM1-22Ex-.	1-4, 2-5	9.6	11	27	3.6/26.0/210	250/922/1H
IM12-22Ex-.						
IM1-44Ex-.	1-2, 4-5, 6-7, 9-10	11.5	12.8	37	1.6/11.2/46.0	222/781/1H
IM1-451Ex-.						

Model	Terminals	V <sub>t</sub> (V)	I <sub>t</sub> (mA)	P <sub>0</sub> (mW)	C <sub>o</sub> (uF) AB/CE/DFG	L <sub>o</sub> (mH) AB/CE/DFG
IM1-22Ex-.	1-2-4-5	9.6	22	54	3.6/26.0/210	67/246/579
IM12-22Ex-.						
IM1-44Ex-.	1-2-4-5-6-7-9-10	11.5	51	147	1.6/11.2/46.0	12.5/49.0/108
IM1-451Ex-.						

Entity Parameters: Class I, Zone 0, 1, or 2  
Circuit Characteristic: Linear

Model	Terminals	U <sub>o</sub> (V)	I <sub>o</sub> (mA)	P <sub>0</sub> (mW)	C <sub>o</sub> (uF) IIC/IIB/IIA	L <sub>o</sub> (mH) IIC/IIB/IIA
IM1-12Ex-.	1-4	9.6	11	26	3.76/11.3/30.1	282/981/1H
IM1-121Ex-.						
IM1-22Ex-.	1-4, 2-5	9.6	11	26	3.76/11.3/30.1	282/981/1H
IM12-22Ex-.						
IM1-22Ex-.	1-2-4-5	9.6	22	54	3.6/26.0/210	67/246/579
IM12-22Ex-.						
IM1-44Ex-.	1-2, 4-5, 6-7, 9-10	11.5	12.8	37	1.6/11.2/46.0	222/781/1H
IM1-451Ex-.						
IM1-44Ex-.	1-2-4-5-6-7-9-10	11.5	51	147	1.6/11.2/46.0	12.5/49.0/108
IM1-451Ex-.						

Notes:


- The symbol designates third party approved with correct entity parameters meeting the relations shown in Table 1.
  - For US jurisdictions - Any FM approved intrinsically safe apparatus with Entity Concept parameters, or any simple apparatus.
  - For Canadian jurisdictions - Any Canadian certified intrinsically safe apparatus with Entity Concept parameters, or any simple apparatus.

The Entity concept allows interconnection of intrinsically safe apparatus and associated apparatus not specifically examined in such combination as a system when the conditions above are met.

$$V_{max} \geq V_{oc} \text{ or } V_t \quad I_{max} \geq I_{sc} \text{ or } I_t \quad U_i \geq U_o \quad I_i \geq I_o \quad P_i \geq P_o \\ C_i + C_{cable} \leq C_o \quad L_i + L_{cable} \leq L_o \quad C_i + C_{cable} \leq C_o \quad L_i + L_{cable} \leq L_o$$

A simple apparatus is defined as an electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5V, 100mA, and 25mW, or a passive component that does not dissipate more than 1.3W and is compatible with the intrinsic safety of the circuit in which it is used.

- When the field device is a contact closure, the connection should be made as shown below for proper performance.



IM1 models with line monitoring enabled

R1 should be 1kΩ to 22kΩ

R2 should be 10kΩ to 22kΩ

IM12 models

- Wiring methods must be in accordance with:

- For US jurisdictions - the National Electrical Code, ANSI/NFPA 70, Article 504 (for Division installations) or Article 505 (for Zone applications), and ANSI/ISA RP12.06.01.
- For Canadian jurisdictions - the Canadian Electrical Code, CSA 22.1, Appendix F.

- Associated apparatus must not be connected to any device that uses or generates in excess of 250Vrms.

- If the electrical parameters of the cable are unknown, the following values may be used:

Capacitance - 60pF/foot,  
Inductance - 0.2uH/foot

Drawing No.:

IS-1.101

**TURCK**

3000 Campus Drive  
Plymouth, MN 55441  
Phone: (763) 553-7300

Title: Control Drawing for IM1-..Ex-.  
and IM12-..Ex-. Isolator Barriers  
with I/S (Entity) Field Circuits



A	Release	BVL	11/16/05	Scale: NONE	Sheet 1 of 1
Rev	Description	Drft	Date		

# FM Approved Isolator Barriers



## Discrete Output Devices with Intrinsically Safe Field Circuits



NON-HAZARDOUS LOCATION, OR  
Class I, Division 2, Groups A,B,C,D

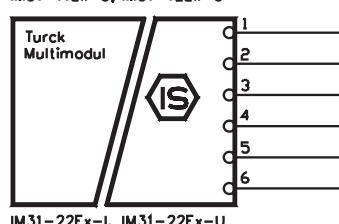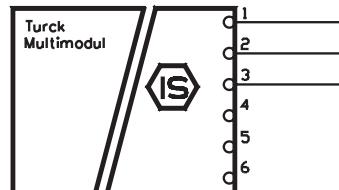

HAZARDOUS (CLASSIFIED) LOCATION  
Class I, Div. 1, Group A,B,C or D; Class II, Div. 1, Group E,F or G; Class III, Div. 1  
or  
Class I, Zone 0, Group IIC, IIB, or IIA

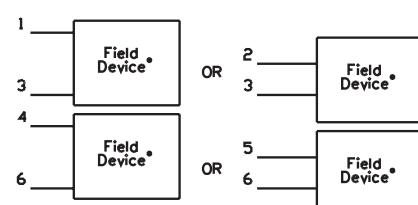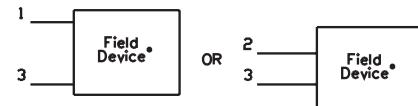

- The field device may be:
  - Any FM approved intrinsically safe apparatus with compatible Entity Concept parameters (see Note 1), or
  - Any Simple Apparatus (see Note 2).

Entity Parameters: Class I, Division 1; Class II, Division 1; Class III, Division 1  
Output characteristic: Linear

Model	Terminals	$V_{oc}$ (V)	$I_{sc}$ (mA)	$P_o$ (mW)	$C_o$ (uF) AB/CE/DFG	$L_o$ (H) ABCDEFG
IM31-1.EX-.	1-2-3	7.2	1	0.3	13.5/240/240	1
IM31-22EX-.	1-2-3 4-5-6	7.2	1	0.3	13.5/240/240	1

Entity Parameters: Class I, Zone 0, 1, or 2  
Output characteristic: Linear

Model	Terminals	$U_o$ (V)	$I_o$ (mA)	$P_o$ (mA)	$C_o$ (uF) IIC/IIB, IIA	$L_o$ (mH) IIC, IIB, IIA
IM31-1.EX-.	1-2-3	7.2	1	0.3	13.5/240	1
IM31-22EX-.	1-2-3 4-5-6	7.2	1	0.3	13.5/240/240	1

Notes:

The entity concept allows interconnection of intrinsically safe apparatus and associated apparatus not specifically examined in combination as a system when the conditions below are met.

$$\begin{aligned} V_{max} &\geq V_{oc} \text{ or } V_t & I_{max} &\geq I_{sc} \text{ or } I_t & U_i &\geq U_0 & I_i &\geq I_0 & P_i &\geq P_0 \\ C_i + C_{cable} &\leq C_o & L_i + L_{cable} &\leq L_o & C_i + C_{cable} &\leq C_o & L_i + L_{cable} &\leq L_o \end{aligned}$$

A simple apparatus is defined as an electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5V, 100mA, and 25mW, or a passive component that does not dissipate more than 1.3W and is compatible with the intrinsic safety of the circuit in which it is used.

3. Wiring methods must be in accordance with:

For US jurisdictions – the National Electrical Code, ANSI/NFPA 70, Article 504 (for Division 1 or 2 installations) or Article 505 (for Zone 0, 1 or 2 applications), and ANSI/ISA RP12.06.01.

For Canadian jurisdictions – the Canadian Electrical Code, CSA 22.1, for Division 1 or 2 or Zone 1 or 2 installations.

4. Associated apparatus must not be connected to any device that uses or generates in excess of 250VRms unless it has been determined that the voltage is adequately isolated from the associated apparatus.

5. If the electrical parameters of the cable are unknown, the following default values may be used:

Capacitance – 60pF/foot  
Inductance – 0.2uH/foot

6. WARNING: Substitution of components may impair intrinsic safety. AVERTISSEMENT: La substitution de composants peut compromettre la securite intrinseque.

Drawing No.:		IS-1.114		TURCK 3000 Campus Drive Plymouth, MN 55441 Phone: (763) 553-7300	
Title: Control Drawing for IM31-..Ex0-. with I/S (Entity) Field Circuits					
Scale: NONE		Sheet 1 of 1			
A	Release	BVL	6/29/06	Drft	Date
Rev	Description				

# FM Approved Isolator Barriers


## Analog Input Devices with Intrinsically Safe Field Circuits



NON-HAZARDOUS LOCATION, OR  
Class I, Division 2, Groups A,B,C,D


HAZARDOUS (CLASSIFIED) LOCATION

Class I, Div. 1, Groups A,B,C,D; Class II, Div. 1, Groups E,F,G; Class III, Div. 1  
or  
Class I, Group IIC, IIB, or IIA, Zone per Note  $\Delta$

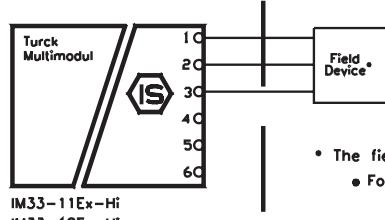

- The field device may be:

- For US jurisdictions – Any FM approved intrinsically safe apparatus with compatible Entity Concept parameters  $\Delta$ , or any simple apparatus  $\triangle$ .
- For Canadian jurisdictions – Any Canadian certified intrinsically safe apparatus with compatible Entity Concept parameters  $\Delta$ , or any simple apparatus  $\triangle$ .

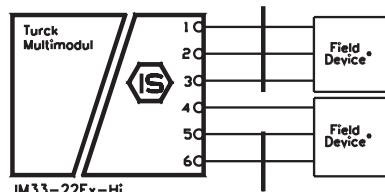

Entity Parameters: Class I, Division 1; Class II, Division 1; Class III, Division 1

Model	Terminals	$V_{oc}$ (V)	$I_{sc}$ (mA)	$P_o$ (mW)	Output Characteristic	$C_o(\mu F)$ AB/CE/DFG	$L_o(mH)$ AB/CE/DFG
IM33-11Ex-...	1-2-3	21.2	89	472	Linear	0.18/01.24/4.68	4.5/17.3/35.9
IM33-22Ex-...	1-2-3, 4-5-6	21.2	89	472	Linear	0.18/01.24/4.68	4.5/17.3/35.9

Entity Parameters: Class I, Zone 0, 1, or 2

Model	Terminals	$U_0$ (V)	$I_o$ (mA)	$P_o$ (mW)	Output Characteristic	$C_o(\mu F)$ IIC/IIB/IIA	$L_o(mH)$ IIC/IIB/IIA
IM33-11Ex-...	1-2-3	21.2	89	472	Linear	0.18/01.24/4.68	4.5/17.3/35.9
IM33-22Ex-...	1-2-3, 4-5-6	21.2	89	472	Linear	0.18/01.24/4.68	4.5/17.3/35.9

Notes:

$\Delta$  1. The entity concept allows interconnection of intrinsically safe apparatus and associated apparatus not specifically examined in combination as a system when the conditions below are met.

$$V_{max} \geq V_{oc} \text{ or } V_t \quad I_{max} \geq I_{sc} \text{ or } I_t \quad U_i \geq U_o \quad I_i \geq I_o \quad P_i \geq P_o \\ C_i + C_{cable} \leq C_o \quad L_i + L_{cable} \leq L_o \quad C_i + C_{cable} \leq C_o \quad L_i + L_{cable} \leq L_o$$

$\Delta$  2. A simple apparatus is defined as an electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5V, 100mA, and 25mW, or a passive component that does not dissipate more than 1.3W and is compatible with the intrinsic safety of the circuit in which it is used.

3. Wiring methods must be in accordance with:

For US jurisdictions – the National Electrical Code, ANSI/NFPA 70, Article 504 (for Division 1 or 2 installations) or Article 505 (for Zone 0, 1 or 2 applications), and ANSI/ISA RP12.06.01.

For Canadian jurisdictions – the Canadian Electrical Code, CSA 22.1, for Division 1 or 2 or Zone 1 or 2 installations.

4. Associated apparatus must not be connected to any device that uses or generates in excess of 250VRms unless it has been determined that the voltage is adequately isolated from the associated apparatus.

5. If the electrical parameters of the cable are unknown, the following default values may be used:

Capacitance – 60pF/foot  
Inductance – 0.2uH/foot

6. WARNING: Substitution of components may impair intrinsic safety. AVERTISSEMENT: La substitution de composants peut compromettre la securite intrinseque.

Drawing No.:		IS-1.102		TURCK 3000 Campus Drive Plymouth, MN 55441 Phone: (763) 553-7300	
Title: Control Drawing for IM33-..Ex-., with I/S (Entity) Field Circuits					
A	Release	BVL	11/22/05	Scale: NONE	Sheet 1 of 1
Rev	Description	Draft	Date		


# FM Approved Isolated Amplifiers

## Temperature Transmitters with Intrinsically Safe Field Circuits



NON-HAZARDOUS LOCATION, OR  
Class I, Division 2, Groups A,B,C,D

HAZARDOUS (CLASSIFIED) LOCATION  
Class I, Div. 1, Groups A,B,C,D; Class II, Div. 1, Groups E,F,G; Class III, Div. 1  
or  
Class I, Group IIC, IIB, or IIA, Zone per Note  $\triangle$

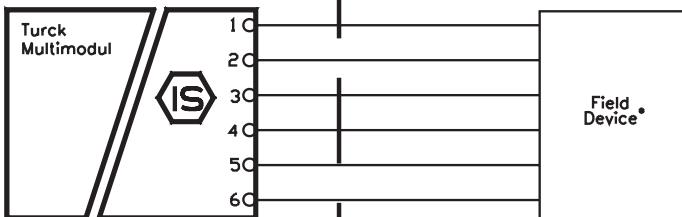

IM34-11Ex-i  
IM34-11Ex-Ri  
IM34-12Ex-Ci  
IM34-12Ex-CRi

- The field device may be:

- For US jurisdictions – Any FM approved intrinsically safe apparatus with compatible Entity Concept parameters  $\triangle$ , or any simple apparatus  $\triangle$ .
- For Canadian jurisdictions – Any Canadian certified intrinsically safe apparatus with compatible Entity Concept parameters  $\triangle$ , or any simple apparatus  $\triangle$ .

Entity Parameters: Class I, Division 1; Class II, Division 1; Class III, Division 1

Model	Terminals	$V_t$ (V)	$I_t$ (mA)	$P_o$ (mW)	Output Characteristic	$C_o(\mu F)$ AB/CDEFG	$L_o(mH)$ AB/CDEFG
IM34-11Ex0-i	1-2-3-4-5-6						
IM34-12Ex0-Ri	1-2-3-4-5-6	5	7.6	9.5	Linear	100/1000	500/1H
IM34-11Ex0-Ci	1-2-3-4-5-6						
IM34-12Ex0-CRi	1-2-3-4-5-6						

Entity Parameters: Class I, Zone 0, 1, or 2

Model	Terminals	$U_o$ (V)	$I_o$ (mA)	$P_o$ (mW)	Output Characteristic	$C_o(\mu F)$ IIC/IIB/IIA	$L_o(mH)$ IIC/IIB/IIA
IM34-11Ex0-i	1-2-3-4-5-6						
IM34-12Ex0-Ri	1-2-3-4-5-6	5	7.6	9.5	Linear	100/1000/1000	500/1H/1H
IM34-11Ex0-Ci	1-2-3-4-5-6						
IM34-12Ex0-CRi	1-2-3-4-5-6						

Notes:

$\triangle$  The entity concept allows interconnection of intrinsically safe apparatus and associated apparatus not specifically examined in combination as a system when the conditions below are met.

$$\begin{aligned} V_{max} &\geq V_{oc} \text{ or } V_t & I_{max} &\geq I_{sc} \text{ or } I_t & U_i &\geq U_o & I_i &\geq I_o & P_i &\geq P_o \\ C_i + C_{cable} &\leq C_o & L_i + L_{cable} &\leq L_o & C_i + C_{cable} &\leq C_o & L_i + L_{cable} &\leq L_o \end{aligned}$$

2. A simple apparatus is defined as an electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5V, 100mA, and 25mW, or a passive component that does not dissipate more than 1.3W and is compatible with the intrinsic safety of the circuit in which it is used.

$\triangle$  Wiring methods must be in accordance with:

For US jurisdictions – the National Electrical Code, ANSI/NFPA 70, Article 504 (for Division 1 or 2 installations) or Article 505 (for Zone 0, 1 or 2 applications), and ANSI/ISA RP12.06.01.

For Canadian jurisdictions – the Canadian Electrical Code, CSA 22.1, for Division 1 or 2 or Zone 1 or 2 installations.

4. Associated apparatus must not be connected to any device that uses or generates in excess of 250Vrms unless it has been determined that the voltage is adequately isolated from the associated apparatus.

5. If the electrical parameters of the cable are unknown, the following default values may be used:

Capacitance – 60pF/foot

Inductance – 0.2μH/foot

6. WARNING: Substitution of components may impair intrinsic safety. AVERTISSEMENT: La substitution de composants peut compromettre la sécurité intrinsèque.

		Drawing No.:			<b>TURCK</b> 3000 Campus Drive Plymouth, MN 55441 Phone: (763) 553-7300
		IS-1.106			
		Title:	Control Drawing for IM34-11Ex-., with I/S (Entity) Field Circuits		
		Scale:	NONE	Sheet 1 of 1	


A	Release	BVL	11/22/05
Rev	Description	Drft	Date

## FM Approved Isolator Barriers


Analog Output Devices with Intrinsically Safe Field Circuits



NON-HAZARDOUS LOCATION, OR  
Class I, Division 2, Groups A,B,C,D



HAZARDOUS (CLASSIFIED) LOCATION  
Class I, Div. 1, Groups A,B,C,D; Class II, Div. 1, Groups E,F,G; Class III, Div. 1  
OR  
Class I, Group IIC, IIB, or IIA, Zone per Note  $\Delta$



- The field device may be:
  - For US jurisdictions – Any FM approved intrinsically safe apparatus with compatible Entity Concept parameters  $\Delta_1$  or any simple apparatus  $\Delta_2$ .
  - For Canadian jurisdictions – Any Canadian certified intrinsically safe apparatus with compatible Entity Concept parameters  $\Delta_1$  or any simple apparatus  $\Delta_2$ .

Entity Parameters: Class I, Division 1; Class II, Division 1; Class III, Division 1

Model	Terminals	$V_{oc}$ (V)	$I_{sc}$ (mA)	$P_o$ (mW)	Output Characteristic	$R_i$ (Ohms)	$C_o(\mu F)$ AB/CDEFG	$L_o(mH)$ AB/CDEFG
IM35-11Ex-Hi/.	1-2	15.9	60	500	Trapezoidal	527	0.15/0.3	1/25
IM35-22Ex-Hi/.	1-2, 4-5	15.9	60	500	Trapezoidal	527	0.15/0.3	1/25
IM35-22Ex-U/.	1-2, 4-5	15.9	60	500	Trapezoidal	527	0.15/0.3	1/25

Entity Parameters: Class I, Zone 0, 1, or 2

Model	Terminals	$U_o$ (V)	$I_o$ (mA)	$P_o$ (mW)	Output Characteristic	$R_i$ (Ohms)	$C_o(\mu F)$ IIC/IIB/IIA	$L_o(mH)$ IIC/IIB/IIA
IM35-11Ex-Hi/.	1-2	15.9	60	500	Trapezoidal	527	0.15/0.3/0.3	1/25/25
IM35-22Ex-Hi/.	1-2, 4-5	15.9	60	500	Trapezoidal	527	0.15/0.3/0.3	1/25/25
IM35-22Ex-U/.	1-2, 4-5	15.9	60	500	Trapezoidal	527	0.15/0.3/0.3	1/25/25

**Notes:**

$\Delta_1$  The entity concept allows interconnection of intrinsically safe apparatus and associated apparatus not specifically examined in combination as a system when the conditions below are met.

$$V_{max} \geq V_{oc} \text{ or } V_t \quad I_{max} \geq I_{sc} \text{ or } I_t \quad U_i \geq U_o \quad I_i \geq I_o \quad P_i \geq P_o \\ C_i + C_{cable} \leq C_o \quad L_i + L_{cable} \leq L_o \quad C_i + C_{cable} \leq C_o \quad L_i + L_{cable} \leq L_o$$

$\Delta_2$  A simple apparatus is defined as an electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5V, 100mA, and 25mW, or a passive component that does not dissipate more than 1.3W and is compatible with the intrinsic safety of the circuit in which it is used.

3. Wiring methods must be in accordance with:

For US jurisdictions – the National Electrical Code, ANSI/NFPA 70, Article 504 (for Division 1 or 2 installations) or Article 505 (for Zone 0, 1 or 2 applications), and ANSI/ISA RP12.06.01.

For Canadian jurisdictions – the Canadian Electrical Code, CSA 22.1, for Division 1 or 2 or Zone 1 or 2 installations.

4. Associated apparatus must not be connected to any device that uses or generates in excess of 250Vrms unless it has been determined that the voltage is adequately isolated from the associated apparatus.

5. If the electrical parameters of the cable are unknown, the following default values may be used:

Capacitance – 60pF/foot  
Inductance – 0.2uH/foot


6. WARNING: Substitution of components may impair intrinsic safety. AVERTISSEMENT: La substitution de composants peut compromettre la securite intrinseque.

Drawing No.:		IS-1105		TURCK 3000 Campus Drive Plymouth, MN 55441 Phone: (763) 553-7300	
Title: Control Drawing for IM35-..Ex-Hi and IM35-..Ex-U with I/S (Entity) Field Circuits					
A	Release	BVL	11/22/05	Scale: NONE	Sheet 1 of 1
Rev	Description	Drft	Date		


## Discrete Output Devices with Intrinsically Safe Field Circuits





NON-HAZARDOUS LOCATION, OR  
Class I, Division 2, Groups A,B,C,D

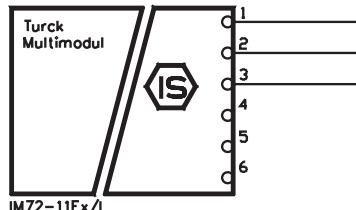

HAZARDOUS (CLASSIFIED) LOCATION  
Class I, Div. 1, Group A,B,C or D; Class II, Div. 1, Group E,F or G; Class III, Div. 1  
or  
Class I, Zone 0, Group IIC, IIB, or IIA

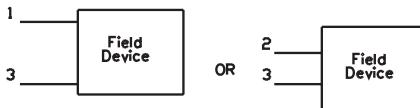

OR  
2      3

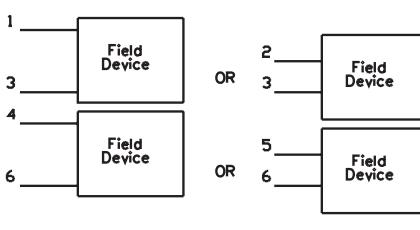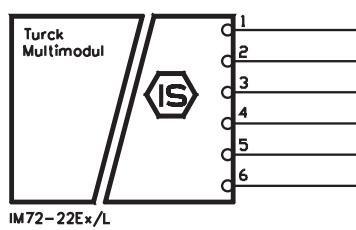

- The field device may be:
  - Any FM approved intrinsically safe apparatus with compatible Entity Concept parameters (see Note 1), or
  - Any Simple Apparatus (see Note 2).

Entity Parameters: Class I, Division 1; Class II, Division 1; Class III, Division 1  
Output characteristic: Trapezoidal ( $R_i = 297$  Ohms)

Model	Terminals	$V_{oc}$ (V)	$I_{sc}$ (mA)	$P_o$ (mW)	$C_o$ (uF) AB/CDEFG	$L_o$ (mH) AB/CDEFG
IM72-11Ex/L	1-3	27	95.3	674	0.03/0.15	2/5
IM72-11Ex/L	2-3	17.5	95.3	674	0.10/0.30	1/10
IM72-22Ex/L	1-3, 4-6	27	95.3	674	0.03/0.15	2/5
IM72-22Ex/L	2-3, 5-6	17.5	95.3	674	0.10/0.30	1/10

Entity Parameters: Class I, Zone 0, 1, or 2  
Output characteristic: Trapezoidal ( $R_i = 297$  Ohms)

Model	Terminals	$U_o$ (V)	$I_o$ (mA)	$P_o$ (mW)	$C_o$ (uF) IIC/IIB,IIA	$L_o$ (mH) IIC/IIB,IIA
IM72-11Ex/L	1-3	27	95.3	674	0.03/0.15	2/5
IM72-11Ex/L	2-3	17.5	95.3	674	0.10/0.30	1/10
IM72-22Ex/L	1-3, 4-6	27	95.3	674	0.03/0.15	2/5
IM72-22Ex/L	2-3, 5-6	17.5	95.3	674	0.10/0.30	1/10

## Notes:

The entity concept allows interconnection of intrinsically safe apparatus and associated apparatus not specifically examined in combination as a system when the conditions below are met.

$$\begin{array}{ll} V_{max} \geq V_{oc} \text{ or } V_t & I_{max} \geq I_{sc} \text{ or } I_t \\ C_i + C_{\text{cable}} \leq C_o & L_i + L_{\text{cable}} \leq L_o \\ U_i \geq U_o & I_i \geq I_o \\ C_i + C_{\text{cable}} \leq C_o & L_i + L_{\text{cable}} \leq L_o \\ P_i \geq P_o & \end{array}$$

A simple apparatus is defined as an electrical component or combination of components of simple construction with well-defined electrical parameters that does not generate more than 1.5V, 100mA, and 25mW, or a passive component that does not dissipate more than 1.3W and is compatible with the intrinsic safety of the circuit in which it is used.

## 3. Wiring methods must be in accordance with:

For US jurisdictions – the National Electrical Code, ANSI/NFPA 70, Article 504 (for Division 1 or 2 installations) or Article 505 (for Zone 0, 1 or 2 applications), and ANSI/ISA RP12.06.01.

For Canadian jurisdictions – the Canadian Electrical Code, CSA 22.1, for Division 1 or 2 or Zone 1 or 2 installations.

4. Associated apparatus must not be connected to any device that uses or generates in excess of 250VRMS unless it has been determined that the voltage is adequately isolated from the associated apparatus.

5. If the electrical parameters of the cable are unknown, the following default values may be used:  
Capacitance – 60pF/foot  
Inductance – 0.2uH/foot

6. WARNING: Substitution of components may impair intrinsic safety. AVERTISSEMENT: La substitution de composants peut compromettre la securite intrinseque.

Drawing No.:		IS-1.108		<b>TURCK</b> 3000 Campus Drive Plymouth, MN 55441 Phone: (763) 553-7300	
Title: Control Drawing for IM72-...Ex0/L with I/S (Entity) Field Circuits					
Scale: NONE		Sheet 1 of 1			
A	Release	BVL	6/21/06		
Rev	Description	Drft	Date		



## Notes:

**TURCK**  
**Process Automation**

**Notes:**

# **IP 20 REMOTE I/O**



## BL20 Gateway Selection Guide



DeviceNet™	PROFIBUS®-DP	Ethernet	Ethernet IP
C7	C8	C9	C10

## BL20 Module Selection Guide



Module Type	Pages
Discrete Input	C11
Discrete Output	C17
Discrete AC Input	C23
Discrete Input Blocks	C27
Analog Input	C31
Analog Output	C37
Serial Input & Output	C39
Counter Input	C41
Power Feed	C43
Bus Refreshing	C45
Motor Starter Input & Output	C47

Base Modules	Accessories
C56	C61



## The BL20 Solution

The BL20 modular concept is a very flexible approach to terminal-wired I/O. The gateway, base and electronic modules provide many benefits to the user.

- The gateway provides communication between the fieldbus and I/O modules; modules are not dependent on the fieldbus protocol.
- DIN-rail mountable base modules are available with different wiring configurations to suit the user's needs.
- Electronic modules are hot swappable.
- Power distribution modules can be used to create isolated power segments within the system.

BL20's openness and flexibility provide a viable alternative to traditional PLC I/O.

## Maximum Size of a BL20 Station

BL20 stations consist of a gateway and a maximum of 74 I/O modules (equivalent to 1 m station length). Some high-tech and analog I/O modules may consume or produce large amounts of data, and therefore may further limit the number of modules that may be used. It is highly recommended that I/Oassistant software is used when planning and commissioning BL20 systems. This program allows you to build the BL20 node on your computer and verify that all restrictions with regard to power and size are met. The free I/Oassistant software is available to download from [www.turck.com](http://www.turck.com).

## Addressing

As a node on a network, the BL20 station must have an address. The setting of this address is dependent on the network system being used. Each network gateway has a set of rotary switches (one for the most significant digit, or 10's multiplier, and one for the least significant digit, or 1's multiplier) that are used to set the address for the node. DeviceNet™ gateways may be addressed between 0 and 63, while PROFIBUS®-DP and CANopen gateways can be set from 0 to 99.

## BL20 Power Distribution

The power supply for a BL20 station is fed via power feeding or bus refreshing modules; the latter also being responsible for the power supply to the internal module bus. Bus refreshing modules are used within a BL20 station (without gateway supply) if the system supply to the BL20 modules (nominal current IMB 1.5 A) is no longer sufficiently guaranteed. Bus refreshing modules are used with tension clamp (BL20-P3T-SBB-B or BL20-P4T-SBBC-B) or screw connection base modules (BL20-P3S-SBB-B or BL20-P4S-SBBC-B). Power feeding modules are used if the system supply to the BL20 modules (nominal current IL < 10 A) is no longer sufficiently guaranteed.

## System Supply Via Module Bus

The amount of BL20 modules that may be supplied by a bus refreshing module via the internal module bus depends on the respective minimal current IMB of the individual modules on the bus. The sum of the nominal current inputs of the connected BL20 modules must not exceed 1.5 A. BL20 gateway power requirements (supplied by the first bus refreshing module) should be considered when calculating the required number of bus refreshing modules. If I/Oassistant software is used, an error message is generated automatically via the <Station - Verify> as soon as the system supply is no longer sufficiently guaranteed.

All bus refreshing modules used in a BL20 station should be connected via the same frame potential. The power supply to the bus is fed via the connections 11 (plus) and 21 (ground) of the respective base module for the bus refreshing module.

## **Creating Potential Groups**

Both bus refreshing modules and power feeding modules may be used to create a potential group. The base module creates the possible isolation of the potential group on the left-hand side of the respective power distribution module.

It is not permitted for modules with 24 VDC and with 120/230 VAC field supply to be used in a joint potential group. Therefore, when using digital input modules for 120/230 VAC, the power feeding module BL20-PF-120/230VAC-D is to be used to create a special potential group.

## **C-rail (Cross Connection)**

C-rails run through all I/O base modules. The C-rail for base modules for power distribution is mechanically separated; thus potentially isolating the adjoining supply groups.

## **Access to the C-rail**

Access to the C-rail is made via base modules with a C designation (i.e. BL20-S4T-SBCS). The corresponding connection level is indicated by a thick black line on all base modules for BL20 I/O modules. For base modules for power distribution, the black line is only above the connection "24" to indicate that the C-rail is separated from the adjoining potential group to its left.

It is permitted to load the C-rail with a maximum of 24 V; never with 120/230 VAC.

## **Using the C-rail with Relay Modules**

The C-rail may be used to supply a common voltage when relay modules are used. To accomplish this, the load voltage (24 VDC) is connected to a power distribution module and the base module BL20-P4x-SBBC with either tension clamp or screw connections.

If the C-rail is used for the joint supply of voltage to relay modules, there must be a power distribution module used for the potential isolation of the BL20 modules. The C-rail may still be used as protective earth (PE) once the potential isolation has been made.

## **Using the C-rail as a Protective Earth**

A C-rail may be used as a protective earth (PE), where the PE connection for each power distribution modules must be connected to the mounting rail via an additional PE terminal, which is available as an accessory.

## Environmental Conditions

### General Technical Data

<b>Potential Isolations</b>	Via Optocoupler
<b>Ambient Temperatures</b>	
<b>Operating Temperature</b>	+32 to +131°F (0 to +55°C)
<b>Storage Temperature</b>	-13 to +185°F (-25 to +85°C)
<b>Relative Humidity</b>	5 to 95% (indoor), Level RH-2, without condensation (storage at 45°C)
<b>Noxious Gas</b>	
<b>SO2</b>	10 ppm (rel. humidity <75%, without condensation)
<b>H2S</b>	1.0 ppm (rel. humidity <75%, without condensation)
<b>Shock and Vibration</b>	
<b>Resistant to Vibration</b>	According to EN 61131
<b>Operating Conditions</b>	According to EN 61131
<b>Resistant to Shock</b>	According to IEC 68-2-27
<b>Topple and Fall</b>	According to IEC 68-2-31 and free fall according to IEC 68-2-32
<b>Protection Class</b>	IP 20
<b>Electromagnetic Compatibility (EMC)</b>	According to EN 50 082-2 (Industry)
<b>Tests</b>	According to EN 61131-2
<b>Base Modules</b>	
<b>Measurement Data</b>	According to VDE 0611 part 1/8.92 / IEC 947-7-1/1989
<b>Connection to Technology in TOP Construction</b>	Tension clamp or screw connection
<b>Insulation Stripping Length</b>	8 mm
<b>Crimpable Wire</b>	
<b>Nominal Diameter</b>	1.5 mm <sup>2</sup>
<b>"e" solid core H 07V-U</b>	0.5 to 2.5 mm <sup>2</sup>
<b>"f" flexible core H 07V-K</b>	0.5 to 1.5 mm <sup>2</sup>
<b>"f" with ferrules</b>	According to DIN 46 228/1 (ferrules crimped gas-tight), 0.5 to 1.5 mm <sup>2</sup>
<b>Plug Gauge</b>	According to IEC 947-1/1988, A1
<b>Protection Class</b>	IP 20
<b>Approvals</b>	CE, UL, CSA

**DeviceNet Gateway****BL20-GWBR-DNET**

- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

**Electrical**

- Operating Current: <250 mA from BR power supply
- Supply Current: <10 A to I/O (from  $U_L$ )  
<1.5 A to backplane (from  $U_{SYS}$ )

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: 1 g @ 5-100 Hz

**Material**


- Housing: PC-V0 (Lexan)

**Diagnostics (Logical)**

- Diagnostic information available through the DeviceNet I/O map

**Diagnostics (Physical)**

- LEDs to indicate status of DeviceNet and Module Bus communication

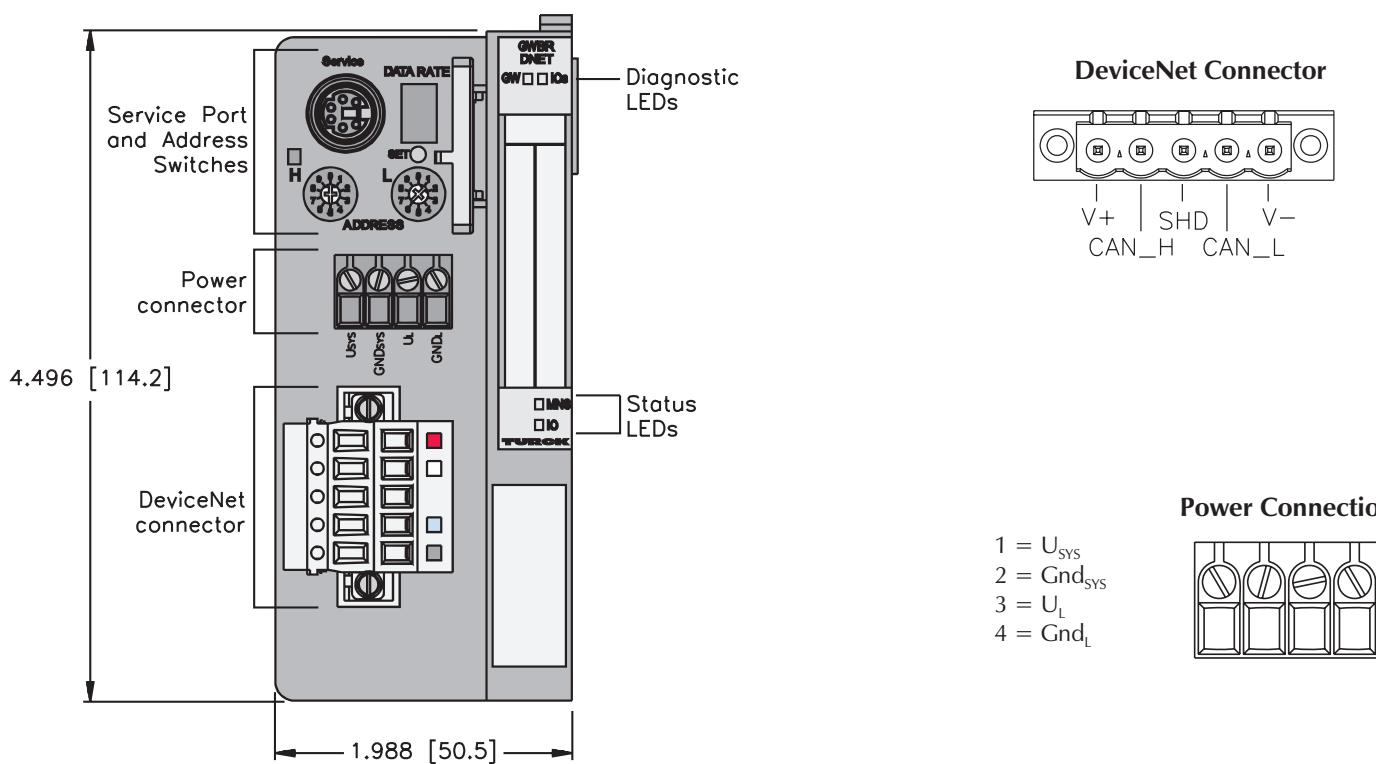

## PROFIBUS-DP Gateway



### BL20-GW-DPV1



- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Various I/O Styles

#### Electrical

- Operating Current: <430 mA from BR power supply ( $U_{sys}$ )
- Supply Current: <10 A to I/O (from  $U_L$ )  
<1.5 A to backplane (from  $U_{sys}$ )

#### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: 1 g @ 5-100 Hz

#### Material

- Housing: PC-V0 (Lexan)




#### Diagnostics (Logical)

- Diagnostic information available through the PROFIBUS-DP interface


#### Diagnostics (Physical)

- LEDs to indicate status of PROFIBUS-DP and Module Bus communication

#### Power Connectors

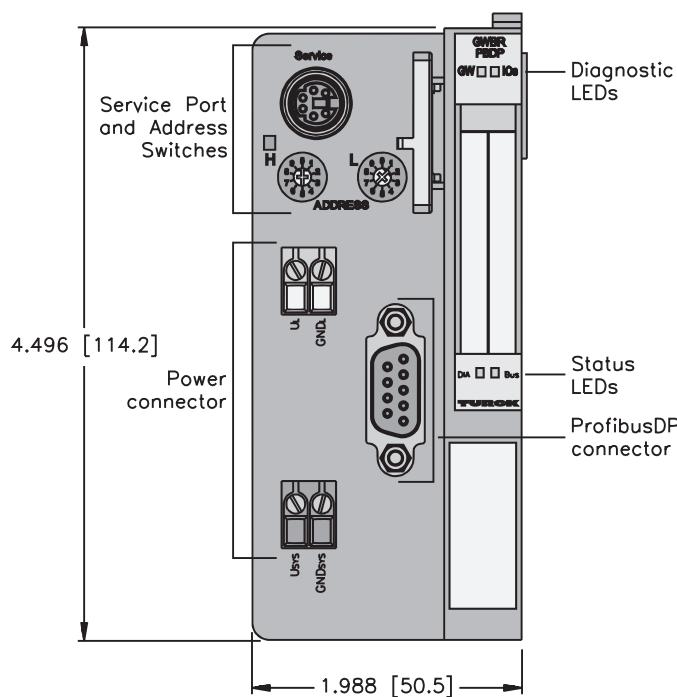

#### PROFIBUS-DP Connector



- 1 = Shield
- 3 = BUS\_B
- 5 = DGnd
- 6 = +5 VDC
- 8 = BUS\_A

**Ethernet Gateway****BL20-GW-EN****BL20-PG-EN**

- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

**Electrical**

- Operating Current: <430 mA from BR power supply ( $U_{SYS}$ )
- Supply Current: <10 A to I/O (from  $U_L$ )  
<1.5 A to backplane (from  $U_{SYS}$ )

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: 1 g @ 5-100 Hz

**Material**

- Housing: PC-V0 (Lexan)

**Diagnostics (Logical)**





- Diagnostic information available through the PROFIBUS-DP interface

**Diagnostics (Physical)**

- LEDs to indicate status of PROFIBUS-DP and Module Bus communication

**Programmability**

- PG in part number designates a programmable gateway
- Programmable according to IEC 61131.3 using CodeSys (includes ladder logic)
- Use CodeSys to create logic programs to control local I/O

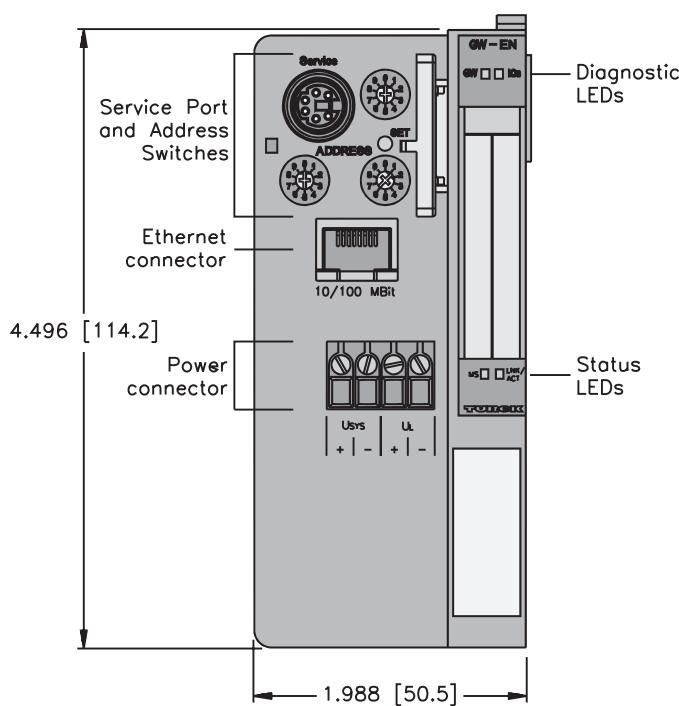**Power Connectors****RJ45 Ethernet Standard**

- 1 = WH/or (+TX)  
2 = OR (-TX)  
3 = WH/GN (+RX)  
4 = BU  
5 = WH/BU  
6 = GN (-RX)  
7 = WH/BN  
8 = BN

## Ethernet IP Gateway



**BL20-GW-EN-IP**  
**BL20-PG-EN-IP**



- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Various I/O Styles

### Electrical

- Operating Current: <430 mA from BR power supply ( $U_{sys}$ )
- Supply Current: <10 A to I/O (from  $U_L$ )  
<1.5 A to backplane (from  $U_{sys}$ )

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: 1 g @ 5-100 Hz

### Material

- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)

- Diagnostic information available through the PROFIBUS-DP interface




### Diagnostics (Physical)

- LEDs to indicate status of PROFIBUS-DP and Module Bus communication


### Programmability

- PG in part number designates a programmable gateway
- Programmable according to IEC 61131.3 using CodeSys (includes ladder logic)
- Use CodeSys to create logic programs to control local I/O

### Power Connectors

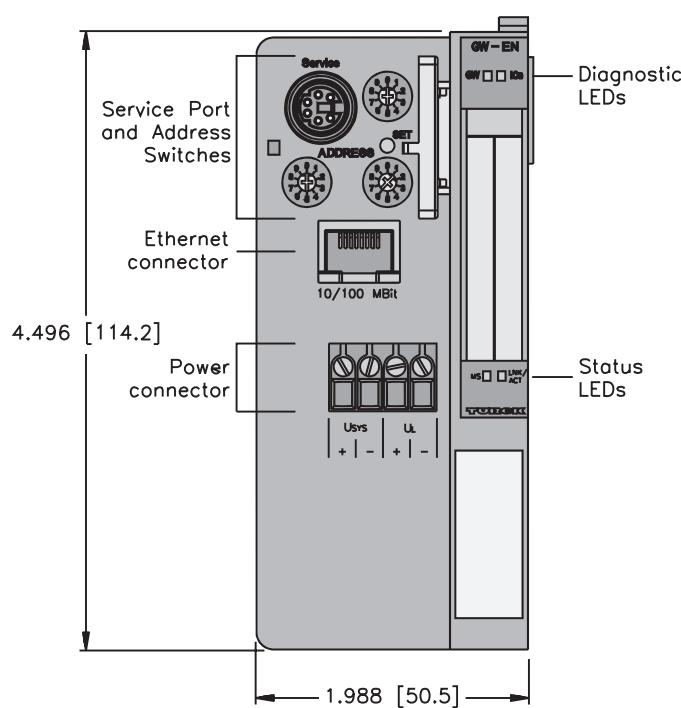

### RJ45 Ethernet Standard



- 1 = WH/or (+TX)
- 2 = OR (-TX)
- 3 = WH/GN (+RX)
- 4 = BU
- 5 = WH/BU
- 6 = GN (-RX)
- 7 = WH/BN
- 8 = BN

**Discrete Input Modules****BL20-2DI-24VDC-N****BL20-2DI-24VDC-P****BL20-4DI-24VDC-N****BL20-4DI-24VDC-P (shown)**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Various I/O Styles

**Electrical**

- Operating Current: <28 mA from  $V_{MB}$   
<20 mA from  $V_{IO}$  (...-2DI...)  
<40 mA from  $V_{IO}$  (...-4DI...)

**Power Distribution**



- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

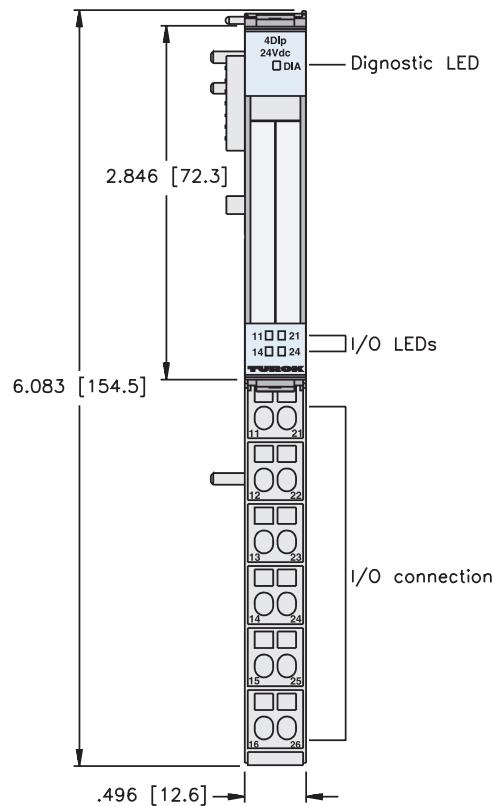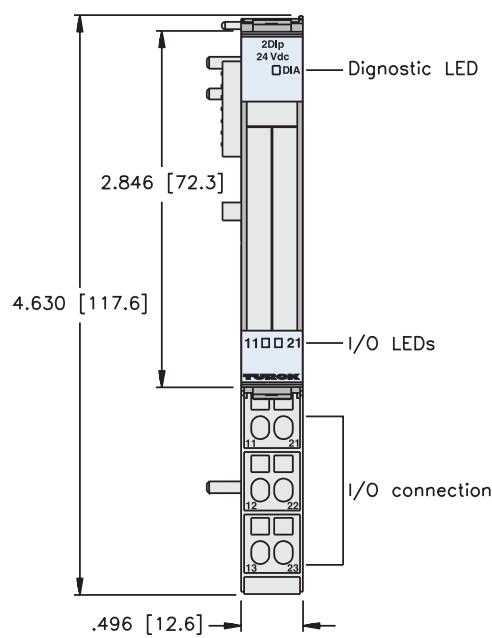

# Process Automation



Part Number	Inputs						Data
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-2DI-24VDC-P with BL20-S3*-SBB**	2	B20-3A	PNP				1
BL20-2DI-24VDC-N with BL20-S3*-SBB**	2	B20-3A	NPN				1
BL20-4DI-24VDC-P with BL20-S6*-SBBSBB**	4	B20-6A	PNP				2
BL20-4DI-24VDC-N with BL20-S6*-SBBSBB**	4	B20-6A	NPN				2


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-3A**

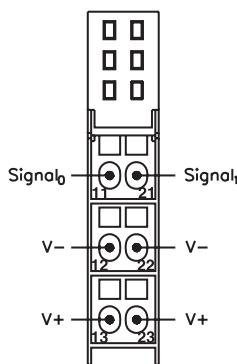

**B20-6A**

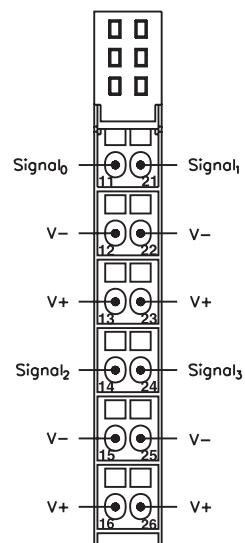

### I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	Data from next discrete modules				I-1	I-0			
n+1	(Data from modules to the right)								

### I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	Data from next discrete modules				I-3	I-2	I-1	I-0	
n+1	(Data from modules to the right)								

## Discrete Input Economy Module

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Base and Electronics in One Part



**BL20-E-8DI-24VDC-P**

**BL20-E-16DI-24VDC-P**



### Electrical

- Operating Current: <30 mA from  $V_{MB}$   
<2 mA from  $V_{IO}$

### Power Distribution

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

### Mechanical



- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

**16DI..**

**8DI..**

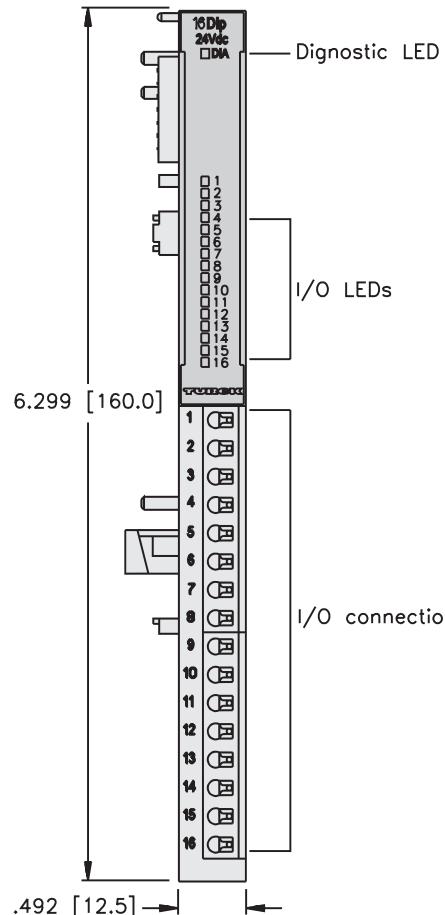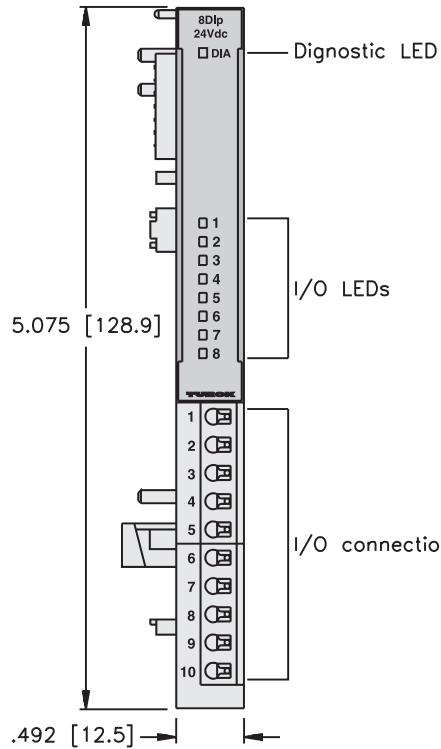

# Process Automation




Part Number	Inputs						Data
	Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-E-8DI-24VDC-P	8	B20-E1	PNP				1
BL20-E-16DI-24VDC-P	16	B20-E2	PNP				2


Note: This module can only be used with other tension clamp modules.

## Input Connectors

**B20-E1**

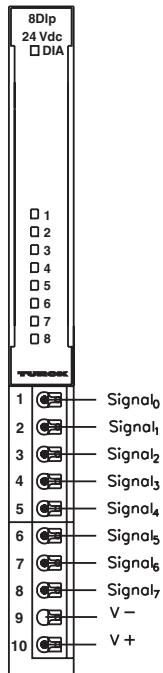

**B20-E2**

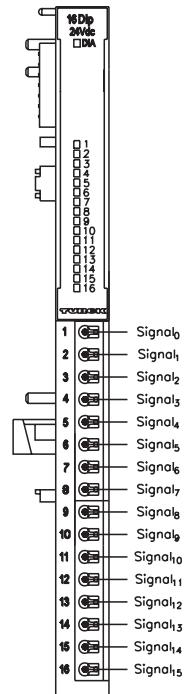

**I/O Data Map 1**

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
n+1	(Data from modules to the right)								

**I/O Data Map 2**

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
n+1	I-8	I-9	I-10	I-11	I-12	I-13	I-14	I-15	
n+2	(Data from right)								

**NAMUR Input Module****BL20-4DI-NAMUR****CE**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- NAMUR Inputs

**Electrical**

- Operating Current: <40 mA from  $V_{MB}$
- <30 mA from  $V_{IO}$

**Power Distribution**

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

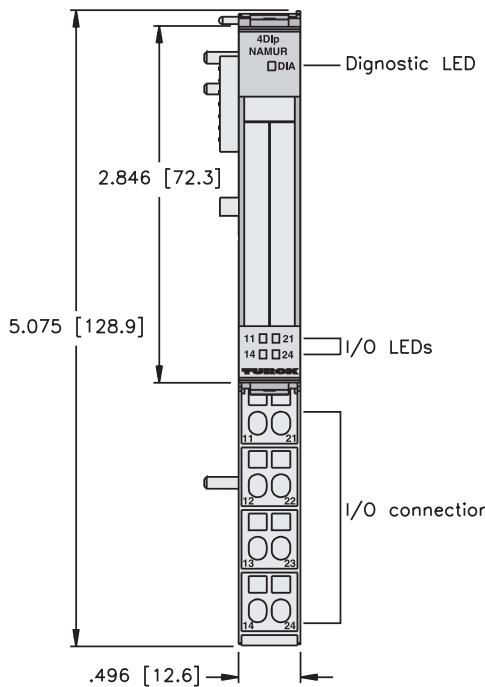

Part Number	Inputs						Data
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-4DI-NAMUR with BL20-S4*-SBBS**	4	B20-4C	NAMUR		X		1


\* T = Tension clamp

S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-4C**

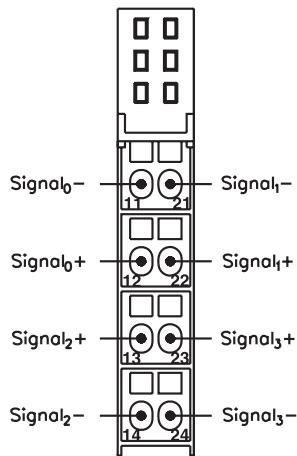

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	S-3	S-2	S-1	S-0	I-3	I-2	I-1	I-0	
n+1	(Data from modules to the right)								

Note: S = status bit

## Discrete DC Output Modules

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Various I/O Styles



**BL20-2DO-24VDC-2A-P**

**BL20-2DO-24VDC-0.5A-N**

**BL20-2DO-24VDC-0.5A-P**

**BL20-4DO-24VDC-0.5A-P**



### Electrical

- Operating Current: <33 mA from  $V_{MB}$   
 $<25$  mA from  $V_{IO}$  (...-0.5A...)  
 $<50$  mA from  $V_{IO}$  (...-2A...)
- Output Current: see table on facing page (from  $V_{IO}$ )

### Power Distribution

- Outputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

### Mechanical


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)

- Diagnostic information available through the fieldbus gateway

### Diagnostics (Physical)

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

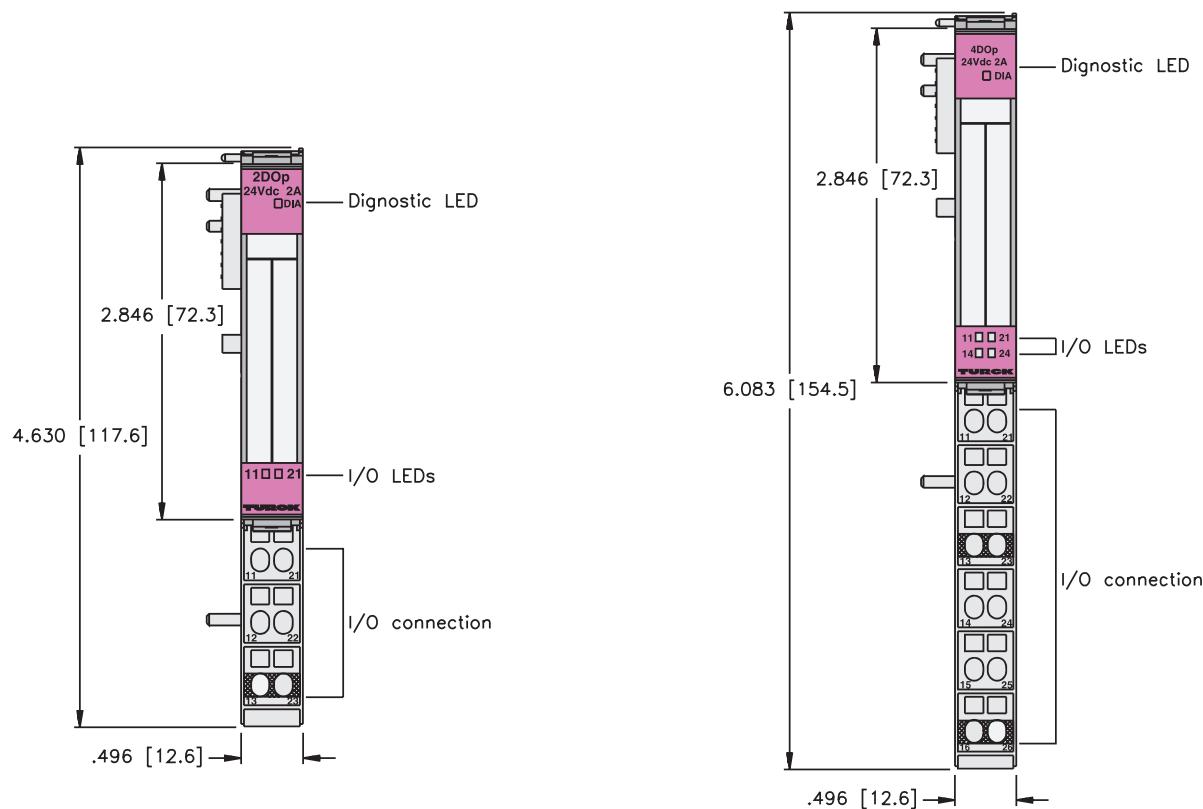

Part Number	Outputs				Data	
	Input Count	Pinout	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-2D0-24VDC-0.5A-P with BL20-S3*-SBC**	4	B20-3B	0.5 A			1
BL20-2D0-24VDC-0.5A-N with BL20-S3*-SBC**	4	B20-3B	0.5 A			1
BL20-2D0-24VDC-2A-P with BL20-S3*-SBC**	4	B20-3B	2 A			1
BL20-4D0-24VDC-0.5A-P with BL20-S6*-SBCSBC**	4	B20-6B	0.5 A			2


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Output Connectors

**B20-3B**

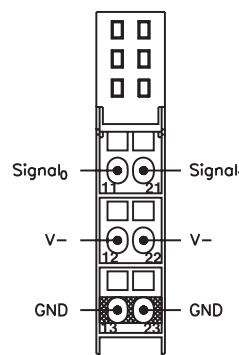

**B20-6B**

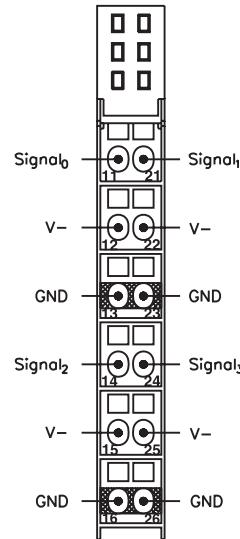

### I/O Data Map 1

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	Data for next discrete modules			0-1	0-0			
	n+1	(Data for modules to the right)							

### I/O Data Map 2

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
	n-1	(Data for modules to the left)								
	n	Data for next discrete modules			0-3	0-2	0-1	0-0		
	n+1	(Data for modules to the right)								

## Discrete Output Economy Module

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Base and Electronics in One Part



**BL20-E-8DO-24VDC-0.5A-P**

**BL20-E-16DO-24VDC-0.5A-P**



### Electrical

- Operating Current: <30 mA from  $V_{MB}$   
<10 mA from  $V_{IO}$
- Output Current: <0.5 A per output (from  $V_{IO}$ )

### Power Distribution

- Outputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

### Mechanical


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)

- Diagnostic information available through the fieldbus gateway

### Diagnostics (Physical)


- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

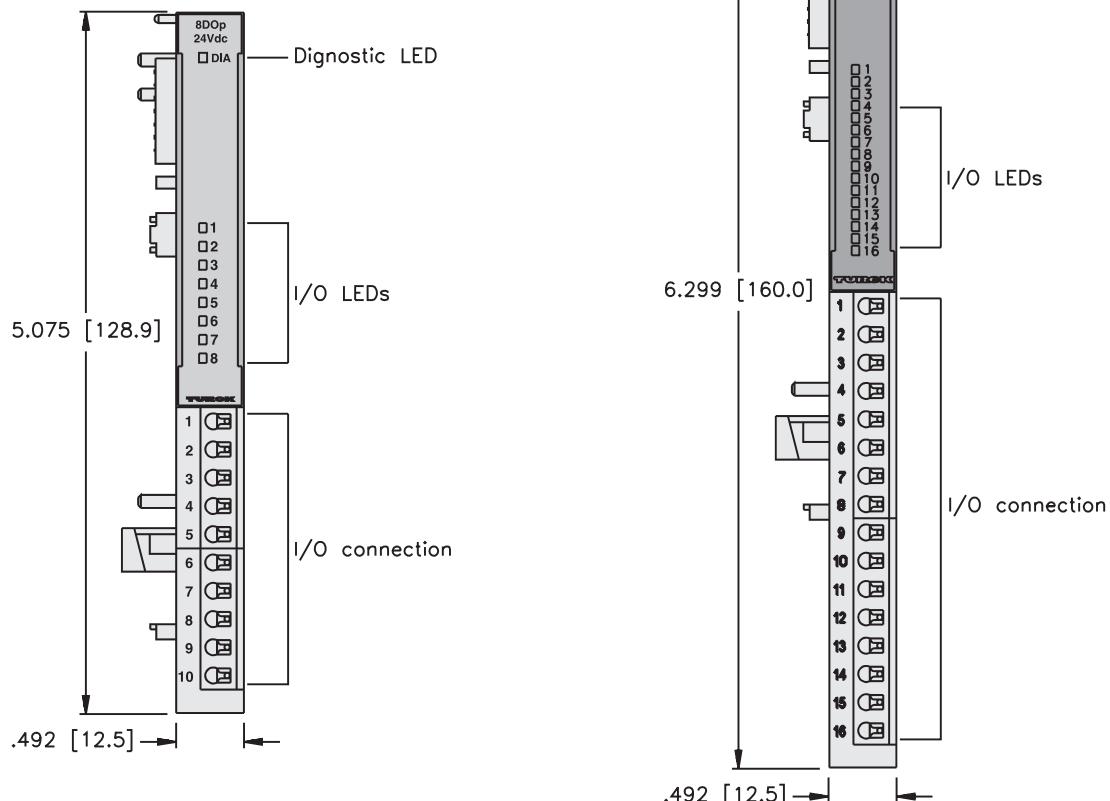


	Outputs					Data
Part Number	Input Count	Pinout	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-E-8DO-24VDC-0.5A-P	8	BO-E1	0.5 A	X		1
BL20-E-16DO-24VDC-0.5A-P	16	BO-E2	0.5 A	X		2

## Output Connectors

BO-E1

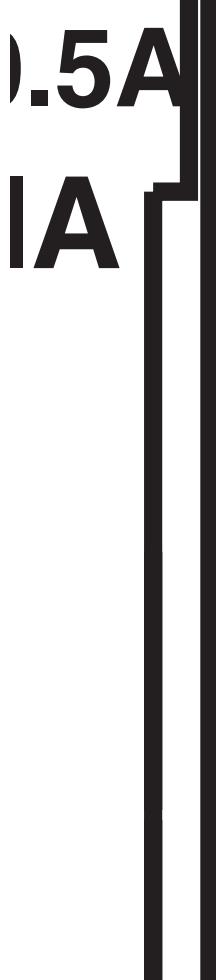

BO-E2

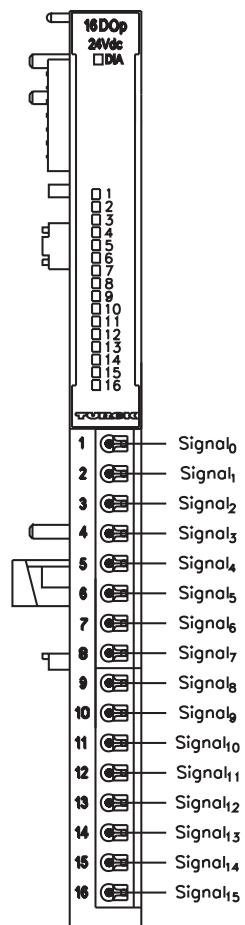

## I/O Data Map 1

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1 (Data for modules to the left)									
n 0-7    0-6    0-5    0-4    0-3    0-2    0-1    0-0									
n+1 (Data for modules to the right)									

## I/O Data Map 2

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1 (Data for modules to the left)									
n 0-7    0-6    0-5    0-4    0-3    0-2    0-1    0-0									
n+1 0-8    0-9    0-10    0-11    0-12    0-13    0-14    0-15									
n+2 (Data from right)									

## Discrete relay Output Modules



- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Relay Outputs

### Electrical

- Operating Current: <28 mA from  $V_{MB}$   
<20 mA from  $V_{IO}$

### Power Distribution

- Outputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)

- Diagnostic information available through the fieldbus gateway


### Diagnostics (Physical)

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

**BL20-2DO-R-CO**

**BL20-2DO-R-NO**

**BL20-2DO-R-NC**

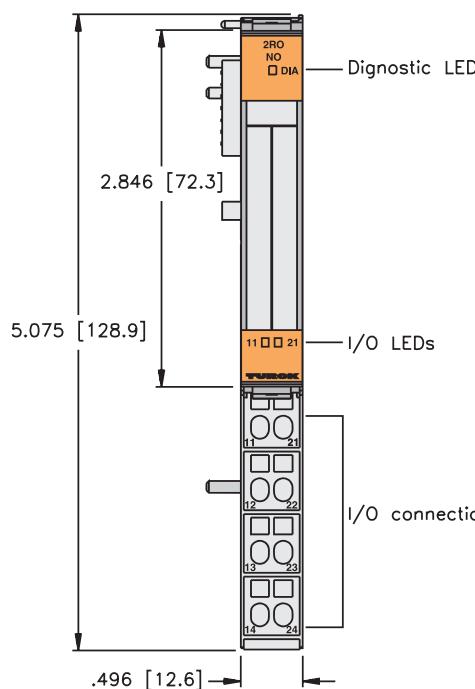

# Process Automation



Part Number	Outputs					Data
	Count	Pinout	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-2D0-R-NO with BL20-S4*-SBCS**	2	B20-4A	2 A			1
BL20-2D0-R-NC with BL20-S4*-SBCS**	2	B20-4A	2 A			1
BL20-2D0-R-CO with BL20-S4*-SBBS**	2	B20-4B	2 A			1


\* T = Tension clamp

S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.


## Output Connectors

**B20-4A**

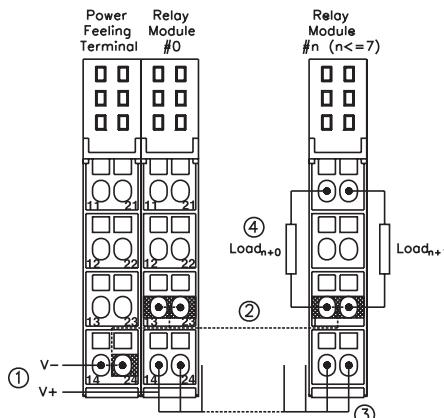

- ① Power is supplied by the user.
  - ② V- terminal points connected internally via "C-Rail"
  - ③ V+ terminal points connected externally by user (jumper part number XN-QV/\*). "\*" indicates number of slices to connect, up to 8
  - ④ Relay<sub>0</sub> contact is between terminals 14/11  
Relay<sub>1</sub> contact is between terminals 24/21
- \*NOTE: C-Rail scheme may only be used with 24 VDC relays. Not rated for AC use.

**B20-4B**

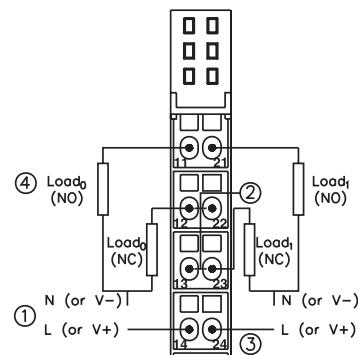

- ① Power is supplied externally by the user.
- ② Terminal points 12/22 connected internally. Points 13/23 connected internally.
- ③ Terminal points 14/24 may be connected externally by user (jumper part number XN-QV/1).
- ④ Relay<sub>0</sub> (NO) contact is between terminals 14/11, (NC) contact between 24/21.  
Relay<sub>1</sub> (NO) contact is between terminals 24/21, (NC) between 24/23.

**I/O Data Map 1**

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	Data for next discrete modules				0-1	0-0		
	n+1	(Data for modules to the right)							

**Discrete AC Input Module****BL20-2DI-120/230VAC-P**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- AC Inputs

**Electrical**

- Operating Current: <28 mA (from  $V_{MB}$ )  
<20 mA (from  $V_{IO}$ )

**Power Distribution**


- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

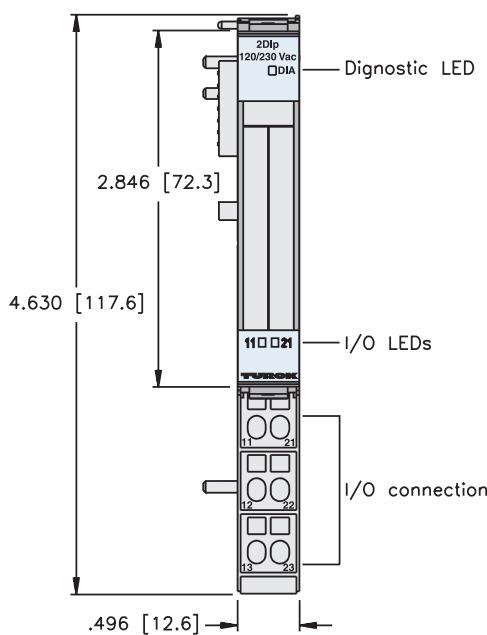

	Inputs						Data
Part Number	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-2DI-120/230VAC-P with BL20-S3*-SBB**	2	B20-3C	AC				1


\* T = Tension clamp

S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

### B20-3C

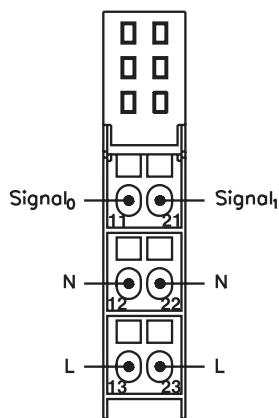

### I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	Data from next discrete modules						I-1	I-0	
n+1	(Data from modules to the right)								

**Discrete AC Output Module****BL20-2DO-120/230VAC-0.5A**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- AC Outputs

**Electrical**

- Operating Current: <35 mA from  $V_{MB}$   
<20 mA from  $V_{IO}$
- Output Current: <0.5 A per output (from  $V_{IO}$ )

**Power Distribution**

- Outputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

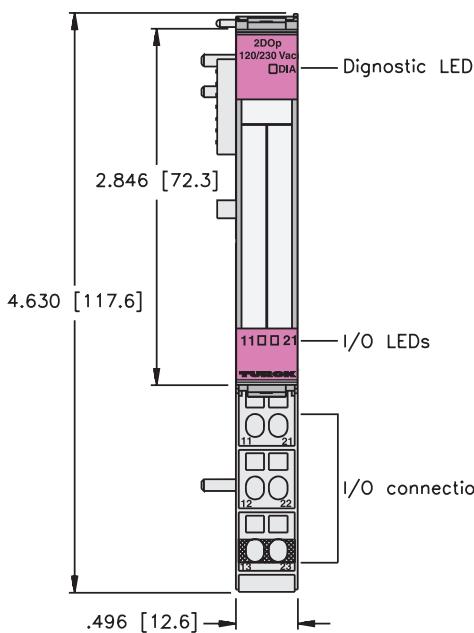

Part Number	Outputs					Data
	Output Count	Pinout	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-2D0-120/230VAC-0.5A-P with BL20-S3*-SBC**	2	B20-3B	0.5 A			1


\* T = Tension clamp

S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.

## Output Connectors

**B20-3B**

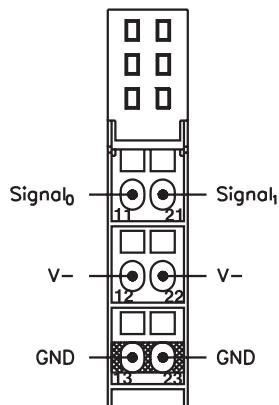

**I/O Data Map 1**

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
n	Data for next discrete modules						0-1	0-0	
n+1	(Data for modules to the right)								

**Discrete Input Blocks**

- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

**BL20-32DI-24VDC-P****BL20-16DI-24VDC-P****Electrical**

- Operating Current: <45 mA from  $V_{MB}$   
 $<40$  mA from  $V_{IO}$  (...-16DI...)  
 $<30$  mA from  $V_{IO}$  (...-32DI...)

**Power Distribution**


- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

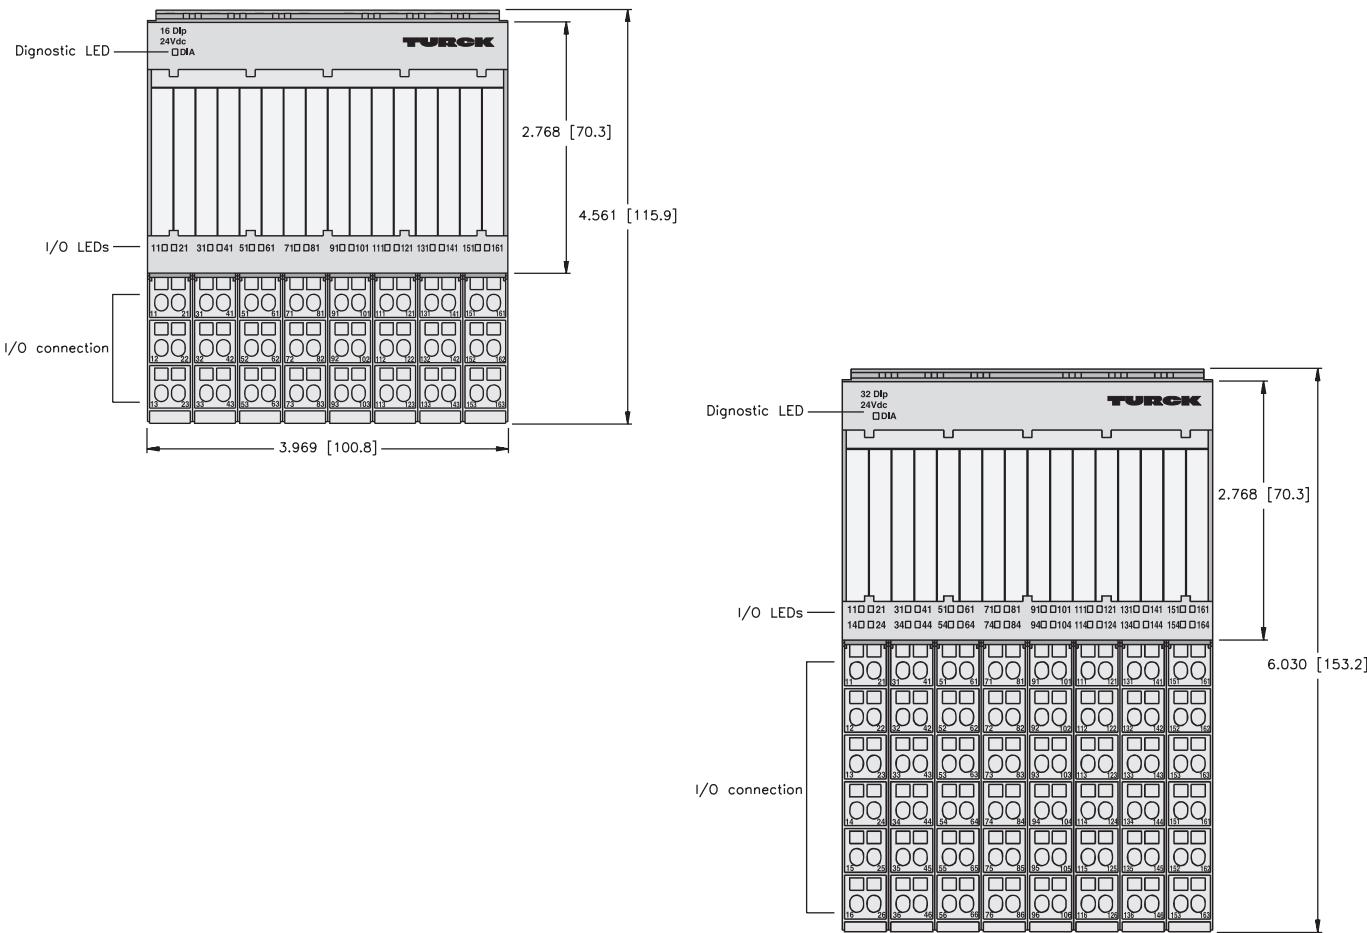

# Process Automation



Part Number	Inputs						Data
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-16DI-24VDC-P with BL20-B3*-SBB**	16	B20-B3A	PNP				1
BL20-32DI-24VDC-P with BL20-B6*-SBB\$BB**	32	B20-B6A	PNP				2


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-B6A**

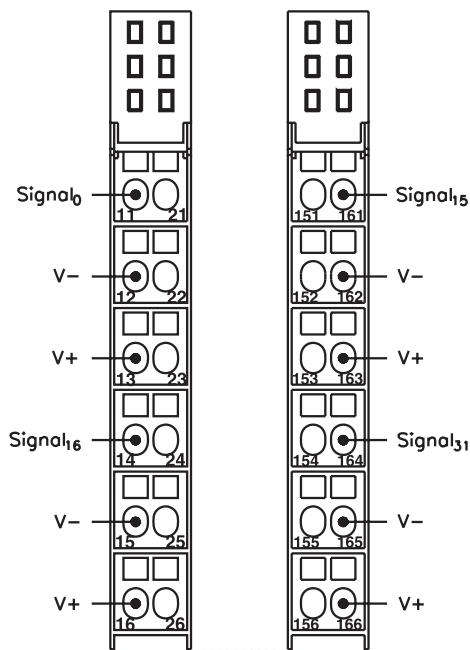

**B20-B3A**

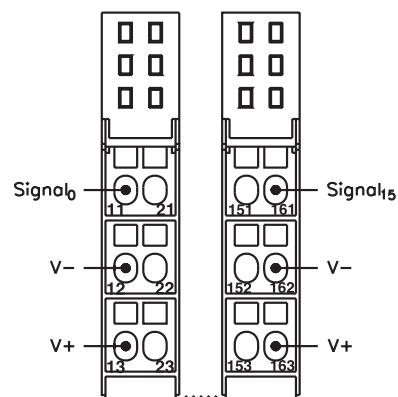

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data from modules to the left)							
	n	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	n+1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
	n+2	(Data from modules to the right)							

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data from modules to the left)							
	n	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	n+1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
	n+2	I-23	I-22	I-21	I-20	I-19	I-18	I-17	I-16
	n+3	I-31	I-30	I-29	I-28	I-27	I-26	I-25	I-24
	n+4	(Data from modules to the right)							

## Discrete Output Blocks



**BL20-32DO-24VDC-0.5A-P**

**BL20-16DO-24VDC-0.5A-P**



- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

### Electrical

- Operating Current: <120 mA from  $V_{MB}$   
<50 mA from  $V_{IO}$
- Output Current: <0.5 A per output (from  $V_{IO}$ )

### Power Distribution

- Outputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

### Mechanical



- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)

- Diagnostic information available through the fieldbus gateway

### Diagnostics (Physical)

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

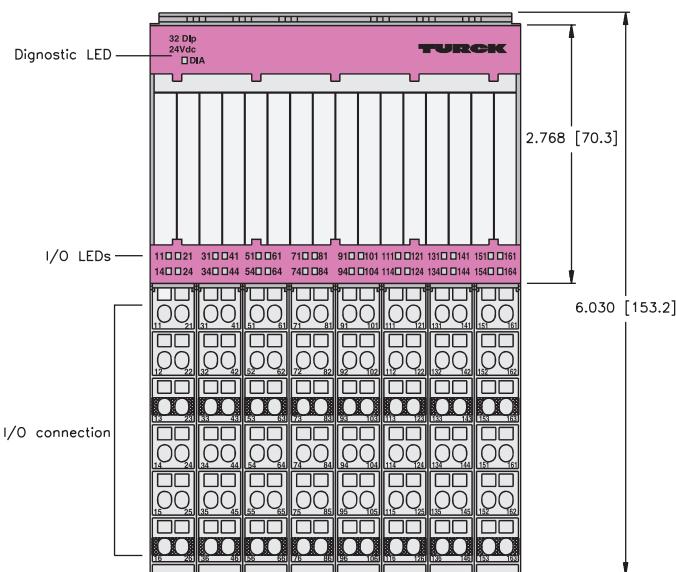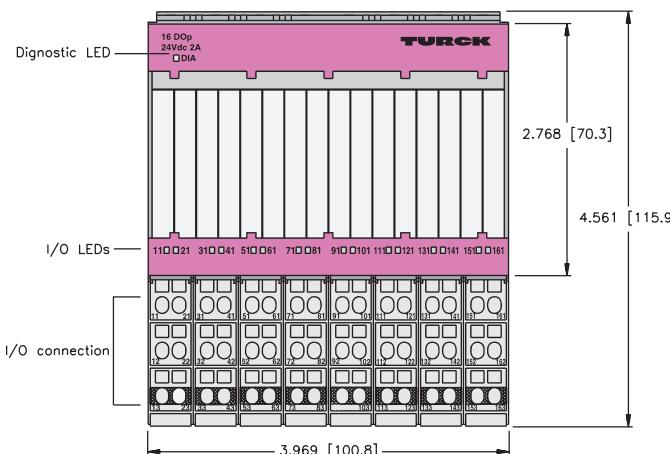

# Process Automation



Part Number	Outputs				Data	
	Output Count	Pinout	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-16D0-24VDC-0.5A-P with BL20-B3*-SBC**	16	B20-B3B	0.5 A			1
BL20-32D0-24VDC-0.5A-P with BL20-B6*-SBCSBC**	32	B20-B6B	0.5 A			2


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Output Connectors

**B20-B6B**

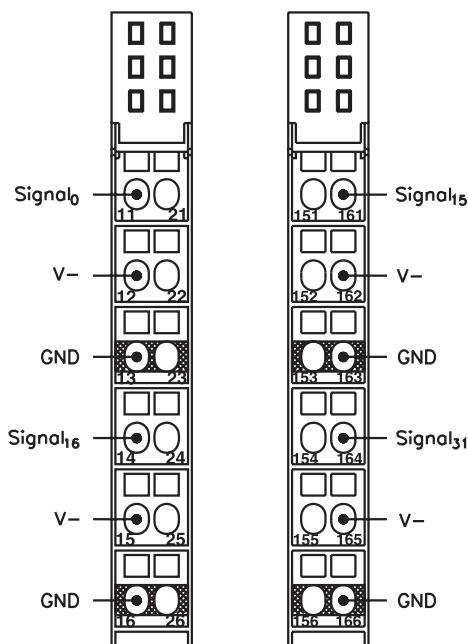

**B20-B3B**

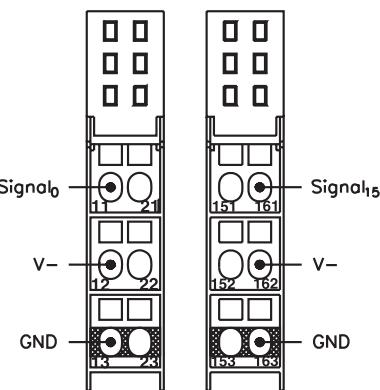

**I/O Data Map 1**

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
	n+1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8
n+2 (Data for modules to the right)									

**I/O Data Map 2**

out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
	n+1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8
	n+2	0-23	0-22	0-21	0-20	0-19	0-18	0-17	0-16
	n+3	0-31	0-30	0-29	0-28	0-27	0-26	0-25	0-24
n+4 (Data for modules to the right)									

**Analog Input Modules****BL20-2AI-U(-10/0 to +10VDC)****BL20-2AI-I(0/4 to 20MA)****BL20-1AI-U(-10/0 to +10VDC)****BL20-1AI-I(0/4 to 20MA)**

- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

**Electrical**

- Operating Current: <41 mA from  $V_{MB}$  (...-1AI...)
- <35 mA from  $V_{MB}$  (...-2AI...)
- <50 mA from  $V_{IO}$  (...-1AI...)
- <12 mA from  $V_{IO}$  (...-2AI...)

**Power Distribution**

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics

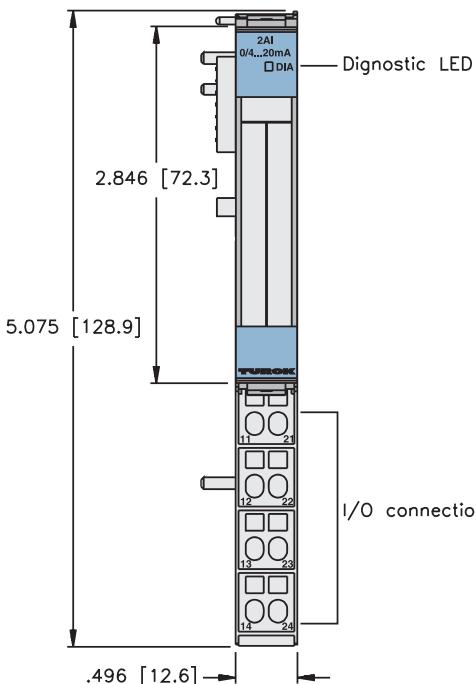

Part Number	Inputs					Data	
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-1AI-U(-10/0 to +10VDC) with BL20-S4*-SBBS**	1	B20-4D	-10/0 to 10 V				1
BL20-1AI-I(0/4 to 20mA) with BL20-S4*-SBBS**	1	B20-4D	0/4 to 20 mA				1
BL20-2AI-U(-10/0 to +10VDC) with BL20-S4*-SBBS**	2	B20-4E	-10/0 to 10 V				2
BL20-2AI-I(0/4 to 20mA) with BL20-S4*-SBBS**	2	B20-4E	0/4 to 20 mA				2


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-4D**

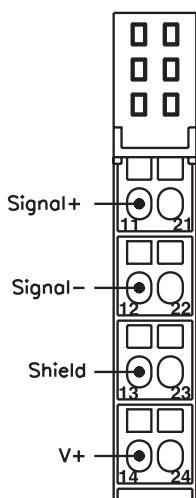

**B20-4E**

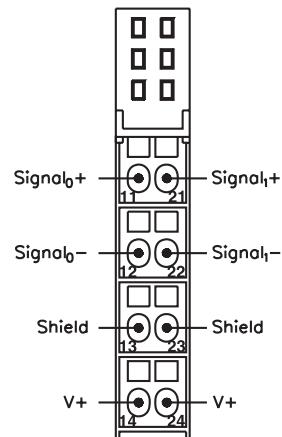

### I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data from modules to the left)							
	n	Channel 0, LSB							
	n+1	Channel 0, MSB							
	n+2	(Data from modules to the right)							

### I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data from modules to the left)							
	n	Channel 0, LSB							
	n+1	Channel 0, MSB							
	n+2	Channel 1, LSB							
	n+3	Channel 1, MSB							
	n+4	(Data from modules to the right)							

**Analog Input Module****BL20-4AI-U/I**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Voltage and Current Inputs

**Electrical**

- Operating Current: <50 mA from  $V_{MB}$   
<20 mA from  $V_{IO}$  (...-2AI...)

**Power Distribution**

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics

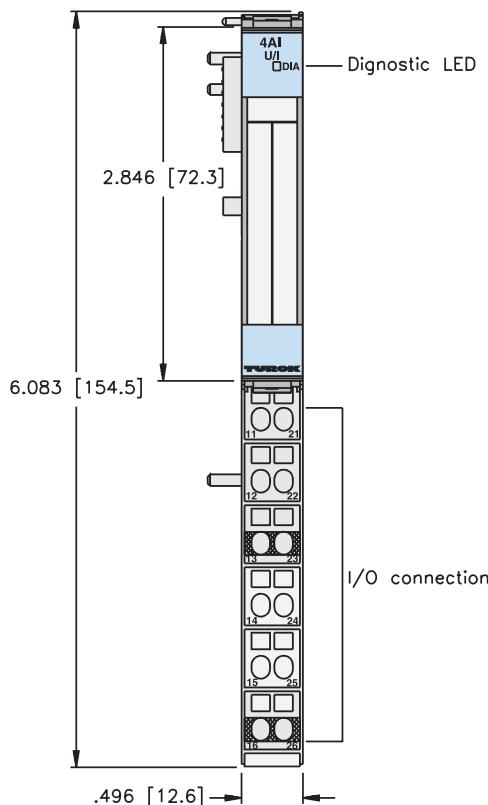

	Inputs						Data
Part Number	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-4AI-U/I with BL20-S6*-SBCSBC**	4	B20-6C	0/4 to 20 mA or -10/0 to 10V				1


\* T = Tension clamp

S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-6C**

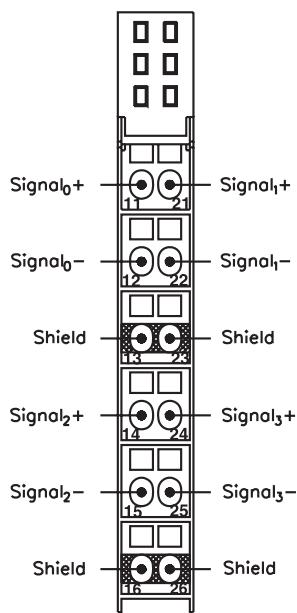

**I/O Data Map 1**

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	n-1	(Data from modules to the left)							
	n	Channel 0, LSB							
	n+1	Channel 0, MSB							
	n+2	Channel 1, LSB							
	n+3	Channel 1, MSB							
	n+4	Channel 2, LSB							
	n+5	Channel 2, MSB							
	n+6	Channel 3, LSB							
	n+7	Channel 3, MSB							
	n+8	(Data from modules to the right)							

**Temperature Input Modules**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Thermocouple or RTD Inputs

**Electrical**

- Operating Current: <45 mA from  $V_{MB}$   
<30 mA from  $V_{IO}$
- Thermocouple Types: B, E, J, K, N, R, S, T (... THERMO-PI)
- RTD Types: PT100, PT500, PT1000, Ni100, Ni1000 (...PT/Ni-2/3)

**Power Distribution**

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics

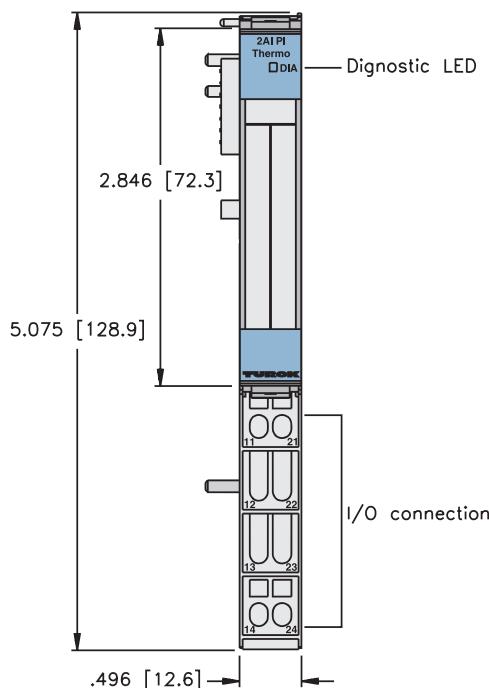**BL20-2AI-THERMO-PI****BL20-2AI-PT/NI-2/3**

Part Number	Inputs						Data
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-2AI-PT/NI-2/3 with BL20-S4*-SBBS**	2	B20-4F	RTD				1
BL20-2AI-THERMO-PI with BL20-S4*-SBBS-CJ**	2	B20-4G	TC				1

\* T = Tension clamp


S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.


Note: BL20-S4\*-SBBS-CJ has integrated cold junction compensation fro thermocouples.

## Input Connectors

**B20-4G**

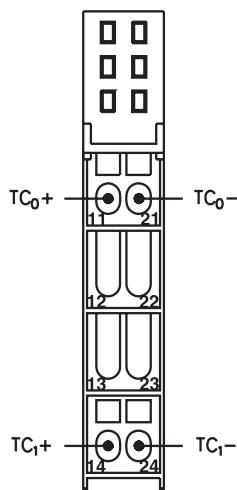

**B20-4F**

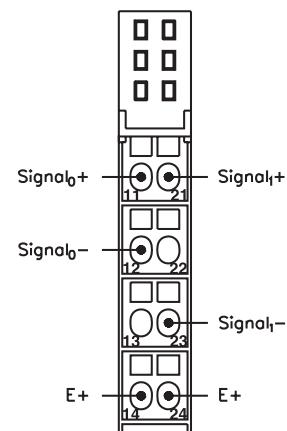

**I/O Data Map 1**

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	n-1	(Data from modules to the left)							
	n	Channel 0, LSB							
	n+1	Channel 0, MSB							
	n+2	Channel 1, LSB							
	n+3	Channel 1, MSB							
	n+4	(Data from modules to the right)							

**Analog Output Modules**

- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

**Electrical**

- Operating Current: <43 mA (from  $V_{MB}$ )
- Sensor Current: <50 mA (from  $V_{IO}$ )

**Power Distribution**

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics

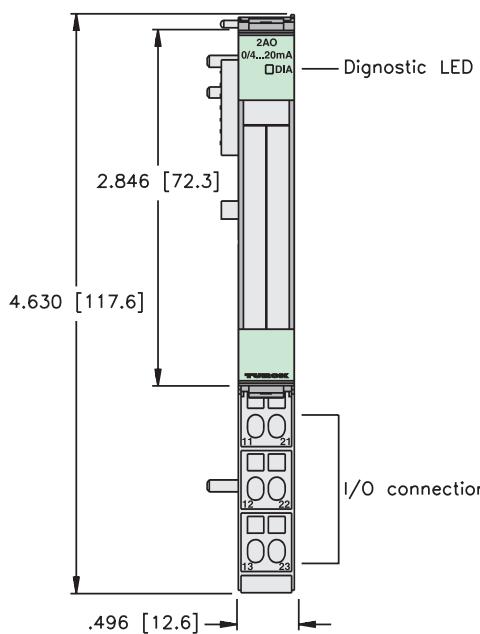**BL20-2AO-I(0/4 to 20MA)****BL20-2AO-U(-10/0 to +10VDC)****BL20-1AO-I(0/4 to 20MA)**

Part Number	Outputs					Data	
	Output Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-1AO-I(0/4 to 20mA) with BL20-S3*-SBB**	1	B20-3D	0/4 to 20 mA				1
BL20-2AO-I(0/4 to 20mA) with BL20-S3*-SBB**	1	B20-3E	0/4 to 20 mA				2
BL20-2AI-U(-10/0 to +10VDC) with BL20-S3*-SBB**	2	B20-3E	-10/0 to 10 V				2


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Output Connectors

**B20-3D**

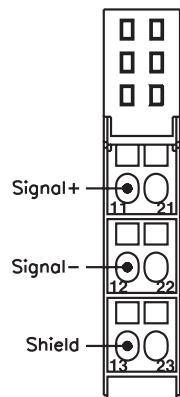

**B20-3E**

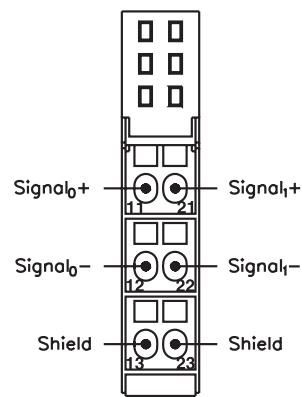

**I/O Data Map 1**

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	Channel 0, LSB							
	n+1	Channel 0, MSB							
	n+2	(Data for modules to the right)							

**I/O Data Map 2**

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	Channel 0, LSB							
	n+1	Channel 0, MSB							
	n+2	Channel 1, LSB							
	n+3	Channel 1, MSB							
	n+4	(Data for modules to the right)							

**Serial I/O Modules****BL20-1RS232****BL20-1SSI****BL20-1RS485/422**

- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

**Electrical**

- Operating Current: <25 mA from  $V_{IO}$   
 <140 mA from  $V_{MB}$  (...1RS232)  
 <50 mA from  $V_{MB}$  (...1SSI)  
 <60 mA from  $V_{MB}$  (...1RS485/422)

**Power Distribution**

- I/O:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

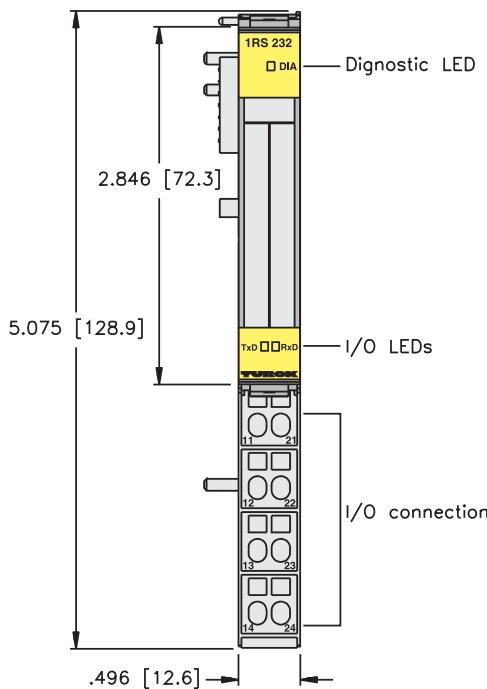

Part Number	Inputs				Outputs				Data			
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Pinout	Style	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-1RS232 with BL20-S4*-SBBS**	1	B20-4H	RS232				1	B20-4H	RS232			#
BL20-1RS485/422 with BL20-S4*-SBBS**	1	B20-4I	RS485/422				1	B20-4I	RS485/422			#
BL20-1SSI with BL20-S4*-SBBS**	1	B20-4J	SSI				1	B20-4J	SSI			#

\* T = Tension clamp


S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.


# I/O data map is dependant on the fieldbus being used. Consult the user manual for details.

## Input/Output Connectors


**B20-H4**

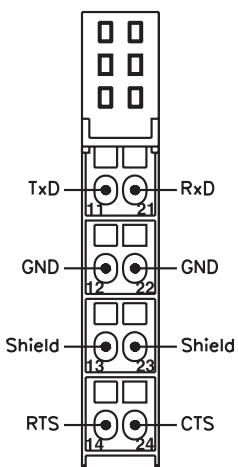

**B20-4I**

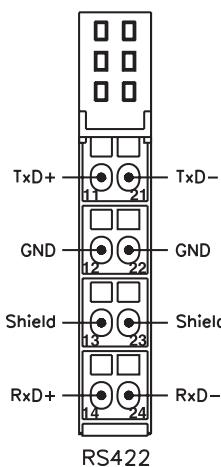

**B20-4J**

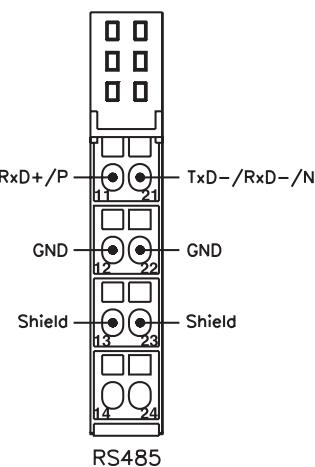

**Counter Module****BL20-1CNT-24VDC**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Counter Input

**Electrical**

- Operating Current: <50 mA (from  $V_{IO}$ )  
<40 mA (from  $V_{MB}$ )
- Count Range: 0...7FFFFFFF (positive)  
80000000...FFFFFF (negative)

**Power Distribution**

- Inputs:  $V_{IO}$
- Logic:  $V_{MB}$  and  $V_{IO}$

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication status as well as I/O diagnostics
- LEDs for each I/O point to indicate on/off status

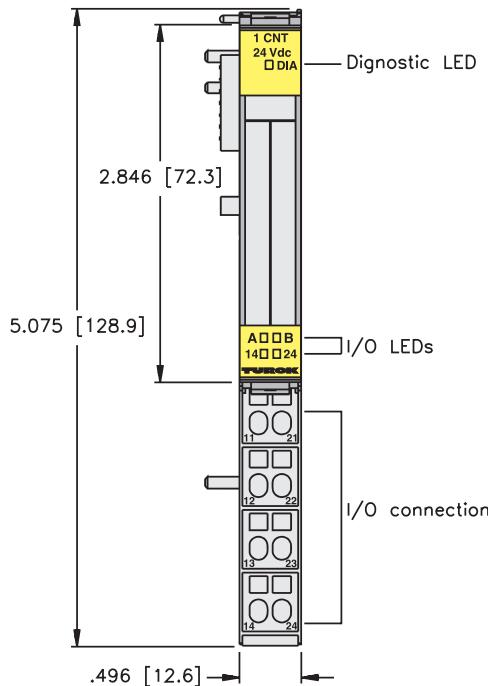

	Inputs						Data
Part Number	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-1CNT-24VDC with BL20-S4*-SBBS**	1	B20-4K	Counter				See below


\* T = Tension clamp

S = Screw clamp

\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-4K**

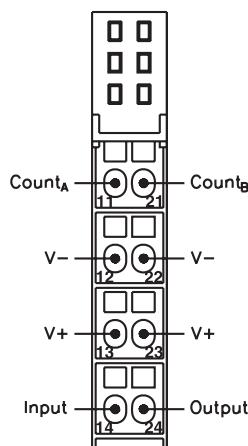

NOTE: "Input" signal serves several uses (gate, sync, etc)

I/O data map is dependant on the fieldbus being used. Consult the user manual for details.

## Power Feeding Modules



**BL20-PF-120/230VAC-D**

**BL20-PF-24VDC-D**



- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Supply AC or DC I/O Power

### Electrical

- Operating Current: <28 mA (from V<sub>MB</sub>)
- Output Current: <10 A for downstream I/O

### Power Distribution

- Accepts AC (...120/230VAC...) or DC (...24VDC...) supply to provide V<sub>IO</sub> for downstream modules

### Mechanical


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)

- Diagnostic information available through the fieldbus gateway

### Diagnostics (Physical)

- LED to indicate module bus communication and power supply status.

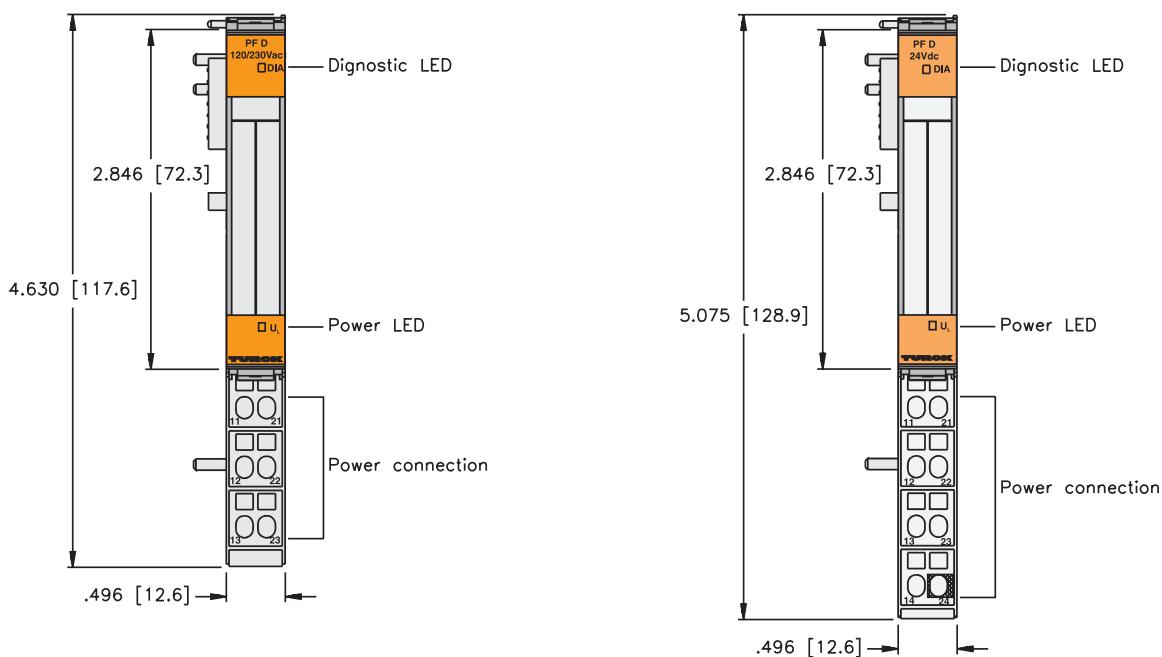

Part Number	Pinout
BL20-PF-120/230VAC-D with BL20-P3*-SBB**	B20-P3
BL20-PF-120/230VAC-D with BL20-P4*-SBBC**	B20-P4
BL20-PF-24VDC-D with BL20-P3*-SBB**	B20-P3
BL20-PF-24VDC-D with BL20-P4*-SBBC**	B20-P4


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

## Input Connectors

**B20-P3**

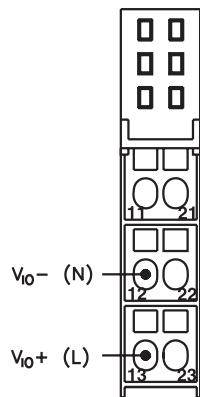

**B20-P4**

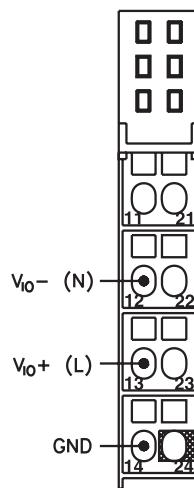

**Bus Refreshing Module****BL20-BR-24VDC-D**

- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection

**Electrical**

- Module Bus Supply: <1.5 A
- I/O Supply: <10 A (24 VDC only)

**Power Distribution**

- Refreshes backplane ( $V_{MB}$ ) supply and provides new  $V_{IO}$  segment for downstream modules

**Mechanical**


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Logical)**

- Diagnostic information available through the fieldbus gateway

**Diagnostics (Physical)**

- LED to indicate module bus communication and power supply status.

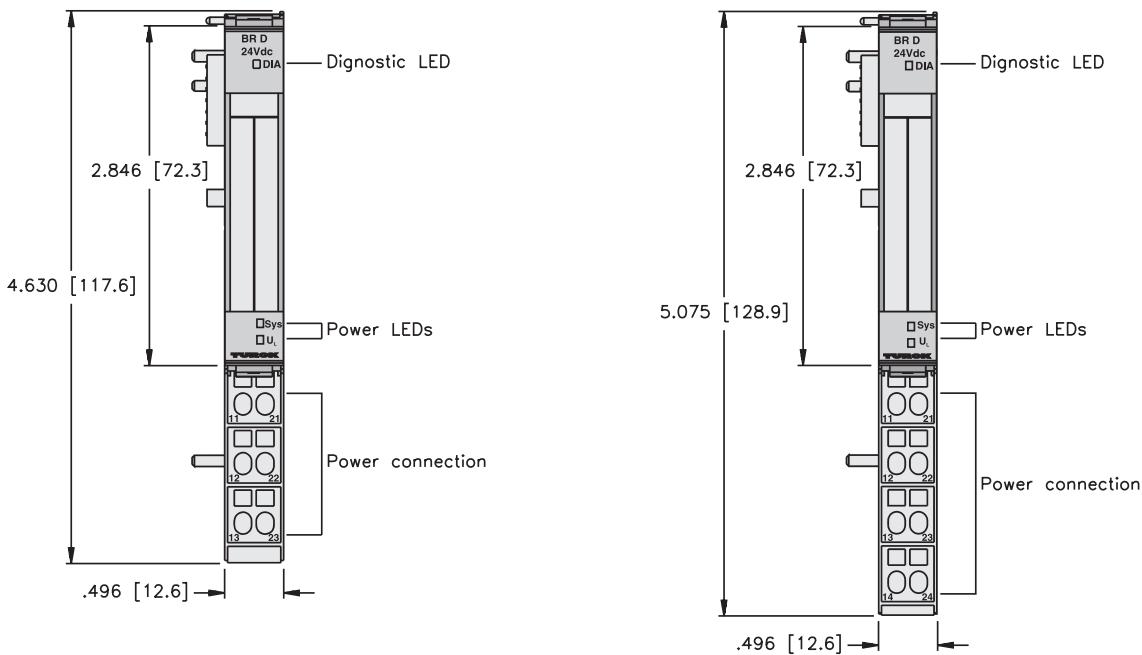

Part Number	Pinout
BL20-BR-24VDC-D with BL20-P3*-SBB-B**	B20-P3A
BL20-BR-24VDC-D with BL20-P4*-SBBC-B**	B20-P4A


\* T = Tension clamp

S = Screw clamp


\*\* Base modules sold separately. See pages C56 - C60.

### Input Connectors

**B20-P3A**

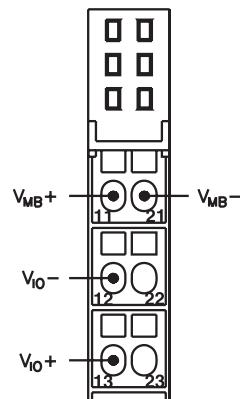

**B20-P4A**

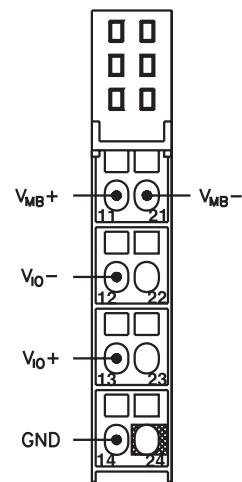

## BL20 Motor Starter Modules

BL20 motor starters allow 3-phase motor control to be connected to the same BL20 rack as the standard I/O. BL20 motor starters can be mounted on the same rail as the BL20 gateway, or they can be mounted on another rail to ease placement within panels. The motor starters will be controlled by the gateways via the chosen fieldbus (DeviceNet, PROFIBUS-DP, or CANopen).

### How to Order a Motor Starter



### How to Implement the Motor Starters



Each SWIRE slice can manage up to 16 non-reversing motor starters.

Each gateway can support up to 3 SWIRE modules for a total of 48 non-reversing motor starters on a single gateway. Any reversing motor starter is considered as 2 non-reversing. The motor starters are rated for .06kW to 15kW (0.08hp to 20hp).

By ordering parts of the motor starter separately will allow for fewer parts to be stored within your inventory and will cost less to repair if just one piece of the motor starter fails. Motor starters are hot-swappable as long as the SWIRE-DIL module stays connected to the SWIRE system.

Refer to the user manual for details on installing and configuring the BL20 motor starter system.

## Available Motor Starter Sizes

Part Number	Motor Rating @ 480 VAC		Rated Operational Current @ 480 VAC	Rated Uninterrupted Current @ 480 VAC	Classification Type
	kW	hp			
PKZM0-0.25	0.06	0.08	0.21	0.25	2
PKZM0-0.4	0.09	0.12	0.31	0.4	2
PKZM0-0.63	0.18	0.24	0.6	0.63	2
PKZM0-1	0.25	0.33	0.8	1	2
PKZM0-1.6	0.55	0.74	1.5	1.6	2
PKZM0-2.5	0.75	1	1.9	2.5	1
PKZM0-4	1.5	2	3.6	4	1
PKZM0-6.3	2.2	2.95	5	6.3	1
PKZM0-10	3	4	6.6	10	1
PKZM0-10*	4	5.4	8.5	10	1
PKZM0-12	5.5	7.38	11.3	12	1
PKZM0-16	7.5	10	15.2	16	1
PKZM0-25	11	15	21.7	25	1
PKZM0-32	15	20	29.3	32	1

\*Can be achieved by using DILM9-10(24VDC) instead of the DILM7-10(24VDC)

## Non-Reversing Part Numbers

hp	Motor Contactor Part Number	Wiring Set Part Number	Relay Part Number	SWIRE Communication
0.08	PKZM0-0.25	PKZM0-XDM12	DILM7-10(24 VDC)	BL20-SWIRE-DIL
0.12	PKZM0-0.4			
0.24	PKZM0-0.63			
0.33	PKZM0-1			
0.74	PKZM0-1.6			
1	PKZM0-2.5			
2	PKZM0-4			
2.95	PKZM0-6.3			
4	PKZM0-10			
5.4	PKZM0-10*		DILM9-10(24 VDC)	
7.38	PKZM0-12		DILM12-10(24 VDC)	
10	PKZM0-16		DILM15-10(24 VDC)	
15	PKZM0-25	PKZM0-XDM32	DILM25-10(24 VDC)	BL20-SWIRE-DIL
20	PKZM0-32		DILM32-10(24 VDC)	

\* To order a motor starter with the rated hp, order one of each part number that appears to the right.




## Reversing Part Numbers

hp	Part Number	Wiring Set Part Number	Relay Part Number	Relay Part Number	SWIRE Communication	SWIRE Communication	Mechanical Interlock
0.08	PKZM0-0.25	PKZM0-XRM12	DILM7-10(24 VDC)	DILM7-10(24 VDC)	BL20-SWIRE-DIL	BL20-SWIRE-DIL	DILM12-XMV
0.12	PKZM0-0.4						
0.24	PKZM0-0.63						
0.33	PKZM0-1						
0.74	PKZM0-1.6						
1	PKZM0-2.5						
2	PKZM0-4						
2.95	PKZM0-6.3						
4	PKZM0-10						
5.4	PKZM0-10*		DILM9-10(24 VDC)	DILM9-10(24 VDC)			
7.38	PKZM0-12		DILM12-10(24 VDC)	DILM12-10(24 VDC)			
10	PKZM0-16		DILM15-10(24 VDC)	DILM15-10(24 VDC)			
15	PKZM0-25	PKZM0-XRM32	DILM25-10(24 VDC)	DILM25-10(24 VDC)			
20	PKZM0-32		DILM32-10(24 VDC)	DILM32-10(24 VDC)			

\* To order a motor starter with the rated hp, order one of each part number that appears to the right.



## SWIRE Economy Communication Module

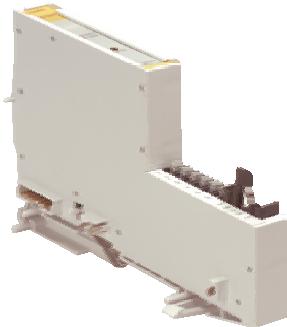

**BL20-E-1SWIRE**



- Modular Motor Starter Control
- Fieldbus Independent Configuration
- IP 20 Protection
- Base and Electronics in One Part

### Electrical

- Operating Current:  $\leq 60 \text{ mA}$  from  $V_{MB}$   
 $< 3 \text{ A}$  from  $V_{IO}$

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)


- Diagnostic information available through the fieldbus gateway

### Diagnostics (Physical)

- LEDs for status and I/O diagnostics

### Supported Gateways

- BL20-GW-DPV1
- BL20-GWBR-CANopen
- BL20-GWBR-DNET

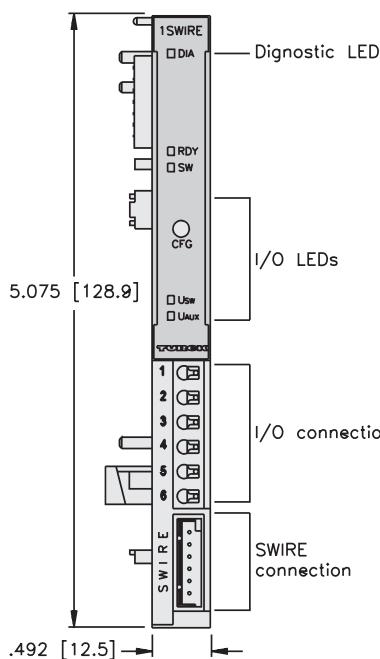


# Process Automation



Part Number	Input Count	Pinout	Current	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
BL20-E-1SWIRE	1	3 A	X	X			1

Note: This module can only be used with other tension clamp modules unless it is separated using a BL20-PF-24VDC-D and BL20-P4T-SBBC base.

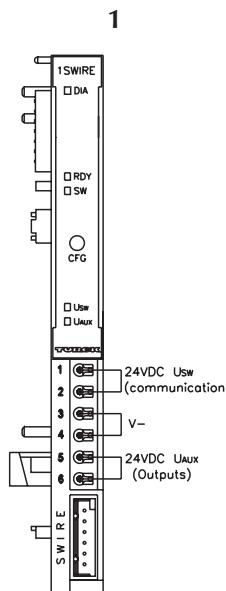

## Mating Cordsets:

From SWIRE slice to first motor starter: BL20-SWIRE-CAB-XXX.

End cap for last motor starter; BL20-SWIRE-CAB-000

From one motor starter to an adjacent motor starter: BL20-SWIRE-CAB-008

XXX = Cable length in cm, cable lengths available in 25, 50, 100 and 200 cm.

## I/O Data Map 1

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
-1 (Data from modules to the left)								
n SWIRE Slave 2 SWIRE Slave 1								
n	SD2	PKZ-ST2	SI2	SD1		PKZ-ST1	SI1	
n+1 SWIRE Slave 4 SWIRE Slave 3								
n+1	SD4	PKZ-ST2	SI2	SD3		PKZ-ST3	SI3	
n+2 SWIRE Slave 6 SWIRE Slave 5								
n+2	SD6	PKZ-ST2	SI2	SD5		PKZ-ST5	SI5	
n+3 SWIRE Slave 8 SWIRE Slave 7								
n+3	SD8	PKZ-ST2	SI2	SD7		PKZ-ST7	SI7	
n+4 SWIRE Slave 10 SWIRE Slave 9								
n+4	SD10	PKZ-ST2	SI2	SD9		PKZ-ST9	SI9	
n+5 SWIRE Slave 12 SWIRE Slave 11								
n+5	SD12	PKZ-ST2	SI2	SD11		PKZ-ST11	SI11	
n+6 SWIRE Slave 14 SWIRE Slave 13								
n+6	SD14	PKZ-ST2	SI2	SD13		PKZ-ST13	SI13	
n+7 SWIRE Slave 16 SWIRE Slave 15								
n+7	SD16	PKZ-ST2	SI2	SD15		PKZ-ST15	SI15	
n+8 (Data from modules to the right)								

SIx: Motor Starter is On

PKZ-STx: Motor Starter is OK

SDx: Slave Diagnostics Available

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
-1 (Data from modules to the left)								
n SWIRE Slave 2 SWIRE Slave 1								
n					S02			S01
n+1 SWIRE Slave 4 SWIRE Slave 3								
n+1					S04			S03
n+2 SWIRE Slave 6 SWIRE Slave 5								
n+2					S06			S05
n+3 SWIRE Slave 8 SWIRE Slave 7								
n+3					S08			S07
n+4 SWIRE Slave 10 SWIRE Slave 9								
n+4					S010			S09
n+5 SWIRE Slave 12 SWIRE Slave 11								
n+5					S012			S011
n+6 SWIRE Slave 14 SWIRE Slave 13								
n+6					S014			S013
n+7 SWIRE Slave 16 SWIRE Slave 15								
n+7					S016			S015
n+8 (Data from modules to the right)								

SOx: Turn on Motor Starter

### **Motor Overload Contactor**

- Protects Motor from Current Overload

Housing	Part Number	Application
	PKZMO-*	<ul style="list-style-type: none"><li>• Available in multiple amperages</li><li>• See table on page C50 for Specs.</li></ul>

### **Motor Starter Wiring Set**

- Wires Motor Overload Contactor to Relay Module

Housing	Part Number	Application
	PKZMO-X*M*2	<ul style="list-style-type: none"><li>• Different styles for different amperages</li><li>• See tables on C51 &amp; C52 for correct part numbers</li></ul>

## Relay Module

- Controls whether or not Power is Supplied to Connected Motor

Housing	Part Number	Application
	DILM*	<ul style="list-style-type: none"> <li>• Available in different styles for different amperages</li> <li>• See pages C51 &amp; C52 for correct part numbers</li> <li>• "10" in part number refers to normally open contact</li> <li>• "01" in part number refers to normally closed contact</li> </ul>

## SWIRE Communication

- Controls SWIRE Communication and Activates the Motor Starter

Housing	Part Number	Application
	BL20-SWIRE-DIL	<ul style="list-style-type: none"> <li>• Use with all DILM* modules</li> <li>• Control motor starter through SWIRE network</li> </ul>


## Trip Indication

- Provide Feedback Status of Motor Starter because of Overcurrent or Short Circuit

Housing	Part Number	Application
	NHI-E-10L-PL20	<ul style="list-style-type: none"> <li>• Monitor motor starter status</li> </ul>

### Bus Commoning Bars

- Easily Connect Multiple Motor Starters without the need for Separate Wiring

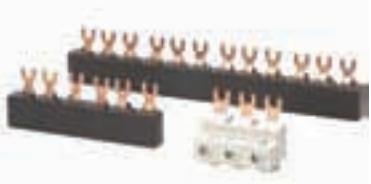Housing	Part Number	Application
	BK25/3-PKZ0 B3.0/2-PKZ0* B3.0/4-PKZ0* B3.0/5-PKZ0*	<ul style="list-style-type: none"><li>• BK25 is used to land 3 phase wires to beginning of the bus</li><li>• B3.0/x; x refers to the number of motor starters can be connected to the bar</li><li>• Max 63A can be carried through a bus bar</li></ul>

\* If bussing a reverse motor starter, a cover may be necessary for finger safe needs. Order a cap with p/n H-B3-PKZ0.

### Power Feed Module

- Safety Zone Separation

Housing	Part Number	Application
	BL20-SWIRE-PF	<ul style="list-style-type: none"><li>• Separate motor starter sets into separate safety zones</li></ul>

**Base Modules for Slice I/O**

Housing	Part Number	Description
<b>Three Terminal Block</b> 	BL20-S3T-SBB	Tension Clamp Connection
	BL20-S3S-SBB	Screw Terminal Connection
<b>Three Terminal Block with C-Connection</b> 	BL20-S3T-SBC	Tension Clamp Connection
	BL20-S3S-SBC	Screw Terminal Connection
<b>Four Terminals</b> 	BL20-S4T-SBBS	Tension Clamp Connection
	BL20-S4S-SBBS	Screw Terminal Connection
<b>Four Terminals with Cold Junction Compensation for Thermocouples</b> 	BL20-S4T-SBBS-CJ	Tension Clamp Connection
	BL20-S4S-SBBS-CJ	Screw Terminal Connection

**Base Modules for Slice I/O**

Housing	Part Number	Description
<b>Four Terminals with C-Connection</b> 	BL20-S4T-SBBC	Tension Clamp Connection
	BL20-S4S-SBBC	Screw Terminal Connection
<b>Four Terminals with C-Connection, Dual Signal</b> 	BL20-S4T-SBCS	Tension Clamp Connection
	BL20-S4S-SBCS	Screw Terminal Connection
<b>Six Terminals</b> 	BL20-S6T-SBBSBB	Tension Clamp Connection
	BL20-S6S-SBBSBB	Screw Terminal Connection
<b>Six Terminals with C-Connection</b> 	BL20-S6T-SBCSBC	Tension Clamp Connection
	BL20-S6S-SBCSBC	Screw Terminal Connection

## Base Modules for Block I/O

Housing	Part Number	Description
<b>Three Terminal Block</b> 	BL20-B3T-SBB	Tension Clamp Connection
	BL20-B3S-SBB	Screw Terminal Connection
<b>Three Terminal Block with C-Connection</b> 	BL20-B3T-SBC	Tension Clamp Connection
	BL20-B3S-SBC	Screw Terminal Connection
<b>Four Terminal Block with C-Connections</b> 	BL20-B4T-SBBC	Tension Clamp Connection
	BL20-B4S-SBBC	Screw Terminal Connection
<b>Six Terminal Block</b> 	BL20-B6T-SBBSBB	Tension Clamp Connection
	BL20-B6S-SBBSBB	Screw Terminal Connection

**Base Modules for Block I/O**

Housing	Part Number	Description
<b>Six Terminal Block with C-Connection</b>  	B6T-SBCSBC	Tension Clamp Connection
	B6S-SBCSBC	Screw Terminal Connection

## Base Modules for Power Input

Housing	Part Number	Description
<b>Three Terminal Power Base</b> 	BL20-P3T-SBB	Tension Clamp Connection
	BL20-P3S-SBB	Screw Terminal Connection
<b>Three Terminal Power Base with Gateway Feed</b> 	BL20-P3T-SBB-B	Tension Clamp Connection
	BL20-P3S-SBB-B	Screw Terminal Connection
<b>Four Terminal Power Base with C-Connection</b> 	BL20-P4T-SBBC	Tension Clamp Connection
	BL20-P4S-SBBC	Screw Terminal Connection
<b>Four Terminal Power Base with C-Connection and Gateway Feed</b> 	BL20-P4T-SBBC-B	Tension Clamp Connection
	BL20-P4S-SBBC-B	Screw Terminal Connection

**Modular Industrial I/O System Accessories**

Housing	Part Number	Description
<b>Markers</b> Used for color coding terminals on BL20 base modules	XN-ANBZ-WS (10/PKG) XN-ANBZ-GN/GE/BED (10/PKG) XN-ANBZ-RT/BL-BED (10/PKG) XN-ANBZ-BR (10/PKG) XN-ANBZ-SW (10/PKG) XN-ANBZ-GN (10/PKG) XN-ANBZ-RT (10/PKG) XN-ANBZ-BL (10/PKG)	White Green/Yellow Red/Blue Brown Black Green Red Blue
<b>Jumpers</b> For use with BL20 relay modules	XN-QV/8 (10/PKG) XN-QV/7 (10/PKG) XN-QV/6 (10/PKG) XN-QV/5 (10/PKG) XN-QV/4 (10/PKG) XN-QV/3 (10/PKG) XN-QV/2 (10/PKG) XN-QV/1 (10/PKG)	8 pair 7 pair 6 pair 5 pair 4 pair 3 pair 2 pair 1 pair
<b>Coding Blocks</b> For keying electronic modules to base modules	XN-K0/17 (10/PKG) XN-K0/16 (10/PKG) XN-K0/14 (10/PKG) XN-K0/13 (10/PKG) XN-K0/12 (10/PKG)  XN-K0/11 (10/PKG) XN-K0/10 (10/PKG) XN-K0/9 (10/PKG) XN-K0/8 (10/PKG) XN-K0/6 (10/PKG) XN-K0/2 (10/PKG)	BL20-PF-120/230VAC-D BL20-PF-24VDC-D BL20-2AO-U(-10/0...+10V) BL20-1AO-I(0/4...20MA)  RTD and TC temperature modules, BL20-1AI-U(-10/0...+10V) BL20-1AI-I(0/4...20MA) BL20-2DO-R-CO BL20-2DO-R-NC BL20-2DO-R-NO BL20-*DO-24VDC* BL20-*DI-24VDC*

## Modular Industrial I/O System Accessories

Housing	Part Number	Description
Labels	FW5/151-200 (10 SETS/PKG) FW5/101-150 (10 SETS/PKG) FW5/51-100 (10 SETS/PKG) FW5/1-50 (10 SETS/PKG)	Numbered 151-200 Numbered 101-150 Numbered 51-100 Numbered 1-50
End Bracket	XN-WEW-35/2-SW (1/PKG)	
End Plate	XN-ABPL	
Shield Connection - For use with analog modules	XN-KLBU/S (10/PKG) XN-KLBU/T (10/PKG)	Screw terminal Tension clamp
Labels - For labeling electronic modules. DIN A5 sheets	BL20-LABEL/BLOCK (5 SHEETS/PKG) BL20-LABEL/SCHEIBE (5 SHEETS/PKG)	For block modules For slice modules
Tension Clamp Tool - For ease of operating tension clamp connections	ZBW5-2	
Ferrite Ring - For damping high frequency interference on data and supply lines	PS416-ZBX-405 (2/PKG)	
Shield Connection - For use with direct wiring gateways	SCH-1-WINBLOC (1/PKG)	
Programming Cable - For connecting the BL20/BL67 system to the I/O Assistant software	XN-PS2-CABLE	

## excom Selection Guide



PROFIBUS-DP® Gateway
D4

Module Type	Pages
Discrete Input	D5
Discrete Output	D7
Discrete Input & Output	D9
Analog Input	D11, D17
Analog Output	D13
Frequency/Counter Input	D15

Accessories
D19 - D24

## Certification Table

Housing	FM	CSA
DM80EX	X	X
D040EX	X	X
AIH40EX	X	X
AIH41EX		X
A040EX	X	X
AI41EX		
TI40EX	X	X
GDP 1.5	X	X
PSD24EX	X	X
MT 9	X	X
MT 18	X	X
SC12-EX	X	

## The excom® System


**excom** is a remote I/O system for use in hazardous locations. It provides PROFIBUS®-DP compatible I/O modules in an IP 20 protected solution for connecting discrete and analog intrinsically safe field devices. It is approved for use in Class I, Division 2 locations, and may be connected to field devices in Class I, Division 1 areas.

The modular system consists of power modules, PROFIBUS-DP communication gateways, I/O modules and a backplane rack. The backplane is available in two sizes, with support for 8 or 16 I/O modules. The larger rack (MT18...) also allows for redundant power supplies and PROFIBUS-DP gateway cards to be used. This allows a failsafe communication scheme to be used.

The I/O modules provide the interface to field devices. The backplane provides power for I/O from the mounted power supply, with no need for a separate field supply. The gateways, power supplies and I/O cards are simply plugged into the backplane rack, with all power, PROFIBUS-DP and I/O wiring separate from the removable modules. I/O modules may also be changed during operation ("hot-swapped"). The system automatically checks whether a newly inserted module matches the configuration.

The internal cycle time of the excom system is less than 5 ms for discrete signals and less than 20 ms for analog signals. Total response time of the PROFIBUS-DP system depends on the cycle time of the controller and its program, as well as the data rate of the PROFIBUS-DP system. HART values may be exchanged with supported devices via PROFIBUS-DPV1 communication.

In order to use the excom system in a hazardous area, the PROFIBUS-DP communication must be conditioned through a segment coupler. Couplers are available for both wire and fiber-optic media.

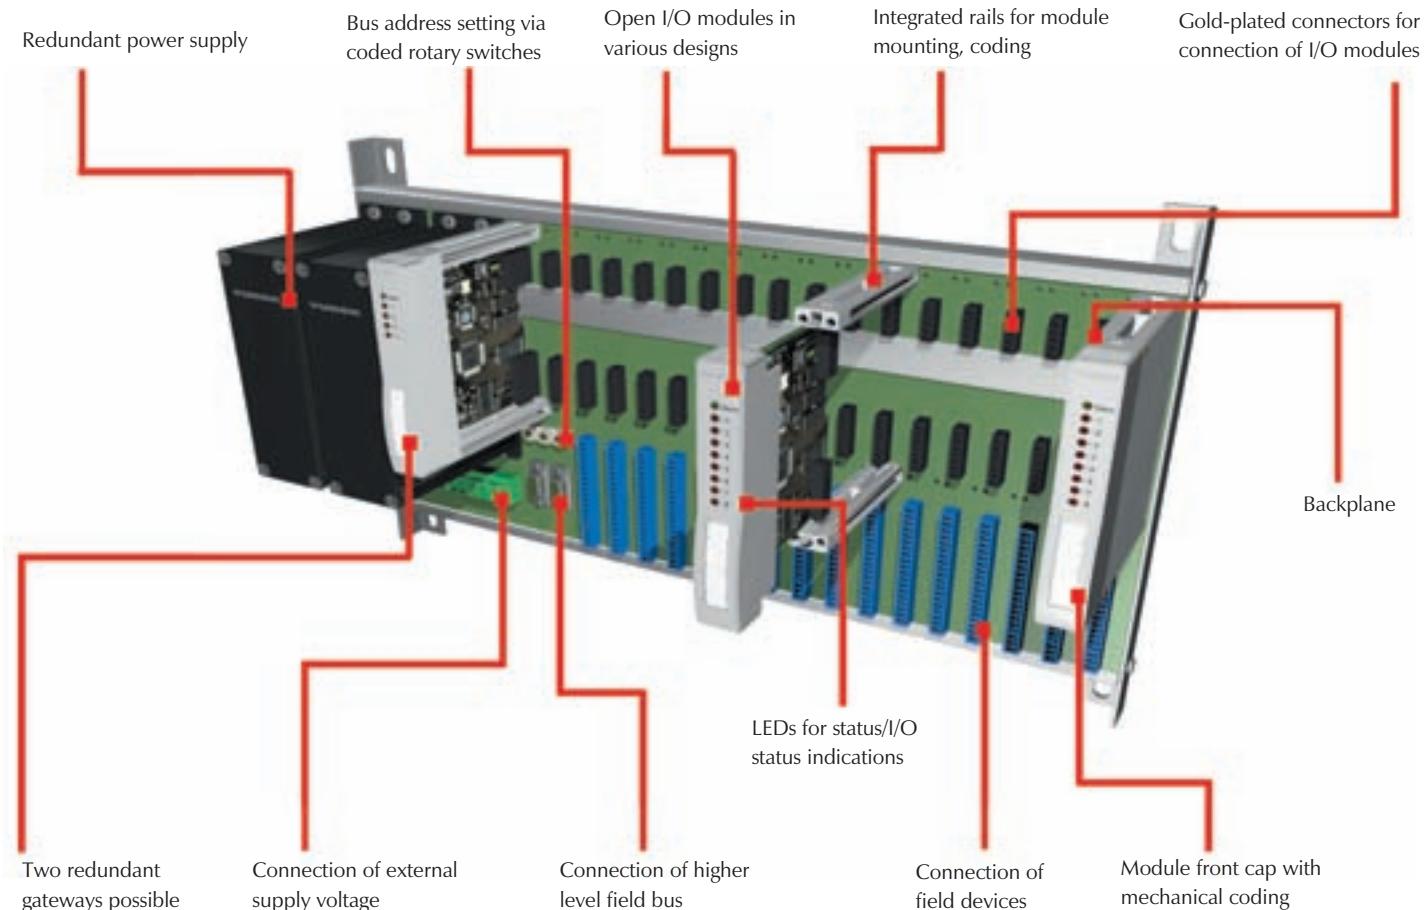

## Diagnostics

The **excom** gateway provides extended PROFIBUS-DP diagnostic information, including channel-specific error indication. Each module also features LEDs for visual error indication as well as I/O status. Consult the user manual for the **excom** system for detailed information.

## Addressing

The I/O modules need no user configured address since the gateway recognizes them by which backplane slot they are inserted in. The **excom** system itself needs a PROFIBUS-DP address, which is set via three rotary switches. The maximum address of the system is 125.



## PROFIBUS-DP Gateway



- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- Various I/O Styles

### Electrical

- Power Consumption: <3 W (from backplane)

### Mechanical

- Operating Temperature: -20 to +60°C (-4 to +140°F)
- Protection: IP 20


### Diagnostics (Logical)

- I/O faults are mapped to the PROFIBUS-DP diagnostic area

### Diagnostics (Physical)

- LEDs to indicate status of PROFIBUS-DP and backplane communication

## GDP1.5

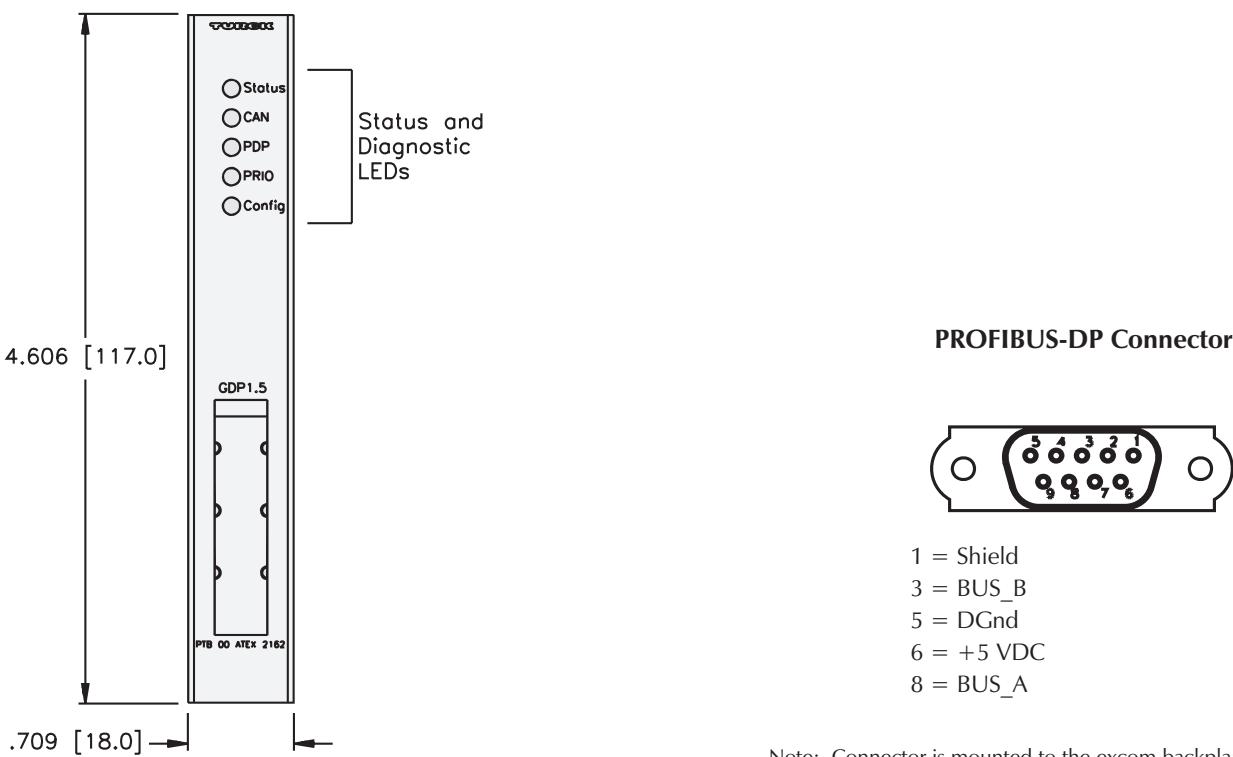

Note: Connector is mounted to the excom backplane rack.

## 4 Channel Discrete Input Module

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- NAMUR Inputs



### Electrical

- Power Consumption: <2 W (from backplane)
- Sensor Type: NAMUR

### Mechanical

- Operating Temperature: -20 to +70°C (-4 to +158°F)
- Protection: IEC IP 20


### Diagnostics (Logical)

- I/O faults are mapped to the PROFIBUS-DP diagnostic area
- Open/short-circuit detection is configurable

### Diagnostics (Physical)


- LEDs indicate faults for each channel

## DI40EX

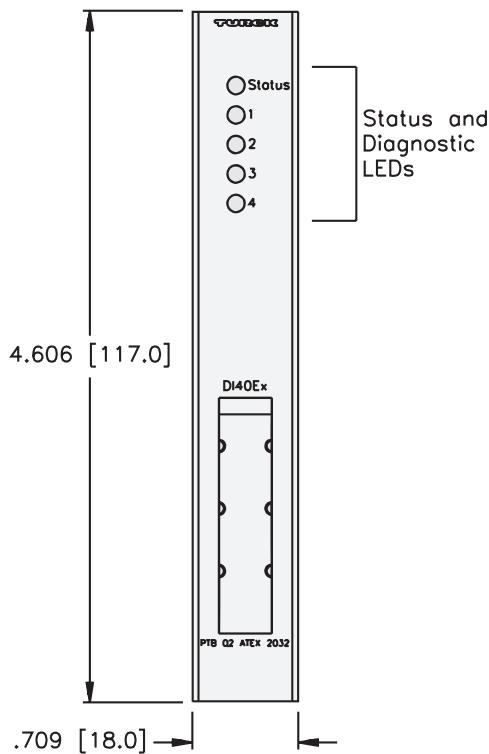

Part Number	Inputs								Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	OCD	I/O Map
DI40EX	4	0-3	E-I	1	NAMUR		X	X	1

E-I

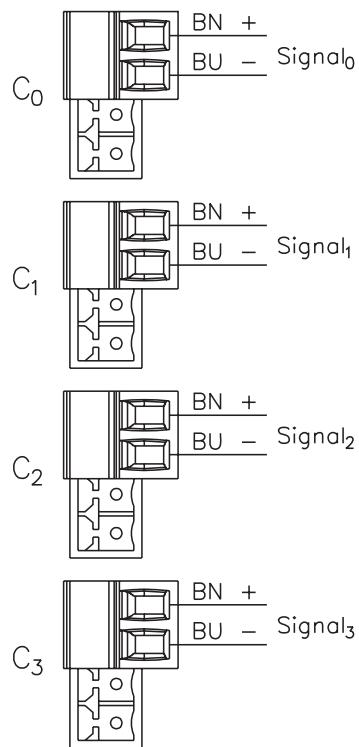

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	Data from next discrete modules				I-3	I-2	I-1	I-0	
n+1	(Data from modules to the right)								

## 4 Channel Discrete Output Module

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- Selectable Output Power



### Electrical

- Power Consumption: <4.5 W (from backplane)
- Output Voltage: 16 or 24 VDC (depending on terminals used)

### Mechanical

- Operating Temperature: -20 to +60°C (-4 to +140°F)
- Protection: IEC IP 20


### Diagnostics (Logical)

- I/O faults are mapped to the PROFIBUS-DP diagnostic area
- Open/short-circuit detection is configurable

### Diagnostics (Physical)


- LEDs indicate faults for each channel

## DO40EX

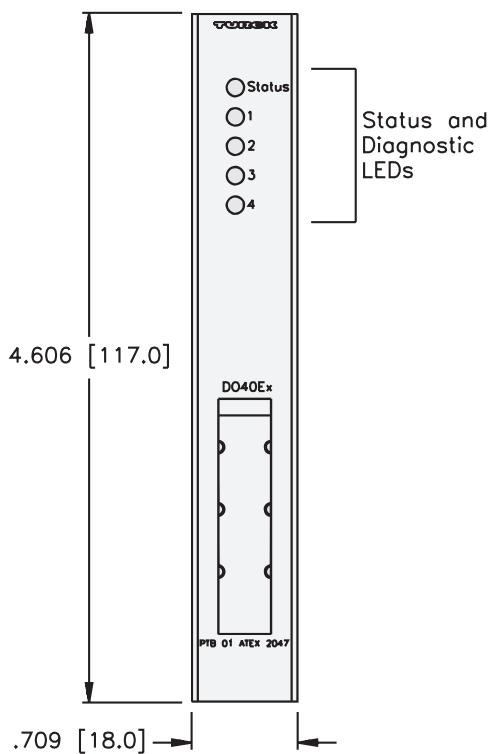

Part Number	Outputs							Data
	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
D040EX	4	0-3	E-O	1	45 mA (@12 V)	X	X	1

E-O

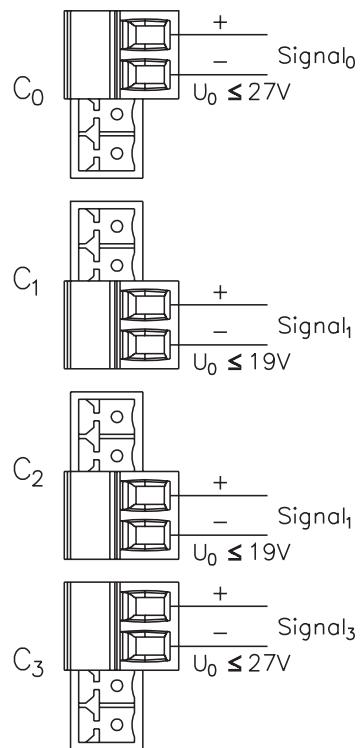

Note: Each output can be used in either the 19 or 27 V mode

I/O Data Map 1

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	Data for next discrete modules    0-3    0-2    0-1    0-0							
	n+1	(Data for modules to the right)							

## 8 Channel Discrete Input/Output Module

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- Channels can be Input or Output



### Electrical

- Power Consumption: <2 W (from backplane)
- Input Type: NAMUR or dry contact
- Output Voltage: 8 VDC

### Mechanical

- Operating Temperature: -20 to +60°C (-4 to +140°F)
- Protection: IEC IP 20


### Diagnostics (Logical)

- I/O faults are mapped to the PROFIBUS-DP diagnostic area
- Open/short-circuit detection is configurable

### Diagnostics (Physical)


- LEDs indicate faults for each channel

## DM80EX

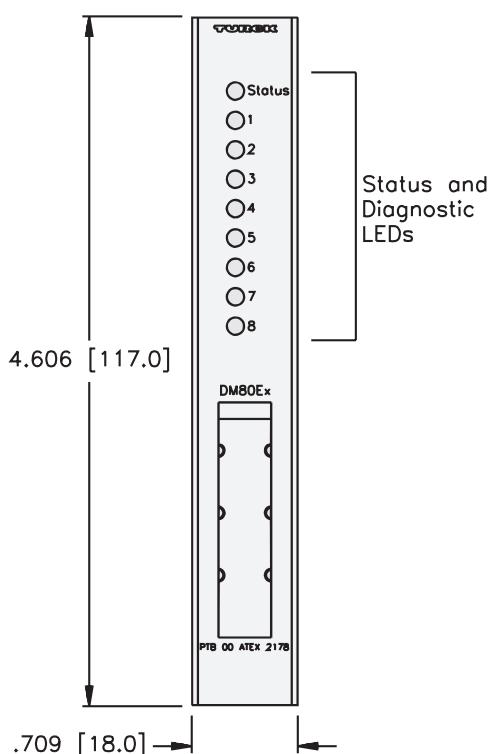

Part Number	Inputs								Outputs								Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map		
DM80EX	8	0-3	E-X	2	NAMUR		X	X	8	0-3	E-X	2	~4 mA	X	X	1		

E-X

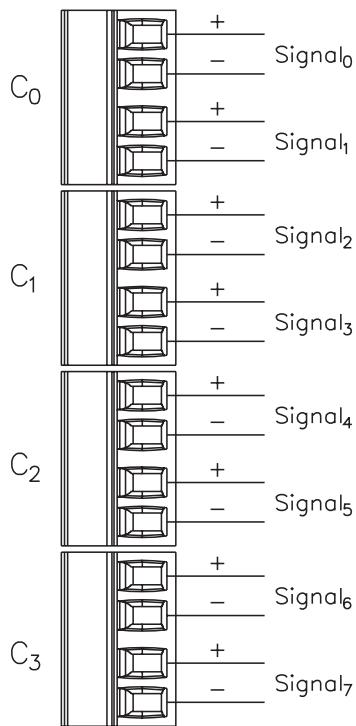

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
n+1	(Data from modules to the right)								

## 4 Channel Analog Input Modules

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- HART Capability



### Electrical

- Power Consumption: <3.5 W (from backplane)
- Input Type: 2-wire (AI(H)40EX) or 4-wire (AI(H)41EX) sensors

### Mechanical

- Operating Temperature: -20 to +70°C (-4 to +158°F)
- Protection: IEC IP 20

### Diagnostics (Logical)

- I/O faults are mapped to the PROFIBUS-DP diagnostic area
- Open/short-circuit detection is configurable

### Diagnostics (Physical)


- LEDs indicate faults for each channel

**AI40EX**

**AIH40EX**


**AI41EX**

**AIH41EX**

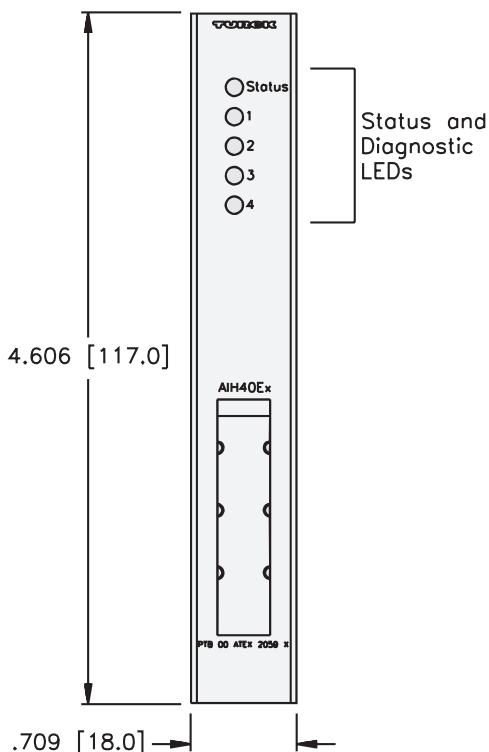


Part Number	Inputs								Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Individual Diagnostics	Wire-Break Detection	HART Compatible	I/O Map
AI40EX	4	0-3	E-AI2	1	0/4 to 20 mA	X	X		1
AI41EX	4	0-3	E-AI4	1	0/4 to 20 mA	X	X		1
AIH40EX	4	0-3	E-AI2	1	0/4 to 20 mA	X	X	X	1
AIH41EX	4	0-3	E-AI4	1	0/4 to 20 mA	X	X	X	1

**E-AI2**

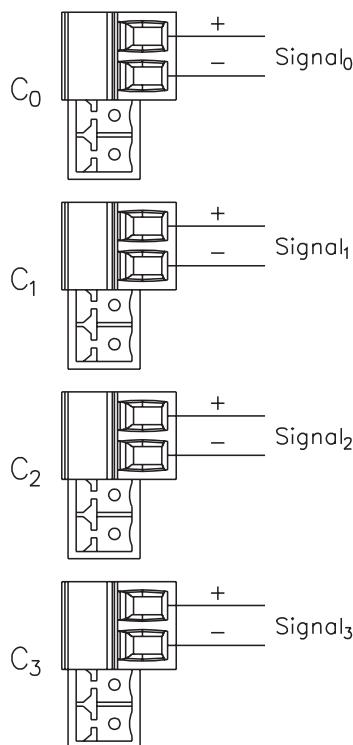

**E-AI4**

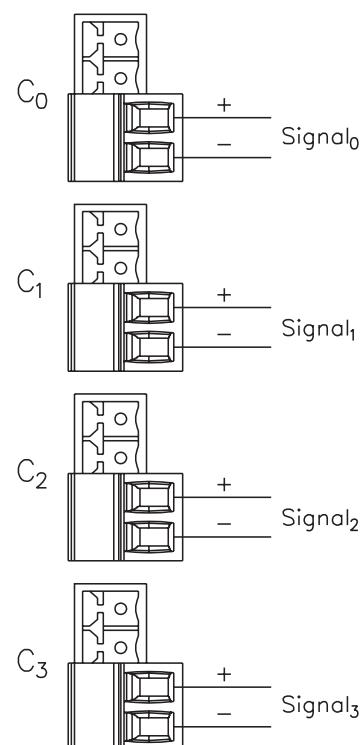

**I/O Data Map 1**

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
n-1	(Data from modules to the left)								
n	Channel 0, MSB								
n+1	Channel 0, LSB								
n+2	Channel 1, MSB								
n+3	Channel 1, LSB								
n+4	Channel 2, MSB								
n+5	Channel 2, LSB								
n+6	Channel 3, MSB								
n+7	Channel 3, LSB								
n+8	(Data from modules to the right)								

Note: Default data map shown. More data is returned if HART variables are used. Consult product user manual for details.

## 4 Channel Analog Output Modules

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- HART Capability



### Electrical

- Power Consumption: <3.5 W (from backplane)
- Output Type: 0/4...20 mA actuators

### Mechanical

- Operating Temperature: -20 to +70°C (-4 to +158°F)
- Protection: IEC IP 20

### Diagnostics (Logical)


- I/O faults are mapped to the PROFIBUS-DP diagnostic area
- Open/short-circuit detection is configurable

### Diagnostics (Physical)

- LEDs indicate faults for each channel


**AO40EX**

**AOH40EX**

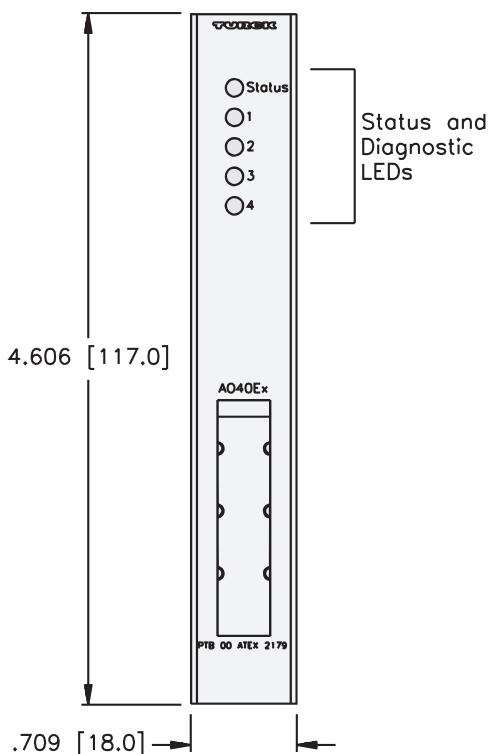


Part Number	Outputs								Data
	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	HART Compatible	I/O Map
A040EX	4	0-3	E-AO	1	0/4 to 20 mA	X	X		1
A0H40EX	4	0-3	E-AO	1	0/4 to 20 mA	X	X	X	1

**E-AO**

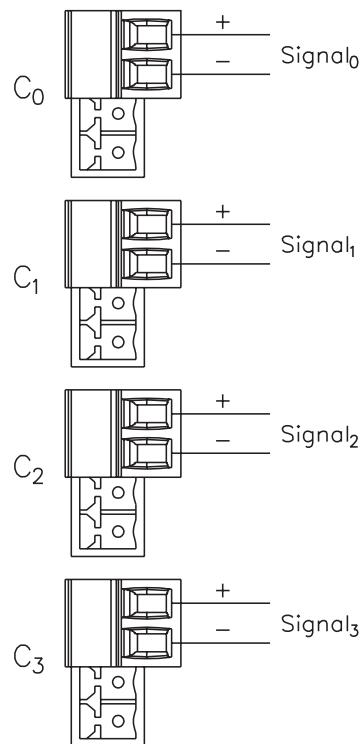

**I/O Data Map 1**

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	n-1	(Data for modules to the left)							
	n	Channel 0, MSB							
	n+1	Channel 0, LSB							
	n+2	Channel 1, MSB							
	n+3	Channel 1, LSB							
	n+4	Channel 2, MSB							
	n+5	Channel 2, LSB							
	n+6	Channel 3, MSB							
	n+7	Channel 3, LSB							
	n+8	(Data for modules to the right)							

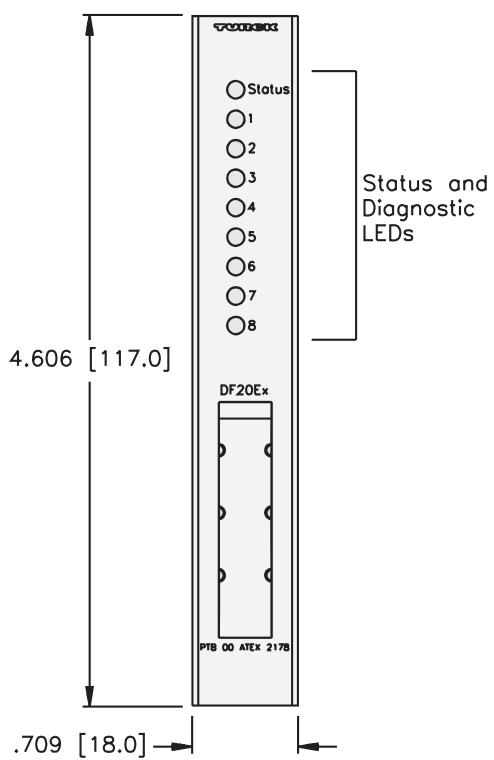


# Process Automation



Part Number	Inputs									Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map	
DF20EX	2	0-3	E-F	2	Frequency/Counter		X	X	1	

E-F

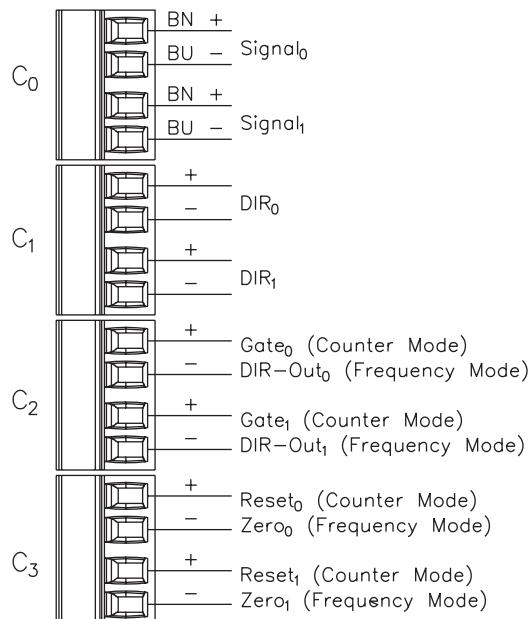

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0						
	n-1	(Data from modules to the left)													
	n	S-0	OV-0*	SIGN-0		Channel 0 (MS bits)									
	n+1	Channel 0													
	n+2	Channel 0													
	n+3	Channel 0 (LSB)													
	n+4	S-1	OV-1*	SIGN-1		Channel 1 (MS bits)									
	n+5	Channel 1													
	n+6	Channel 1													
	n+7	Channel 1 (LSB)													
	n+8	(Data from modules to the right)													
* OV is used in counter mode only															

## 4 Channel Temperature Input Module



TI40EX

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- Thermocouple or RTD Inputs

### Electrical

- Power Consumption: <3 W (from backplane)
- Input Type: PT100, PT1000, NI100 2-, 3- or 4-wire RTDs  
Type B, E, J, K, L, N, R, S, T Thermocouples

### Mechanical


- Operating Temperature: -20 to +70°C (-4 to +158°F)
- Protection: IEC IP 20

### Diagnostics (Logical)

- I/O faults are mapped to the PROFIBUS-DP diagnostic area
- Open/short-circuit detection is configurable


### Diagnostics (Physical)

- LEDs indicate faults for each channel

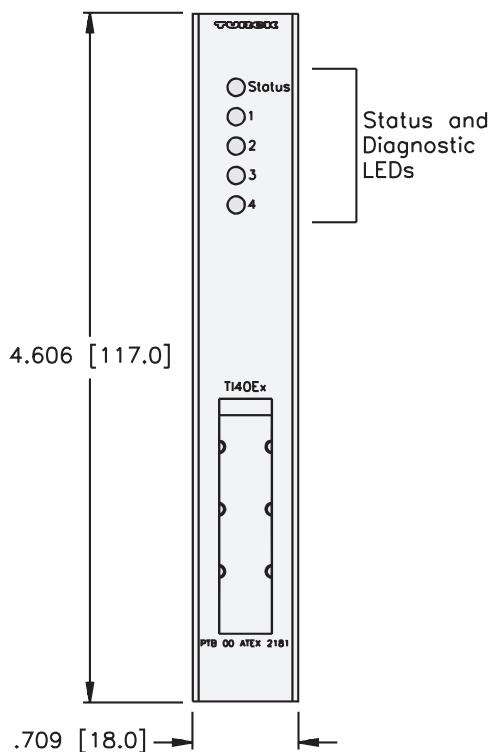

Part Number	Inputs								Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
TI40EX	4	0-3	E-T	1	TC / RTD		X	X	1

E-T

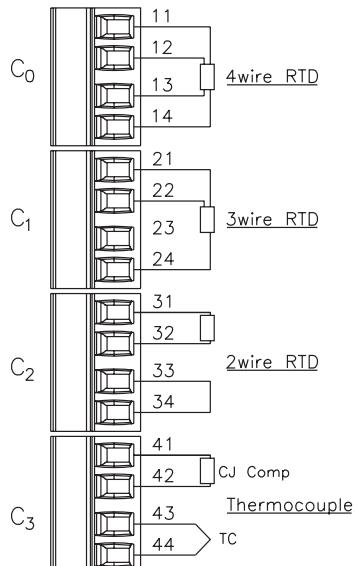

Note: Each channel may be used in any of the four example forms shown.


I/O Data Map 1


In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0							
	n-1	(Data from modules to the left)														
	n	S-0	Channel 0, MSB													
	n+1	Channel 0, LSB														
	n+2	S-1	Channel 1, MSB													
	n+3	Channel 1, LSB														
	n+4	S-2	Channel 2, MSB													
	n+5	Channel 2, LSB														
	n+6	S-3	Channel 3, MSB													
	n+7	Channel 3, LSB														
	n+8	(Data from modules to the right)														

**Backplane Racks**

- Modular I/O
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- Redundant Communication Option

Excom Racks				
Part Number	I/O Slots	Redundancy	Connector Type	FM Approval
MT9/FM	8		Screw Terminal	X
MT9-R024	8		Screw Terminal	Pending
MT18-R024	16	X	Screw Terminal	Pending

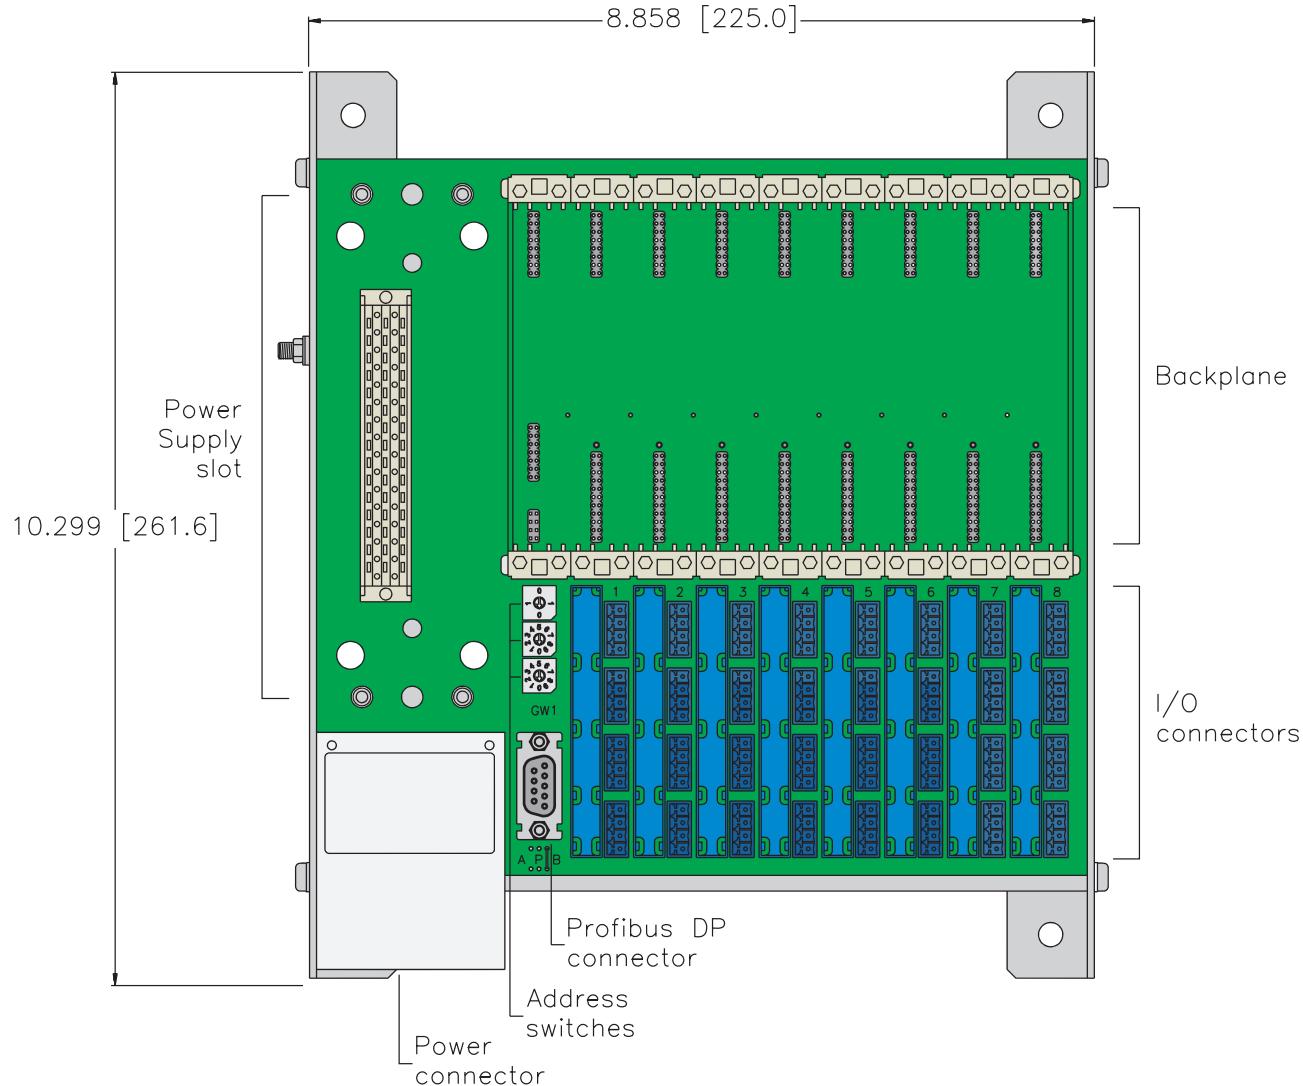**MT9/FM****MT18-R024**

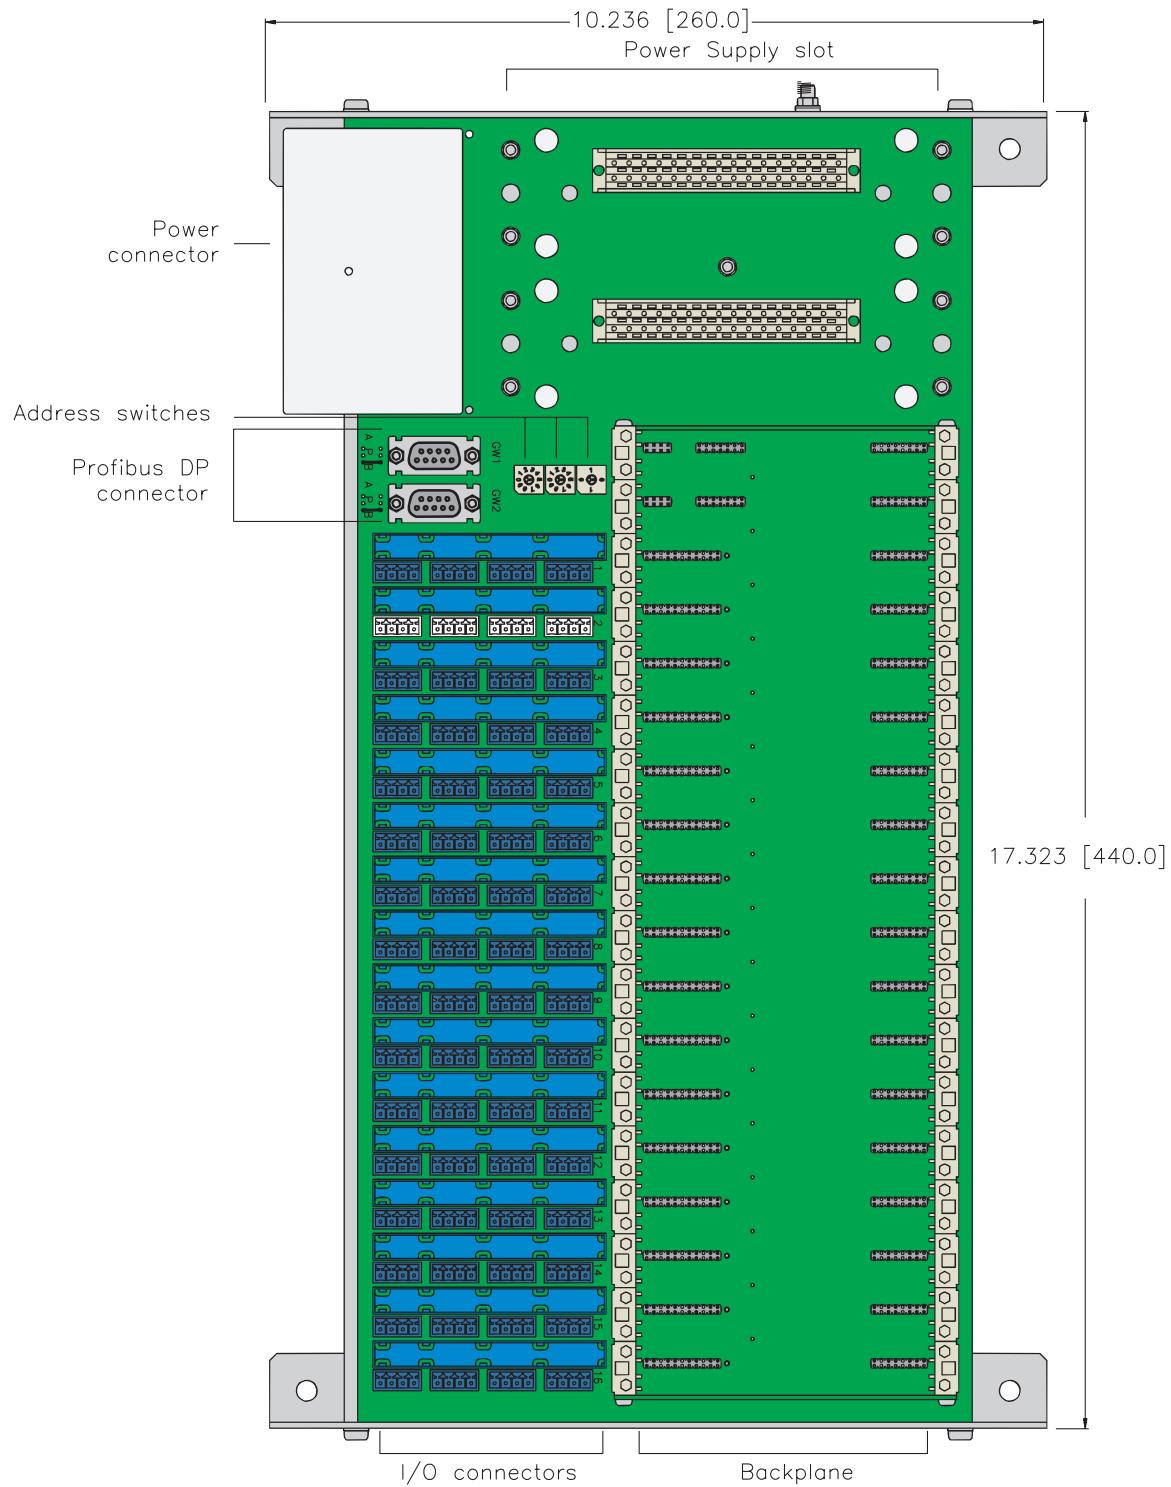

## PSD24EX

- Power Supply Module (24 VDC in) for Excom Rack

**Electrical**

- Power Consumption: 75 W
- Power Output: 60 W
- Voltage Input: 18...33 VDC

**Mechanical**

- Operating Temperature: -20 to +60°C (-4 to +140°F)
- Protection: IEC IP50

**Diagnostics (Physical)**

- LEDs indicate status of power supply



## BM1

- Blank Cover for Unused excom Slots



**excom® Module Accessories**

Image	Part Number	Description
	D9T-RS485	D9 PROFIBUS®-DP connector for use in safe areas.
	D9T-RS485IS	D9 PROFIBUS-DP connector for use in hazardous (FM Div 2) areas.
	D9T-RS485PG	D9 PROFIBUS-DP connector with programming port for use in safe areas
	MODEX-FILTER	Capacitor to improve power up performance and operational safety of <b>excom</b>

## PROFIBUS-DP IS Couplers

- Redundant Communication
- PROFIBUS-DP Compatible
- Hazardous Area Usage
- Fiber Optic or Copper Media

### Electrical

- Voltage In: 18 to 32 VDC
- Current Consumption: <100 mA (OC11...), <200 mA (SC12...)

### Mechanical

- Operating Temperature: -20 to +70°C (-4 to +158°F)
- Protection: IEC IP 20


### Diagnostics (Physical)

- LEDs indicate status of power and PROFIBUS-DP communication


**OC11EX/2G**

**OC11EX/3G**

**SC12-EX**

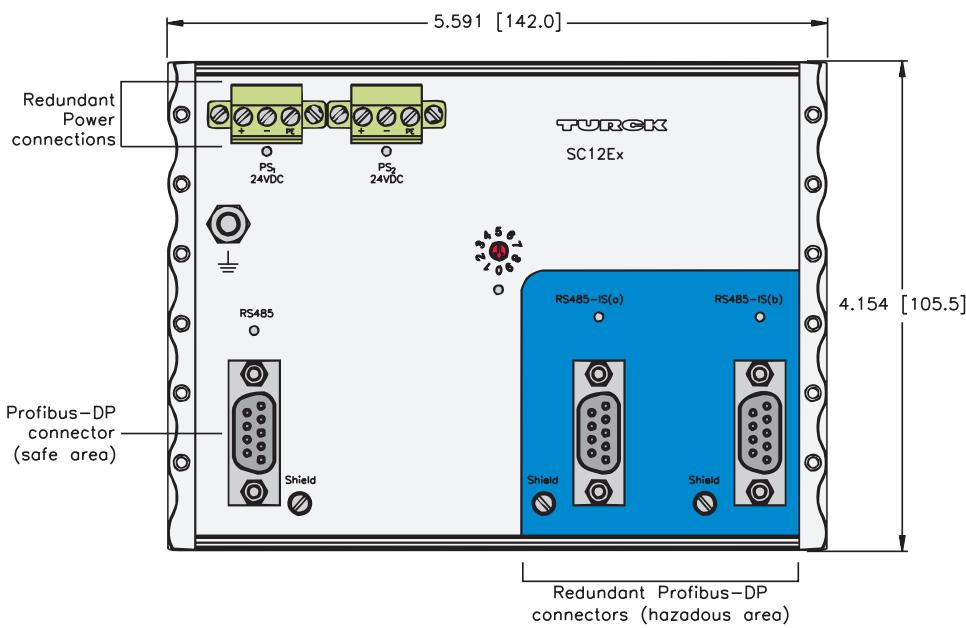

**SC12-EX shown**




- 1=Shield
- 3=BUS\_B
- 5=DGND
- 6=+VDC
- 8=BUS\_A

Note: For fiber optic communication the part number CABLE LWL-2ST/SY-\*M (where \* is the length in meters) must be used.

Part Number	Classification	Connection
OC11EX/2G	Zone 1	Fiber
OC11EX/3G	Zone 2	Fiber
SC12-EX		Copper

Note: For fiber-optic communication the part number CABLE LWL-2ST/SY-\*M (where \* is the length in meters) must be used.

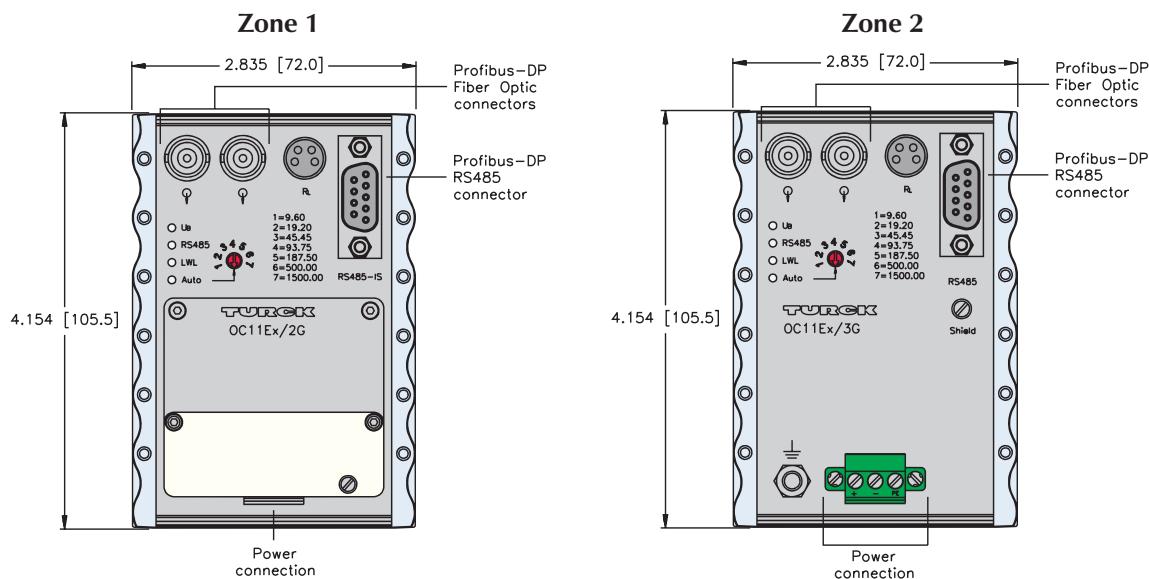

**TURCK**  
**Process Automation**

**Notes:**

# **NETWORKS**



## FOUNDATION™ fieldbus Selection Guide



Power Conditioner	Cables	Terminating Resistors
E7 - E16	E17 - E21	E22



Feed Through Connectors	Field Wireable Tee	Junctions
E23	E24	E25 - E50



Conduit Adapters	Power Supply Conditioner	Tees	Gender Changers
E51	E53	E55	E56



Surge Suppressor	Receptacles	Field Wireable Connectors
E57	E59 - E66	E67

## FOUNDATION™ fieldbus General Specifications


FOUNDATION fieldbus is a communication protocol and physical method to interconnect smart devices such as temperature transmitters, pressure transmitters and valve actuators. The physical layer conforms to ISA SP50.02 and IEC 1158-2 standards for fieldbuses.

Fieldbus technology allows many smart devices to share one communication medium. The digital communication signal is superimposed onto a DC carrier. This reduces the amount of terminations to connect all the field devices to a host system and allows greater flexibility for future additions of I/O points.

A FOUNDATION fieldbus device is addressable and can store and transmit data. The devices can store values, track changes and use pre-set alarms to trigger. Based on pre-defined tag names host systems can read transmitter values such as temperature and pressure to set values of a valve actuator.

Digital signal encoding is done using Manchester BiPhase-L and error checking is done with the CRC method. FOUNDATION fieldbus has two types of devices - A Basic Device (BD) which reads inputs, track values and set outputs if programmed to do so - A Link Active Scheduler (LAS) performs the same features as a BD and handles network communication timing between all the active devices on the network.

## Topology

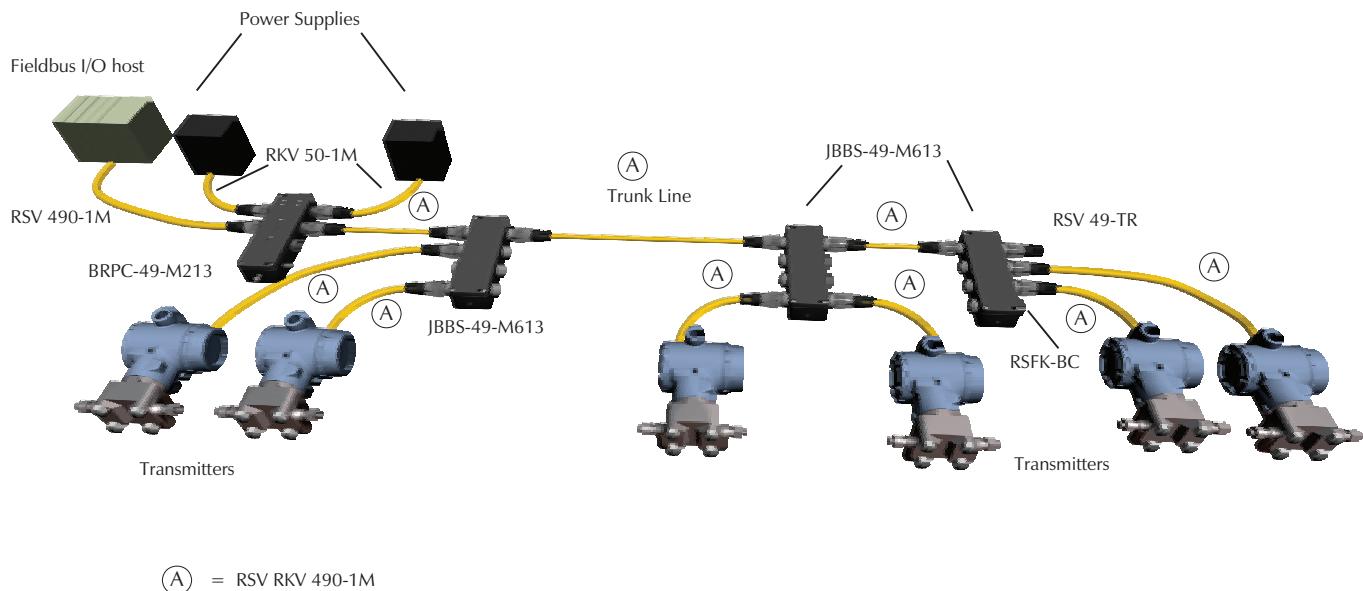


## FOUNDATION™ fieldbus, Cable Specifications

- Cable that Meets the Requirements of ISA/SP50 and FOUNDATION™ fieldbus Requirements for Type A Cable
- Cables are Available in 3-wire Versions with a Device Ground or 2-wire Versions

## Type A Cable Specifications


- Temperature range: -40 to +105°C
- Governed by: ISA SP50.02 specification
- Sunlight Resistant
- PLTC and ITC Rated (CSA FT4)
- Impedance [ $Z_0$  at  $f_r$  (31.25 kHz)] = 100 Ohms  $\pm$  20 %
- Maximum Attenuation at 1.25  $f_r$  (39 kHz) = 3.0 dB/km
- Maximum Capacitive Unbalance to Shield = 2 nF/km
- Maximum DC Resistance (per conductor) = 24 Ohms/km
- Maximum Propagation Delay Variance 0.25  $f_r$  to 1.25  $f_r$  = 1.7  $\mu$ s/km
- Conductor Cross-sectional area (wire size) = nominal 0.8 mm<sup>2</sup> (#18 AWG) or 1.2 mm<sup>2</sup> (#16 AWG)
- Shield Coverage = 100 % (90 % minimum)

Figure A

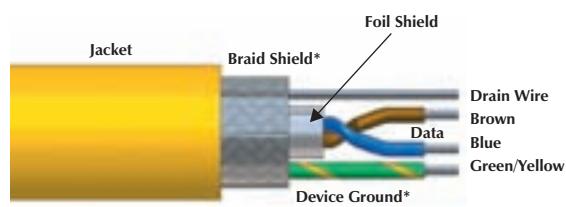

\*Available on some cable types

Figure B

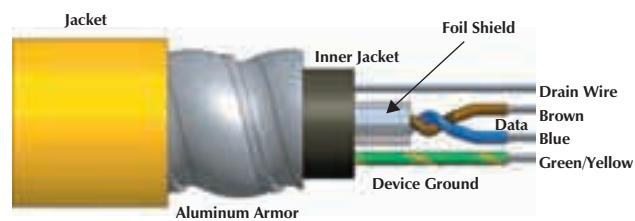

Type	Approvals	Data Pair		Device Ground	Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	Material Color Nominal O.D.	Type Drain Wire		
<b>490</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG] AWM I/II A/B FT4	2/18 AWG BU/BN	6.5 Ohms XLPE	18 AWG GN/YE	PVC Yellow 8.4 mm (.330 in)	Foil 20 AWG	RB50693-*M 58 lbs.	A
<b>490B</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG] AWM I/II A/B FT4	2/18 AWG BU/BN	6.5 Ohms XLPE	18 AWG GN/YE	PVC Blue 8.4 mm (.330 in)	Foil 20 AWG	RB50783-*M 58 lbs.	A
<b>492A</b> 105°C 300 Volts	NEC ITC PLTC/CM CEC [CMG HLBCD]	2/18 AWG BU/BN	6.5 Ohms XLPE	18 AWG GN/YE	Armor/PVC Yellow 12.7 mm (0.5 in)	Foil 18 AWG	RB50874-*M 96 lbs. <i>armorfast</i> ®	B
<b>492BA</b> 105°C 300 Volts	NEC ITC PLTC/CM CEC [CMG HLBCD]	2/18 AWG BU/BN	6.5 Ohms XLPE	18 AWG GN/YE	Armor/PVC Blue 12.7 mm (0.5 in)	Foil 18 AWG	RB50803-*M 96 lbs. <i>armorfast</i> ®	B
<b>493</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG] AWM I/II A/B FT4	2/18 AWG BU/BN	6.5 Ohms XLPE	None	PVC Yellow 8.5 mm (.335 in)	Foil/Braid 20 AWG	RB50784-*M 59 lbs.	A
<b>493B</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG] AWM I/II A/B FT4	2/18 AWG BU/BN	6.5 Ohms XLPE	None	PVC Blue 8.5 mm (.335 in)	Foil/Braid 20 AWG	RB50786-*M 59 lbs.	A

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.


## FOUNDATION™ fieldbus, Cable Specifications

- Cable that Meets the Requirements of ISA/SP50 and FOUNDATION™ fieldbus Requirements for Type A Cable
- Cables are Available in 3-wire Versions with a Device Ground or 2-wire Versions

### Type A Cable Specifications


- Temperature range: -40 to +105°C
- Governed by: ISA SP50.02 specification
- Sunlight Resistant
- PLTC and ITC Rated (CSA FT4)
- Impedance  $[Z_0 \text{ at } f_r (31.25 \text{ kHz})] = 100 \text{ Ohms} \pm 20\%$
- Maximum Attenuation at 1.25  $f_r$  (39 kHz) = 3.0 dB/km
- Maximum Capacitive Unbalance to Shield = 2 nF/km
- Maximum DC Resistance (per conductor) = 24 Ohms/km
- Maximum Propagation Delay Variance 0.25  $f_r$  to 1.25  $f_r$  = 1.7  $\mu\text{s}/\text{km}$
- Conductor Cross-sectional area (wire size) = nominal  $0.8 \text{ mm}^2$  (#18 AWG) or  $1.2 \text{ mm}^2$  (#16 AWG)
- Shield Coverage = 100% (90% minimum)

Figure A

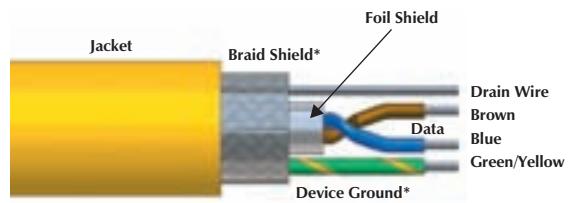

\*Available on some cable types

Figure B

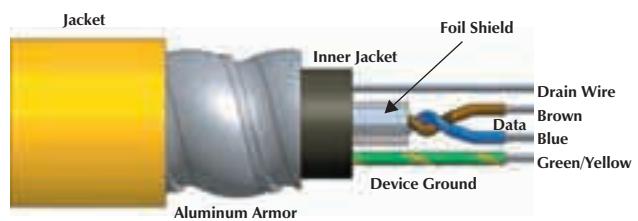

Type	Approvals	Data Pair		Device Ground	Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation					
<b>493O</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring <b>CEC [CMG]</b> AWM I/II A/B FT4	2/18 AWG BU/BN	6.5 Ohms XLPE	None	PVC Orange 8.5 mm (.335 in)	Foil/Braid 20 AWG	RB50785-*M 59 lbs.	A
<b>496</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring <b>CEC [CMG]</b> AWM I/II A/B FT4	2/16 AWG BU/BN	4.1 Ohms XLPE	None	PVC Yellow 9.6 mm (.378 in)	Foil 18 AWG	RB50891-*M 64 lbs.	A
<b>496BK</b> AWM 2517 105°C 300 Volts	NEC ITC PLTC Open Wiring <b>CEC [CMG]</b> AWM I/II A/B FT4	2/16 AWG BU/BN	4.1 Ohms XLPE	None	PVC Black 9.6 mm (.378 in)	Foil 18 AWG	RB51300-*M 64 lbs.	A

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.


## Process Automation – Networks

The DPC-System (Diagnostic Power Conditioner System) is a power supply system for the installation of FOUNDATION™ fieldbus H1 segments. It provides comprehensive diagnostic functions for the monitoring of FOUNDATION fieldbus segments and supports asset management for the entire system.

A DPC system consists of one or more module racks (DPC-49-MB-RC) each with up to eight power supply modules (DPC-49-IPS) and one diagnostic module (DPC-49-ADU). Up to four H1 segments for each module rack can be operated and monitored redundantly. The diagnostic data from the H1 segments are transmitted via the HSE interface module (DPC-49-HSEFD/24VDC) to the higher level asset management system.

The diagnostic module (DPC-49-ADU) is used as a communication and diagnostic interface between the H1 segments and the power supply module. The diagnostics module monitors the electrical parameters and the communication parameters of the H1 segments. Operation without diagnostic module is possible. In this configuration, simple diagnostics are provided locally.

The diagnostic information is collected in the device and transmitted via the HSE interface module to the higher fieldbus level (e.g. to the host) as diagnostic and alarm data. The diagnostic module can be plugged in and unplugged during operation (hot swapable).

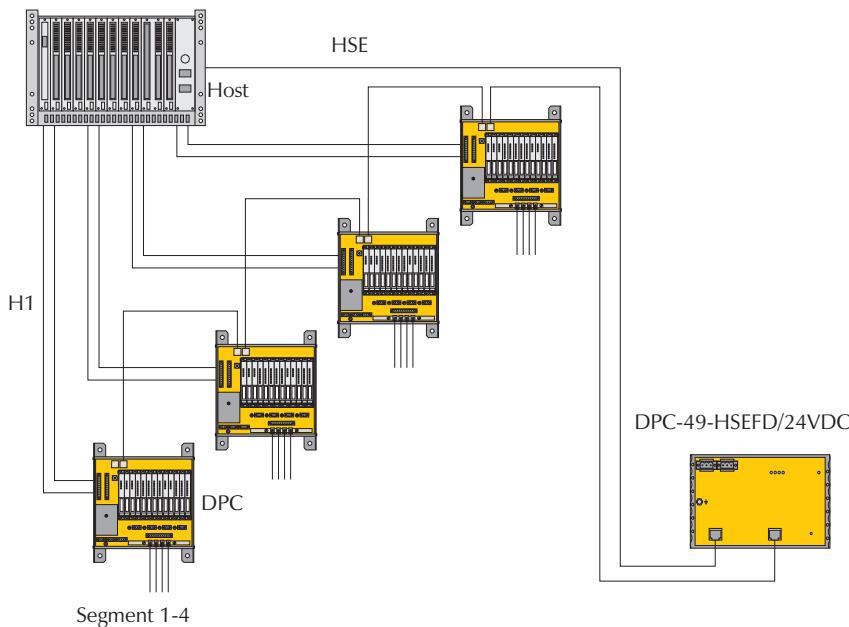

DPC system configuration




Diagnostics via DTM

## Fieldbus – The Dynamic Asset

Information concerning the components of the control system and field devices are typically stored and monitored by that system. Information on assets that make up the communication infrastructure (physical layer components) have been simply stored in an asset management system. With the DPC system, the physical layer components are continuously monitored providing virtually instantaneous information regarding the quality and the status of the communication link.


This aspect of the system is the key to achieving the main objective of asset management to minimize maintenance and lower system operating costs.

TURCK has drastically improved on existing physical layer components for use in FOUNDATION™ fieldbus applications. The introduction of this system allows the continuous monitoring of every physical layer component, thus treating the entire physical layer as an asset and providing the means for it to be managed as such.

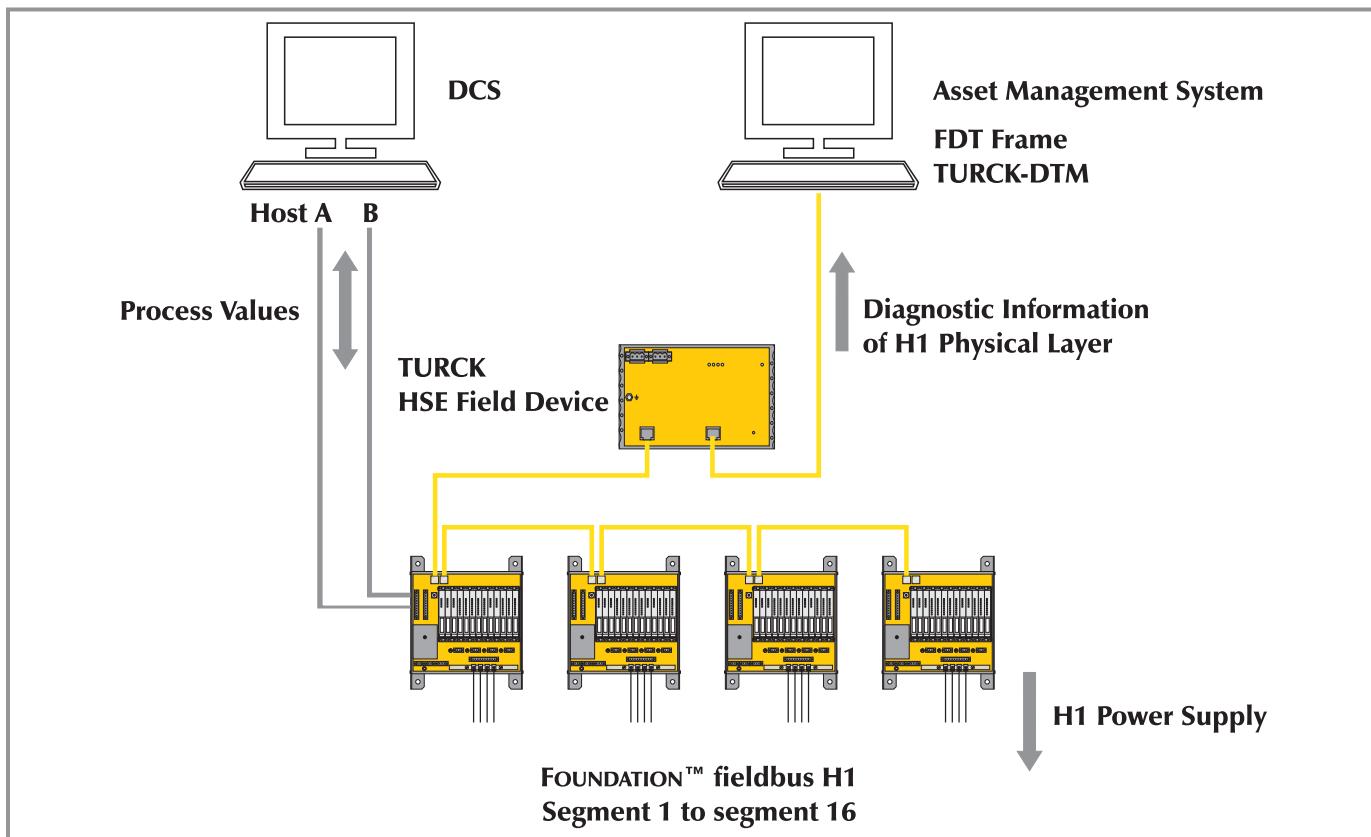

The DPC System detects errors that may develop over an extended period of time or through typical failure modes. These changes can occur due to many factors, such as environmental changes, deterioration of components over time, and any other factors that may affect the physical components of a fieldbus segment. Some of these factors may appear as changes in jitter, hum, noise levels etc. Alarm strategies may be employed that will warn of typical asset errors, potential errors or failures. Preventive measures can be implemented well in advance of a potential system failure. Most common failures can be completely avoided when a preventive maintenance schedule is implemented. The DPC system also supports the set-up of fieldbus assets by using expedient localization of error sources, as well as documentation indicating a "good condition" of the segment structure.

The DPC system provides an option for redundant segment supplies. The system, fully loaded, can accommodate up to 16 fully redundant FOUNDATION fieldbus segments each with an output of 800 mA and 30 VDC. Diagnostic data is available via a DTM, standard FOUNDATION fieldbus function block libraries or an embedded web server in the HSE field device.

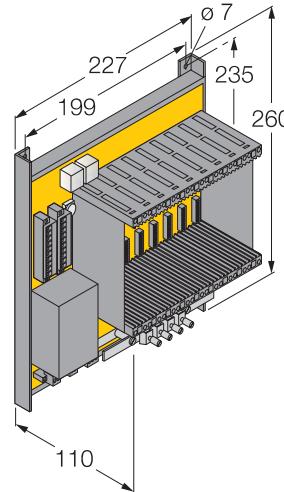**DPC-49-MB-RC****Backplane for the DPC System**

The DPC-System (Diagnostic-Power-Conditioner-System) is a power supply system for the installation of FOUNDATION™ fieldbus H1 segments. It offers comprehensive diagnostic functions for the monitoring of FOUNDATION™ fieldbus segments and thus supporting Asset Management for the whole system.

A DPC system consists of one or more module racks DPC-49-MB-RC each with up to eight power supply modules DPC-49-IPS and one diagnostic module DPC-49-ADU. Up to four H1 segments for each module rack can be operated and monitored redundantly in the FOUNDATION™ fieldbus. The diagnostic data from the H1 segments are transmitted via the HSE interface module DPC-49-HSEFD/24VDC to the higher level Asset-Management-System.

The module rack DPC-49-MB-RC consists of a backplane and the actual rack system for the power supply modules and the diagnostic module.

The single components of the system are electrically linked via the connection terminals of the backplane from the user side. Thereby from an electrical perspective, the backplane is to be considered passive.

The power can be supplied via two 2-pole screw connectors. The connection to the host system is established via two system cables. Optional pre-assembled system cables are available at **TURCK**.

For the connection of the H1 segments to the fieldbus side a 2-pole screw connector terminal is provided for each segment, or alternatively a 10-pole screw connector terminal for all segments together on the system side (system connection). Each H1 segment is equipped with a terminating resistor.

Shielding is established via a shielding bus bar DPC-49-SB4 or via the system connection, which is internally connected with the M5 threaded bolt for equipotential bonding.

A connection to the relay alarm contact of the diagnostic module is available for simple diagnostics processing. Additionally a terminal for the connection of test devices is available for each H1 segment.

The rack system is made of extruded aluminum sections. Thus high system stability and shielding is guaranteed. The module rack is suited for wall mounting as well as for 19" rail mounting.

**Features:**


- Backplane for up to 8 power conditioner modules and 1 diagnostics module
- Exchangeable EMC filter
- Redundant host connection
- Redundant power supply
- Removable terminal blocks with screw connection
- RJ45 connector for HSE fieldbus diagnostics
- Insulated shield terminals
- Terminating resistor with segment output


## Backplane for the DPC System

DPC-49-MB-RC

<b>Part Number</b>	DPC-49-MB-RC
ID Number	M6882010
<b>Fieldbus Standard</b>	IEC 61158-2
<b>Operating Voltage (Pwr)</b>	18 to 32 VDC
Surge / Overvoltage Suppression	< 250 mA
<b>Connection</b>	Removable terminal block, reverse polarity protected, screw connection RJ45 socket
<b>Protection Degree</b>	IP 20
Ambient Temperature	-20 to +60°C (-4 to +140°F)
Housing Material	Aluminum
Housing Color	Black / Yellow
Dimensions	227 x 260 x 110 mm
Mounting	Flush Panel

### Installation Example:

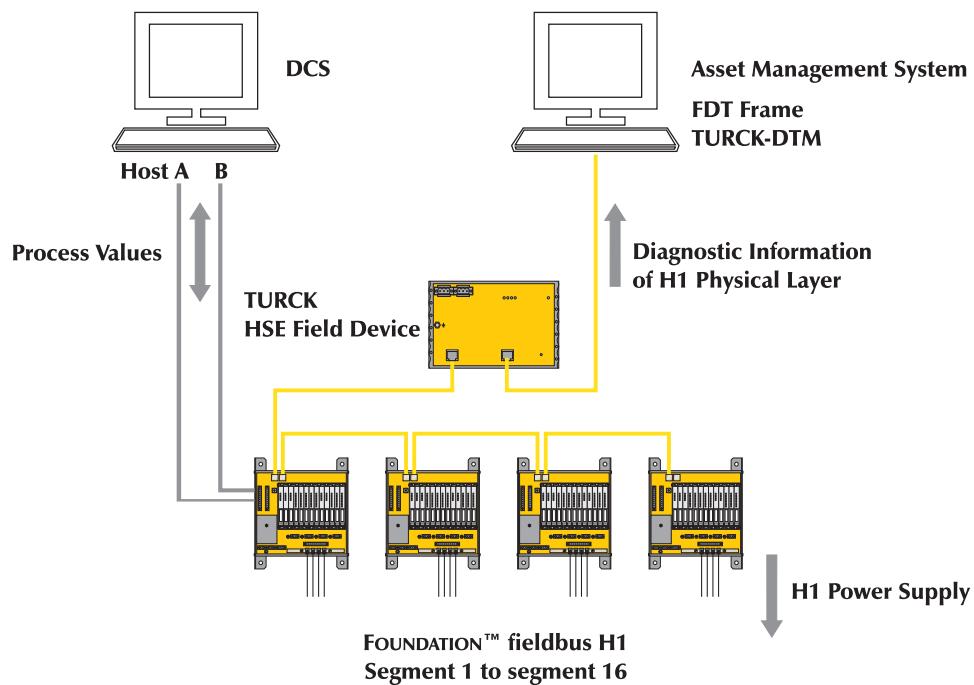

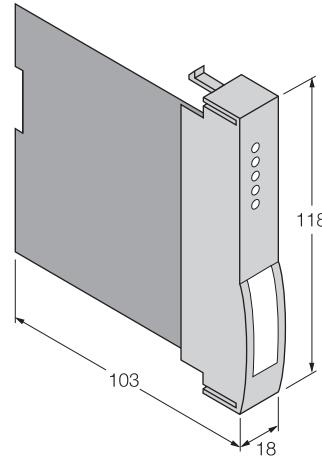**DPC-49-IPS****Power Supply Module**

The DPC-System (Diagnostic-Power-Conditioner-System) is a power supply system for the installation of Foundation fieldbus™ H1 segments. It offers comprehensive diagnostic functions for the monitoring of FOUNDATION™ fieldbus segments and thus supporting Asset Management for the whole system.

A DPC system consists of one or more module racks DPC-49-MB-RC each with up to eight power supply modules DPC-49-IPS and one diagnostic module DPC-49-ADU. Up to four H1 segments for each module rack can be operated and monitored redundantly in the FOUNDATION™ fieldbus. The diagnostic data from the H1 segments are transmitted via the HSE interface module DPC-49-HSEFD/24VDC to the higher level Asset-Management-System.

The power supply module provides up to 30 VDC and 800 mA for the installation of the segment. Due to this maximum output power broad segment allocation (up to 1900 m) is possible without restriction.

If two power supply modules are applied, a redundant operation of the segment is possible. Therefore the power supply modules can be plugged in and unplugged shock-free (Hot swapable in run).

Due to complete galvanic isolation:

- H1 to H1
- H1 for the internal supply
- H1 to the diagnostics module
- H1 to the HSE diagnostics bus

Potential transfer is avoided and an error-free communication is insured. In order to simplify the start-up and the diagnostics on site, the following LED functions are available:

- Pwr: green: Operational readiness
- On / Off yellow: Output switched on
- Load: yellow: Recognition of consumers (field device) at the segment
- Com: yellow: Communication display
- Fault: red: Short-circuit message

**Features:**


- Supply of a FOUNDATION™ fieldbus H1 segment
- Output current: 800 mA
- Output voltage: 28 to 30 VDC
- Local diagnostics via LEDs
- Complete galvanic isolation


## Power Supply Module

DPC-49-IPS

<b>Part Number</b>	DPC-49-IPS
ID Number	M6882013
<b>Fieldbus Standard</b>	IEC 61158-2
<b>Supply Voltage</b>	Via the backplane
Current Consumption	0.8 to 1.7 A
Galvanic Isolation	Complete galvanic isolation, test voltage 500 VAC
<b>Output Circuits</b>	Field
Output Current	≤ 800 mA
Output Voltage	> 28 VDC
Short-circuit Protection	≤ 850 mA
Efficiency	80%
Output Circuits	HOST
Output Current	< 30 mA
Output Voltage	< 27 VDC
<b>Indication</b>	
Operational Readiness	1 x green
Output Active	1 x yellow
Output Current	1 x yellow
Short-circuit Message	1 x red
Bus Communication	1 x yellow
<b>Protection Degree</b>	IP 20
Ambient Temperature	-20 to +60°C (-4 to +140°F)
Housing Material	Plastic / flammability class V-0 to UL 96
Housing Color	Yellow
Dimensions	18 x 118 x 103 mm

### Installation Example:

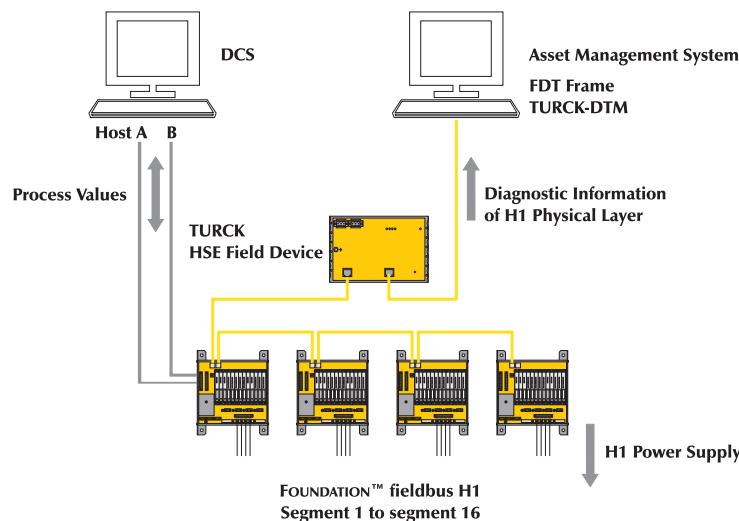

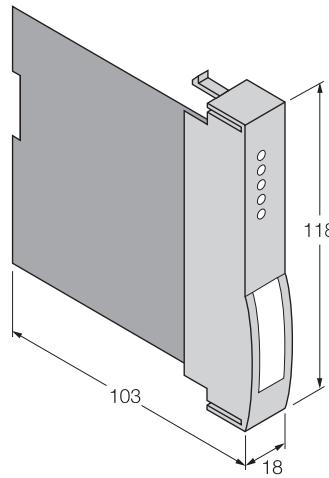**DPC-49-ADU****Diagnostics Module**

The DPC-System (Diagnostic-Power-Conditioner-System) is a power supply system for the installation of FOUNDATION fieldbus™ H1 segments. It offers comprehensive diagnostic functions for the monitoring of FOUNDATION fieldbus™ segments and thus supporting Asset Management for the whole system.

A DPC system consists of one or more module racks DPC-49-MB-RC each with up to eight power supply modules DPC-49-IPS and one diagnostic module DPC-49-ADU. Up to four H1 segments for each module rack can be operated and monitored redundantly in the FOUNDATION fieldbus™. The diagnostic data from the H1 segments are transmitted via the HSE interface module DPC-49-HSEFD/24VDC to the higher level Asset-Management-System.

The diagnostic module DPC-49-ADU is used as a communication and diagnostic interface between the H1 segments and the power supply module. The diagnostics module monitors the electrical parameters and the communication parameters of the H1 segments. Operation without diagnostic module is possible.

The diagnostic information is collected in the device and transmitted via the HSE interface module to the higher fieldbus level (e.g. to the host) as diagnostic and alarm data. The diagnostic module can be plugged in and unplugged during operation (Hot swap-able in run).

The device features a LED display which indicates the operating status of the H1 segments. A pre-alarm is indicated yellow and a main alarm red on the LED display. Alarm signals can also be transmitted via a relay contact.

**Features:**


- Continuous diagnostics for 4 H1 segments
- Local diagnostics via LEDs
- Alarm signal via relay contact
- Complete galvanic isolation

## Diagnostics Module

DPC-49-ADU


<b>Part Number</b>	DPC-49-ADU
ID Number	M6882012
<b>Fieldbus Standard</b>	IEC 61158-2
<b>Supply Voltage</b>	Via the backplane
Current Consumption	< 100 mA
Galvanic Isolation	Complete galvanic isolation, test voltage 500 VAC
<b>Diagnosis</b>	1 x relay
Switching Current	≤ 1000 mA
Switching Voltage	≤ 30 VDC galvanically isolated against other electronic parts
<b>Operational Readiness</b>	1 x green / red
Alarm	4 x yellow / red
<b>Protection Degree</b>	IP 20
Ambient Temperature	-20 to +60°C (-4 to +140°F)
Housing Material	Plastic
Housing Color	Yellow
Dimensions	18 x 118 x 103 mm

### Installation Example:

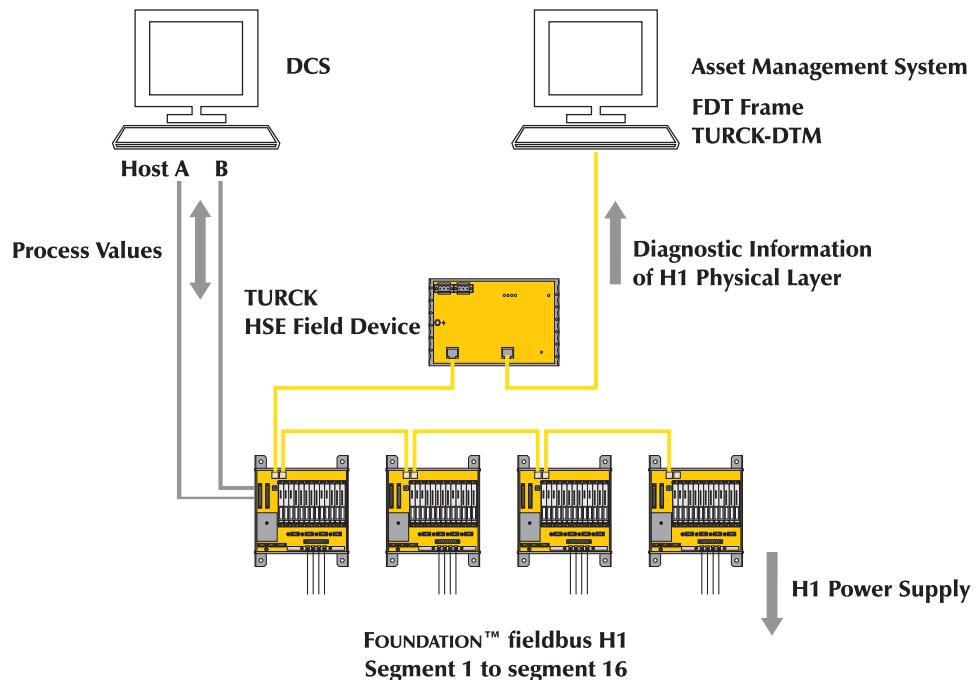

## DPC-49-HSEFD/24VDC

## HSE Field Device

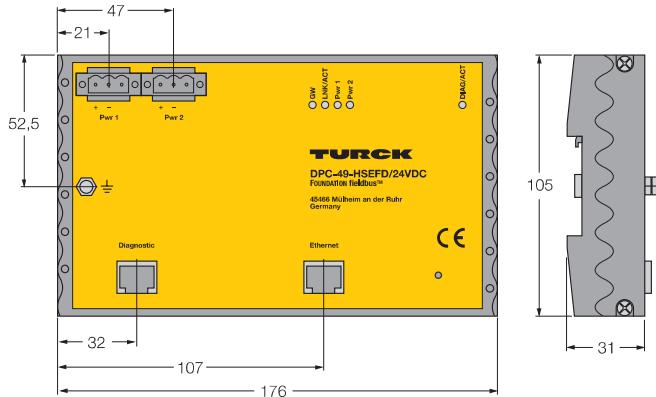

The DPC-System (Diagnostic-Power-Conditioner-System) is a power supply system for the installation of Foundation fieldbus™ H1 segments. It offers comprehensive diagnostic functions for the monitoring of FOUNDATION™ fieldbus segments thus supporting Asset Management for the whole system.

A DPC system consists of one or more module racks DPC-49-MB-RC, each with up to eight power supply modules DPC-49-IPS and one diagnostic module DPC-49-ADU. Up to four H1 segments for each module rack can be operated and monitored redundantly in the FOUNDATION™ fieldbus.

The diagnostic data from the H1 segments are transmitted via the HSE interface module DPC-49-HSEFD/24VDC to the higher level Asset-Management-System. Only the diagnostics data of the diagnostic module DPC-49-ADU are transmitted with the HSE interface module, not the process data of the H1 field device. Each diagnostic module monitors up to four H1 segments.

The HSE interface module is a FOUNDATION™ fieldbus field device, which contains one resource and one transducer block and various standard function blocks. On the basis of these standard function blocks, suitable applications for the analysis of the diagnostics data can be programmed in the control system.

### Features:


- HSE interface module for the transmission of diagnostic data
- FOUNDATION™ fieldbus function blocks for remote diagnostics
- Diagnostics via LEDs
- Continuous diagnostics for sixteen H1 segments
- Complete galvanic isolation
- Complete galvanic isolation

## HSE Field Device

DPC-49-HSEFD/24VDC

<b>Part Number</b>	DPC-49-HSEFD/24VDC
ID Number	M6882014
<b>Fieldbus Standard</b>	IEC 61158-2
<b>Supply Voltage</b>	Two power terminals - PWR1 & PWR2
Current Consumption	< 100 mA
Galvanic Isolation	Complete galvanic isolation, test voltage 500 VAC
<b>Indication</b>	
Operational Readiness	2 x green
State / Fault	1 x yellow / red
Bus Communication	1 x green / yellow
Int. Communication (CAN)	1 x yellow / red
<b>Protection Degree</b>	IP 20
Ambient Temperature	-20 to +60°C (-4 to +140°F)
Housing Material	Aluminum
Housing Color	Black / Yellow
Dimensions	176 x 105 x 31 mm
Connection Mode	Snap-on DIN rail (DIN 50022)

## Installation Example:

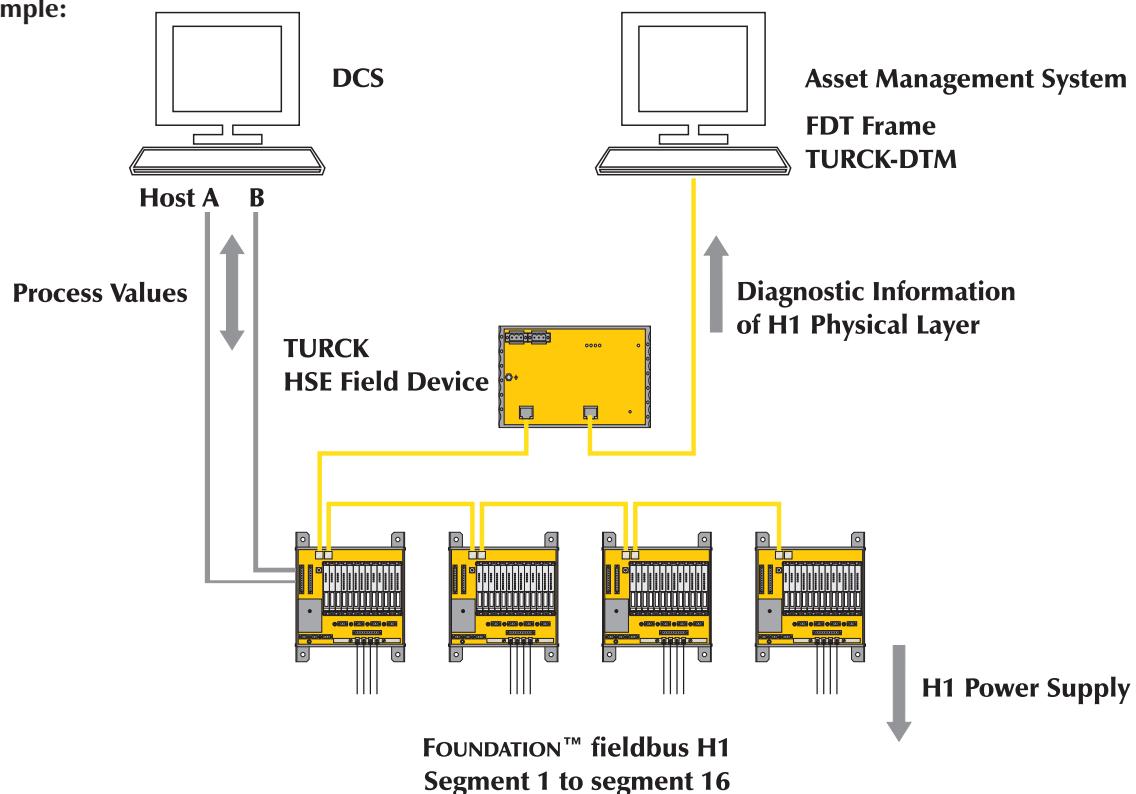

## FOUNDATION™ fieldbus, Cable and Cordset Selection Matrix

		minifast®				eurofast®
		Pin (Male)		Socket (Female)		Pin (Male)
minifast	Bare	1 RSV	2 WSV	3 RKV	4 WKV	5 RSCV
	1 RSV	RSV RSV 49x-*M	RSV WSV 49x-*M	RSV RKV 49x-*M	RSV WKV 49x-*M	RSV RSCV 49x-*M
	2 WSV		WSV WSV 49x-*M	WSV RKV 49x-*M	WSV WKV 49x-*M	WSV RSCV 49x-*M
	3 RKV			RKV RKV 49x-*M	RKV WKV 49x-*M	RKV RSCV 49x-*M
	4 WKV				WKV WKV 49x-*M	WKV RSCV 49x-*M
	5 RSCV					RSCV RSCV 49x-*M
	6 WSCV					
	7 RKCV					
	8 WKCV					

See pages E19 - E20 for dimensional drawings.





\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15...50 Meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSM ... to RSV, WSM ... to WSV. For **eurofast armorfast®** cable RSC ... to RSA.

minifast		Pinouts	eurofast	
Male	Female		Male	Female
		1. Blue (- Voltage) 2. Brown (+ Voltage) 3. Bare (Shield Drain Wire) 4. Green/Yellow (Ground)		

**FOUNDATION™ fieldbus, Cable and Cordset Selection Matrix**


<b>eurofast®</b>			<b>minifast® Bulkhead</b>		<b>eurofast Bulkhead</b>	
<b>Pin (Male)</b>	<b>Socket (Female)</b>		<b>Pin (Male)</b>	<b>Socket (Female)</b>	<b>Pin (Male)</b>	<b>Socket (Female)</b>
WSCV	RKCV	WKCV	RSFPV	RKFPV	FSFDV	FKFDV
WSCV 49x-*M	RKCV 49x-*M	WKCV 49x-*M	RSFPV 49x-*M	RKFPV 49x-*M	FSFDV 49x-*M	FKFDV 49x-*M
RSV WSCV 49x-*M	RSV RKCV 49x-*M	RSV WKCV 49x-*M	RSV RSFPV 49x-*M	RSV RKFPV 49x-*M	RSV FSFDV 49x-*M	RSV FKFDV 49x-*M
WSV WSCV 49x-*M	WSV RKCV 49x-*M	WSV WKCV 49x-*M	WSV RSFPV 49x-*M	WSV RKFPV 49x-*M	WSV FSFDV 49x-*M	WSV FKFDV 49x-*M
RKV WSCV 49x-*M	RKV RKCV 49x-*M	RKV WKCV 49x-*M	RKV RSFPV 49x-*M	RKV RKFPV 49x-*M	RKV FSFDV 49x-*M	RKV FKFDV 49x-*M
WKV WSCV 49x-*M	WKV RKCV 49x-*M	WKV WKCV 49x-*M	WKV RSFPV 49x-*M	WKV RKFPV 49x-*M	WKV FSFDV 49x-*M	WKV FKFDV 49x-*M
RSCV WSCV 49x-*M	RSCV RKCV 49x-*M	RSCV WKCV 49x-*M	RSCV RSFPV 49x-*M	RSCV RKFPV 49x-*M	RSCV FSFDV 49x-*M	RSCV FKFDV 49x-*M
WSCV WSCV 49x-*M	WSCV RKCV 49x-*M	WSCV WKCV 49x-*M	WSCV RSFPV 49x-*M	WSCV RKFPV 49x-*M	WSCV FSFDV 49x-*M	WSCV FKFDV 49x-*M
	RKCV RKCV 49x-*M	RKCV WKCV 49x-*M	RKCV RSFPV 49x-*M	RKCV RKFPV 49x-*M	RKCV FSFDV 49x-*M	RKCV FKFDV 49x-*M
		WKCV WKCV 49x-*M	WKCV RSFPV 49x-*M	WKCV RKFPV 49x-*M	WKCV FSFDV 49x-*M	WKCV FKFDV 49x-*M

FOUNDATION™ fieldbus, *minifast*® Cordset and Receptacle Connector Dimensions

## Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +105°C (-40° to +221°F)


1

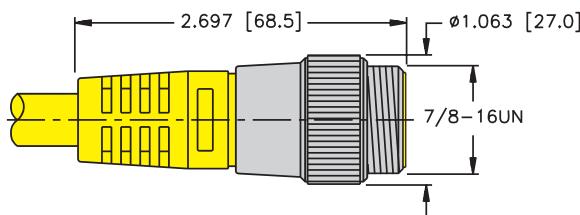

RSV ..


Pages E17 - E18

3

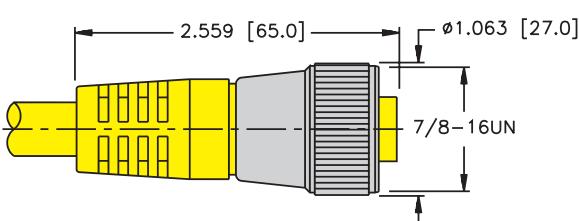

Pages E17 - E18


2

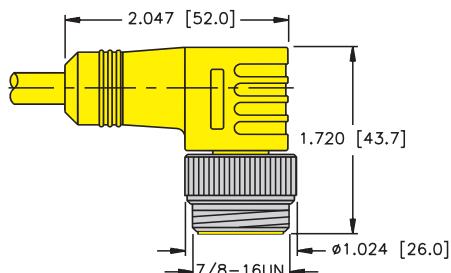

WSV ..


Pages E17 - E18

4

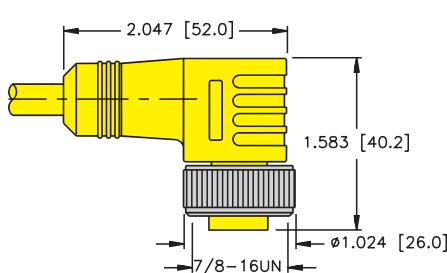

Pages E17 - E18


9

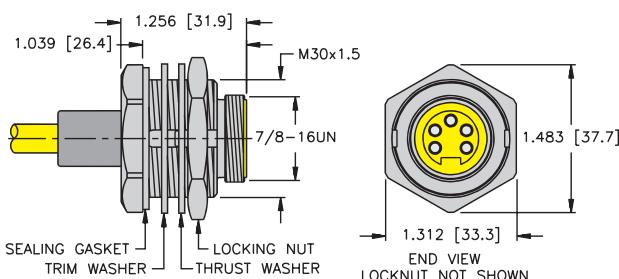

RSFPV ..

Pages E17 - E18

10

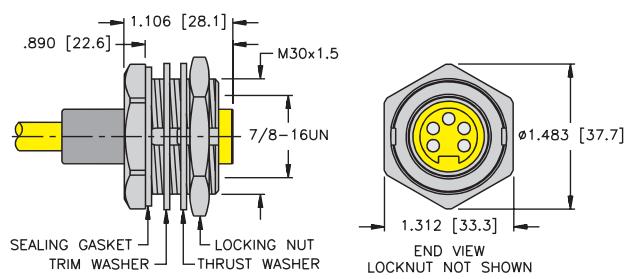


Pages E17 - E18

**FOUNDATION™ fieldbus, eurofast® Cordset and Receptacle Connector Dimensions**

**Specifications**

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +105°C (-40° to +221°F)


**5**

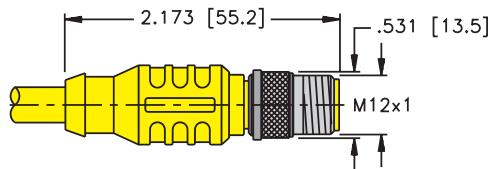

RSCV ..

Pages E17 - E18


**7**

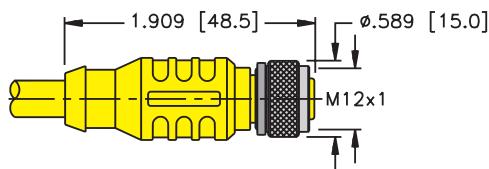

RKCV ..

Pages E17 - E18


**6**

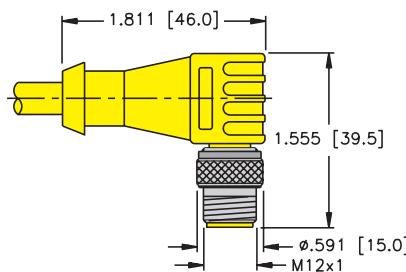

WSCV ..

Pages E17 - E18


**8**

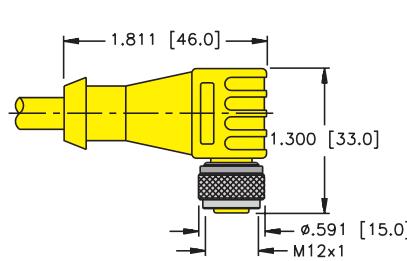

WKCV ..

Pages E17 - E18


**11**

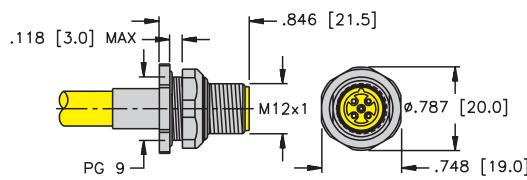

FSFDV ..

Pages E17 - E18

**12**

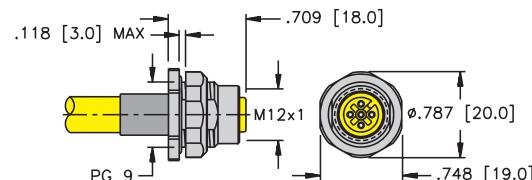

FKFDV ..

Pages E17 - E18

## FOUNDATION™ fieldbus, eurofast® Heavy Duty Cordsets

- Heavy Duty Coupling Nut Completely Supports the Molded Plug Body
- Provides Superior Strength



Housing	Part Number	Specs	Applications	Pinouts
	RSGV-49x-*M	TPU (Polyurethane) Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	<b>eurofast</b> Heavy Duty Cordsets <ul style="list-style-type: none"> <li>• Heavy coupling nut completely supports the molded plug body to provide superior strength</li> </ul>	<b>Male</b> 
	RKGV-49x-*M			<b>Female</b> 

\* Indicates length in meters.

x Indicates cable type.

For nickel plated brass coupling nut change: RSGV ... to RSG ... or RKGV ... to RKG ...

**FOUNDATION™ fieldbus, Terminating Resistors**

- **Terminating Resistors Stabilize and Minimize Reflections on the Bus Line**
- **A Terminating Resistor is Required at the Beginning and End of the Main Bus Line**



Housing	Part Number	Specs	Application	Pinouts
	RSV 49-TR	Nickel Plated Brass or Stainless Steel 250 V, 4 A -40° to +75°C	<b>minifast®</b> Terminating Resistor • Male <b>minifast</b> connector	<b>Male</b> 
	RSEV 49-TR		<b>eurofast®</b> Terminating Resistor • Male <b>eurofast</b> connector	<b>Male</b> 

## FOUNDATION™ fieldbus, Feed Through Connectors


- Receptacles Provide Transition from Male to Female Connectors
- Available for Bulkhead and Feed Through Applications




Housing	Part Number	Specs	Application	Pinouts
<p>7/8-16UN LOCKNUT LOCKWASHER SEALING GASKET THRUST WASHER</p>	RSFV RKFV 49/22	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +75°C	<b>minifast® Bulkhead Receptacle</b> <ul style="list-style-type: none"> <li>• Straight male/female feed-through</li> <li>• For use with <b>minifast</b> cordsets</li> </ul>	<p><b>Male</b> <b>Female</b></p>
<p>M12x1 LOCKNUT LN-M12 LOCKWASHER LW-M12</p>	FKV FSV 49/M12	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	<b>eurofast® Bulkhead Receptacle</b> <ul style="list-style-type: none"> <li>• Straight male/female connector</li> <li>• For use with <b>eurofast</b> cordsets</li> </ul>	<p><b>Male</b> <b>Female</b></p>

Standard housing material is nickel plated brass. "RSF RKF .."; "RSFV RKFV .." indicates stainless steel housing.

**Panel Cutout**  
**RSF RKF 49/22**

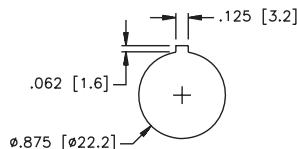

**Panel Cutout**  
**FKM FS 49/M12**




## FOUNDATION™ fieldbus, Field Wireable Tee


- A Hybrid Connection System Offering Reliable Connections on Short Drops and Ease of Installation on Long Trunk Runs
- Features Standard *minifast*® Connector for the Drop Connection and Terminal Connectors on the Trunk Connections



Housing	Part Number	Specs	Application	Pinout
See Drawing 1	SPTT1-A49	Anodized Aluminum 250 V, 4 A -40° to +75°C NEMA 1, 3, 4, 6P and IEC IP 68	Field wireable terminals and (7/8-16UN) <i>minifast</i> connector on drop connection	
See Drawing 2	SPTTM13-A49			<p><b>Female</b></p>

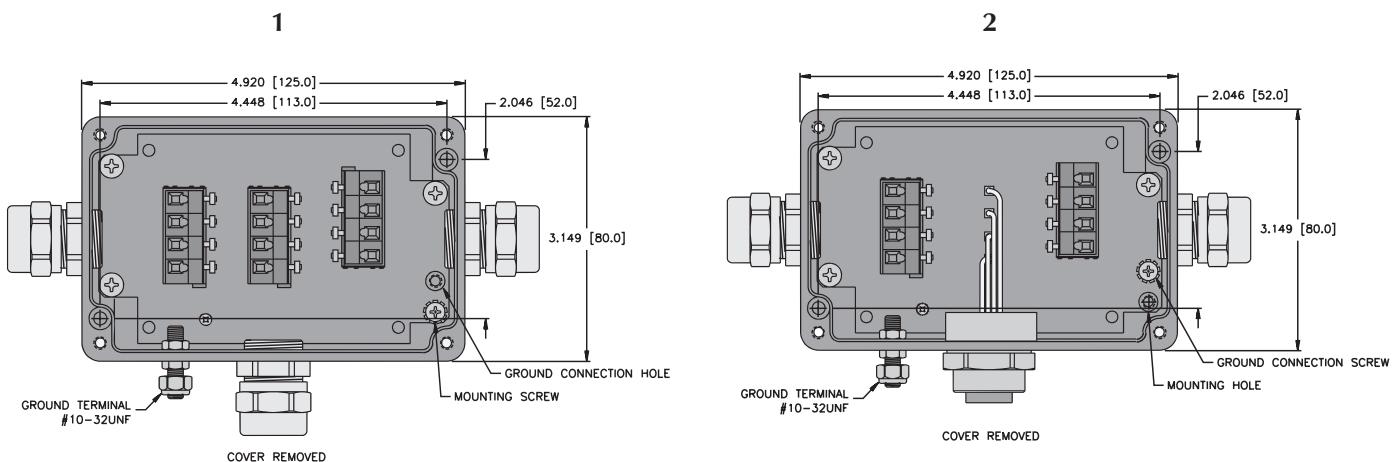

## Wiring Diagram

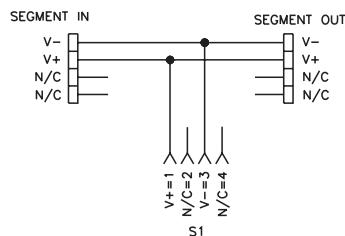

## FOUNDATION™ fieldbus, Junction Box for Din Rail Mounting

- IP20 DIN Rail Mounted Junctions
- Available in 4, 6, and 8 Channel




Part Number	Application	Wiring Diagram
JRBS-40-4/EX	<p>4-port Junction Tee</p> <ul style="list-style-type: none"> <li>Four cage clamp device ports</li> <li>Approval: ATEX II 2 G EEx ib IIC/IIB T4</li> </ul>	
JRBS-40SC-4/EX	<p>4-port Junction Tee</p> <ul style="list-style-type: none"> <li>Four cage clamp device ports</li> <li>Short-circuit protection: adjustable 30, 35, 45, 60 mA</li> <li>Open circuit voltage: 32 V</li> <li>Current consumption: 7 mA</li> <li>LED indicators Power: Green = On Short-circuit: Red = On</li> <li>Approval: ATEX II 2 G EEx ib IIC/IIB T4</li> </ul>	
JRBS-40-6/EX	<p>6-port Junction Tee</p> <ul style="list-style-type: none"> <li>Six cage clamp device ports</li> <li>Approval: ATEX II 2 G EEx ib IIC/IIB T4</li> </ul>	
JRBS-40SC-6/EX	<p>6-port Junction Tee</p> <ul style="list-style-type: none"> <li>Six cage clamp device ports</li> <li>Short-circuit protection: adjustable 30, 35, 45, 60 mA</li> <li>Open circuit voltage: 32 V</li> <li>Current consumption: 7 mA</li> <li>LED indicators Power: Green = On Short-circuit: Red = On</li> <li>Approval: ATEX II 2 G EEx ib IIC/IIB T4</li> </ul>	
JRBS-40-8/EX	<p>8-port Junction Tee</p> <ul style="list-style-type: none"> <li>Eight cage clamp device ports</li> <li>Approval: ATEX II 2 G EEx ib IIC/IIB T4</li> </ul>	
JRBS-40SC-8/EX	<p>8-port Junction Tee</p> <ul style="list-style-type: none"> <li>Eight cage clamp device ports</li> <li>Short-circuit protection: adjustable 30, 35, 45, 60 mA</li> <li>Open circuit voltage: 32 V</li> <li>Current consumption: 7 mA</li> <li>LED indicators Power: Green = On Short-circuit: Red = On</li> <li>Approval: ATEX II 2 G EEx ib IIC/IIB T4</li> </ul>	

## Specifications


<b>Housing:</b>	Aluminum
<b>Contact Carrier:</b>	PA (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1 and IP 20
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-25° to +70°C (-13° to +158°F)

## Dimensions


### 4 Channel

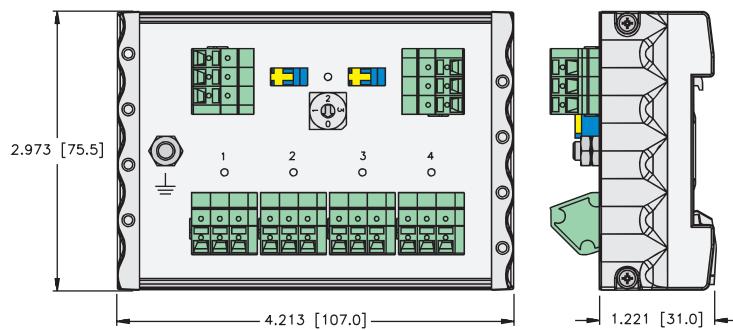

### 6 Channel

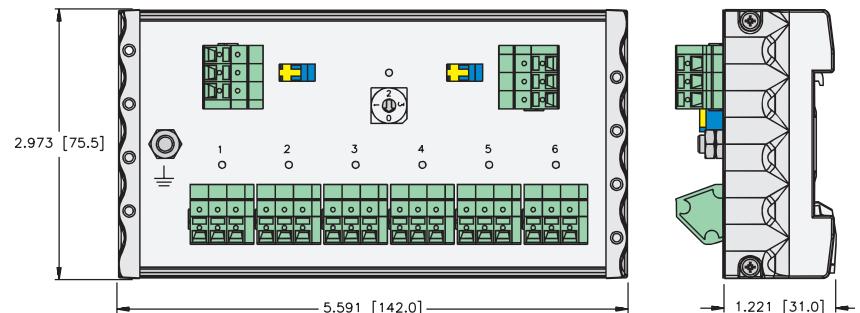


### 8 Channel

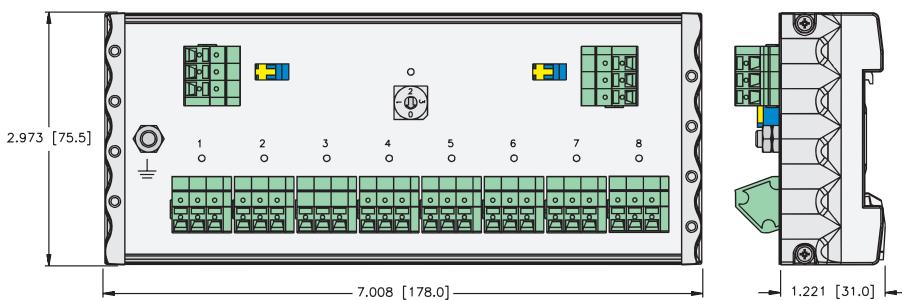

## FOUNDATION™ fieldbus, Junction Box for Din Rail Mounting

- IP 20 DIN Rail Mounted Junctions
- 8 Channel

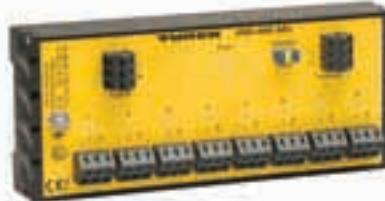


Part Number	Application	Wiring Diagram
JRBS-49SC-8	<p>8-port Junction Tee</p> <ul style="list-style-type: none"> <li>• Eight cage clamp device ports</li> <li>• 55 mA Short-circuit protected</li> <li>• Open circuit voltage: 33 V</li> <li>• Current consumption: 15 mA</li> <li>• LED indicators Power: Green = On Comm: Green = Data transfer Short-circuit: Red = On</li> <li>• Switchable terminating resistor</li> </ul>	

## Specifications

<b>Housing:</b>	Aluminum
<b>Contact Carrier:</b>	PA (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1 and IP 20
<b>Connection Mode:</b>	Snap-on DIN RAIL (DIN 50022)
<b>Ambient Temperature:</b>	-25° to +70°C (-13° to +158°F)

## Dimensions

8 Channel

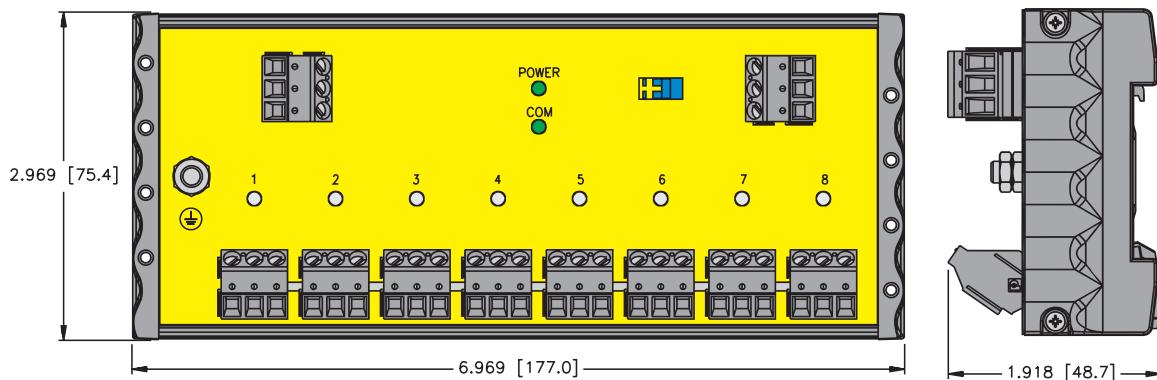

FOUNDATION™ fieldbus, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49-M413 JBBS-49-M414	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Four (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-M613 JBBS-49-M614	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Six (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-M813 JBBS-49-M814	No short-circuit protection	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Eight (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions


**8-Port**

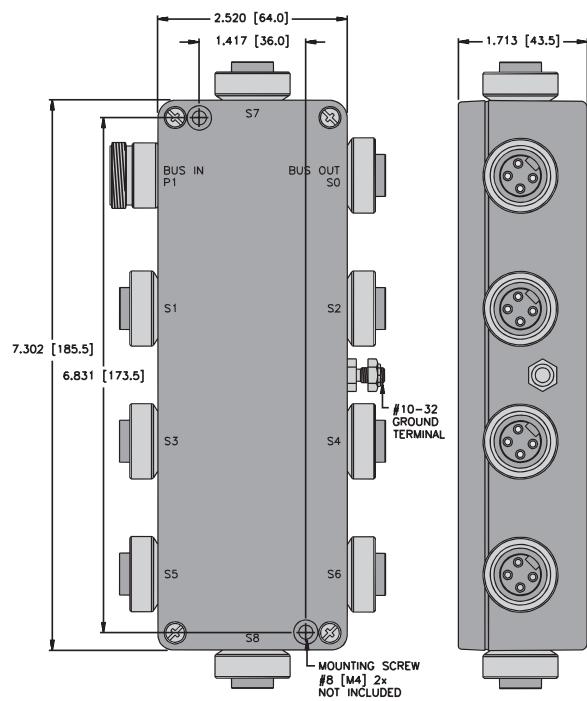

**6-Port**

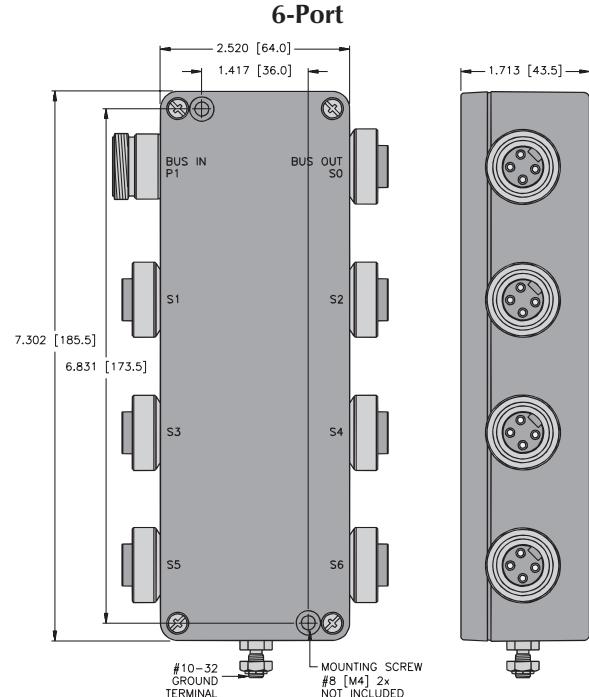


**4-Port**

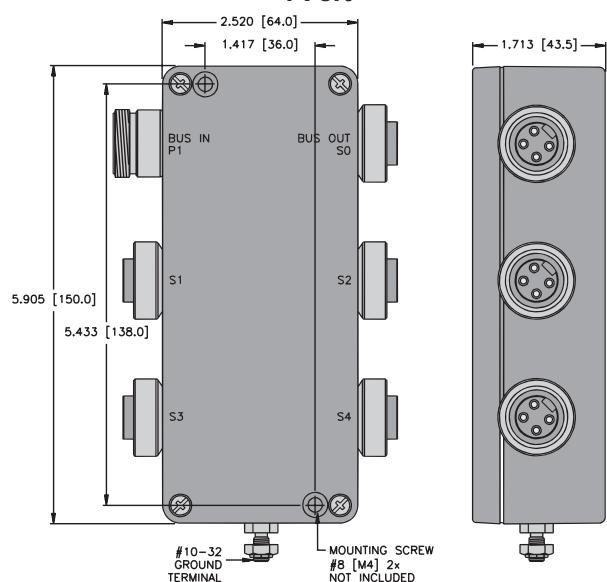

## Pinouts

*minifast*

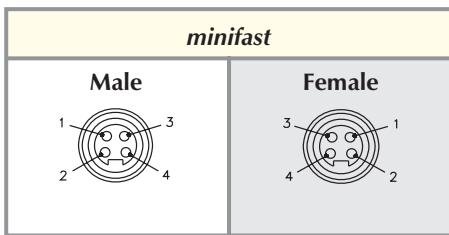

FOUNDATION™ fieldbus, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas






Part Number	Specs	Application	Wiring Diagrams
JBBS-49SC-M413	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: &lt;60 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Four (7/8-16UN) <i>minifast</i> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	
JBBS-49SC-M613	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: &lt;60 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Six (7/8-16UN) <i>minifast</i> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	
JBBS-49SC-M813	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: &lt;60 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Eight (7/8-16UN) <i>minifast</i> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

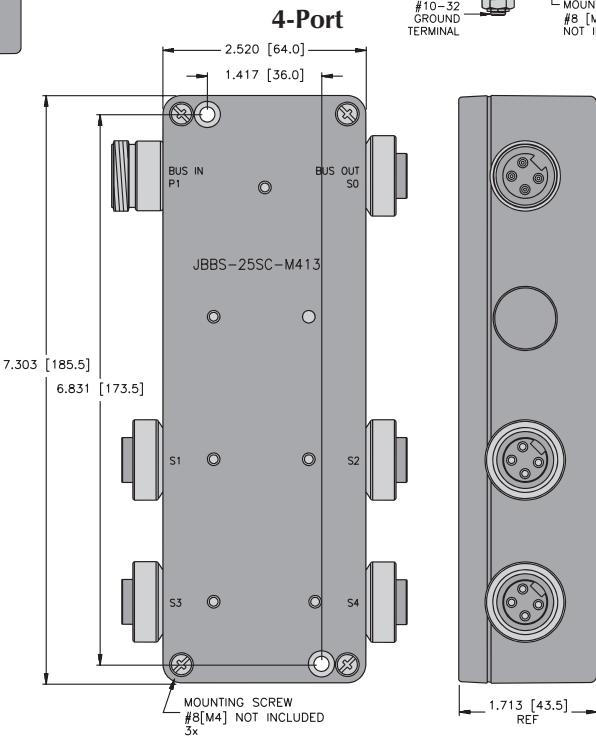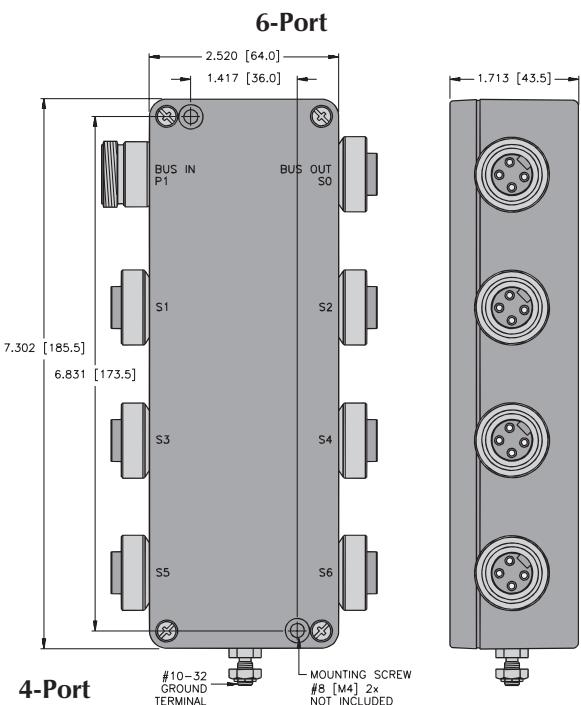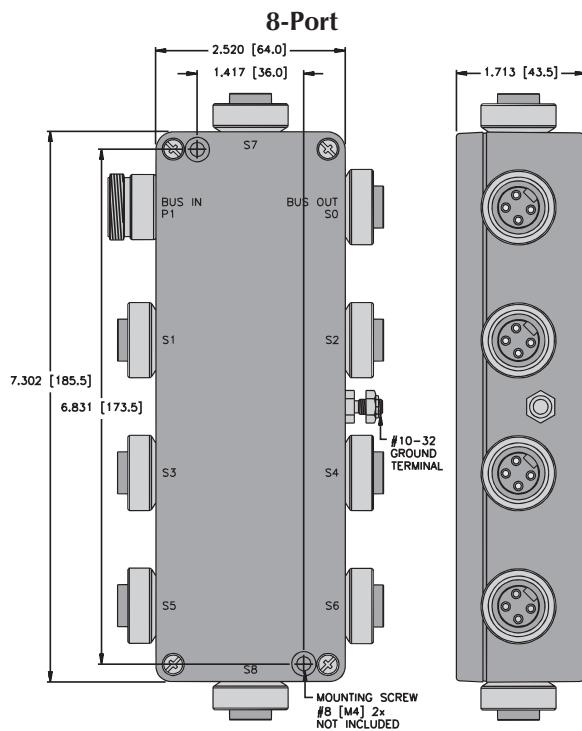

## Pinouts

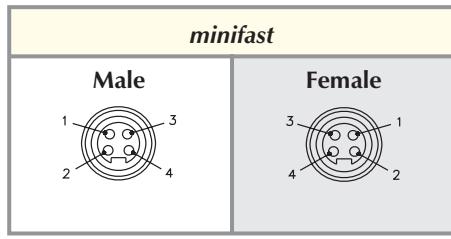

FOUNDATION™ fieldbus, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49-M423 JBBS-49-M424	No short-circuit protection Fiberglass housing	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Four (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-M623 JBBS-49-M624	No short-circuit protection Fiberglass housing	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Six (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-M823 JBBS-49-M824	No short-circuit protection Fiberglass housing	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Eight (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	

## Specifications


<b>Housing:</b>	Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions


**8-Port**

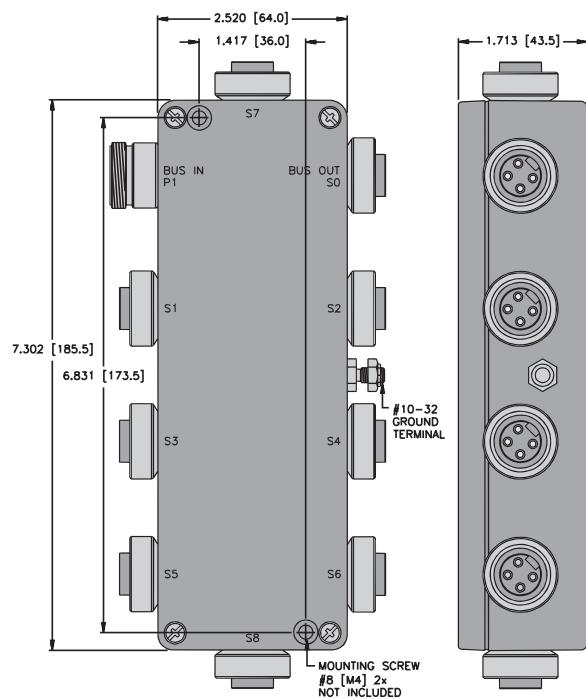

**6-Port**

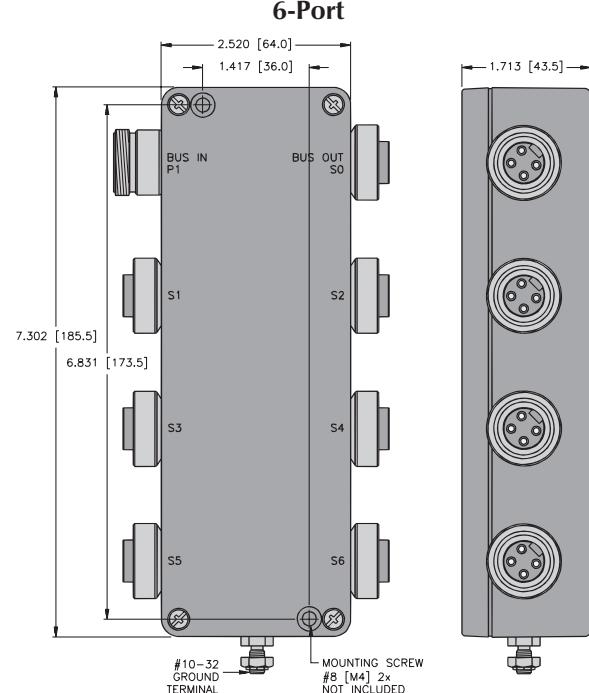

**4-Port**

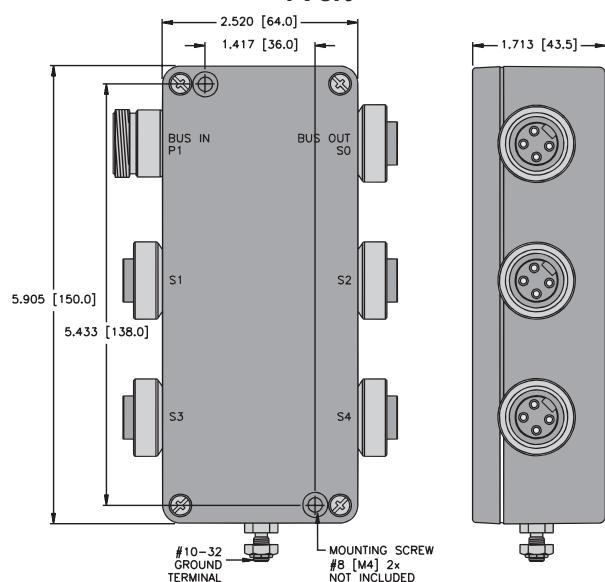


## Pinouts

*minifast*

**Male**



**Female**



FOUNDATION™ fieldbus, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49-M413/EX	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Four (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> <li>• FISCO/ENTITY Field Device</li> </ul>	
JBBS-49-M613/EX	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Six (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> <li>• FISCO/ENTITY Field Device</li> </ul>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

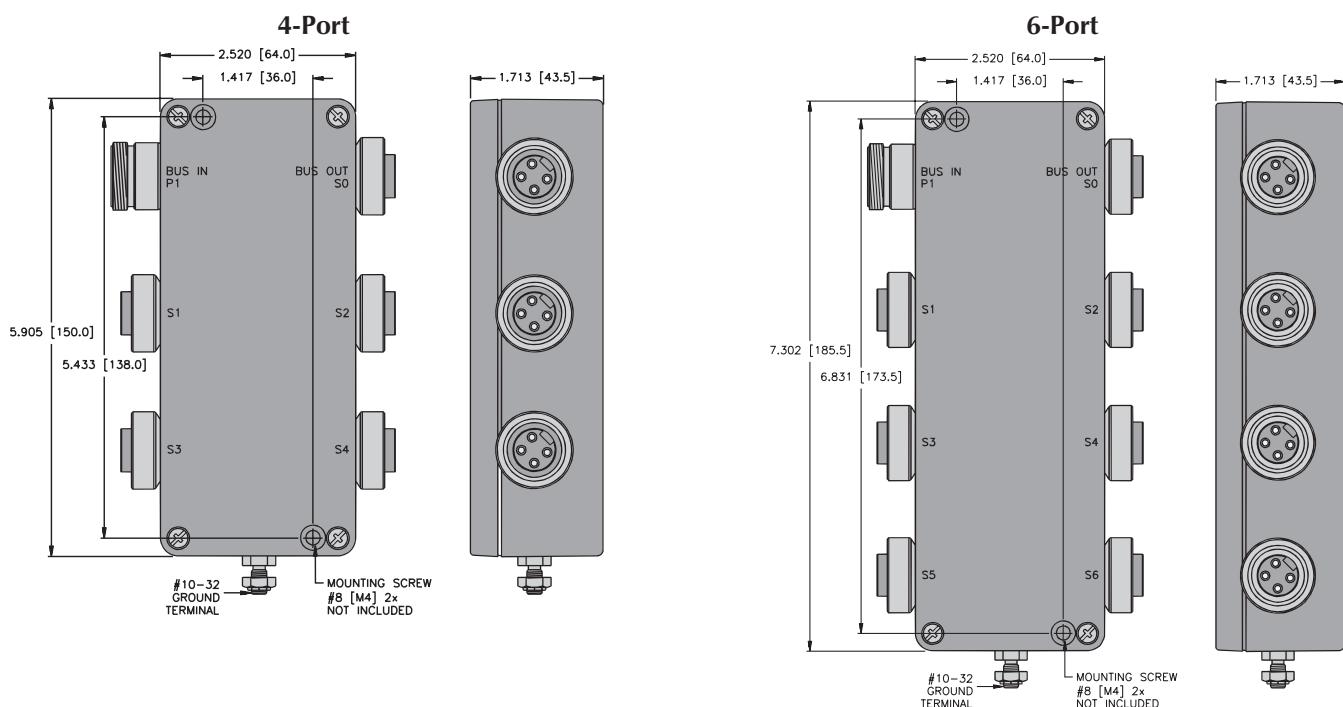

## Pinouts

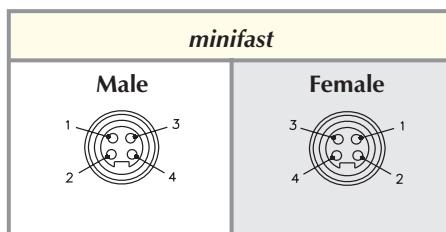

FOUNDATION™ fieldbus, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49SC-M413/EX	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 35 VDC</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Four (7/8-16UN) <b>minifast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only) FISCO/ENTITY Field Device</p>	
JBBS-49SC-M613/EX	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 35 VDC</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Six (7/8-16UN) <b>minifast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only) FISCO/ENTITY Field Device</p>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

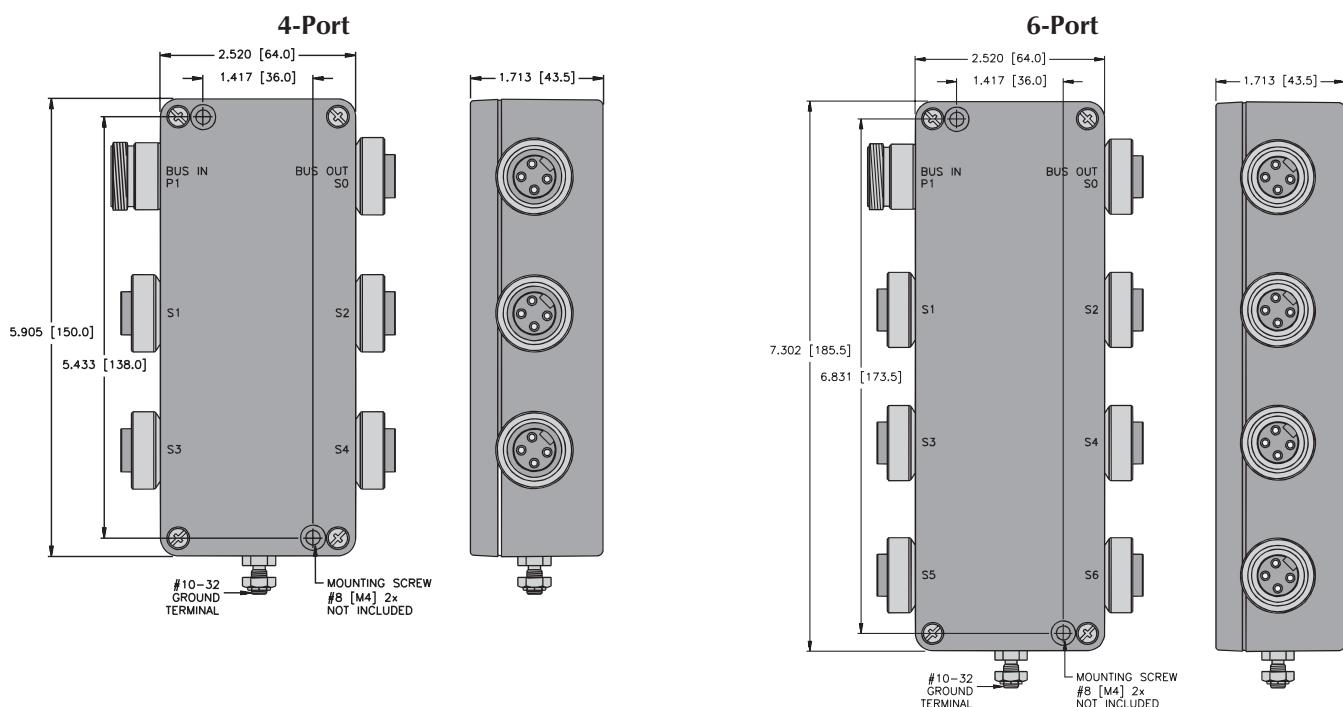

## Pinouts

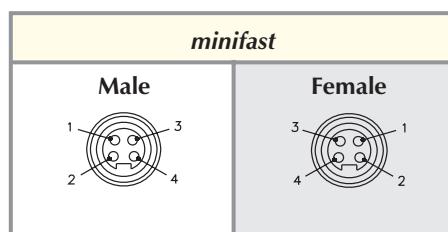

FOUNDATION™ fieldbus, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49SC-T415B/EX	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 35 mA (Isc)</li> <li>• Voltage drop: 0.3 V</li> <li>• Current consumption: 7 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Four (7/8-16UN) <b>minifast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only) FISCO/ENTITY Field Device</p>	
JBBS-49SC-T615B/EX	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 35 mA (Isc)</li> <li>• Voltage drop: 0.3 V</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Six (7/8-16UN) <b>minifast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only) FISCO/ENTITY Field Device</p>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Cable Glands
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

**4-Port**

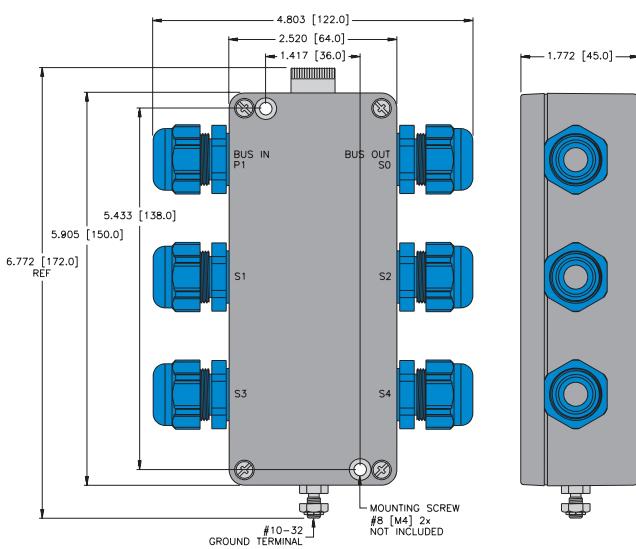

**6-Port**

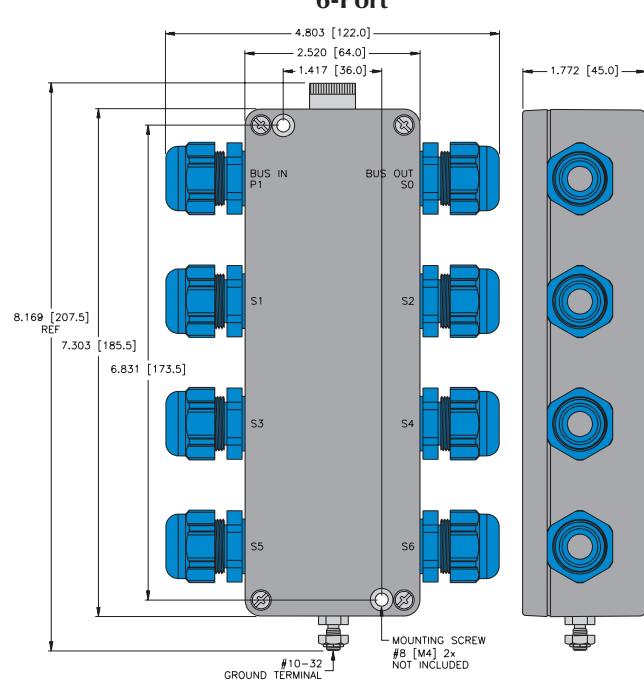

## FOUNDATION™ fieldbus, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49-E413 JBBS-49-E414	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Four (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-E613/3GD JBBS-49-E614	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-E813 JBBS-49-E814	No short-circuit protection	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions


**8-Port**

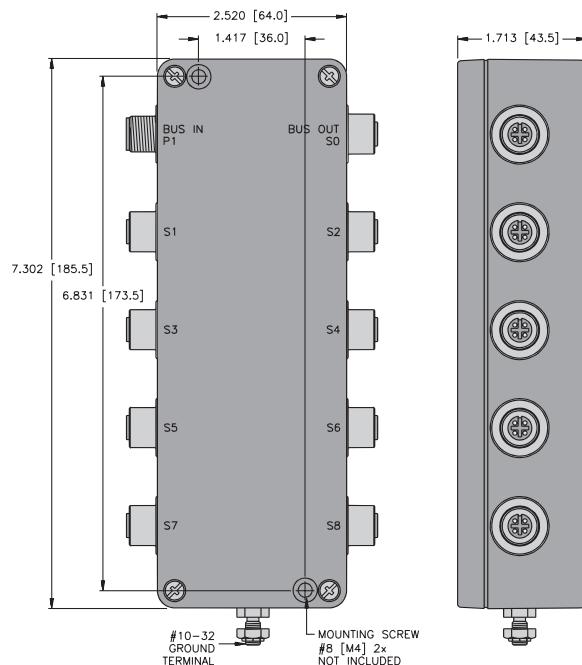


**6-Port**

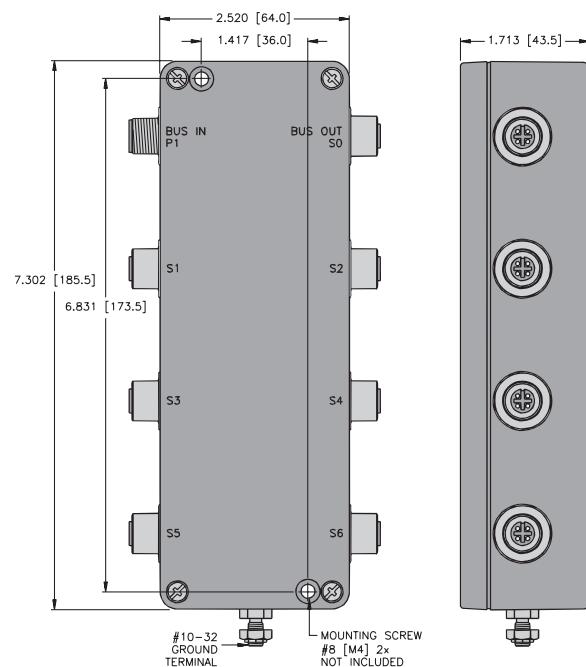

**4-Port**

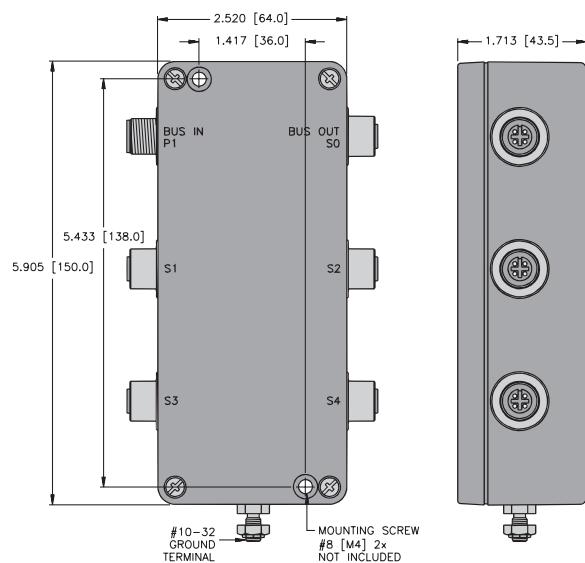

## Pinouts

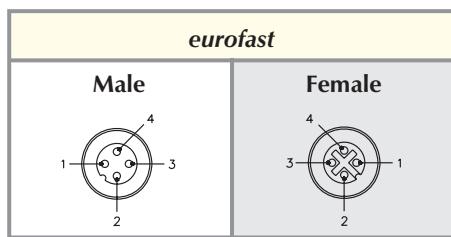

## FOUNDATION™ fieldbus, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49SC-E413	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 35 VDC</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Four (M12x1) <b>eurofast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	
JBBS-49SC-E613	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 35 VDC</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six (M12x1) <b>eurofast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

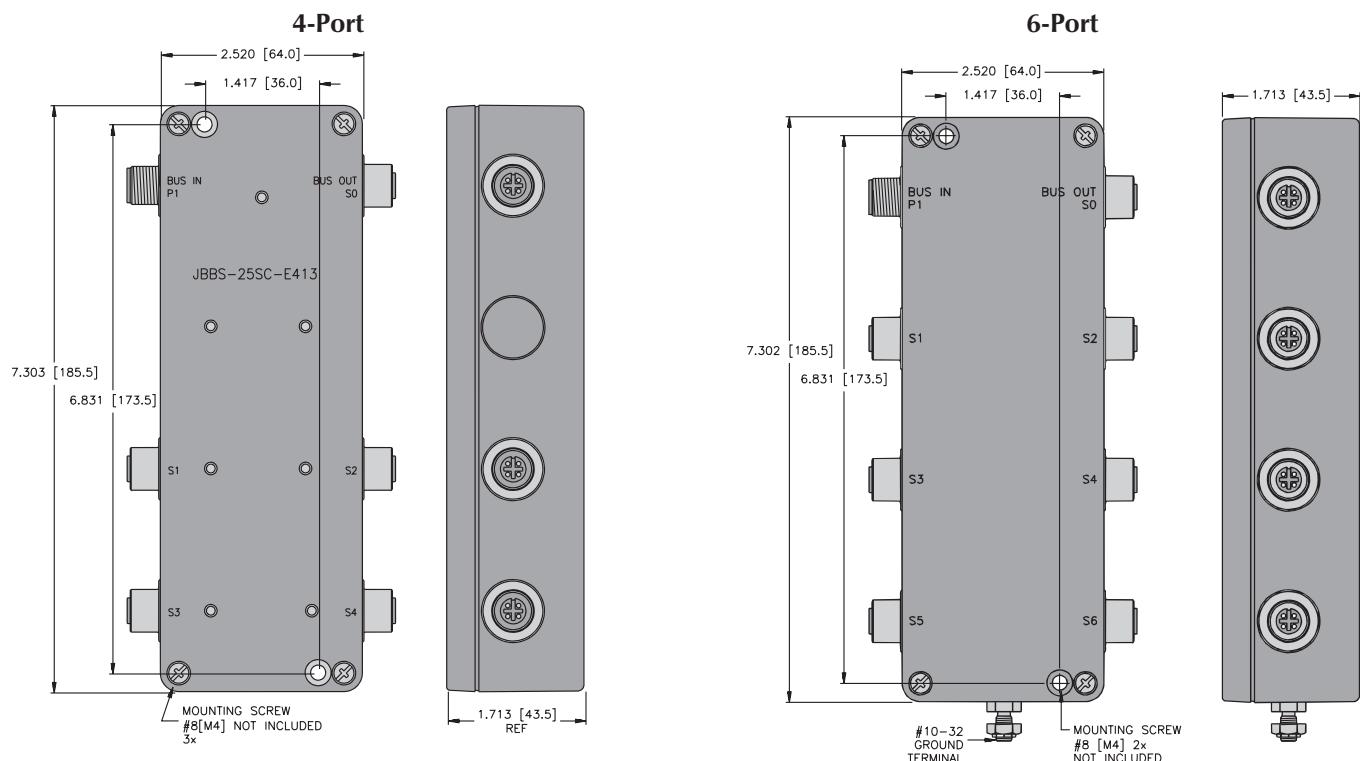

## Pinouts

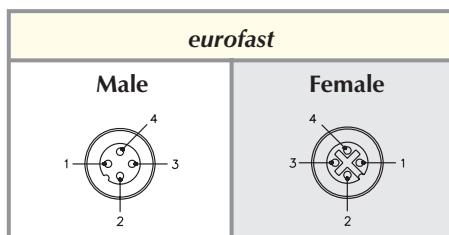

## FOUNDATION™ fieldbus, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49SC-E813	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 35 VDC</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

**8-Port**

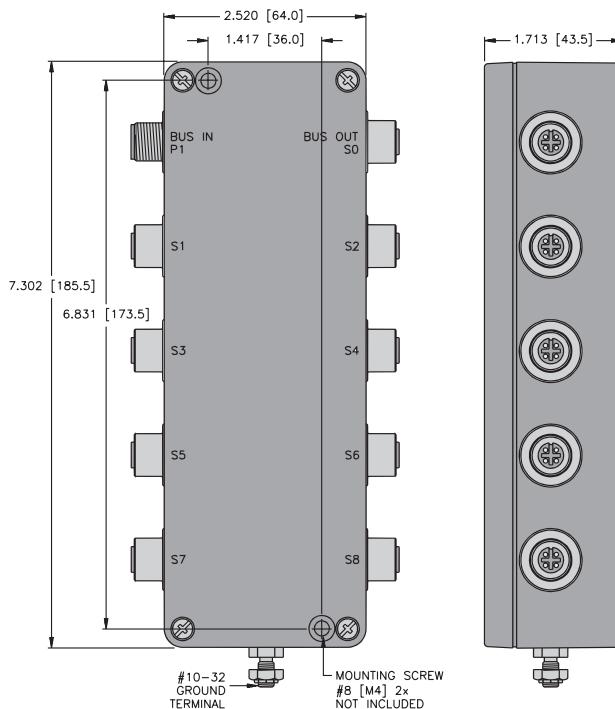

## Pinouts

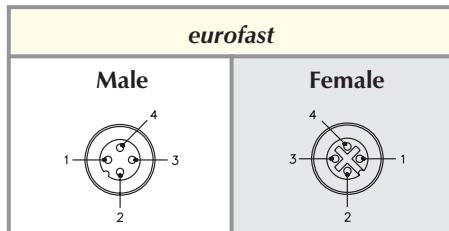

## FOUNDATION™ fieldbus, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49-E423 JBBS-49-E424	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Four (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-49-E623 JBBS-49-E624	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	


## Specifications

<b>Housing:</b>	Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

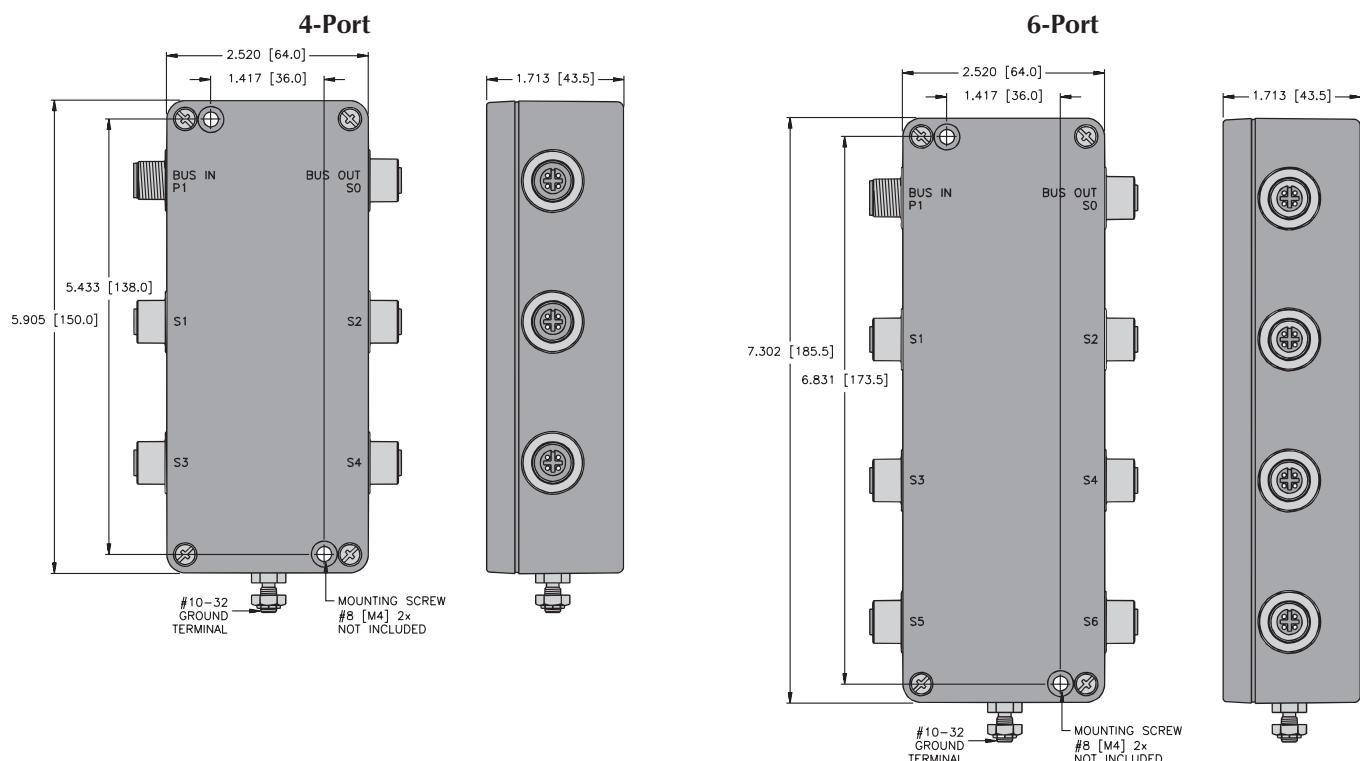

## Pinouts

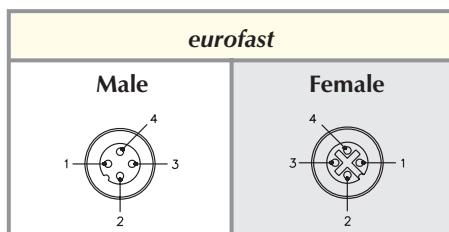

## FOUNDATION™ fieldbus, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas




Part Number	Specs	Application	Wiring Diagrams
JBBS-49-E823 JBBS-49-E824	No short-circuit protection	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	

## Specifications


<b>Housing:</b>	Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

8-Port

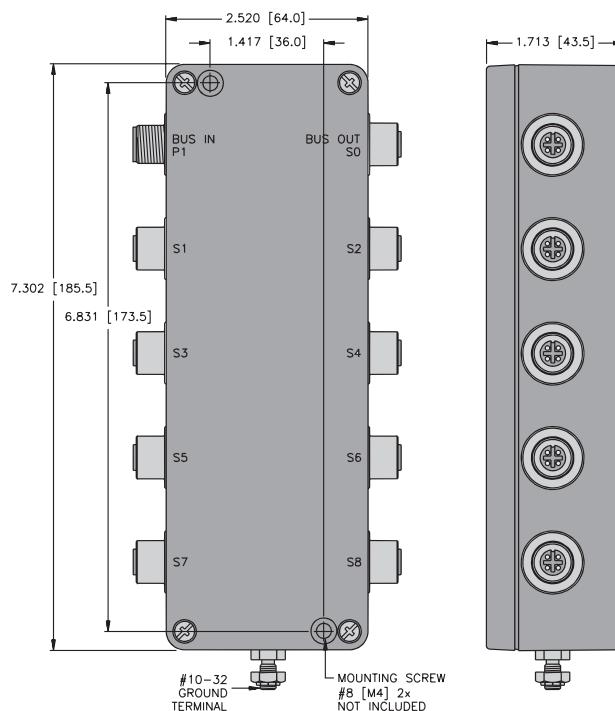

## Pinouts

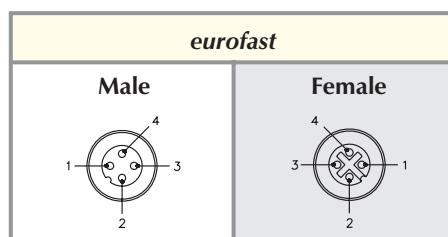


FOUNDATION™ fieldbus, *minifast*® Conduit Adapters

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 49-M123 BCA 49SC-M123	<p>Nylon Housing 300 V, 9 A -40° to +75°C</p> <p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <p><b>Diagnostics</b></p> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>		
	BCA 49-M223 BCA 49SC-M223	<p>Nylon Housing 300 V, 9 A -40° to +75°C</p> <p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <p><b>Diagnostics</b></p> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>Attaches to standard conduit body* for transition to 4-wire (7/8-16UN) <b>minifast</b> connector</p> <p>*Crouse Hinds 3/4" Form 8, Mark 9 or equivalent</p>	<b>Female</b>

1-port Wiring Diagram



2-port Wiring Diagram

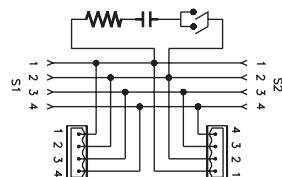


**FOUNDATION™ fieldbus, eurofast® Conduit Adapters**

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 49-E123	Nylon Housing 250 V, 4 A -40° to +75°C	Attaches to standard conduit body* for transition to 4-wire (M12x1) <b>eurofast</b> connector  *Crouse-Hinds 3/4" Form 8, or Mark 9 or equivalent.	<b>Female</b> 
	BCA 49-E223		Attaches to standard conduit body* for transition to 4-wire (M12x1) <b>eurofast</b> connector  *Crouse-Hinds 3/4" Form 8, or Mark 9 or equivalent.	

**1-port Wiring Diagram**



**2-port Wiring Diagram**

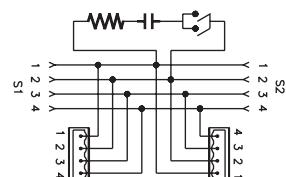

**FOUNDATION™ fieldbus, Power Supply Conditioner**

- Meets the Needs of Redundant Power Supplies for FOUNDATION fieldbus
- Has Primary and Secondary Power Inputs to Supply Two Fieldbus H1 Segments
- Filters the Fieldbus Signal from the Power Source




Part Number	Specs	Application
BRPC-49-M213	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Supply voltage (Supply A &amp; B): 12-32 VDC</li> <li>• Supply surge protection (Supply A &amp; B): &gt;36 VDC</li> <li>• Supply redundancy (Supply A &amp; B):            Supply "A" is primary. If Supply "A" Voltage drops below 11 Volts, Supply "B" becomes Active.            Supply "A" becomes active once voltage &gt;11 Volts         </li> <li>• Output voltage (Segment 1 &amp; 2): Input Voltage - 3 Volts</li> <li>• Output current (Segment 1 &amp; 2): &lt;1 Amp</li> <li>• Short-circuit protection (Segment 1 &amp; 2): &gt; 1 Amp to infinite</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• Power LED indications:            Green - Active / Red - No Power</li> <li>• Segment LED indications: Green - Active</li> <li>• Supply monitor contacts (Supply A &amp; B): Solid State, AC/DC &lt;400 Volts, &lt;70 mA when supply voltage &gt;11 Volts, contact is closed.</li> </ul>	<p>4-port Power Supply Conditioner</p> <ul style="list-style-type: none"> <li>• Primary and secondary power inputs</li> <li>• Diagnostics for each power supply</li> <li>• Internal switches for terminators</li> </ul>

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

**BRPC-49-M213**

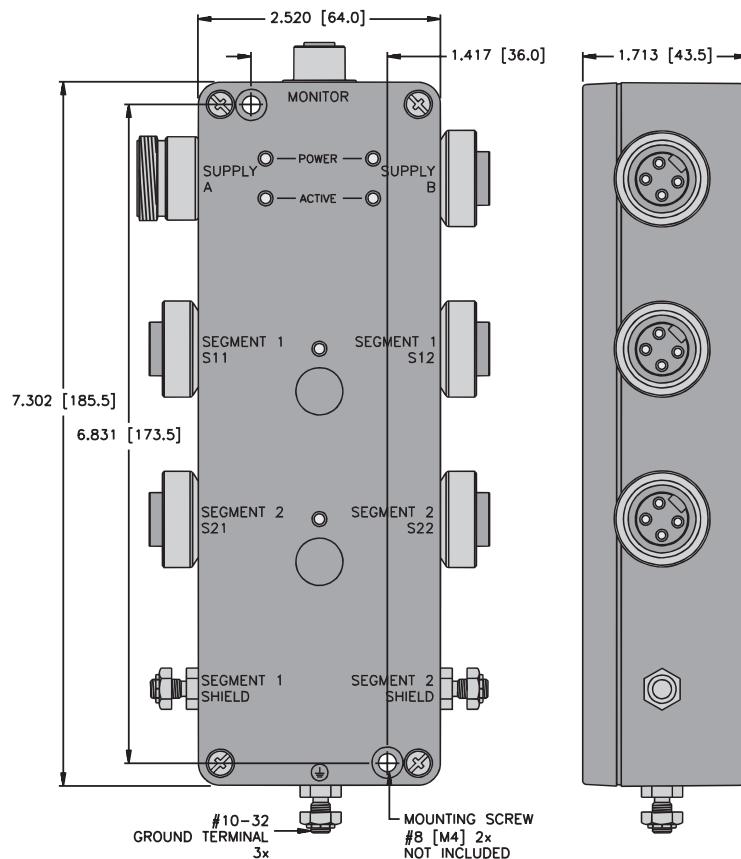

## Pinouts

<i>minifast</i>		<i>eurofast</i>
Female	Male	Female

**FOUNDATION™ fieldbus, Tees**

- Creates a Drop or Branch from the Main Bus Line
- *minifast*® Connectors on Bus Line
- *minifast* or *eurofast*® Connectors on Dropline



Housing	Part Number	Specs	Application	Wiring Diagrams
	RSV 2RKV 49		<b>minifast Tee</b> <ul style="list-style-type: none"> <li>• Data, ground, shield</li> <li>• Stainless steel coupling nuts</li> </ul>	
	PUR (Polyurethane) 250 V, 4 A -40° to +75°C	RSV FKV RKV 49	<b>minifast to eurofast Drop</b> <ul style="list-style-type: none"> <li>• Data, ground, shield</li> <li>• Stainless steel coupling nuts</li> </ul>	
	RSCV 2RKCV 49		<b>eurofast Tee</b> <ul style="list-style-type: none"> <li>• Stainless steel coupling nuts</li> </ul>	

**Pinouts**

<i>minifast</i>		<i>eurofast</i>	
Male	Female	Male	Female

FOUNDATION™ fieldbus, Gender Changers and Elbow Connectors

- Allows Quick and Easy Changes from Male to Female *minifast*® Connectors



Housing	Part Number	Specs	Application	Wiring Diagrams
	RSV RSV 49		<p>Male <b>minifast</b> Gender Changer</p> <ul style="list-style-type: none"> <li>Changes female cordset to male receptacle</li> </ul>	
	TPU RKV RKV 49	<p>Female <b>minifast</b> Gender Changer 250 V, 4 A -40° to +75°C</p>	<ul style="list-style-type: none"> <li>Changes female cordset to male receptacle</li> </ul>	
	WSV RKV 49		<p><b>minifast</b> Elbow</p> <ul style="list-style-type: none"> <li>Right angle male to female connector</li> </ul>	

## Pinouts

The diagram illustrates two types of minifast connectors: Male and Female.

**Male:** A circular connector with four pins labeled 1, 2, 3, and 4. Pin 1 is at the top, pin 2 is at the bottom, pin 3 is on the left, and pin 4 is on the right. The pins are arranged in a square pattern.

**Female:** A circular connector with four holes labeled 1, 2, 3, and 4. Hole 1 is at the top, hole 2 is at the bottom, hole 3 is on the left, and hole 4 is on the right. The holes are arranged in a square pattern.


## FOUNDATION™ fieldbus, Surge Suppressor

- Protects Data Communication Lines (V+ and V-)
- Absorbs the Front End of the Transient, Responding in Less Than a Nanosecond
- Diverts the Surge Energy to Ground
- Automatically Resets and waits for Next Surge



Housing	Part Number	Specs	Application	Pinouts
See Drawing 1	RSV_RKV_49_SS	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Maximum operating voltage: 27 Volts</li> <li>• Maximum operating current: 200mA</li> <li>• Clamping action turn-on: 28.5 Volts</li> <li>• Maximum clamping at 2 kA: (8 x 20 Sec): 44 Volts</li> <li>• Maximum surge voltage: 20 kV</li> <li>• Maximum surge current: 2.5 kA</li> <li>• Current leakage/line at operating voltage: 5 A</li> <li>• Capacitance /line at operating voltage: 500 pF</li> <li>• Response time: less than 1 nanosecond</li> </ul> <p><b>Mechanical</b></p> <ul style="list-style-type: none"> <li>• Ground stud: 10-32 stainless steel</li> <li>• Operating temperature: -40° to +85°C</li> </ul>	Male and Female minifast®, 4-pin	

1

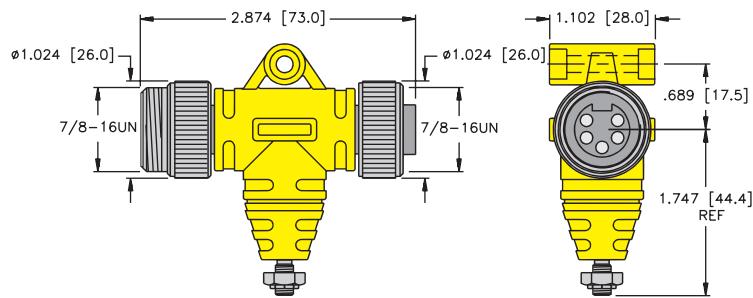

**Notes**

FOUNDATION™ fieldbus, (7/8-16UN) *minifast*® Male Receptacles

- Provides Quick Connection to Field Devices
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
13 	RSFV 49-*M/14.5		1/2-14NPT full length threads	
15 	RSFV 49-*M/14.75		3/4-14NPT full length threads	
14 	RSFV 49-*M/M20	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	M20x1.5 threads	Male 1. BU 2. BN 3. N/C 4. GN/YE
16 	RSFV 49-*M		1/2-14NPSM threads	
17 	RSFV 49-*M/NPT		1/2-14NPT modified length threads	

See page E63 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is stainless steel. "RKF .."; "RKVF .." indicates 316 nickel plated brass housing.

For locknuts to be included, add "W/LN" to the end of the part number.

**FOUNDATION™ fieldbus, (7/8-16UN) *minifast*® Female Receptacles**

- Provides Quick Connection to Field Devices
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
18	RKFV 49-*M/14.5		1/2-14NPT full length threads	
20	RKFV 49-*M/14.75		3/4-14NPT full length threads	
19	RKFV 49-*M/M20	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	M20x1.5 threads	Female 1. BU 2. BN 3. GY 4. GN/YE
21	RKFV 49-*M		1/2-14NPSM threads	
22	RKFV 49-*M/NPT		1/2-14NPT modified length threads	

See page E64 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is stainless steel. "RKF .."; indicates 316 nickel plated brass housing.

For locknuts to be included, add "W/LN" to the end of the part number.

## FOUNDATION™ fieldbus, (M12x1) eurofast® Male Receptacles

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinout
23 	FSV 49-*M/14.5		1/2-14NPT full length threads	
25 	FSV 49-*M/14.75		3/4-14NPT full length threads	
24 	FSV 49-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. BU 2. BN 3. N/C 4. GN/YE
26 	FSV 49-*M		PG 9 threads	
27 	FSV 49-*M/NPT		1/2-14NPT modified length threads	

See page E65 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.


Standard housing material is stainless steel. "RKF .."; indicates 316 nickel plated brass housing.

**FOUNDATION™ fieldbus, (M12x1) eurofast® Female Receptacles**

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
28	FKV 49-*M/14.5		1/2-14NPT Full Length Threads	
30	FKV 49-*M/14.75		3/4-14NPT Full Length Threads	
29	FKV 49-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 Threads	1. BU 2. BN 3. N/C 4. GN/YE
31	FKV 49-*M		PG 9 Threads	
32	FKV 49-*M/NPT		1/2-14NPT Modified Length Threads	




See page E66 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.


Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is stainless steel. "RKF .."; "RKFV .." indicates 316 nickel plated brass housing.

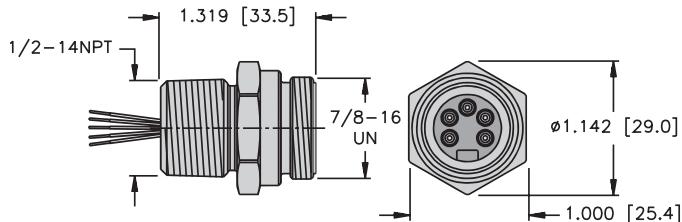**minifast® Male Receptacles****13**


RSFV .. 14.5

Page E59

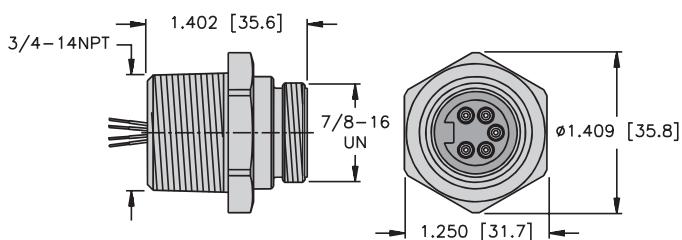**15**


RSFV .. 14.75

Page E59

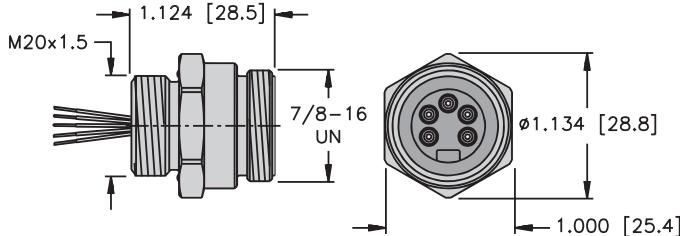**14**


RSFV .. M20

Page E59

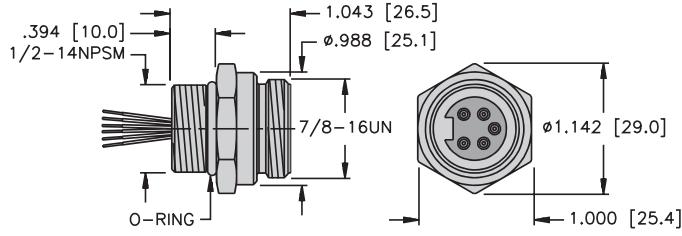**16**

RSFV ..

Page E59

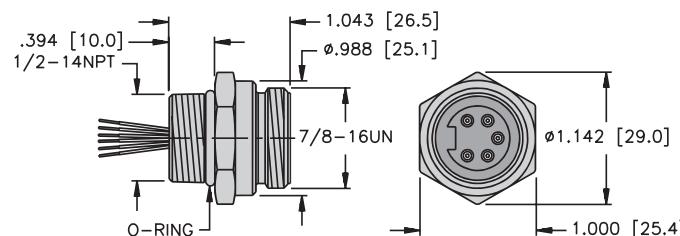
**17**

RSFV .. NPT

Page E59

**minifast® Female Receptacles**


**18**

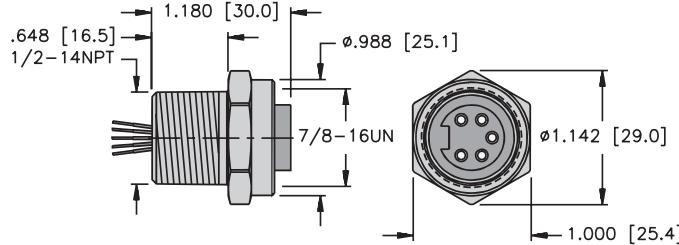

RKFV .. 14.5

Page E60


**20**

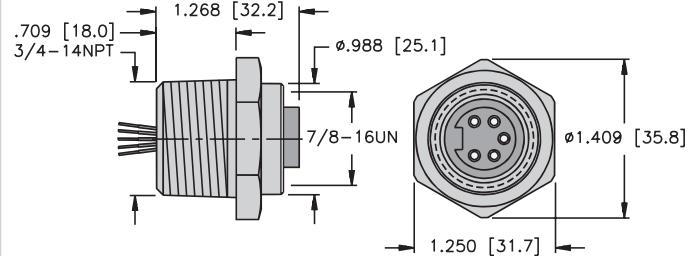

RKFV .. 14.75

Page E60


**19**

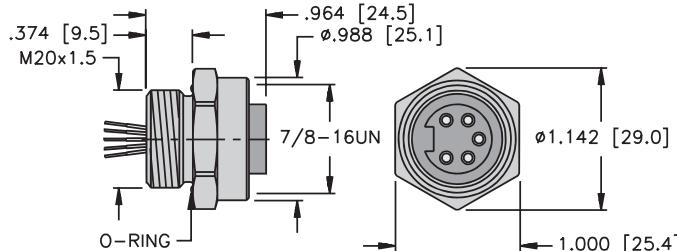

RKFV .. M20

Page E60


**21**

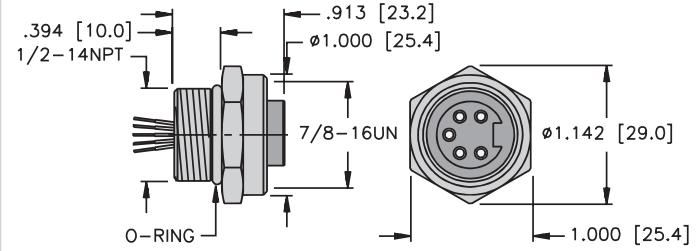

RKFV ..


Page E60

**22**

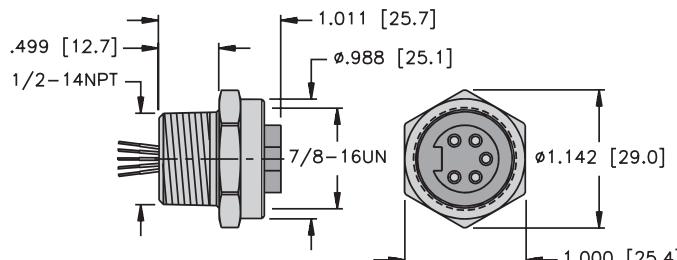


RKFV .. NPT

Page E60

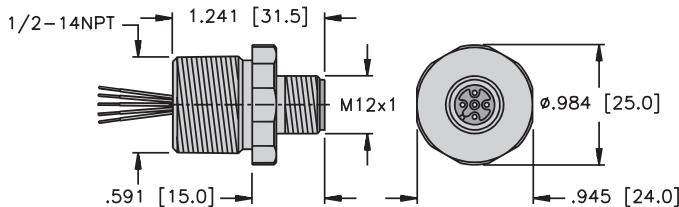**eurofast® Male Receptacles****23**


FSV .. 14.5

Page E61

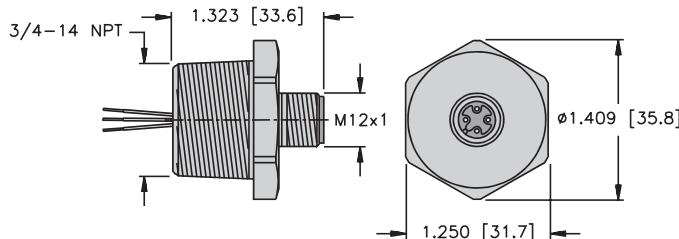**25**


FSV .. 14.75

Page E61

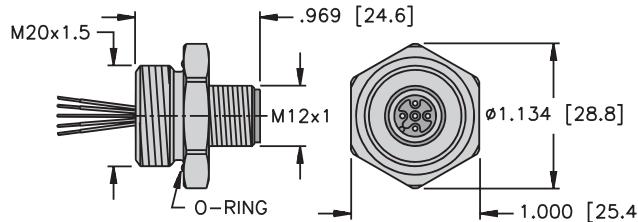**24**


FSV .. M20

Page E61

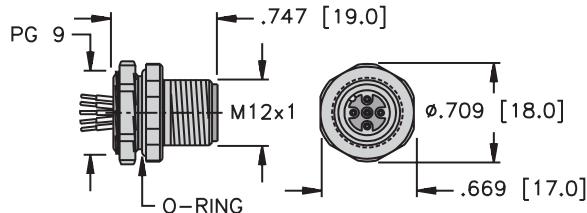**26**

FSV ..

Page E61

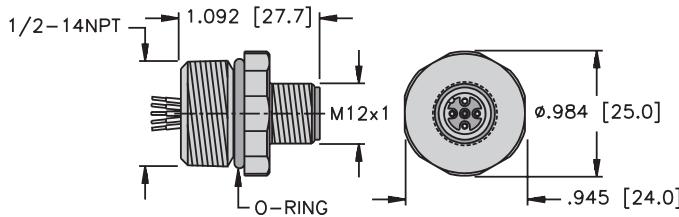
**27**

FSV .. NPT

Page E61

**eurofast® Female Receptacles**


**28**

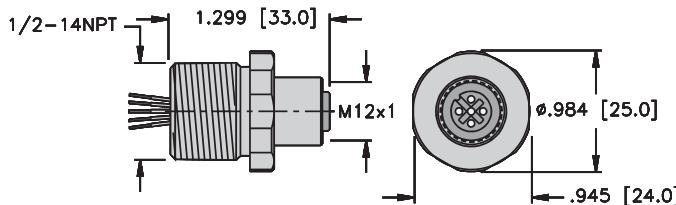

FKV .. 14.5

Page E62


**30**

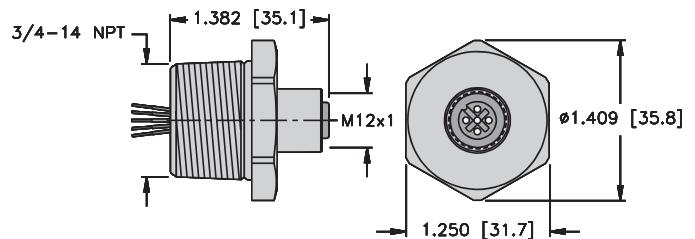

FKV .. 14.75

Page E62


**29**

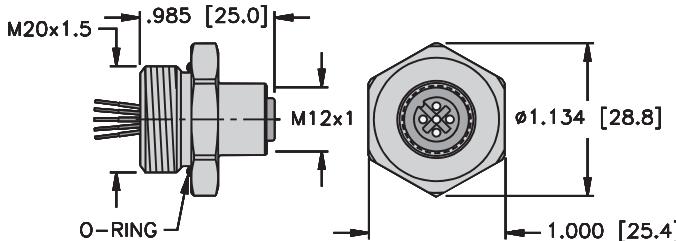

FKV .. M20

Page E62


**31**

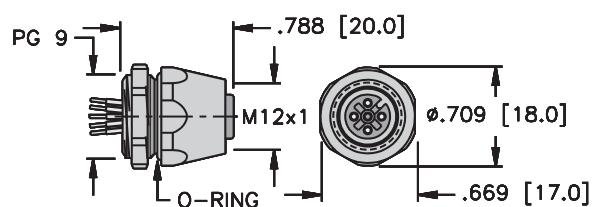

FKV ..

Page E62

**32**

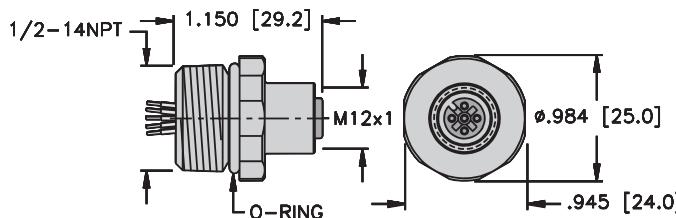





FKV .. NPT

Page E62

FOUNDATION™ fieldbus, *minifast*® Field Wireable Connectors

- Screw Terminals Accept up to 16 AWG Conductors

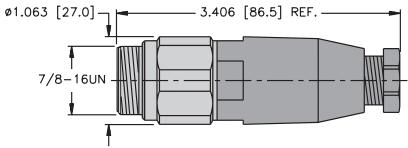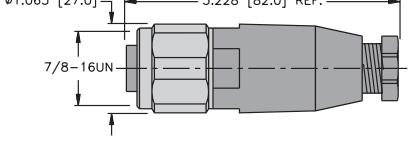

Housing	Part Number	Specs	Application	Pinouts
	BSV 4149-0/9	Glass filled nylon, stainless steel coupling nut PG 9 cable gland, accepts 6-8 mm cable diameter 85°C 250 V, 9 A	Mates with all 4-pin cordsets and receptacles	<b>Male</b> 
	BSV 4149-0/16	Glass filled nylon, stainless steel coupling nut PG 13.5 cable gland accepts 12-14 mm cable diameter 85°C 250 V, 9 A		
	BV 4149-0/9	Glass filled nylon, stainless steel coupling nut PG 9 cable gland, accepts 6-8 mm cable diameter 85°C 250 V, 9 A	Mates with all 4-pin cordsets and receptacles	<b>Female</b> 
	BV 4149-0/16	Glass filled nylon, stainless steel coupling nut PG 13.5 cable gland accepts 12-14 mm cable diameter 85°C 250 V, 9 A		

**FOUNDATION™ fieldbus, eurofast® Field Wireable Connectors**

- Screw Terminals Accept up to 18 AWG Conductors





Housing	Part Number	Specs	Application	Pinouts
	BS 8141-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 125 V, 4 A		<b>Male</b> 
	BS 8241-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 125 V, 4 A	Mates with standard key 4-pin cordsets and receptacles	
	B 8141-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 250 V, 4 A		<b>Female</b> 
	B 8241-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 250 V, 4 A		

## FOUNDATION™ fieldbus, Gender Changer

- Allows Quick and Easy Changes from Male to Female and *minifast*® to *eurofast*® Connectors

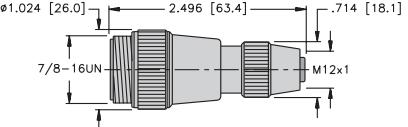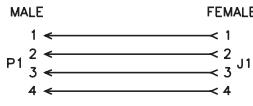

Housing	Part Number	Specs	Application	Wiring Diagram
	RSM 49-FK 4.5	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	Female <i>eurofast</i> , male <i>minifast</i> , 4-pin	

## Pinouts

<i>minifast</i>	<i>eurofast</i>
Male	Female
	

**Notes:**

## Ethernet I/O Selection Guide



<b>BL67 Gateway</b>	<b>AS-i Gateway</b>
<b>F5 - F8</b>	<b>F9 - F16</b>

## Ethernet 8-wire Selection Guide



<b>Cables</b>	<b>Switches</b>	<b>Conduit Adapters</b>
<b>F17 - F22</b>	<b>F23 - F24</b>	<b>F25</b>



<b>Cabinet Adapters</b>	<b>Receptacles</b>
<b>F26</b>	<b>F27- F30</b>

## Ethernet 4-wire Selection Guide



Cables	Switches	Conduit Adapters
F31 - F35	F37 - F42	F43



Wall Plate Adapter	Cabinet Adapters	Receptacles
F44	F45	F46



Field Wireables	RJ11 Cordset
F47 - F48	F49


## Ethernet System Description

Ethernet is the most popular protocol used to connect office computers and peripherals today. It is increasingly finding its way into other applications, and is rapidly becoming the network of choice for higher level industrial control applications. Ethernet is primarily used to connect PLCs, computers, HMI displays and other high level components.

The term “Ethernet” actually refers to the lower level communication structure. Various different versions, or implementations, of Ethernet are available, such as Ethernet/IP™ and Modbus-TCP. It is important to note that while all of these different specifications use the same physical communication method and can operate on the same cable simultaneously, they cannot necessarily communicate with each other. For example, Modbus-TCP devices cannot communicate with Ethernet/IP devices. This is because the messages and communication protocol have been defined differently for these systems, even though the physical electrical structure is the same. Think of it as two people who speak different languages; they speak by moving air with their mouths, but the rules of the languages are different.

**TURCK's** BL67 Ethernet gateways provide a convenient way to connect industrial I/O devices directly to the Ethernet system, expediting monitoring and troubleshooting for the overall control scheme.

## Typical System Configuration

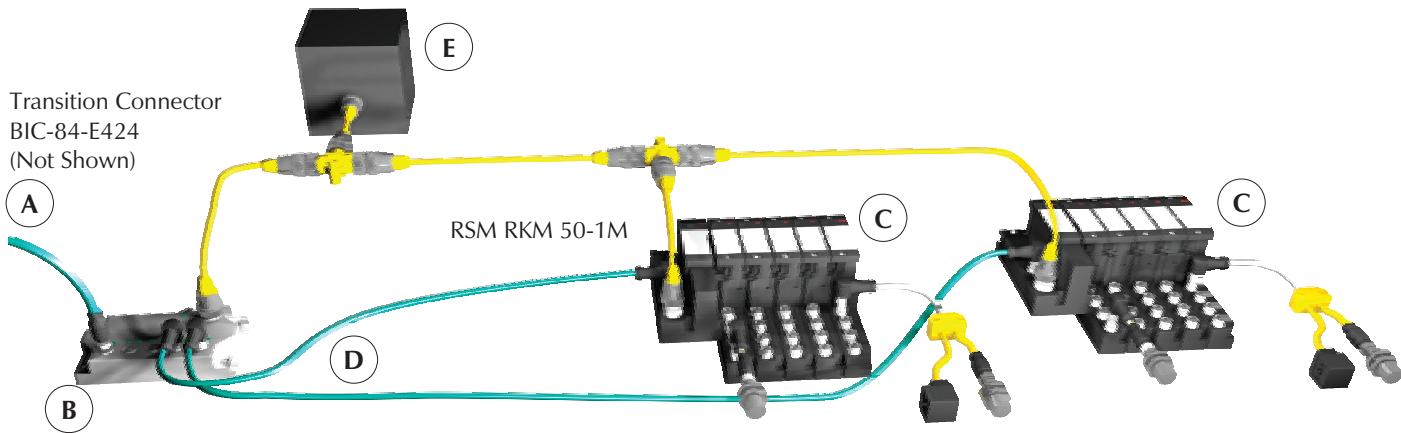

## Basic Parts List

A typical Ethernet system consists of the following parts:

- A - Controller
- B - Switches
- C - Ethernet I/O modules
- D - Ethernet cable
- E - Power supply

Ethernet I/O modules act as clients on a network. A server device is needed to retrieve data from and post data to the client. This is analogous to an office network, where the client PC on a user's desk may actively connect with multiple servers to access information in different areas of the enterprise. **TURCK** Ethernet stations are designed to be fully compatible with established Ethernet standards for industrial use.



## Cordsets

**TURCK** offers a complete line of molded Ethernet cordsets to facilitate network installation, resulting in a faster start-up and fewer wiring errors. Cables are available with stranded or solid-core conductors, with or without shielding.

Most **TURCK** Ethernet equipment uses the 4 or 8-pin (M12) **eurofast**® connector specifications. These connectors provide a tough, rugged seal, and are IP 67 rated. In some cases (mainly in the control cabinet) a traditional RJ45 Ethernet connector needs to be used. **TURCK** provides RJ45 cordsets, as well as a variety of devices made to convert between RJ45 and **eurofast** connectors.

**TURCK** cordsets for the Ethernet system are available in standard lengths. Please contact your local sales representative to order custom lengths.

## Addressing

Industrial Ethernet stations use the IP addressing scheme. An address defined by this scheme consists of four byte values usually displayed in decimal form, for example, 192.168.1.254. Different classifications of networks require different portions of this address to be constant for all devices on the network (referred to as a "subnet"). This means that the number of stations allowed on a particular network varies depending on what class of subnet is being used. If the first three bytes of the IP address are constant (which is common), then the remaining byte may be addressed between 2 and 254, resulting in 253 possible addresses.

## Maximum Ratings


Ethernet allows different maximum cable lengths depending on the type of cable being used. Normally an Ethernet segment may be as long as 100 m, where 90 m must be solid core cable and the remaining 10 m can be stranded patch cords.

## Ethernet BL67 Stations

TURCK's BL67 is a modular, user configurable network I/O system designed to allow installation of nodes containing different types and sizes of I/O depending on the users needs for a particular area. Featuring IP 67 protection and metal threaded connectors, the BL67 can often be mounted directly on a machine without the need to plan or purchase a separate enclosure for the I/O. This saves planning and installation time, as well as the cost of the enclosure itself.

The BL67 system supports several different network protocols, including Ethernet/IP™ and Modbus-TCP. A BL67 station consists of a gateway module that interfaces to the Ethernet system, and several I/O modules that interface with the physical I/O in the field. Different connector options are available to allow a greater level of customization to the user.

For more details on the BL67 system please see section G of this catalog.

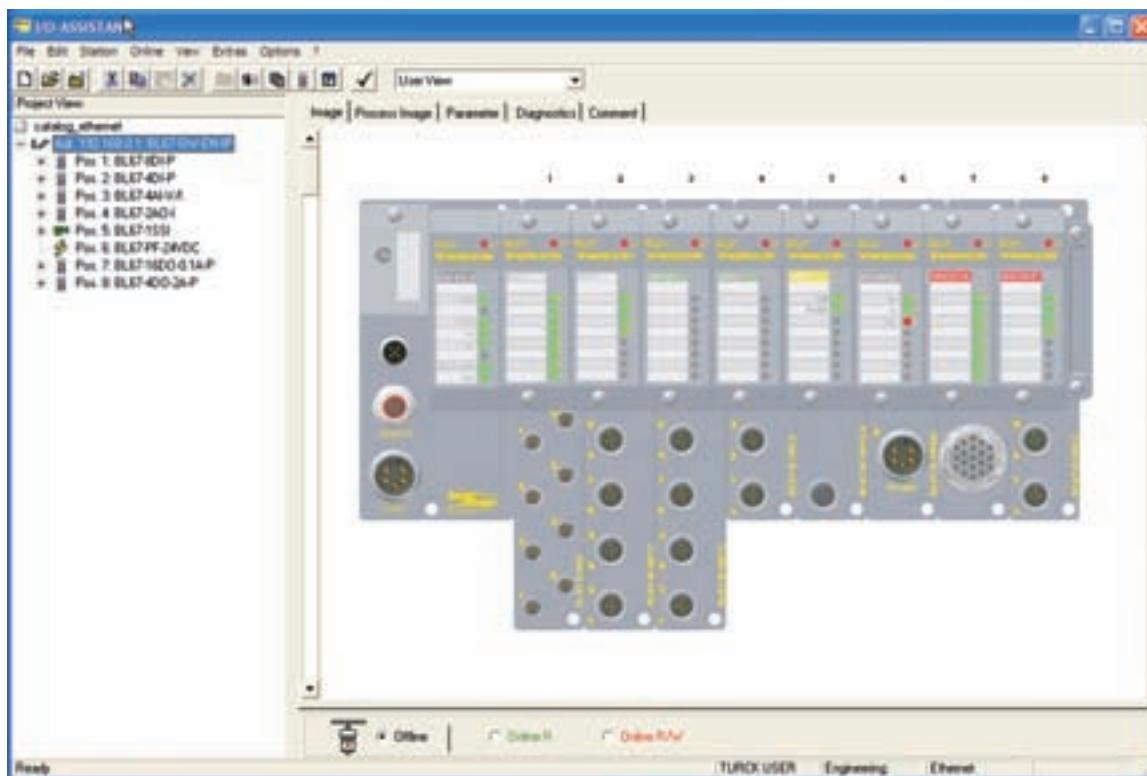

## ModBus TCP/IP Ethernet Gateways



### Gateway:

**BL67-GW-EN**

### Programmable Gateway:

**BL67-PG-EN**



- Modular I/O
- Fieldbus Independent Configuration
- IP 67 Protection
- Various I/O Styles

### Electrical

- Operating Current: <600 mA from  $V_{MB}$
- Input Supply Current: <4 A (from  $V_I$ )
- Output Supply Current: <8 A (from  $V_O$ )
- Backplane Current: <1.5 A (from  $V_{MB}$ )

### Mechanical

- Operating Temperature: -12 to +55°C (-13 to +131°F)
- Protection: IP 67
- Vibration: 5 g @ 10-500 Hz

### Material


- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)


- Diagnostic information available through the system I/O map

### Diagnostics (Physical)

- LEDs to indicate status of Network and Module Bus communication

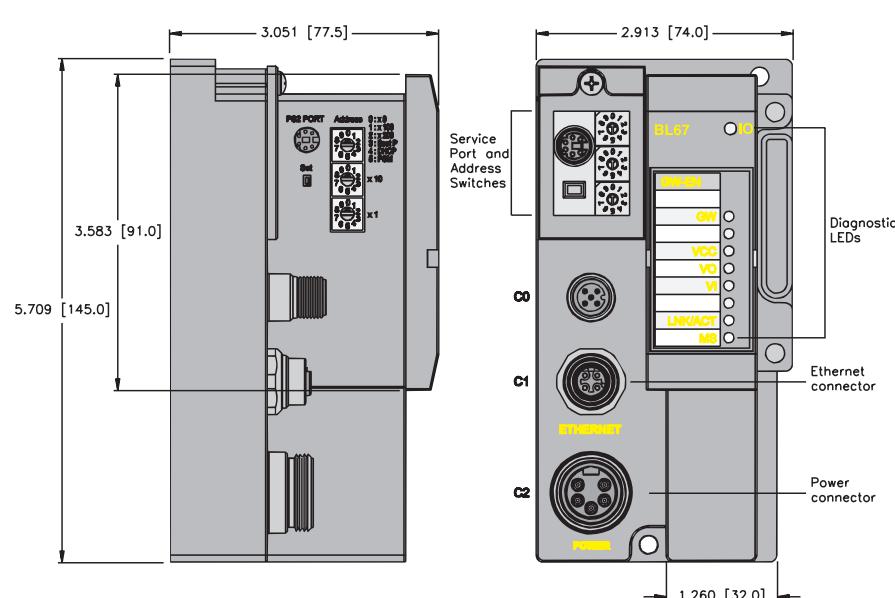


Ethernet Pinout

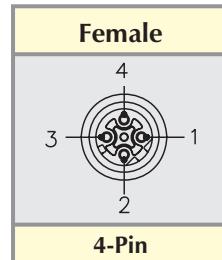

- 1 = TD+  
2 = RD+  
3 = TD-  
4 = RD-

5-pin minifast® Power Pinout

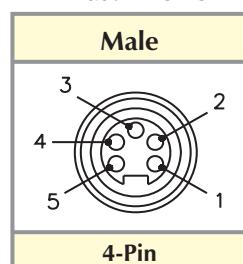

- 1 = Gnd  
2 = Gnd  
3 = PE  
4 =  $V_I$   
5 =  $V_O$

**Ethernet IP**  
**Ethernet Gateways**



**Gateway:**  
**BL67-GW-EN-IP**  
**Programmable Gateway**  
**BL67-PG-EN-IP**



- Modular I/O
- Fieldbus Independent Configuration

- IP 67 Protection
- Various I/O Styles

### Electrical

- Operating Current: <600 mA from  $V_{MB}$
- Input Supply Current: <4 A (from  $V_I$ )
- Output Supply Current: <8 A (from  $V_O$ )
- Backplane Current: <1.5 A (from  $V_{MB}$ )

### Mechanical

- Operating Temperature: -12 to +55°C (-13 to +131°F)
- Protection: IP 67
- Vibration: 5 g @ 10-500 Hz

### Material


- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)


- Diagnostic information available through the system I/O map

### Diagnostics (Physical)

- LEDs to indicate status of Network and Module Bus communication

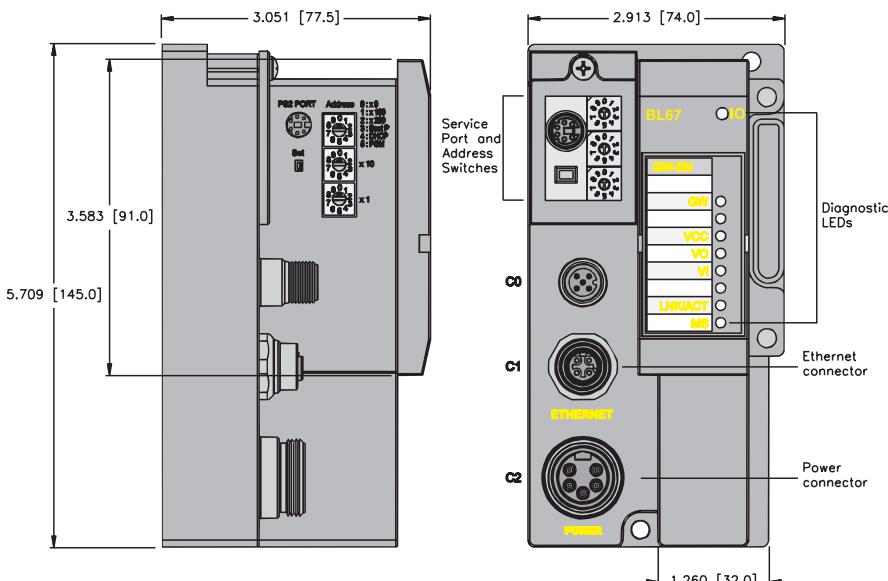


**Ethernet Pinout**

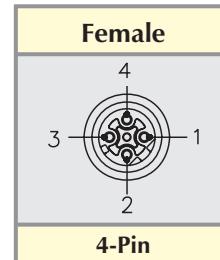

- 1 = TD+  
2 = RD+  
3 = TD-  
4 = RD-

**5-pin minifast® Power Pinout**

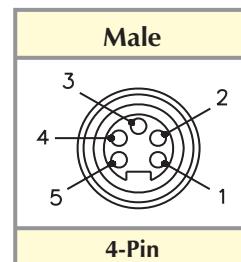

- 1 = Gnd  
2 = Gnd  
3 = PE  
4 =  $V_I$   
5 =  $V_O$

## Profinet Ethernet Gateways



**BL67-GW-EN-PN**



- Modular I/O
- Fieldbus Independent Configuration
- IP 67 Protection
- Various I/O Styles

### Electrical

- Operating Current: <600 mA from  $V_{MB}$
- Input Supply Current: <4 A (from  $V_I$ )
- Output Supply Current: <8 A (from  $V_O$ )
- Backplane Current: <1.5 A (from  $V_{MB}$ )

### Mechanical

- Operating Temperature: -12 to +55°C (-13 to +131°F)
- Protection: IP 67
- Vibration: 5 g @ 10-500 Hz

### Material


- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)


- Diagnostic information available through the system I/O map

### Diagnostics (Physical)

- LEDs to indicate status of Network and Module Bus communication

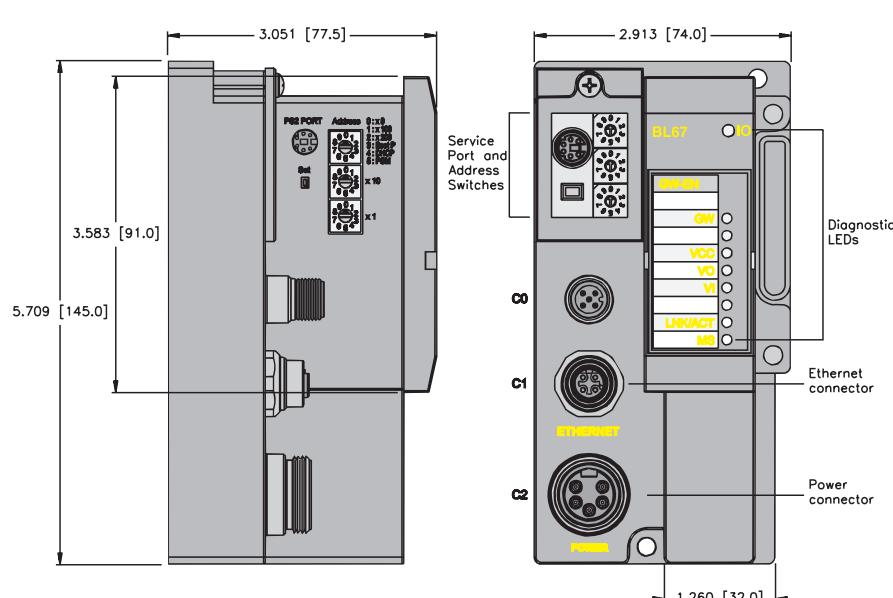


**Ethernet Pinout**

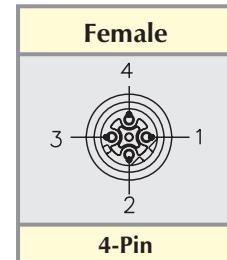

1 = TD+  
2 = RD+  
3 = TD-  
4 = RD-

**5-pin minifast® Power Pinout**

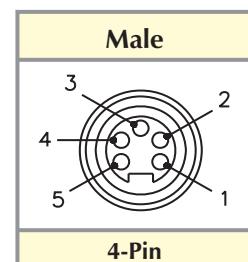


1 = Gnd  
2 = Gnd  
3 = PE  
4 =  $V_I$   
5 =  $V_O$

## Ethernet to AS-interface® Gateways

AS-I systems can be easily connected to a higher-level network, such as EtherNet/IP™ and Modbus-TCP, through a gateway master. The gateway acts as a master to the AS-I system(s) and a slave to the Ethernet system, mapping all of the AS-I data for Ethernet in a single block.

For AS-I specifications and rating details, see section G of this catalog.

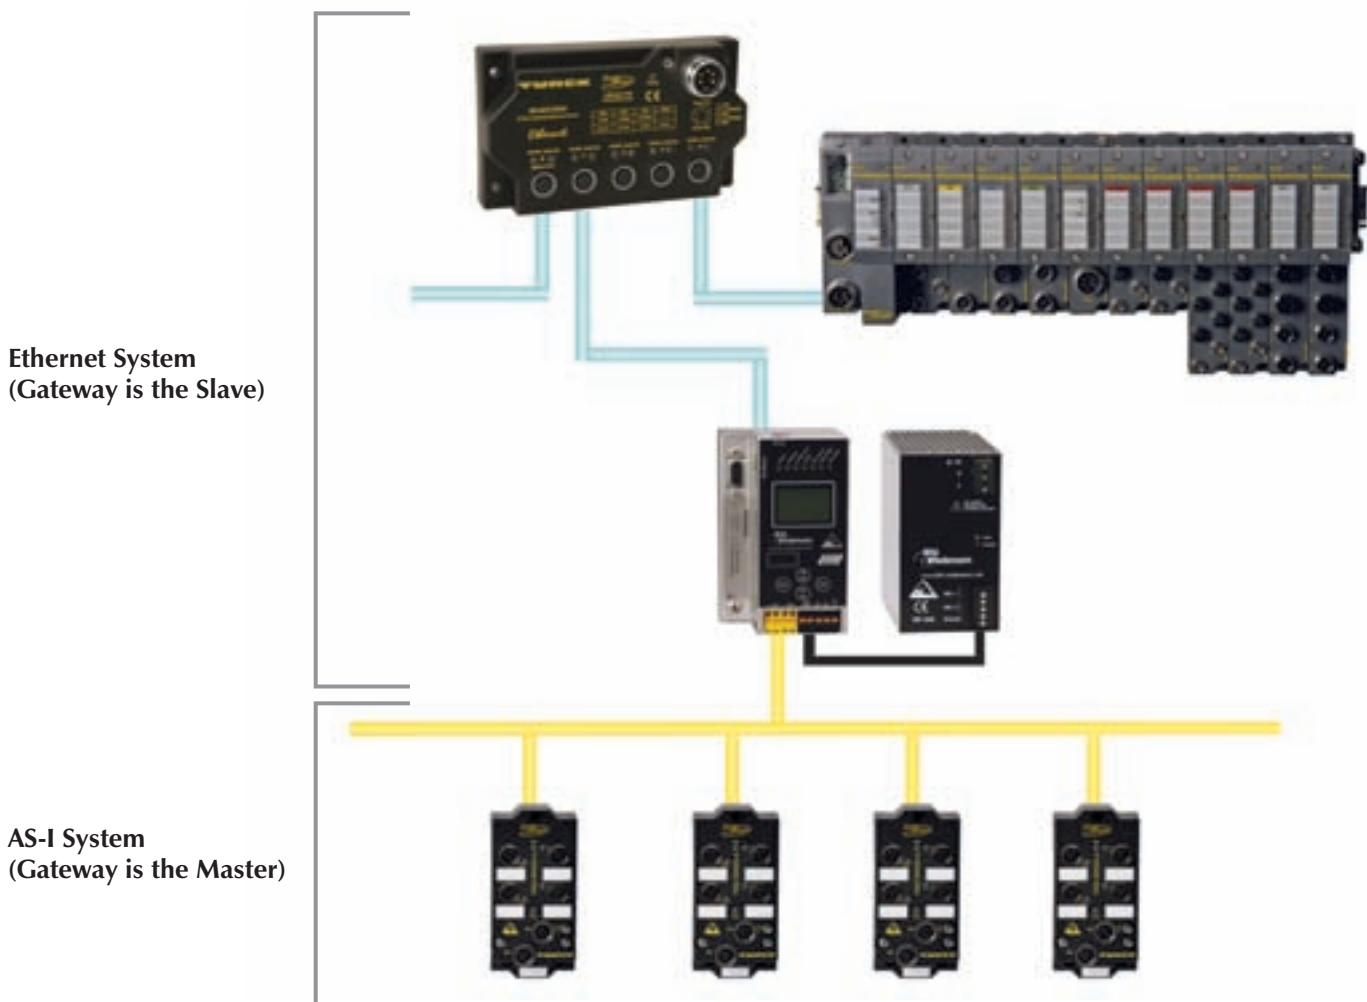



## Addressing

Ethernet stations must have an IP address for communication. The address for AS-i/Ethernet gateways may be set via the on-unit display and push buttons. Please consult the manual for a particular gateway for instruction on the procedure.

## Diagnostics

AS-i/Ethernet gateways contain LEDs for diagnosing I/O and communication problems for Ethernet and AS-I. For a detailed description of the LED states, see the Bihl+Wiedemann AS-i/Ethernet Gateway User Manual available for download from [www.bihl-wiedemann.com](http://www.bihl-wiedemann.com).

## Power

Most AS-i/Ethernet gateways draw power from the AS-I power supply. The option to use a separate, non-AS-I power supply is also available. Consult the gateway documentation to ensure the gateway being selected meets the requirements of your system.

Modbus TCP Gateways in  
Stainless Steel



**ASI-ENG-SS BW1650\***

**ASI-ENG-SS BW1651\***

**ASI-ENG-SS BW1652\***

**ASI-ENG-SS-C1D2 BW1659**

**ASI-ENG-SS-C1D2 BW1660**

**ASI-ENG-SS-C1D2 BW1661**

\* not ETL Listed

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

### Electrical

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)  
200 mA from  $V_{AS-i1}$ , 70mA from  $V_{AS-i2}$  (Power Supply A2)  
250 mA from  $V_{AUX}$  (Power Supply E)

### Power Distribution

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Material


- Housing: Stainless Steel

### Diagnostics (Logical)

- Health of AS-I network is available via Network interface

### Diagnostics (Physical)

- LED to indicate status of network and AS-I communication and power supply

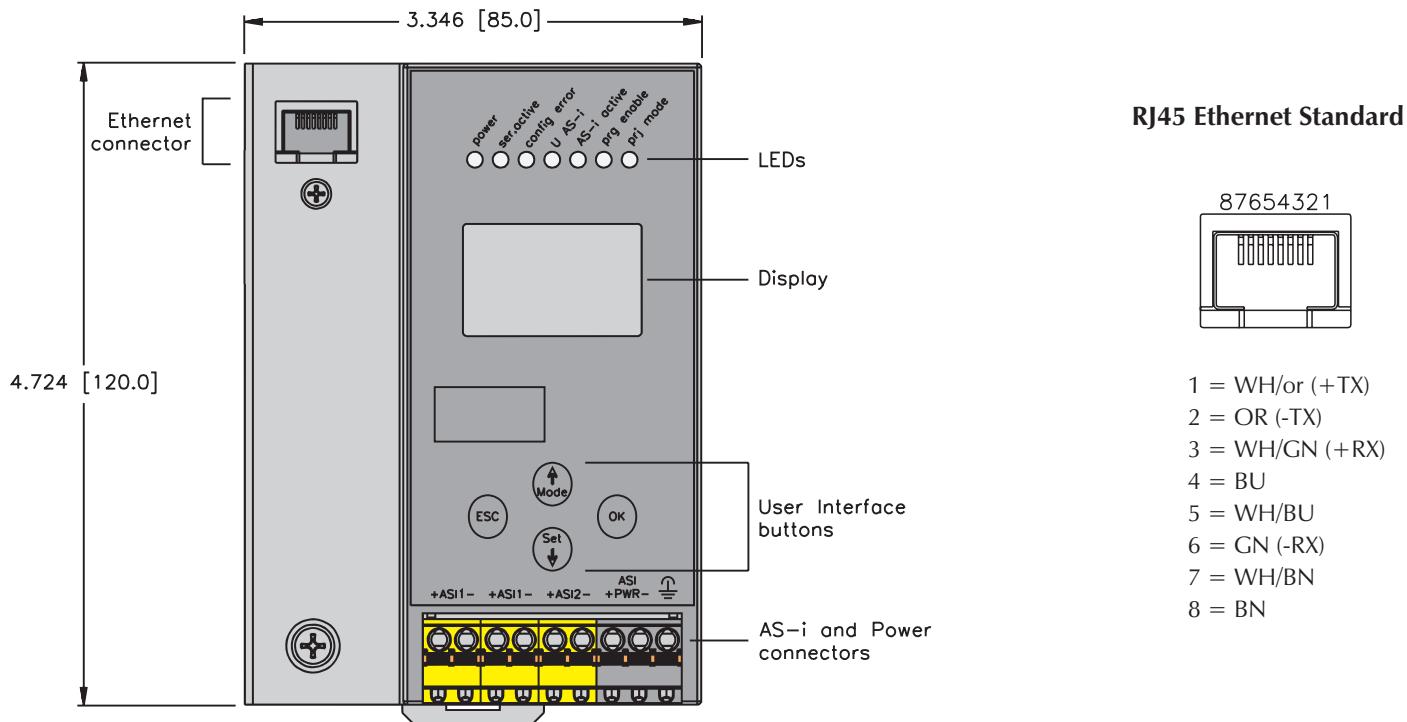

# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-ENG-SS BW1650	ModbusTCP	A	3.0	1	X	X
ASI-ENG-SS BW1651	ModbusTCP	A2	3.0	2	X	X
ASI-ENG-SS BW1652	ModbusTCP	E	3.0	2	X	X
ASI-ENG-SS-C1D2 BW1659*	ModbusTCP	A	3.0	1		
ASI-ENG-SS-C1D2 BW1660*	ModbusTCP	A2	3.0	2		
ASI-ENG-SS-C1D2 BW1661*	ModbusTCP	E	3.0	2		


\* Approved for use in Class 1, Division 2 areas

## Input/Output Connectors


**A**

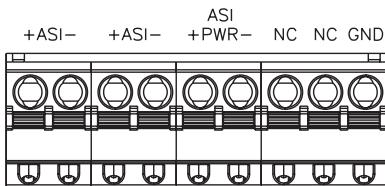

**A2**

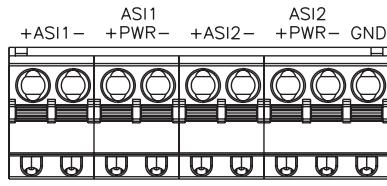

**E**

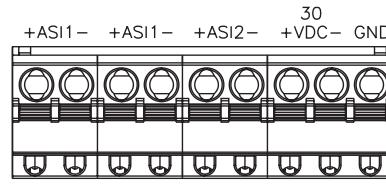

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I Ethernet/IP Gateways in  
Stainless Steel**

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics



**ASI-EIPG-SS BW1828\***

**ASI-EIPG-SS BW1829\***

**ASI-EIPG-SS BW1833\***

**ASI-EIPG-SS-C1D2 BW1834**

**ASI-EIPG-SS-C1D2 BW1835**

**ASI-EIPG-SS-C1D2 BW1836**

\* not ETL listed



### Electrical

- Operating Current: 300 mA from VAS<sub>-1</sub> (Power Supply A)  
200 mA from VAS<sub>-i1</sub>, 70mA from VAS<sub>-i2</sub>  
(Power Supply A2)  
250 mA from V<sub>AUX</sub> (Power Supply E)

### Power Distribution

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Material


- Housing: Stainless Steel

### Diagnostics (Logical)

- Health of AS-I network is available via Network interface

### Diagnostics (Physical)

- LED to indicate status of network and AS-I communication and power supply

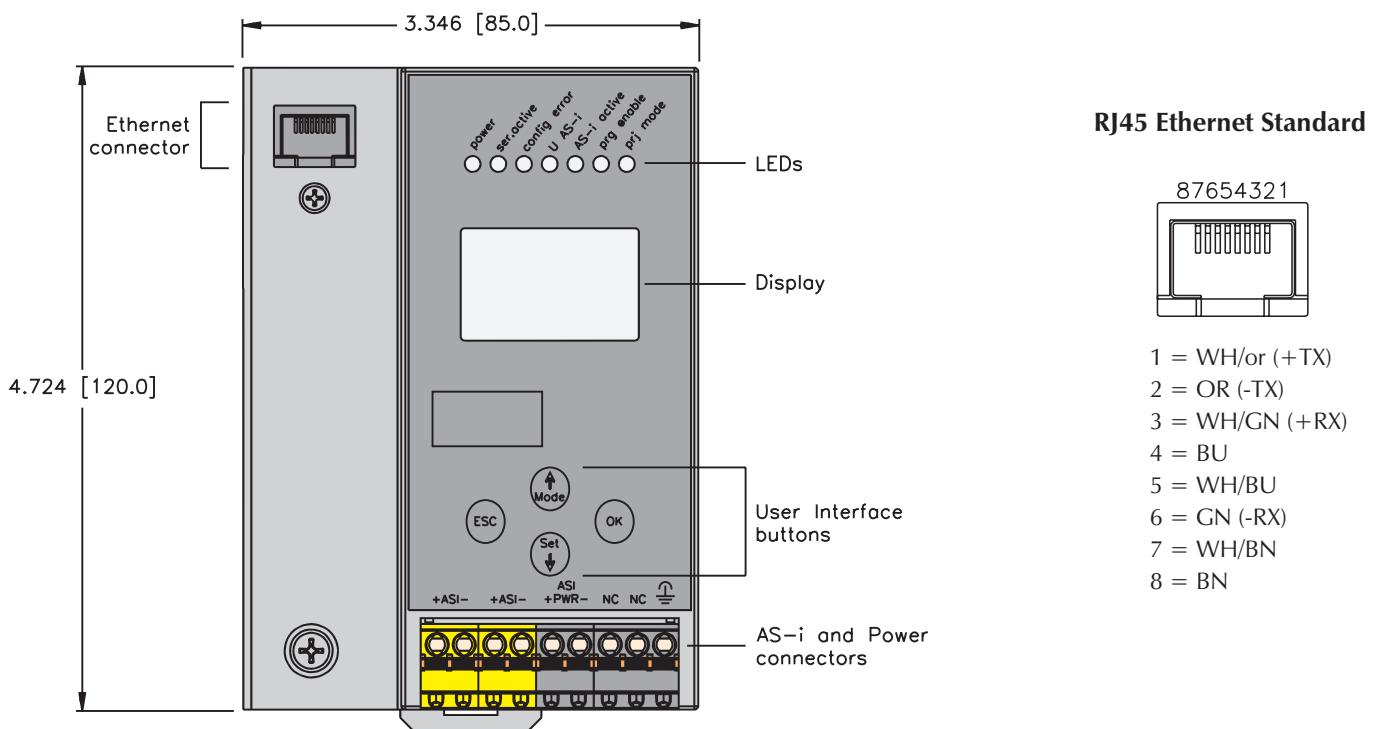


Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-EIPG-SS BW1828	Ethernet/IP	A	3.0	1	X	X
ASI-EIPG-SS BW1829	Ethernet/IP	A2	3.0	2	X	X
ASI-EIPG-SS BW1833	Ethernet/IP	E	3.0	2	X	X
ASI-EIPG-SS-C1D2 BW1834*	Ethernet/IP	A	3.0	1		
ASI-EIPG-SS-C1D2 BW1835*	Ethernet/IP	A2	3.0	2		
ASI-EIPG-SS-C1D2 BW1836*	Ethernet/IP	E	3.0	2		


\* Approved for use in Class 1, Division 2 areas

### Input/Output Connectors


**A**

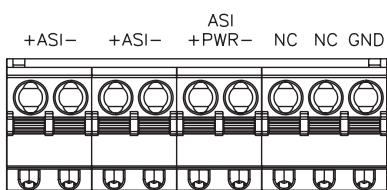

**A2**

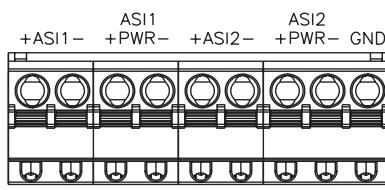

**E**

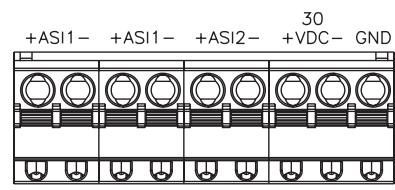

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I ProfiNET Gateways in  
Stainless Steel**

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics



**ASI-PNG-SS BW1912**



**Electrical**

- Operating Current: 300 mA from  $V_{AS-I}$  (Power Supply A)

**Power Distribution**

- From AS-I supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**


- Health of AS-I network is available via Network interface

**Diagnostics (Physical)**

- LED to indicate status of network and AS-I communication and power supply

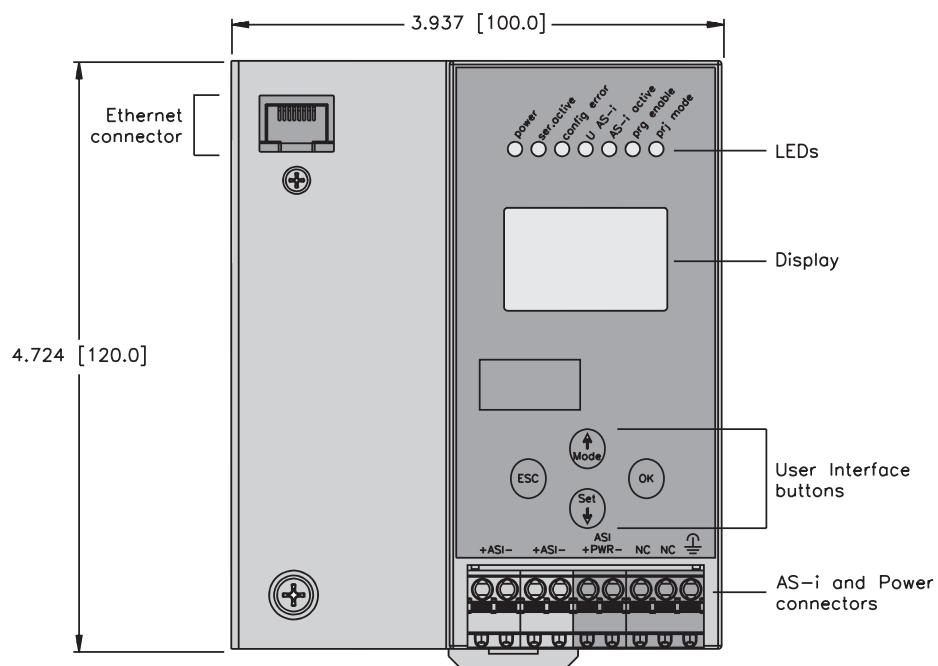

**RJ45 Ethernet Standard**




- |                 |
|-----------------|
| 1 = WH/or (+TX) |
| 2 = OR (-TX)    |
| 3 = WH/GN (+RX) |
| 4 = BU          |
| 5 = WH/BU       |
| 6 = GN (-RX)    |
| 7 = WH/BN       |
| 8 = BN          |

Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-PNG-SS BW1912	PROFINET	A	3.0	1	X	X

## Input/Output Connectors

A

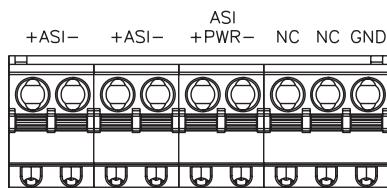

A - Single AS-I network is powered by and AS-I power supply

## Ethernet, Cable Specifications, 8-wire

- **Cable that Meets the Requirements of TIA/EIA568-B.2 Category 5e Cable for 10 and 100 Base-T Ethernet**
- **Cable is UL Rated for Sunlight and Oil Resistant**

Figure A

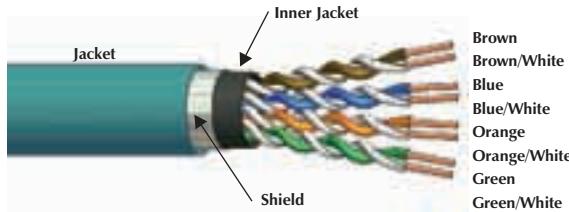


Figure B



Maximum 100 meters of cable of which:

- 90 meters Horizontal Cable (SOLID - 842 or 843)
- 2 x 5 meters Patch Cables (STRANDED - 840 or 841)
- Direct Connect 30 M STRANDED

Type	Approvals	Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation				
<b>840</b> 75°C 300 Volts	NEC CMR (ETL) CEC C (ETL)	8/24 AWG Stranded	28.6 Ohms PE	PVC Teal 6.5 mm (.256 in)	None	RB50856-*M 39 lbs. <i>flexlife</i> ® <sup>++</sup>	A
<b>841</b> 75°C 300 Volts	NEC CMR (ETL) CEC C (ETL)	8/24 AWG Stranded	28.6 Ohms PE	PVC Teal 7.3 mm (.286 in)	Foil/Braid	RB50893-*M 50 lbs. <i>flexlife</i> <sup>++</sup>	A
<b>842</b> 75°C 100 Volts	NEC CMR (ETL) CEC C (ETL)	8/24 AWG Solid	28.6 Ohms PE	PVC Teal 5.9 mm (.231 in)	None	RB50857-*M 39 lbs. <i>flexlife</i> <sup>+</sup>	A
<b>843</b> 75°C 300 Volts	NEC CMR (ETL) CEC C (ETL)	8/24 AWG Solid	28.6 Ohms PE	PVC Teal 7.3 mm (.286 in)	Foil/Braid	RB50894-*M 50 lbs. <i>flexlife</i> <sup>+</sup>	A
<b>845</b> 50°C 125 Volts	TSB-36 ISO/IEC 11801	8/26 AWG Stranded	37.3 Ohms PE	PUR Teal 6.3 mm (.248 in)	Foil/Braid	RB51305-*M 54 lbs. <i>flexlife</i> <sup>+++</sup> Halogen Free	A
<b>849A</b> AWM 444 80°C 300 Volts	NEC CMG CEC HL CMG	8/24 AWG Solid	28.6 Ohms PO	PVC Black 15.3 mm (.530 in)	Foil/Braid Armor	RB51100-*M 159 lbs. <i>armorfast</i> <sup>®</sup>	B

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.

† 85 thousand cycles on c-track flexing machine at 1.5" bend radius.

‡ 4 million cycles on c-track flexing machine at 1.5" bend radius.

+++ 2 million cycles on c-track flexing machine at 1.5" bend radius.

## Ethernet, (M12x1) eurofast® Cable/Cordset Selection Matrix - Cable Type 840 & 842 Only

eurofast					
	Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)	RJ45 Plug
	1 RSC	2 RKC	3 FSFD	4 FKFD	7 RJ45
Bare	RSC 84x-*M	RKC 84x-*M	FSFD 84x-*M	FKFD 84x-*M	RJ45 84x-*M
1 RSC	RSC RSC 84x-*M	RSC RKC 84x-*M	RSC FSFD 84x-*M	RSC FKFD 84x-*M	RSC RJ45 84x-*M
2 RKC		RKC RKC 84x-*M	RKC FSFD 84x-*M	RKC FKFD 84x-*M	RKC RJ45 84x-*M
7 RJ45			RJ45 FSFD 84x-*M	RJ45 FKFD 84x-*M	RJ45 RJ45 84x-*M

See pages F20 - F21 for dimensional drawings.

\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSC ... to RSCV, FKFD ... to FKFDV.

For cross-over cable, add "CR" to part number RJ45 RJ45 CR 84x-\*M.

eurofast	Pinouts	eurofast	Standard Pinout	RJ45 Plug	(CR) Pinout
<b>Male</b>  1. White/Blue 2. White/Brown 3. Brown 4. Orange 5. White/Green 6. White/Orange 7. Blue 8. Green	<b>Female</b>  1. White/Blue 2. Orange 3. White/Green 4. Blue 5. White/Blue 6. Green 7. White/Brown 8. Brown	<b>Male</b>  1. White/Orange 2. Orange 3. White/Green 4. Blue 5. White/Blue 6. Green 7. White/Brown 8. Brown	<b>Male</b>  1. White/Green 2. Green 3. White/Orange 4. Blue 5. White/Blue 6. Orange 7. White/Brown 8. Brown	<b>12345678</b>	<b>(CR) Pinout</b> 1. White/Green 2. Green 3. White/Orange 4. Blue 5. White/Blue 6. Orange 7. White/Brown 8. Brown

**Ethernet, (M12x1) eurofast® Cable/Cordset Selection Matrix - Cable Type 841 & 843 Only**

eurofast					
	Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)	RJ45 Plug
	1 RSS	2 RKS	5 FSSDE	6 FKSDE	7 RJ45S
eurofast	Bare	RSS 84x-*M	RKS 84x-*M	FSSDE 84x-*M	FKSDE 84x-*M
	1 RSS	RSS RSS 84x-*M	RSS RKS 84x-*M	RSS FSSDE 84x-*M	RSS FKSDE 84x-*M
	2 RKS		RKS RKS 84x-*M	RKSS FSSDE 84x-*M	RKS FKSDE 84x-*M
RJ45 Plug	7 RJ45S			RJ45S FSSDE 84x-*M	RJ45S FKSDE 84x-*M
				RJ45S RJ45S 84x-*M	RJ45S RJ45S 84x-*M

See pages F20 - F21 for dimensional drawings.

\* Indicates length in meters.



x Indicates cable type.


Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15...50 meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSS ... to RSSV, FKSDE ... to FKSDEV.

For cross-over cable, add "CR" to part number RJ45S RJ45S CR 84x-\*M.

eurofast	Pinouts	eurofast
<b>Male</b> 	1. White/Blue 2. White/Brown 3. Brown 4. Orange 5. White/Green 6. White/Orange 7. Blue 8. Green	<b>Female</b> 


Standard Pinout	RJ45 Plug	(CR) Pinout
1. White/Orange 2. Orange 3. White/Green 4. Blue 5. White/Blue 6. Green 7. White/Brown 8. Brown	<b>Male</b>  12345678	1. White/Green 2. Green 3. White/Orange 4. Blue 5. White/Blue 6. Orange 7. White/Brown 8. Brown

## Ethernet, eurofast® Cordset Connector Dimensions / Configuration

### Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	60 V
<b>Rated Current:</b>	2 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)


**1**

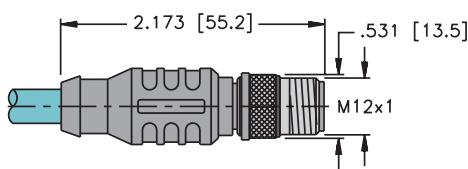

RSC/RSS ..

Pages F18 - F19


**2**

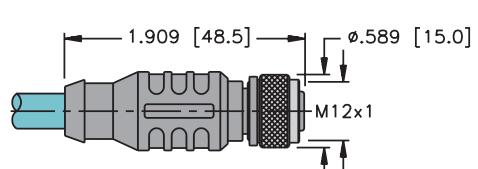

RKC/RKS ..

Pages F18 - F19


**3**

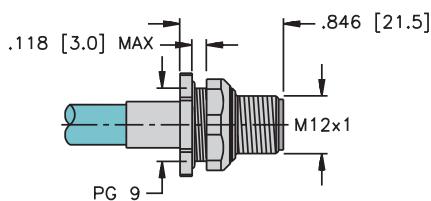

FSFD ..


Pages F18 - F19

**4**

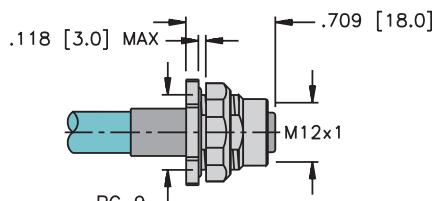

Pages F18 - F19


**5**

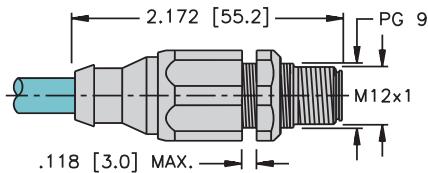

FSSDE ..

Pages F18 - F19

**6**

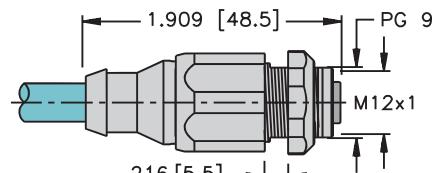

FKSDE ..


Pages F18 - F19

## Ethernet, RJ45 Connector Dimensions / Configuration

### Specifications

<b>Housing:</b>	Polyolefin
<b>Protection:</b>	NEMA 1 and IEC IP 20
<b>Rated Voltage:</b>	42 V
<b>Rated Current:</b>	1.5 A
<b>Ambient Temperature:</b>	-40° to +80°C (-22° to +176°F)

7

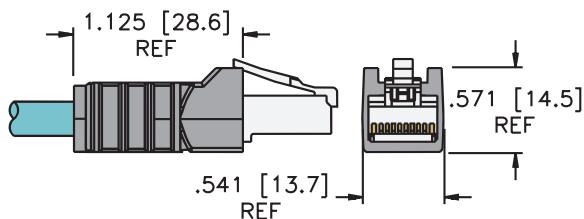


RJ45/RJ45S ..

Page F18 - F19

### Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	60 V
<b>Rated Current:</b>	2 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

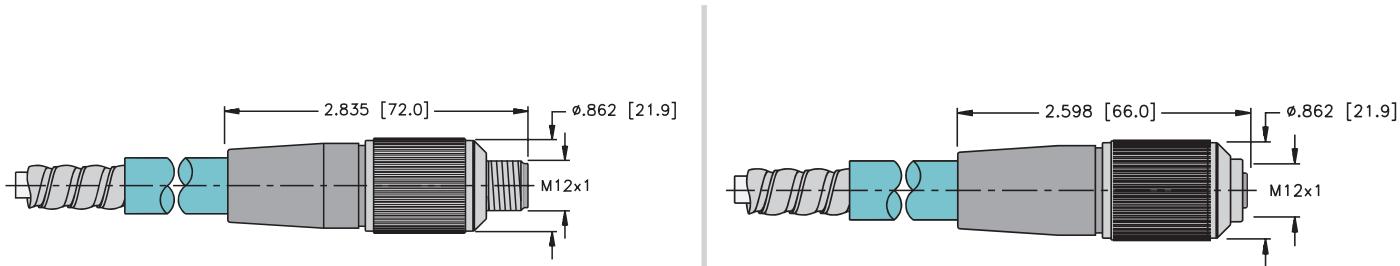

RSA ..

(*armorfast*® only)

RKA ..

(*armorfast* only)

## Ethernet, Economy RJ45 to RJ45 Cordsets

- For "In the Panel" Applications Where Industrial Cordsets are not Needed
- Available on Yellow, 3 FT and 7 FT Lengths Only



	Part Number	Application	Pinout
	RJ45 RJ45 840-3FT/ECON	<ul style="list-style-type: none"> <li>• Ethernet patch cordsets for panel connections</li> <li>• Economy, non industrial</li> </ul>	<b>Male</b>  12345678
	RJ45 RJ45 840-7FT/ECON		

RJ45 Plug	Pinout
<b>Male</b>  12345678	1. White/Orange 2. Orange 3. White/Green 4. Blue 5. White/Blue 6. Green 7. White/Brown 8. Brown

**Unmanaged Switches**

- 5 and 9 Ports Available
- 10/100 Mbps

- IP 67 Protection
- 8-pin Ethernet Connectors

**Electrical**

- Power Consumption: 2 W (...-E524), 4 W (...-E924)
- Operating Voltage: 10-30 VDC

**Mechanical**

- Operating Temperature: -30 to +80°C (-22 to +176°F)
- Protection: NEMA 1,3,4,6,13 and IEC IP 67



**Material**

- Housing: Nylon 6 (other materials available on request)
- Connectors: Nickel-plated Brass (other materials available on request)

**Diagnostics (Physical)**

- LEDs to indicate status of Ethernet communication


CE

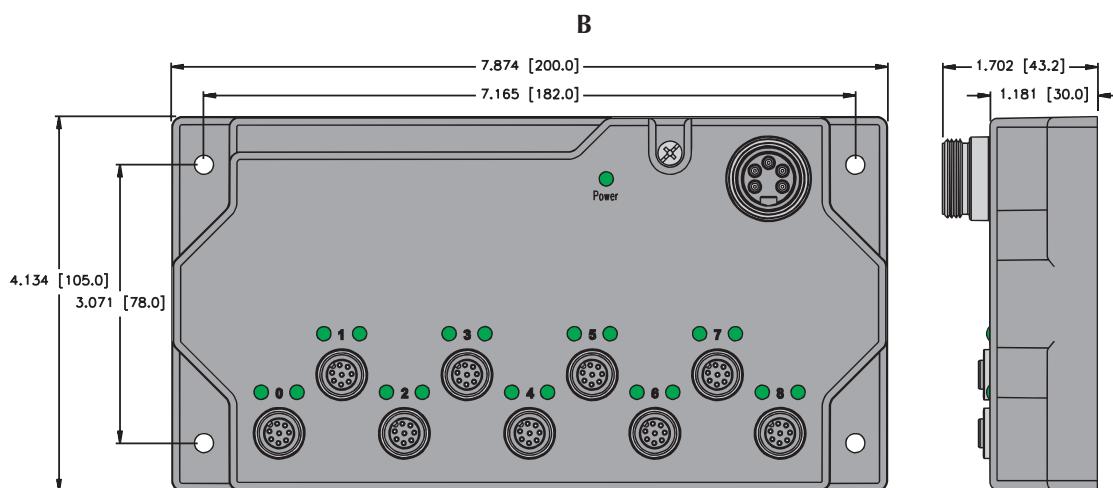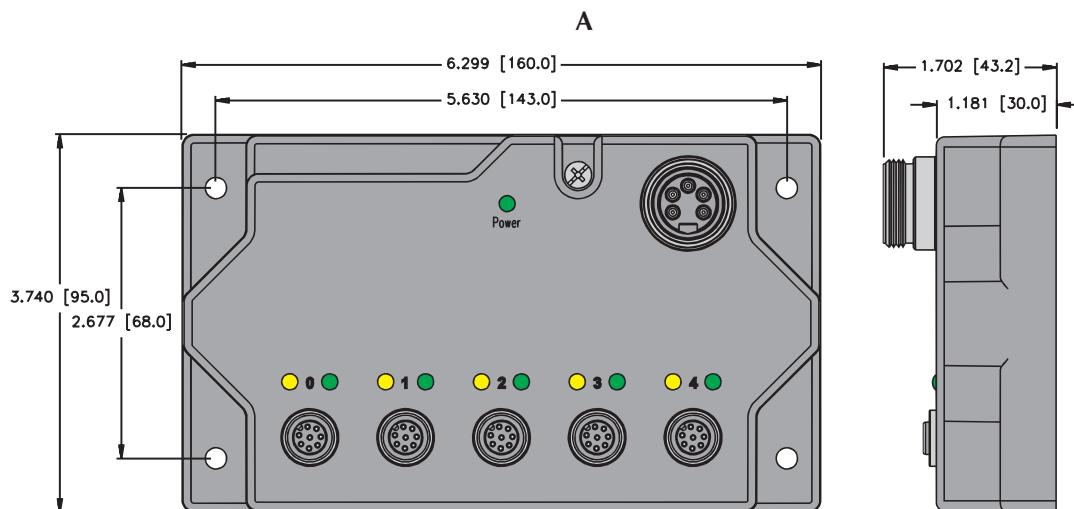

Inputs				
Part Number	Ports*	Ethernet Pinouts	Power Pinout	Dimensions
SE-84X-E524	5	8E	5M	A
SE-84X-E924	9	8E	5M	B
SE-84X4-E524	5	8E	4M	A
SE-84X4-E924	9	8E	4M	B


\* Note: One port for each switch is a dedicated uplink port

## Port/Power Connectors




**8E**

- 1 = WH/BU
- 2 = WH/BN
- 3 = BN
- 4 = OG (TX-)
- 5 = WH/GN (RX+)
- 6 = WH/OG (TX+)
- 7 = BU
- 8 = GN (RX-)



**5M**

- 1 = NC
- 2 = V-
- 3 = NC
- 4 = V+
- 5 = NC






**4M**

- 1 = V+
- 2 = NC
- 3 = NC
- 4 = V-

## Ethernet, Conduit Adapters, 8-wire

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port

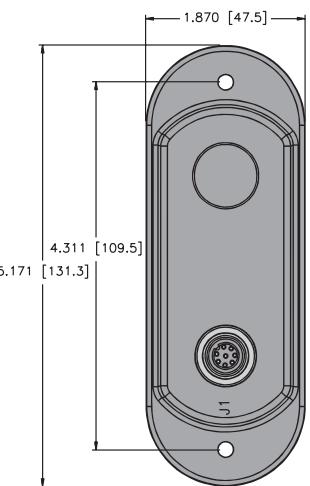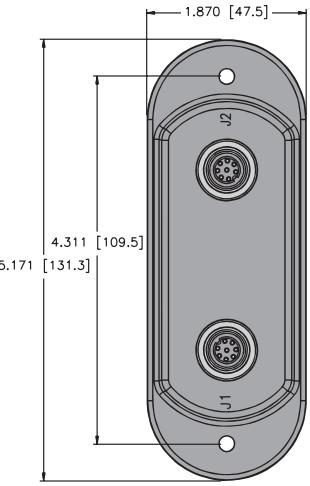

Housing	Part Number	Specs	Application	Pinout
	BCA 84-E124		<p>Attaches to standard conduit body* for transition to 8-wire (M12x1) <b>eurofast®</b> connector</p> <p>*Cross Hinds 3/4" Mark 9, Form 8 or Equivalent.</p>	
	BCA 84-E224	<p>Nylon Housing 60 V, 2 A -40° to +75°C</p>	<p>Attaches to standard conduit body* for transition to 8-wire (M12x1) <b>eurofast®</b> connector</p> <p>*Cross Hinds 3/4" Mark 9, Form 8 or Equivalent.</p>	<b>Female</b> 


## Ethernet, Cabinet Adapter, 8-wire

- Mounts to any Cabinet for Transition from (M12x1) **eurofast®** 8-Pin Connectors to RJ45 Connectors
- Gasket and Mounting Hardware Included (8-32 x 1/2")



Housing	Part Number	Specs	Application	Pinout
<p>(2.047 [52.0])  1.260 [32.0]  .516 [13.1] REF  (5.512 [140.0])  5.118 [130.0]  J1  J2  J3  J4</p>	BIC 84-E424	Nylon Housing 60 V, 2 A -40° to +75°C	Attaches to cabinet for transition to 4-wire (M12x1) <b>eurofast</b> connector	<b>Female</b> 

### Panel Dimensions

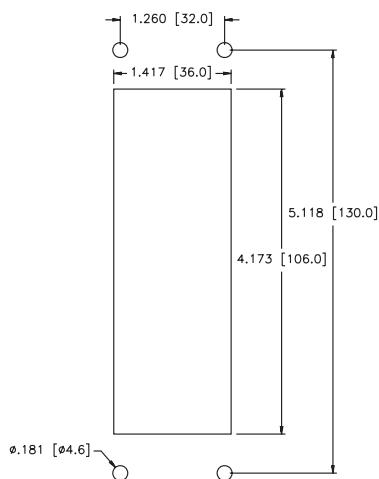

RJ45 Plug	Pinouts
	1. White/Orange (+TX) 2. Orange (-TX) 3. White/Green (+RX) 4. Blue 5. White/Blue 6. Green (-RX) 7. White/Brown 8. Brown

## Ethernet, Circuit Board Connectors and OEM Receptacles, 8-wire

- Provides (M12x1) *eurofast®* 8-Pin Connection to Field Devices




Housing	Part Number	Specs	Application	Pinouts
19 	FS 84 PCB KIT		Male <i>eurofast</i> with mounting kit	<b>Male</b>  1. WH/BU 2. WH/BN 3. BN 4. OG 5. WH/GN 6. WH/OG 7. BU 8. GN
21 	FS 84 PCB	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	Male <i>eurofast</i>	
20 	FK 84 PCB KIT		Female <i>eurofast</i> with mounting kit	<b>Female</b>  1. WH/BU 2. WH/BN 3. BN 4. OG 5. WH/GN 6. WH/OG 7. BU 8. GN
22 	FK 84 PCB		Female <i>eurofast</i>	


See pages F29 - F30 for dimensional drawings.

Standard housing material is nickel plated brass "FSV .."; "FKV .." indicates 316 stainless steel.


**Panel Cutout**  
FK ... FS



**Board Layout** (reference only)  
FK ... FS

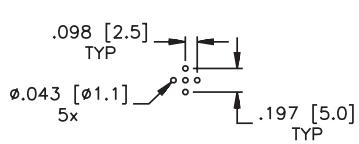

**Panel Cutout**  
FKFD ... FSFD

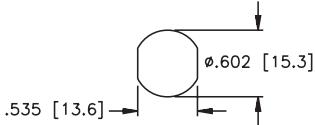

## Ethernet, Circuit Board Connectors and OEM Receptacles, 8-wire

- Provides (M12x1) eurofast® 8-Pin Connection to Field Devices




Housing	Part Number	Specs	Application	Pinouts
17	FSFD 84 PCB		Male eurofast PCB pins	
15	FSFDL 84		Male eurofast solder cups	
23	WFS 84 PCB	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	Male eurofast right angle PCB pins	<p><b>Male</b></p> <ol style="list-style-type: none"> <li>WH/BU</li> <li>WH/BN</li> <li>BN</li> <li>OG</li> <li>WH/GN</li> <li>WH/OG</li> <li>BU</li> <li>GN</li> </ol>
18	FKFD 84 PCB		Female eurofast PCB pins	
16	FKFDL 84		Male eurofast solder cups	<p><b>Female</b></p>


See pages F29 - F30 for dimensional drawings.

Standard housing material is nickel plated brass "FKFD.."; "FKFDV.." indicates 316 stainless steel.


**Panel Cutout**  
**FKFD ... FSFD**

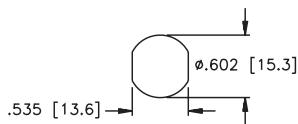


**Board Layout (reference only)**  
**FKFD ... FSFD**

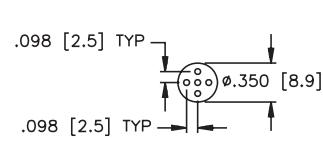

**Panel Cutout**  
**WFS**




**Board Layout (reference only)**  
**WFS**

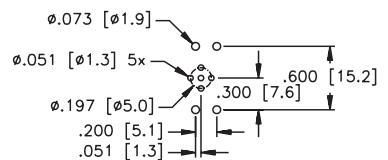

**eurofast® PCB Mount Male and Female Receptacles**


**15**

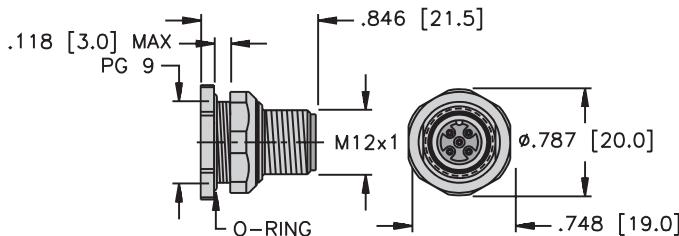

FSFDL ..

Page F28


**16**

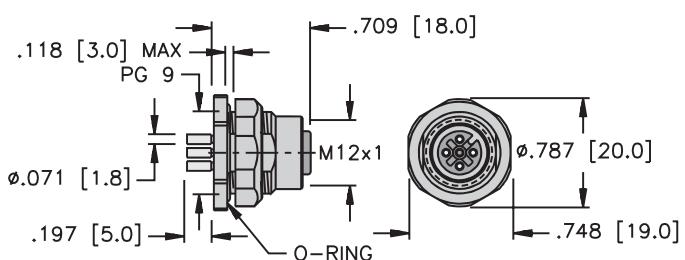

FKFDL ..

Page F28


**17**

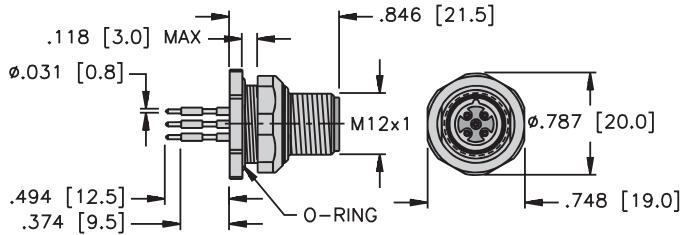

FSFD .. PCB

Page F28


**18**

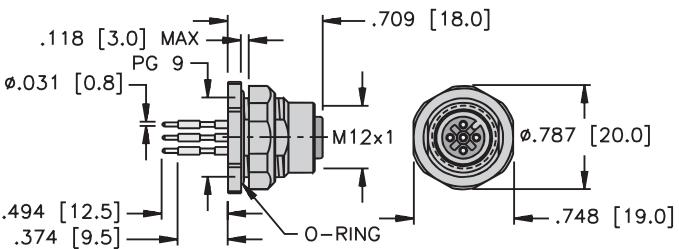

FKFD .. PCB

Page F28


**19**

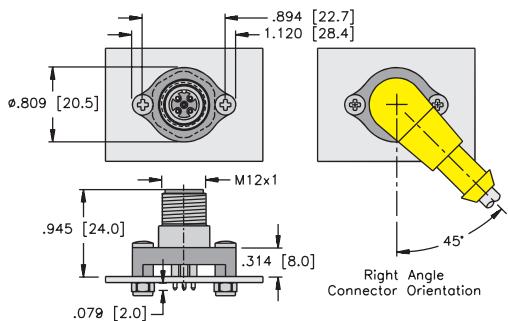

FS .. PCB KIT

Page F27


**20**

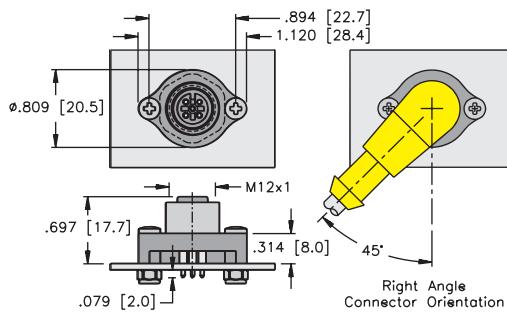

FK .. PCB KIT


Page F27

## eurofast® PCB Mount Male and Female Receptacles

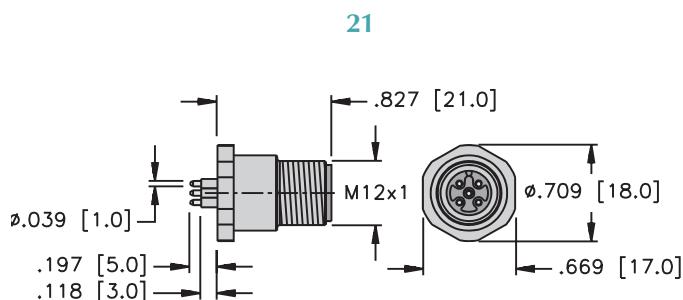


FS .. PCB KIT

Page F27

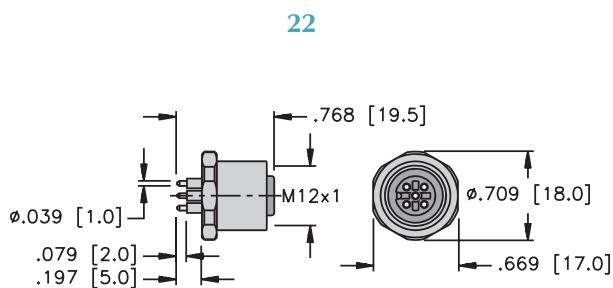

Page F27

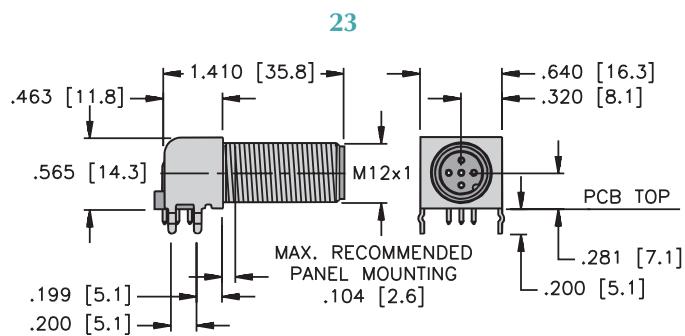


WFS .. PCB

Page F28

## Ethernet, Cable Specifications, 4-wire

- Cable that Meets the Requirements of TIA/EIA568-B.2 Category 5e Performance Requirements Cable for 10 and 100 Base-T Ethernet
- Compliant with Ethernet/IP Standards
- Cable is UL Rated for Sunlight and Oil Resistant

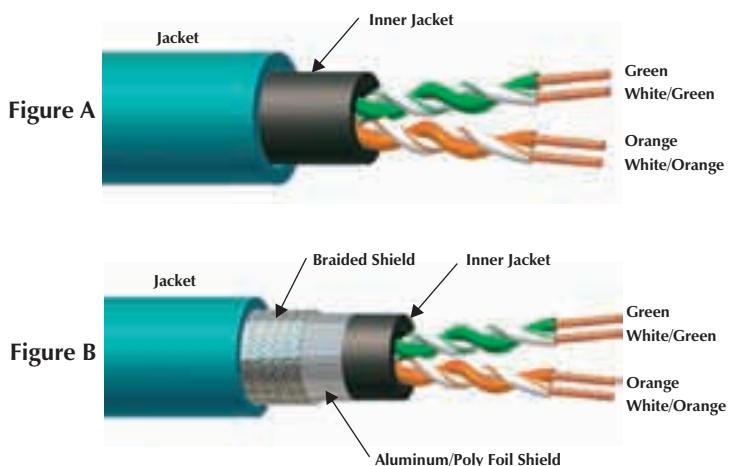

Maximum 100 meters of cable of which:

- 90 meters Horizontal Cable (SOLID - 442 or 443)
- 2 x 5 meters Patch Cables (STRANDED - 440 or 441)

Type	Approvals	Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation				
<b>440</b> 75°C 300 Volts	NEC CMR CEC C(UL) CMR	4/24 AWG Stranded	28.6 Ohms PO	PVC Teal 6.9 mm (.270 in)	None	RB51210-*M 29 lbs.	<b>A</b>
<b>441</b> 75°C 300 Volts	NEC CMR CEC C(UL) CMR	4/24 AWG Stranded	28.6 Ohms PO	PVC Teal 7.2 mm (.285 in)	Foil/Braid	RB51211-*M 44 lbs.	<b>B</b>
<b>442</b> 75°C 100 Volts	NEC CMR CEC C(UL) CMR	4/24 AWG Solid	28.6 Ohms PO	PVC Teal 6.4 mm (.250 in)	None	RB51212-*M 27 lbs.	<b>A</b>
<b>443</b> 75°C 300 Volts	NEC CMR CEC C(UL) CMR	4/24 AWG Solid	28.6 Ohms PO	PVC Teal 7.1 mm (.280 in)	Foil/Braid	RB51213-*M 49 lbs.	<b>B</b>
<b>4410</b> 50°C 124 Volts	TSB-36 ISO/IEC 11801	4/26 AWG Stranded	37.3 Ohms PE	PUR Teal 6.1 mm (.240 in)	Foil/Braid	RB51306-*M 48 lbs. <i>flexlife</i> ®+ Halogen Free	<b>A</b>

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters. Consult factory for other lengths.

+ 2.5 million flex motions at 12.5x cable diameter bend radius.

## Ethernet, (M12x1) eurofast® Cables and Extensions - Cable Type 440 & 442 D-coded

eurofast					
	Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)	RJ45 Plug
eurofast	8	9	12	13	14
Bare	RSCD 44x-*M	RKCD 44x-*M	FSFDD 44x-*M	FKFDD 44x-*M	RJ45 44x-*M
8 RSCD	RSCD RSCD 44x-*M	RSCD RKCD 44x-*M	RSCD FSFDD 44x-*M	RSCD FKFDD 44x-*M	RSCD RJ45 44x-*M
9 RKCD		RKCD RKCD 44x-*M	RKCD FSFDD 44x-*M	RKCD FKFDD 44x-*M	RKCD RJ45 44x-*M
14 RJ45			RJ45 FSFDD 44x-*M	RJ45 FKFDD 44x-*M	RJ45 RJ45 44x-*M

See pages F34 - F35 for dimensional drawings.

\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSCD ... RSCDV, FSFDED ... FSFDEDV.

eurofast	Pinouts	eurofast
<b>Male</b> 	1. White/Orange (+ tx) 2. White/Green (+rx) 3. Orange (-tx) 4. Green (-rx)	<b>Female</b> 

RJ45 Pinout	RJ45 Plug	RJ45 (CR) Pinout
1. White/Orange 2. Orange 3. White/Green 4. N/C 5. N/C 6. Green 7. N/C 8. N/C	<b>Male</b>  12345678	1. White/Green 2. Green 3. White/Orange 4. N/C 5. N/C 6. Orange 7. N/C 8. N/C

**Ethernet, (M12x1) eurofast® Cables and Extensions - Cable Type 441 & 443 D-coded**

eurofast					
	Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)	RJ45 Plug
eurofast	8 RSSD	9 RKSD	10 FSSDED	11 FKSDED	14 RJ45S
	Bare	RSSD 44x-*M	RKSD 44x-*M	FSSDED 44x-*M	RJ45S 44x-*M
	8 RSSD	RSSD RSSD 44x-*M	RSSD RKSD 44x-*M	RSSD FSSDED 44x-*M	RSSD RJ45S 44x-*M
	9 RKSD		RKSD RKSD 44x-*M	RKSD FSSDED 44x-*M	RKSD RJ45S 44x-*M
	14 RJ45S			RJ45S FSSDED 44x-*M	RJ45S FKSDED 44x-*M

See pages F34 - F35 for dimensional drawings.



\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15...50 meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSSD ... RSSDV, FSSDED ... FSSDEDV.

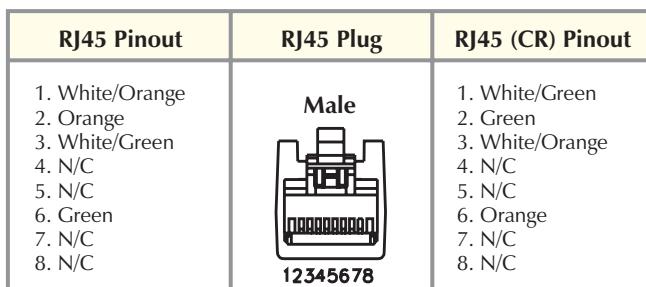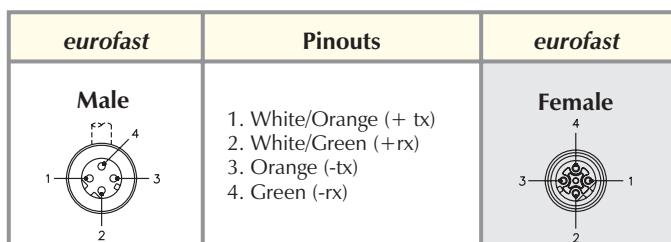


## Ethernet, eurofast® Cordset Connector Dimensions / Configuration

### Specifications

<b>Housing:</b>	TPU (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)


**8**

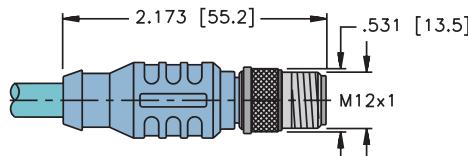

RSCD/RSSD ..

Pages F32 - F33


**9**

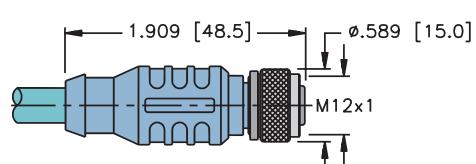

RKCD/RKSD ..

Pages F32 - F33


**10**

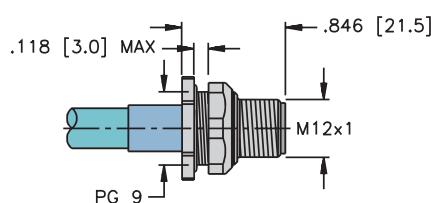

FSFDD ..


Pages F32 - F33

**11**

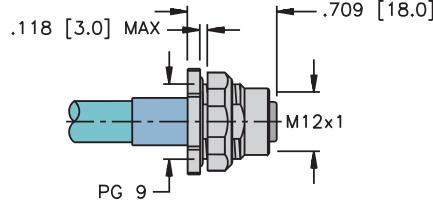

Pages F32 - F33


**12**

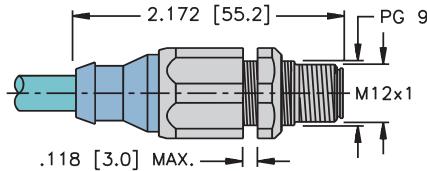

FSSDED ..

Pages F32 - F33

**13**

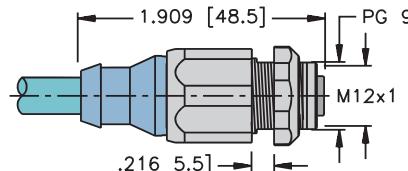

FKSDED ..


Pages F32 - F33

## Ethernet, RJ45 Connector Dimensions / Configuration

### Specifications

<b>Housing:</b>	Polyolefin
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 20
<b>Rated Voltage:</b>	42 V
<b>Rated Current:</b>	1.5 A
<b>Ambient Temperature:</b>	-40° to +80°C (-22° to +176°F)

14

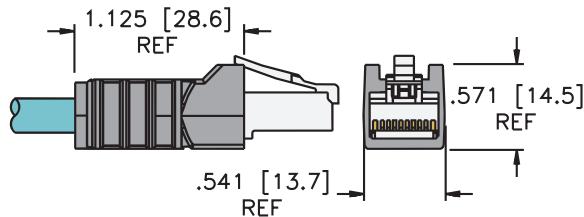

RJ45/RJ45S ..

Pages F32 - F33

# Process Automation



Notes:

### Unmanaged Switches



- 5 and 9 Ports Available
- 10/100 Mbps
- IP 67 Protection
- 4-pin Ethernet Connectors

### Electrical

- Power Consumption: 2 W (...-E524), 4 W (...-E924)
- Operating Voltage: 10-30 VDC

### Mechanical

- Operating Temperature: -30 to +80°C (-22 to +176°F)
- Protection: NEMA 1,3,4,6,13 and IEC IP 67


### Material

- Housing: Nylon 6 (other materials available on request)
- Connectors: Nickel-plated Brass (other materials available on request)


### Diagnostics (Physical)

- LEDs to indicate status of Ethernet communication

CE

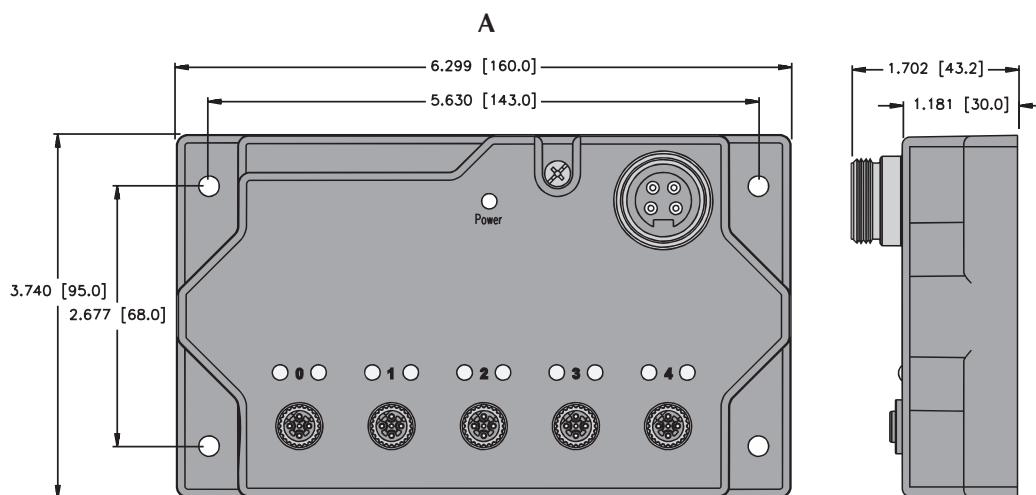

A

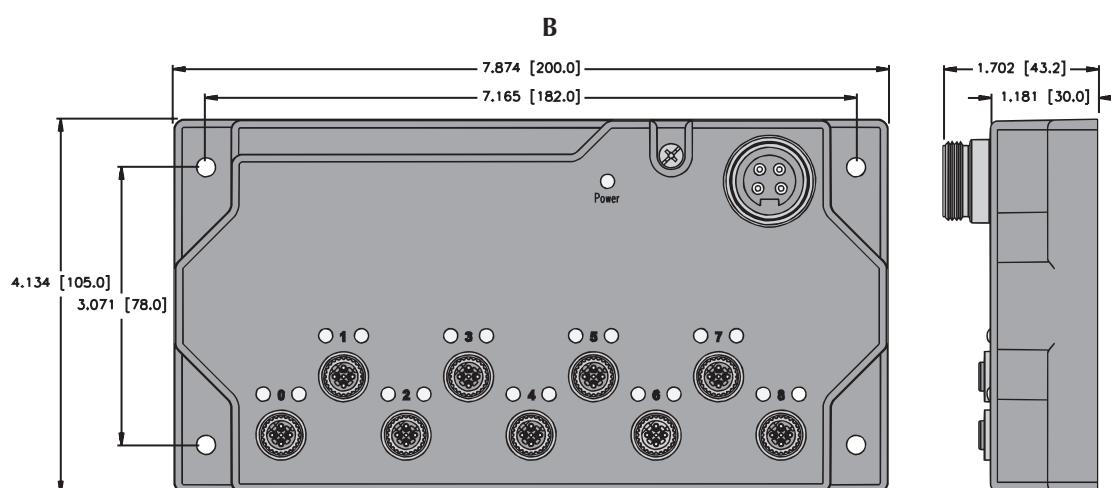


B

Part Number	Ports*	Ethernet Pinouts	Power Pinout	Dimensions
SE-44X-E524	5	4E	5M	A
SE-44X-E924	9	4E	5M	B
SE-44X4-E524	5	4E	4M	A
SE-44X4-E924	9	4E	4M	B


\* Note: One port for each switch is a dedicated uplink port

## Input/Output Connectors




**4-pin eurofast®  
Female**

- 1 = WH/OG (TX+)
- 2 = WH/GN (RX+)
- 3 = OG (TX-)
- 4 = GN (RX-)



**5-pin minifast®  
Power**

- 1 = NC
- 2 = V-
- 3 = NC
- 4 = V+
- 5 = NC



**4-pin minifast Power**

- 1 = V+
- 2 = NC
- 3 = NC
- 4 = V-

**Unmanaged switches**

- Molded Cords for Panel Mounting
- 10/100 Mbps

- IP 67 Protection
- 8-pin Ethernet Connectors

**Electrical**

- Power Consumption: 2 W (...-E524), 4 W (...-E924)
- Operating Voltage: 10-30 VDC

**Mechanical**



- Operating Temperature: -30 to +80 °C (-22 to +176 °F)
- Protection: NEMA 1,3,4,6,13 and IEC IP 67

**Material**

- Housing: Nylon 6 (other materials available on request)
- Connectors: Nickel-plated Brass (other materials available on request)

**Diagnostics (Physical)**

- LEDs to indicate status of Ethernet communication

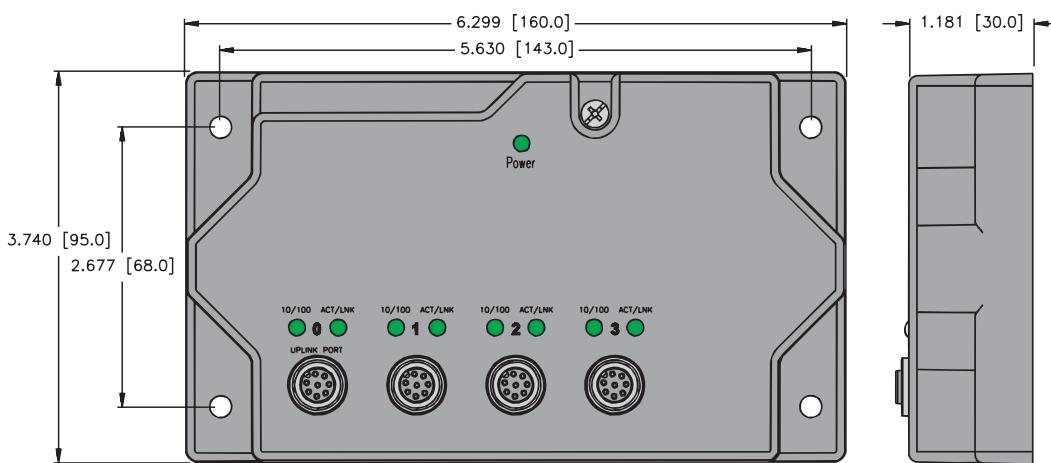**SE-84ST-E524/C1165****SE-84ST-E924/C1165****SE-84ST-E924/C1190****In-Cabinet Ethernet Connector**

1 = WH/or (+TX)

2 = OR (-TX)

3 = WH/GN (+RX)

4 = BU

5 = WH/BU

6 = GN (-RX)

7 = WH/BN

8 = BN

Part Number	Ports*	Ethernet Pinout	Power Pinout	Dimensions
SE-84ST-E524/C1165	5	8E	2Wire	A
SE-84ST-E924/C1165	9	8E	2Wire	B
SE-84ST-E924/C1190	9	8E	2Wire	B


Notes:

\* One port for each switch is a dedicated uplink port.

.../C1165 have one port in the cabinet; .../C1190 has two ports in the cabinet.

## Input/Output Connectors


**8E**



**8-pin eurofast®**

- 1 = WH/BU
- 2 = WH/BN
- 3 = BN
- 4 = OG (TX-)
- 5 = WH/GN (RX+)
- 6 = WH/OG (TX+)
- 7 = BU
- 8 = GN (RX-)

**2-Wire**



## Managed switches

- 8 Ports Available
- Configuration Port
- IP 67 Protection
- 4-pin Ethernet Connectors



**SE-44M-E924**

### Electrical

- Power Consumption: 4 W
- Operating Voltage: 10-30 VDC

### Mechanical


- Operating Temperature: -30 to +80 °C (-22 to +176 °F)
- Protection: NEMA 1,3,4,6,13 and IEC IP 67

### Material

- Housing: Nylon 6 (other materials available on request)
- Connectors: Nickel-plated Brass (other materials available on request)

### Diagnostics (Physical)


- LEDs to indicate status of Ethernet communication

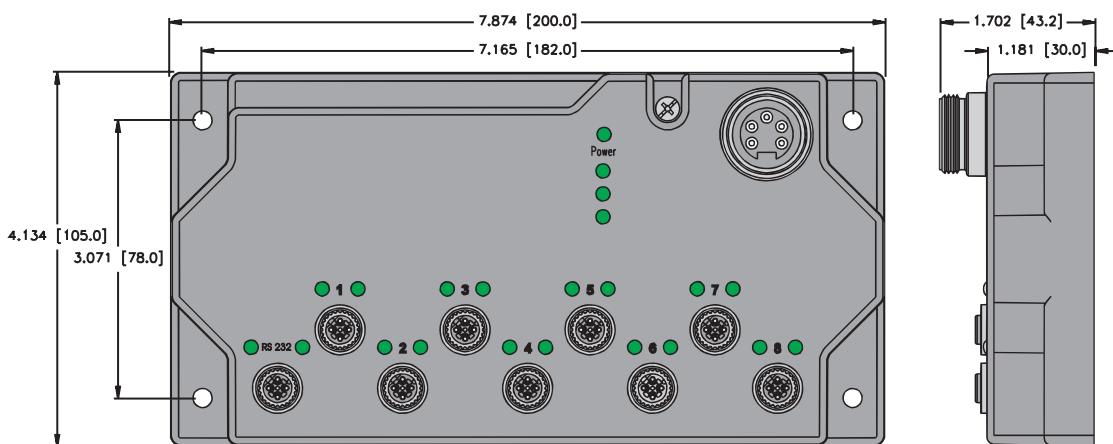

Inputs				
Part Number	Ports*	Ethernet Pinout	Power Pinout	Dimensions
SE-44M-E924	8	4E	5M-2	A


\* Note: 8 Ethernet ports plus one RS232 configuration port

## Port/Power Connectors




**4E**  
4-pin eurofast®  
Female

- 1 = WH/OG (TX+)
- 2 = WH/GN (RX+)
- 3 = OG (TX-)
- 4 = GN (RX-)



**5M-2**  
5-pin minifast® Power

- 1 = Gnd
- 2 = Gnd
- 3 = Ok
- 4 = V<sub>1</sub>+
- 5 = V<sub>2</sub>+

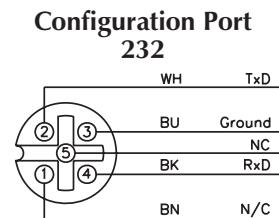

**Configuration Port  
232**



**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

## Ethernet, Conduit Adapters, 4-wire

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port



Housing	Part Number	Specs	Application	Pinout
	BCA 44-E123	Nylon Housing 250 V, 9A -40° to +75°C	Attaches to standard conduit body* for transition to 4-wire (M12x1) <b>eurofast</b> ® connector  *Cross Hinds 3/4" Mark 9, Form 8 or Equivalent.	<b>Female</b> 
	BCA 44-E223		Attaches to standard conduit body* for transition to 4-wire (M12x1) <b>eurofast</b> connector  *Cross Hinds 3/4" Mark 9, Form 8 or Equivalent.	

## Ethernet, Wall Plate Adapters, 4 and 8-wire

- Gasket and Mounting Screws Provided
- For Use with a Single Gang Electrical Box



Housing	Part Number	Specs	Application	Pinouts
	BPA-44-E113	Stainless Steel 30 VAC/36 VDC, 1.5 A -40 to +70°C (-40 to +158°F)	Attaches to standard single gang electrical box for transition to 4-wire (7/8-16UN) <b>eurofast</b> connector w/punch-down blocks	
	BPA-84-E113	Stainless Steel 30 VAC/36 VDC, 1.5 A -40 to +70°C (-40 to +158°F)	Attaches to standard single gang electrical box for transition to 8-wire (M12x1) <b>eurofast</b> connector w/punch-down blocks	


## Ethernet, Cabinet Adapter, 4-wire

- Mounts to Any Cabinet for Transition from (M12x1) *eurofast*® 4-Pin Connectors to RJ45 Connectors
- Gasket and Mounting Hardware Included (8-32 x 1/2")



Housing	Part Number	Specs	Application	Pinout
	BIC 44-E424	Nylon Housing 250 V, 4 A -40° to +75°C	Attaches to cabinet for transition to 4-wire (M12x1) <i>eurofast</i> connector	<b>Female</b> 

### Panel Dimensions

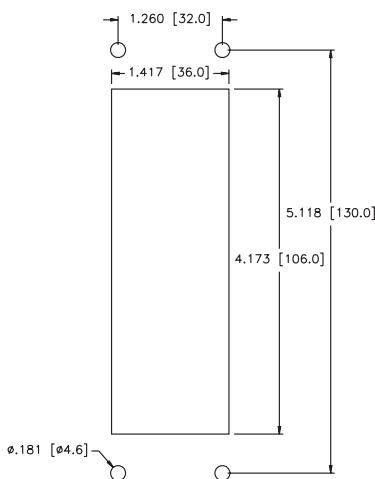

RJ45 Receptacle	Pinout
	1. White/Orange (+TX) 2. Orange (-TX) 3. White/Green (+RX) 4. N/C 5. N/C 6. Green (-RX) 7. N/C 8. N/C

## Ethernet, Receptacle


- Transitions from a RJ45 Connector to a 4-wire eurofast® Connector



Housing	Part Number	Application
	FKSDD RJ45SF 44	Polyurethane PUR Overmold 42 V, 1.5 A -40° to +75°C

Panel mounting clearance hole 19/32" (15 mm). Panel thickness: .060-.120" (1.5-3 mm)

## Wiring Diagram

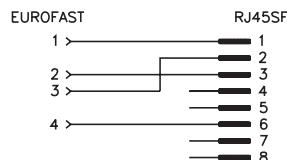

RJ45 Receptacle	Pinouts	eurofast Female
<b>Female</b> 	1. White/Orange (+TX) 2. Orange (-TX) 3. White/Green (+RX) 4. N/C 5. N/C 6. Green (-RX) 7. N/C 8. N/C	<b>Female</b> 

## Ethernet, RJ45 Field Wireable

- Allows for Quick Connections in the Field
- Fully Shielded
- Includes Assembly Instructions



Housing	Part Number	Application	Pinout
	Connector, RJ45S IDC	RJ45 4-wire field wireable	<b>Male</b> 

RJ45 Plug	Pinout
<b>Male</b> 	1. White/Orange (+TX) 2. Orange (-TX) 3. White/Green (+RX) 4. N/C 5. N/C 6. Green (-RX) 7. N/C 8. N/C

## Ethernet, 4-Pin D-coded Field Wireables

- Allows for Quick Connections when Pre-Molded Cables are not Available
- Available in Male, Straight and Right Angle Connector Configurations




Housing	Part Number	Application	Pinout
	CMBSD 8141-0/PG9	<i>Mates with female 4-pin D-coded eurofast® cordsets and receptacles</i>	<b>Male</b> 
	CMBSD 8241-0/PG9		<b>Male</b> 

## Ethernet®, RJ11 Cordsets

- Double Ended
- Available in 1, 2, 5 Meter Extended Lengths



Part Number	Specs	Application	Pinouts	
RJ11S RJ11S 4412-*M	PVC 1.5 A 42 V -40° to +75°C	Industrial phone connection RJ11 connector	1. N/C 2. White/Orange (+TX) 3. Orange (-TX) 4. White/Green (+RX) 5. Green (-RX) 6. N/C	 123456

# Process Automation



Notes:

## AS-interface Selection Guide



Higher-Level Masters	Pages
Allen-Bradley	G11
DeviceNet	G13
Ethernet	G15 - G18
ProfiNET	G19
PROFIBUS-DP	G20 - G24
CANopen	G25
Modbus	G27
Modbus Plus	G29
CC-Link	G31
RS232	G33
PCI	G35
ISA	G35

Power	Pages
Supplies, Decoupled	G93 - G94
Supplies, Non-Decoupled	G95 - G96
Extenders	G97
Decoupler	G98
Safety Monitors	G99



Repeater	Tuner	Couplers
G75, G77	G79	G103

## AS-interface Selection Guide



AIM	Pages
Discrete Input	G37
Discrete Output	G45
Discrete Input & Output	G39 - G43

Conduit Body	Pages
Discrete Input & Output	G47



IP 20 Slice	Pages
Analog Input	G49 - G55
Analog Output	G57 - G61

IP 65 Block	Pages
Analog Input	G63 - G67
Analog Output	G69
Special Function, Code Block	G73
Special Function, Counter	G71



OEM	Pages
PC-Boards	G81 - G91
Safety Input & Output	G101

## AS-interface Selection Guide



Cables	Junctions	Conduit Adapters
G112 - G116	G117 - G136	G137 - G138



Tees	Gender Changers	Field Wireable Tees
G139	G140, G153	G141



Flat Cable and Adapters	Receptacles	Field Wireable Connectors
G142	G143 - G150	G151 - G152


## AS-interface® System Description

AS-interface (commonly referred to as AS-I) is a low-level I/O interface system. It was originally intended to be a simple, low cost system that would be easy to install and maintain. With that philosophy in mind, the original developers designed AS-I as a discrete-only two-wire system. It incorporated features like automatic station addressing, and power and data were carried on a single untwisted pair of wires.

As the demand for AS-I grew, so did the demand for more complex devices. The next major version of AS-I, v2.1, extended the protocol to include seamless transfer of analog data, transmission of simple diagnostic data and an extended addressing up to a 62 node scheme that effectively doubled the number of stations allowed on the network. The newest version of AS-I, v3.0, has gone even further, allowing more options for analog data and much more detailed diagnostic information to be communicated. New versions of AS-I are backward compatible and support slaves from earlier versions. Additionally, AS-I was one of the first network systems to incorporate a safety protocol, allowing emergency-stop and machine-stop systems to be seamlessly integrated with the network.

AS-I can be used as a stand alone network or can be connected to a higher level system, such as DeviceNet™ or PROFIBUS®-DP, through a gateway. The gateway acts as a slave to the higher system and a master to the AS-I system.

## Typical System Configuration

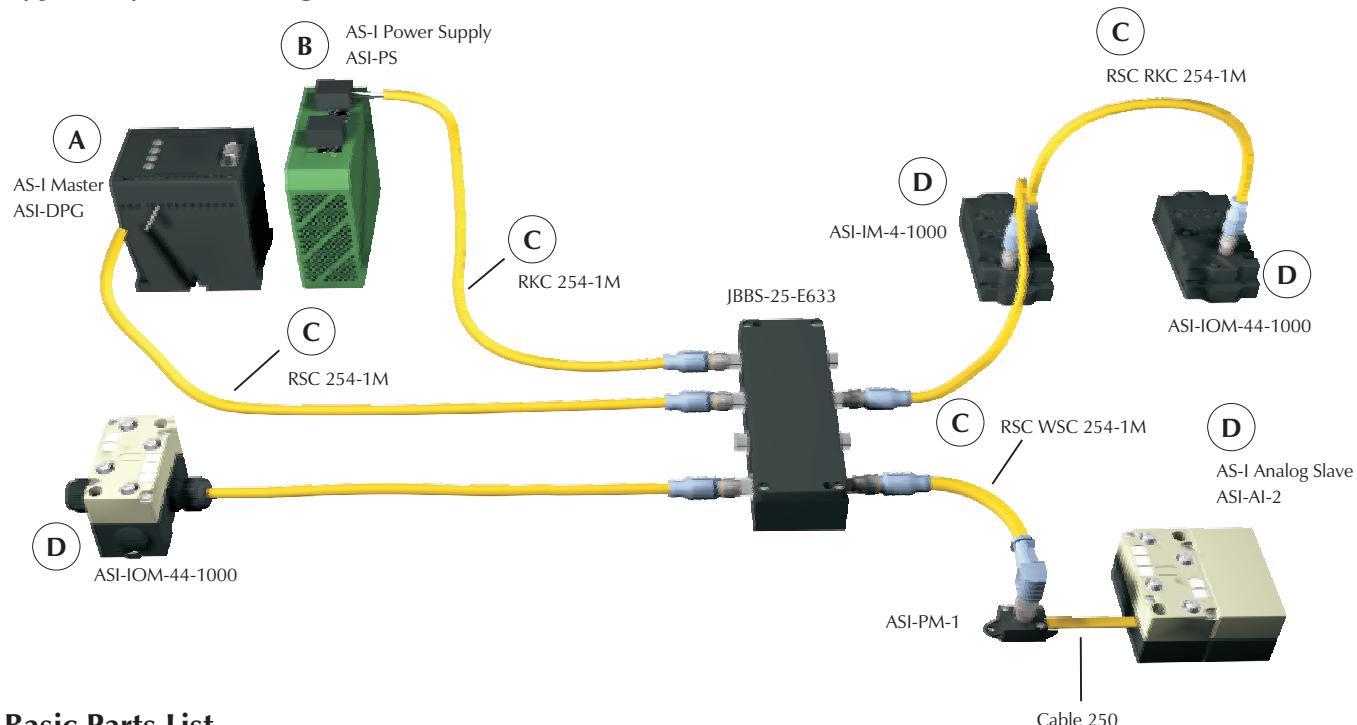

## Basic Parts List

A typical AS-I system consists of the following parts:

- A = Master
- B = AS-I Power Supply
- C = AS-I Cable
- D = AS-I I/O Modules (or Slaves)

AS-I stations require a network master (also called a scanner) to interface the stations to the host controller. In some cases the scanner and controller are packaged as a single unit; in other cases the scanner acts as a gateway to a higher level network or to a PLC. **TURCK** AS-I stations are designed to be fully compatible with AS-I equipment from other manufacturers.



## TURCK & Bihl+Wiedemann

Bihl+Wiedemann, considered the "AS-I masters", is the leading supplier of AS-I master and gateway products. Their broad product range enables users to select from a wide variety of higher level fieldbuses or PC/PLC control solutions. Additionally, Bihl+Wiedemann provides a wide variety of analog AS-I slaves, PC-board level devices for OEMs and sophisticated AS-I accessory products. **TURCK** has partnered with Bihl+Wiedemann to distribute and support their products in North America.

## Cordsets

**TURCK** offers a complete line of molded AS-I cordsets to facilitate network installation, resulting in a faster start-up and fewer wiring errors. The bus and drop cables are specially designed foil-shielded, high-flex cables with very low inductance and capacitance to minimize propagation delay time. AS-I cables consist of a single untwisted and unshielded wire pair that carries both 30 VDC power and the network data. AS-I was originally designed for use with flat cable using an insulation displacement connection technology, but the use of round cables with sealed connectors has become more common. **TURCK** provides both cable options.

## Diagnostics

AS-I has limited field diagnostic capability, due to the limited amount of data transferred in each message. Although with v2.1, a peripheral fault bit can be reported by an AS-I station to indicate a fault with a field device. This allows the user to easily determine the location of a system fault down to the station level. AS-I v3.0 has even more diagnostic capabilities, allowing asynchronous "mailbox" messaging to receive more detailed error information.

Bihl+Wiedemann AS-I masters provide comprehensive information about the status of each station on the network by using register based tables to display each occupied network address.

## Addressing

The original AS-I system allowed only 4 bits of data to be transferred in each message for a fast and efficient data transfer system. Slaves could be addressed from one to 31, but with the growth of the network more than 31 stations were often required. Beginning with AS-I v2.1 stations were available with "AB" addressing. This scheme allows the station to be addressed from 1A to 31A or 1B to 31B, with 62 total slaves with four discrete inputs and three discrete outputs each. The extended address range (and the three outputs) is achieved by using one output bit as an AB address.

When both A and B addressed slaves are on the same network, they are scanned on alternating cycles (first all the A slaves are scanned, then all the B slaves). Both AB and single-address slaves can be on the same network. In this case the single-address (non AB style) slaves are scanned every cycle. It's important to note that not all v2.1 slaves use this addressing scheme, although it is often referred to as v2.1 addressing.

## Analog Data

Although the original AS-I version only allowed discrete data transfer, v2.1 and higher support seamless analog data transfer. This is accomplished by sending a portion of the analog data on each of several consecutive network cycles; for example, a 16-bit word of data requires seven network cycles. Further, AS-I v3.0 allows analog data to be transferred in a single cycle by consuming more than one address for the analog slave.

## Communication Rate/Cycle Time

AS-I communicates at a fixed data rate of 167 kbps. The system's cycle time is very predictable because of the simple communication scheme and fixed data rate. For example, a network with 31 slaves will have a cycle time of less than 5 ms. A network with 62 slaves (all A and B addresses used) will have a cycle time of less than 10 ms. If analog slaves are being used, the cycle time will change to account for the fact that an analog word takes multiple network cycles to transmit.

## Maximum Ratings

The AS-I system uses a freeform layout topology. Up to 100 m of cable can be used on a segment before a repeater or tuner needs to be installed to allow the network to be extended beyond the 100 m limit. No terminating resistors are required.

# Process Automation



**Notes:**



## AS-interface® Masters and Gateways

**TURCK** offers a wide variety of AS-I masters and gateways manufactured by Bihl+Wiedemann. These devices control communication on the AS-I network and provide a logical connection from the slave and I/O devices in the field to the host. The terms “master” and “gateway” as used here differ in the following way: A master is an AS-I controller that provides a direct link to the host (PLC, PC, DCS etc.); a gateway is an AS-I master, while also being a slave to a higher-level system (such as DeviceNet™, PROFIBUS®-DP or Ethernet). In the case of a gateway, the AS-I information is compiled by the AS-I master and communicated through the higher-level system as a standard slave data map.


AS-I masters and gateways are available in several different designs. The latest gateway versions incorporate stainless steel housing, support DeviceNet, EtherNet/IP™, Modbus-TCP, PROFIBUS-DP, CANopen and Modbus as higher-level networks, and are available with one or two AS-I masters. These gateways also feature AS-I v3.0 software, and a graphical display for configuration and maintenance with no need for a PC. Other new features include a direct serial connection to the AS-I Control Tools software (requires a connection cable that can be ordered with the software: part number ASI-CT-SS BW1602), ground fault detection and duplicate address detection.

Gateways for some higher-level systems are also available with nylon housing. Some of these feature a graphical display, while others contain a two-digit display for configuration. These gateways may be connected to the AS-I Control Tools software through the higher-level network interface by using a “master simulator”.


Masters are available as cards for Allen-Bradley® ControlLogix®, CompactLogix and MicroLogix 1500 PLCs, as well as in several different PC control form factors. Stand-alone masters with RS232, RS485 and RS422 serial connections are also available.

## Features


AS-I masters and gateways are available with one or two supported AS-I networks, referred to as "single masters" and "double masters". Double masters can be used to save cost and cabinet space where the system being installed is too large (physically or due to the number of slaves) for one AS-I network. The master and power supply may be connected anywhere along the network, but should be located next to each other. Slaves and repeaters should not be connected between the master and the power supply, as doing so disables some diagnostic features (such as duplicate address detection and ground fault detection). An example of a system with the "A-style" power supply (gateway is powered from the AS-I power supply) is shown here.

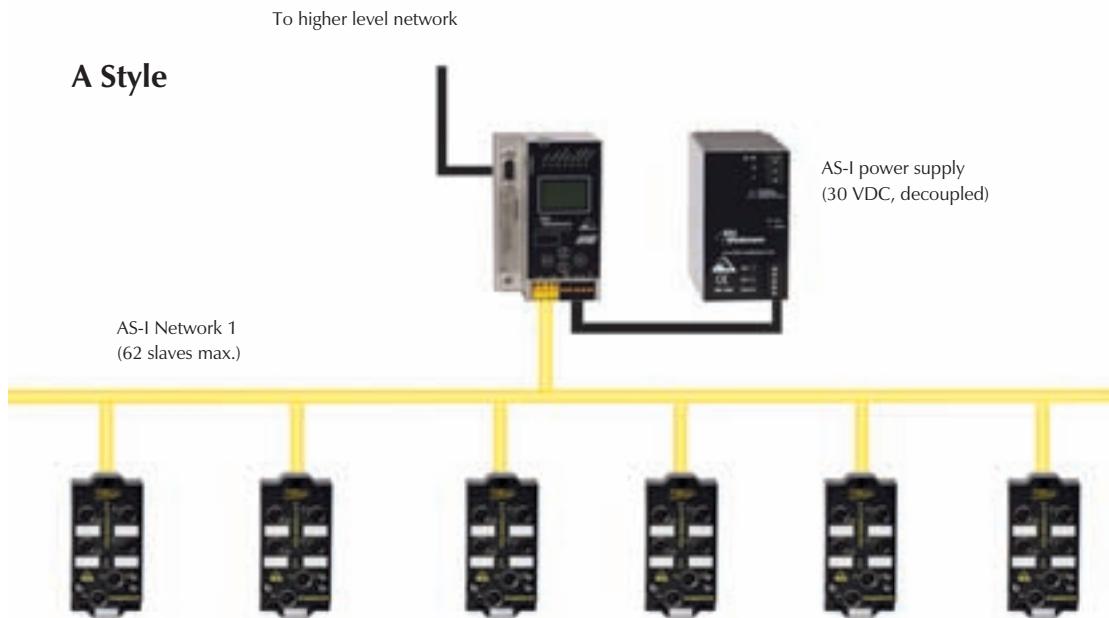

Alternatively, two AS-I networks could be connected to one dual master, as shown. The dual master consists of two AS-I masters and one connection to the higher-level system (or backplane). Note that each AS-I network has its own power supply, but combining the two masters into one unit conserves cabinet space. This is the “A2” power supply configuration (gateway is powered from the AS-I supplies for each network).

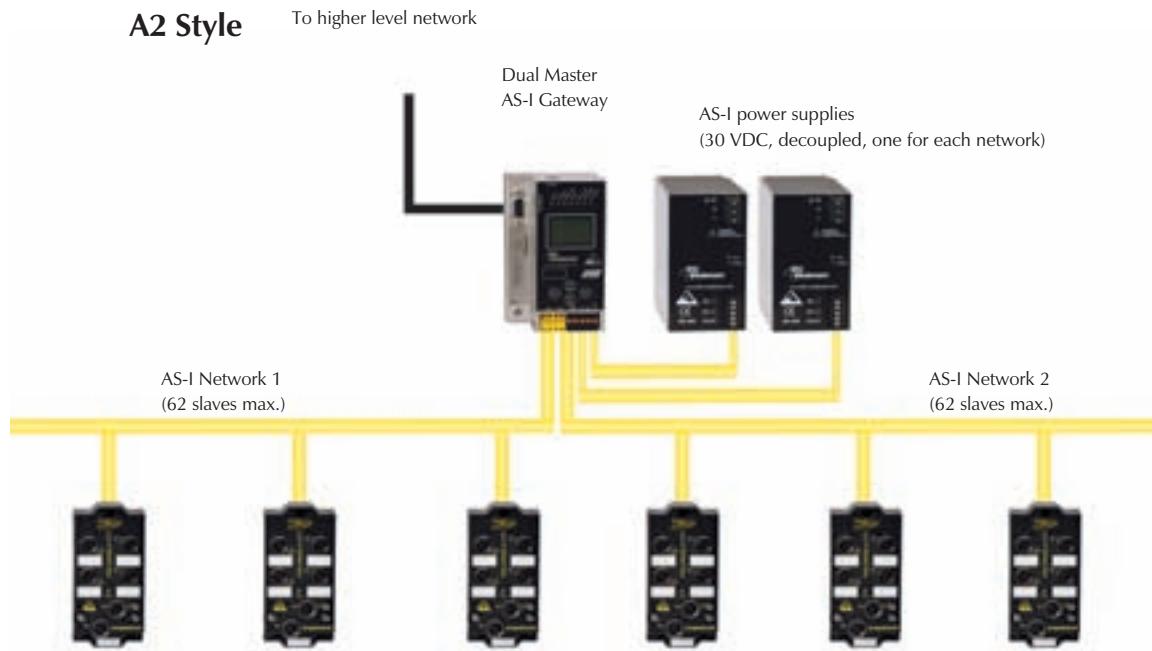

A third option is to use a dual master with a single power supply (E-style power configuration). In this case, the master contains the necessary AS-I power supply decoupling circuit for each network. Therefore one 30 VDC power supply can be used for both networks saving even more space and product cost. More than one of these double masters can be supplied from the same 30 VDC source.

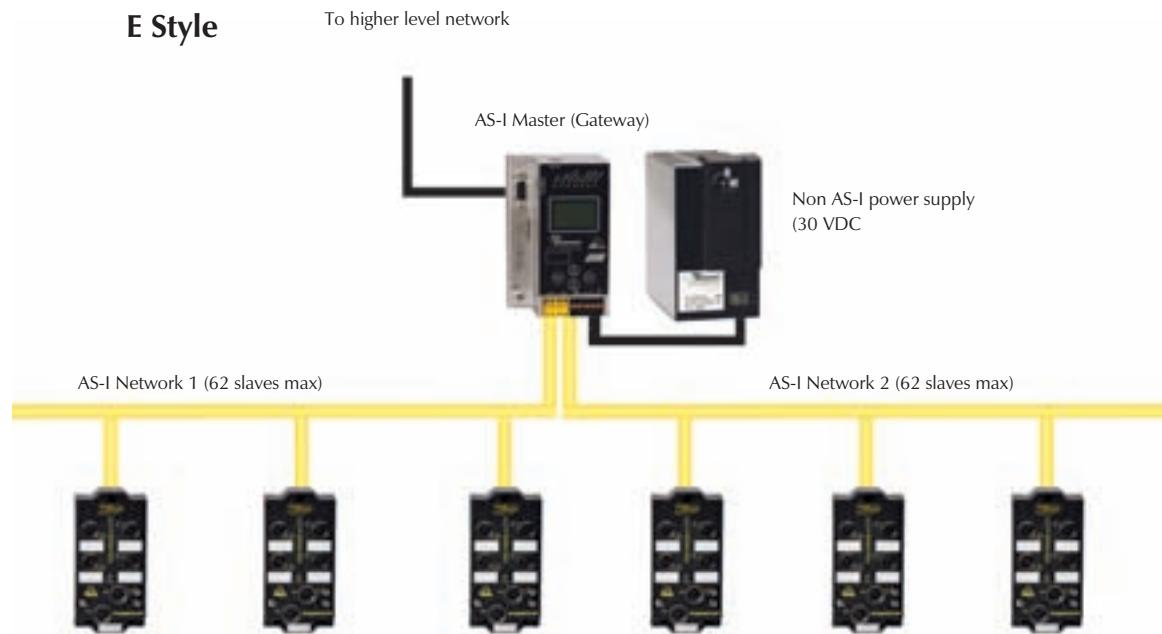

## Addressing

Network addresses for all AS-I gateways are programmed via the push buttons on the face of the gateway. For more details, please consult the user manual for the specific gateway in question. Manuals can be downloaded from [www.turck.com](http://www.turck.com).

### AS-I Masters for AB PLCs



- PLC AS-I Masters
- Fit Standard Allen-Bradley Backplanes

- Analog and Discrete Data Support
- Integrated AS-I Diagnostics

### Electrical

- Operating Current: 70 mA from each AS-I supply, 390 mA from 5.1 V backplane supply, 150 mA from 24 V backplane supply (BW1488, BW1611) 100 mA from AS-I supply, 450 mA from 5 V backplane supply (BW1416, BW1610)

### Power Distribution

- Power is drawn both from AS-I and the backplane

### Mechanical

- Operating Temperature: 0 to +55 °C (+32 to +131°F)
- Protection: IP 20


### Diagnostics (Logical)

- AS-I I/O faults are reported via the peripheral fault bit for each slave (v2.1 and higher)

### Diagnostics (Physical)

- LEDs to indicate status of AS-I and backplane communication and power supply

**ASI-SCAN-AB-BW1488**  
**ASI-SCAN-AB BW1416**  
**ASI-SCAN-AB/ACT BW1610**  
**ASI-SCAN-AB/ACT BW1611**

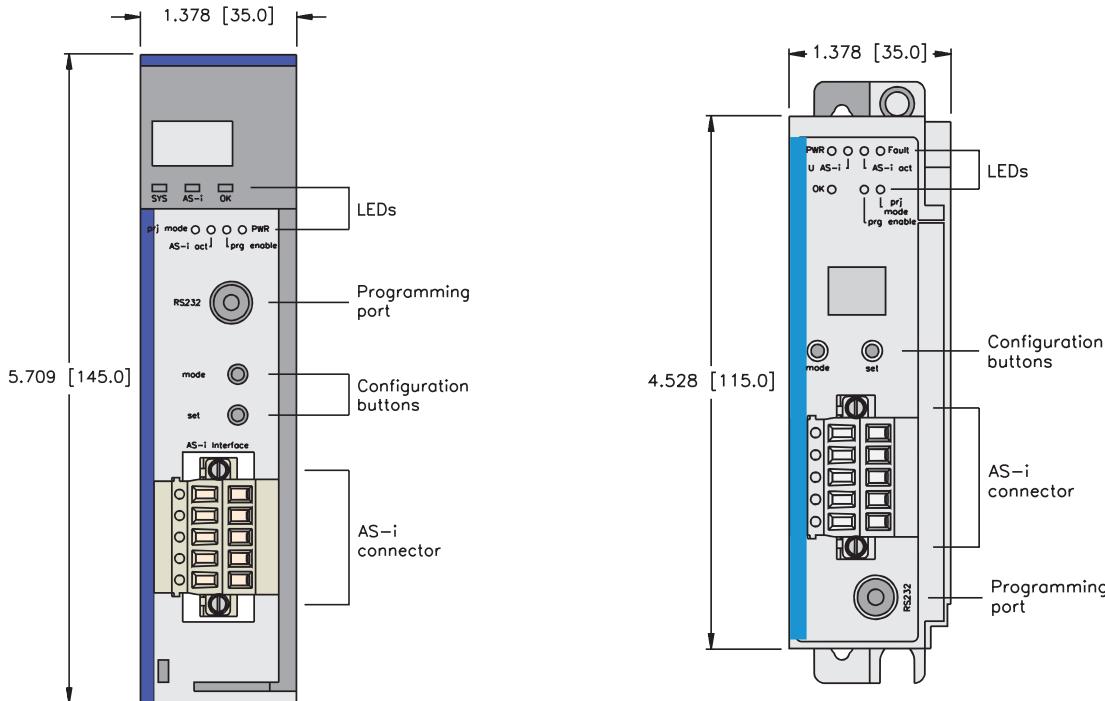


Note: BW1610 is BW1416 with configuration software. BW1611 is BW1488 with configuration software.


Part Number	PLC Format	AS-i Version	Connection Diagram	# of AS-i Masters	Included Software
ASI-SCAN-AB-BW1488	ControlLogix	2.1	A	2	
ASI-SCAN-AB BW1416	CompactLogix/MicroLogix1500	2.1	B	1	
ASI-SCAN-AB/ACT BW1610	CompactLogix/MicroLogix1500	2.1	B	1	X
ASI-SCAN-AB/ACT BW1611	ControlLogix	2.1	A	2	X

### Input/Output Connectors

**A**

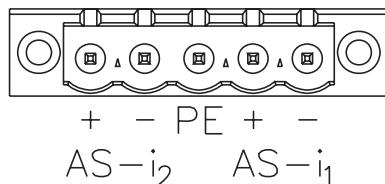

**B**

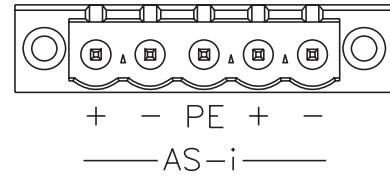

**AS-I Gateways in Stainless Steel**


- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)  
200 mA from  $V_{AS-i_1}$ , 70mA from  $V_{AS-i_2}$  (Power Supply A2)  
250 mA from  $V_{AUX}$  (Power Supply E)

**Power Distribution**

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: According to EN 61131-2

**Material**

- Housing: Stainless Steel


**Diagnostics (Logical)**

- AS-I diagnostic data is available via Network interface

**Diagnostics (Physical)**

- LEDs to indicate status of network and AS-I communication and power supply

\* not ETL Listed

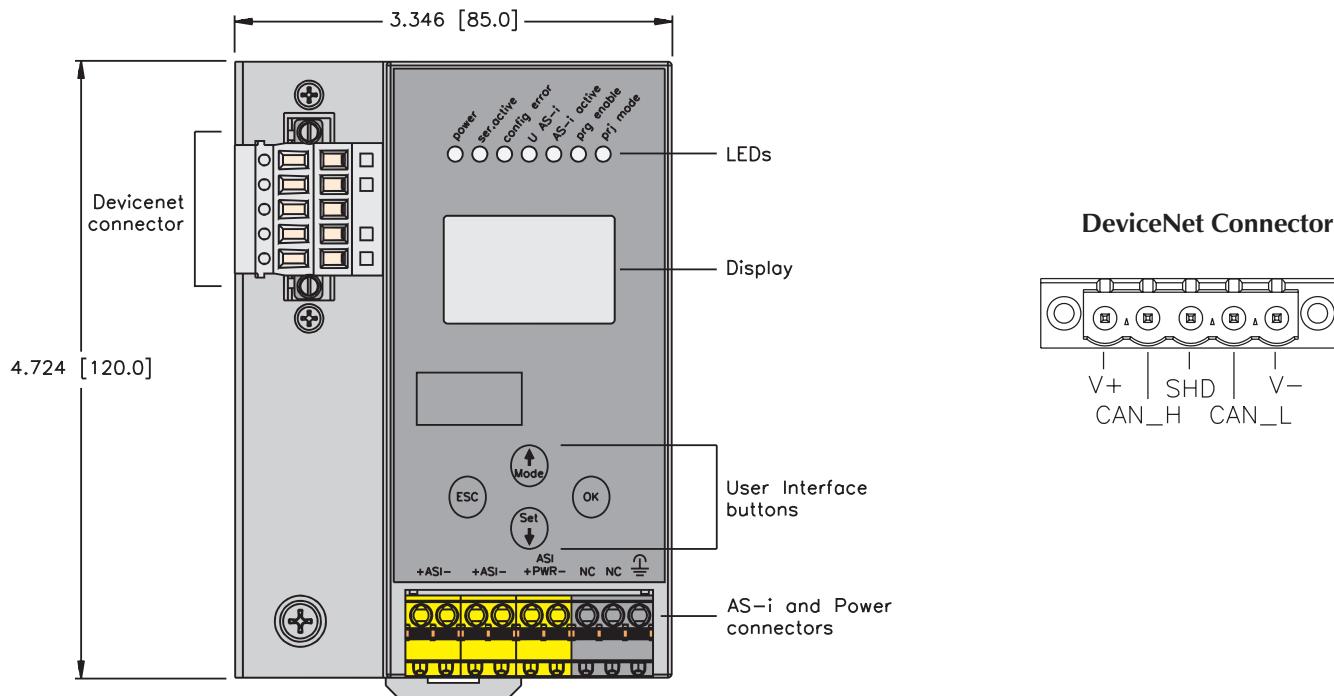


Part Number	Higher Level Network	Power Style	AS-I Version	Connection Diagram	# of AS-I Masters
ASI-DNG-SS BW1818	DeviceNet	A	3.0	A	1
ASI-DNG-SS BW1819	DeviceNet	A2	3.0	A2	2
ASI-DNG-SS BW1820	DeviceNet	E	3.0	E	2
ASI-DNG-SS-C1D2 BW1824*	DeviceNet	A	3.0	A	1
ASI-DNG-SS-C1D2 BW1825*	DeviceNet	A2	3.0	A2	2
ASI-DNG-SS-C1D2 BW1826*	DeviceNet	E	3.0	E	2


\* Approved for use in Class 1, Division 2 areas

## Input/Output Connectors


**A**

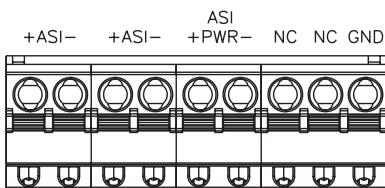

**A2**

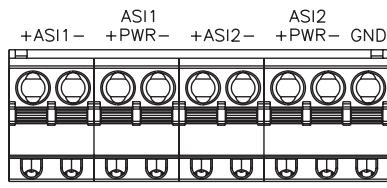

**E**

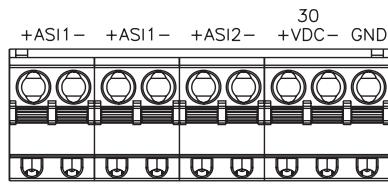

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**Modbus TCP Gateways in  
Stainless Steel**
**ASI-ENG-SS BW1650\*****ASI-ENG-SS BW1651\*****ASI-ENG-SS BW1652\*****ASI-ENG-SS-C1D2 BW1659****ASI-ENG-SS-C1D2 BW1660****ASI-ENG-SS-C1D2 BW1661**

\* not ETL Listed

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)  
200 mA from  $V_{AS-i1}$ , 70mA from  $V_{AS-i2}$  (Power Supply A2)  
250 mA from  $V_{AUX}$  (Power Supply E)

**Power Distribution**

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**

- Health of AS-I network is available via Network interface

**Diagnostics (Physical)**

- LED to indicate status of network and AS-I communication and power supply

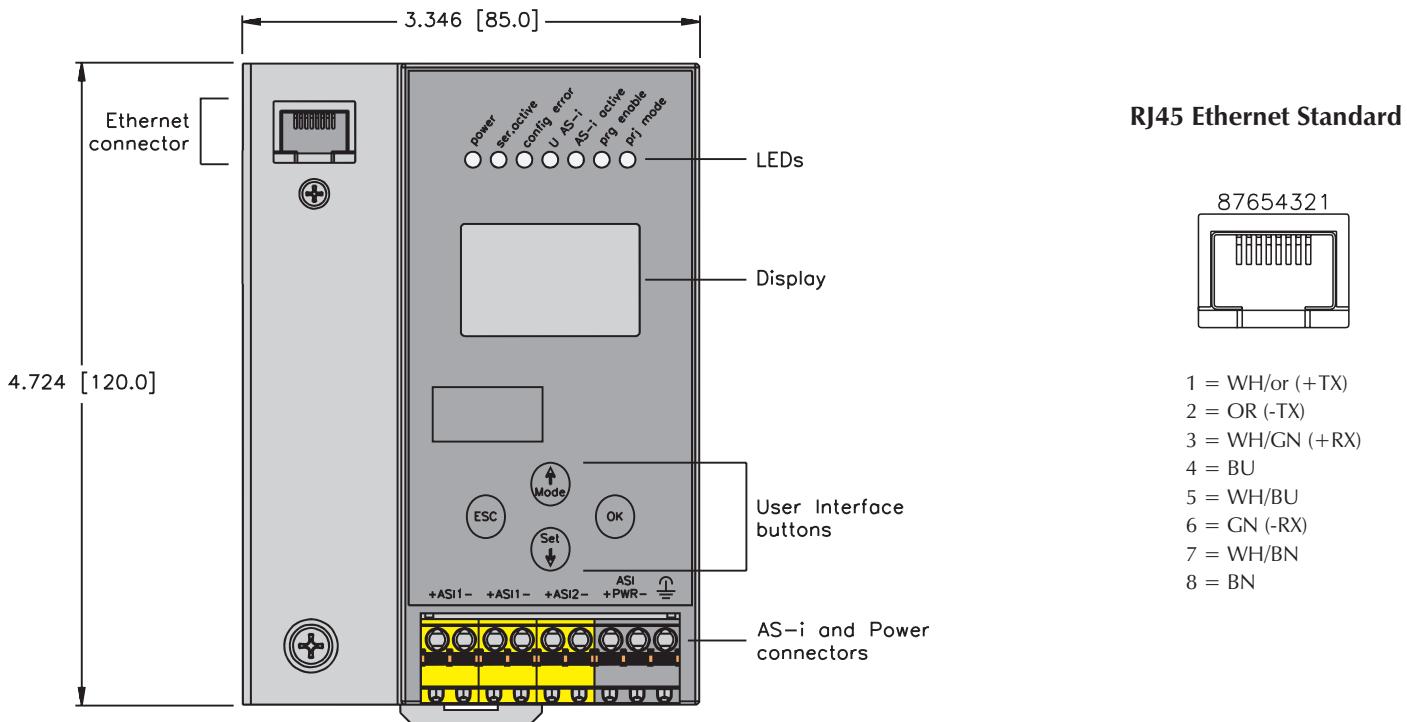

# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-ENG-SS BW1650	ModbusTCP	A	3.0	1	X	X
ASI-ENG-SS BW1651	ModbusTCP	A2	3.0	2	X	X
ASI-ENG-SS BW1652	ModbusTCP	E	3.0	2	X	X
ASI-ENG-SS-C1D2 BW1659*	ModbusTCP	A	3.0	1		
ASI-ENG-SS-C1D2 BW1660*	ModbusTCP	A2	3.0	2		
ASI-ENG-SS-C1D2 BW1661*	ModbusTCP	E	3.0	2		


\* Approved for use in Class 1, Division 2 areas

## Input/Output Connectors


A

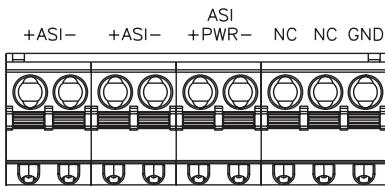

A2

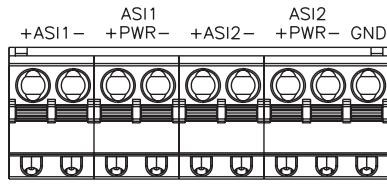

E

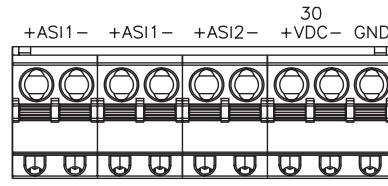

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

## AS-I Ethernet/IP Gateways in Stainless Steel

- AS-I v3.0 Supported
  - Graphical Display
  - Integrated Ground-Fault Detection
  - Integrated AS-I Diagnostics



ASI-EIPG-SS BW1828\*

ASI-EIPG-SS BW1829\*


ASI-EIPG-SS BW1833\*

**ASI-EIPG-SS-C1D2 BW1834**

**ASI-EIPG-SS-C1D2 BW1835**

**ASI-EIPG-SS-C1D2 BW1836**

\* not ETL listed

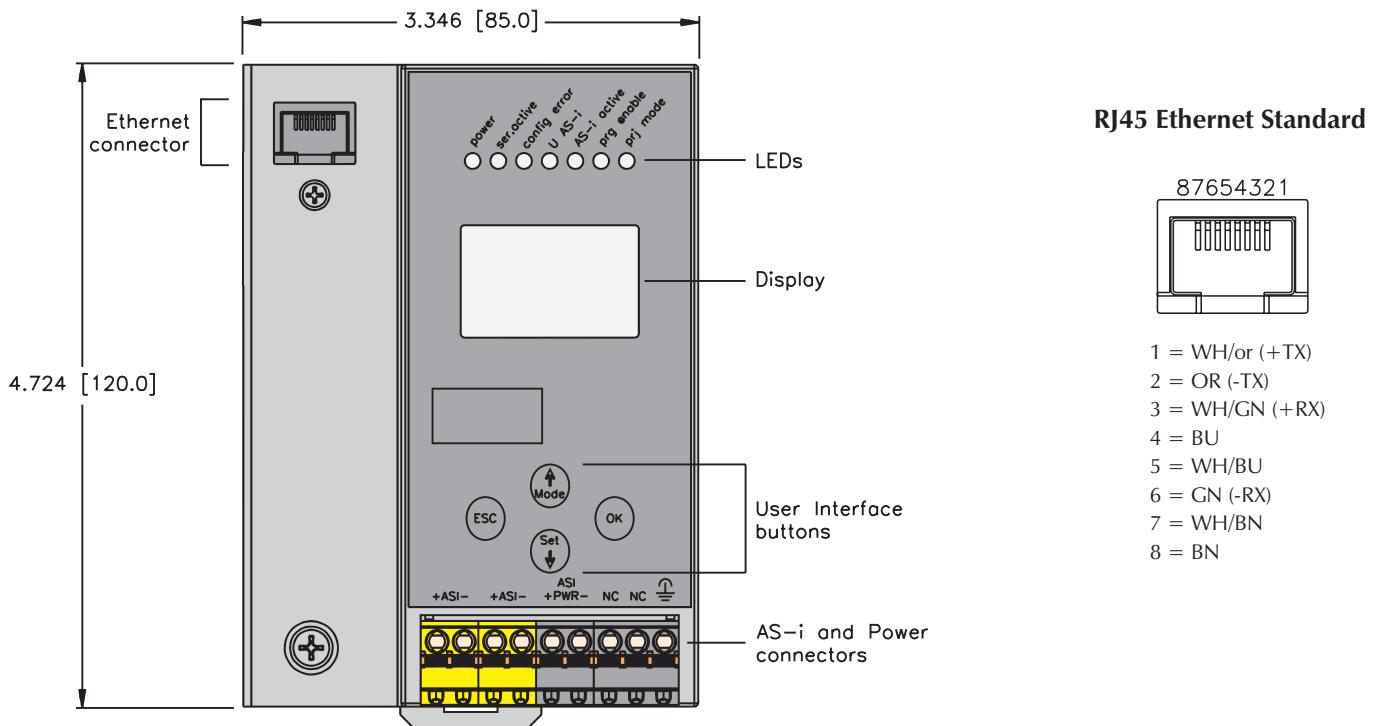


Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-EIPG-SS BW1828	Ethernet/IP	A	3.0	1	X	X
ASI-EIPG-SS BW1829	Ethernet/IP	A2	3.0	2	X	X
ASI-EIPG-SS BW1833	Ethernet/IP	E	3.0	2	X	X
ASI-EIPG-SS-C1D2 BW1834*	Ethernet/IP	A	3.0	1		
ASI-EIPG-SS-C1D2 BW1835*	Ethernet/IP	A2	3.0	2		
ASI-EIPG-SS-C1D2 BW1836*	Ethernet/IP	E	3.0	2		


Approved for use in Class 1, Division 2 areas

### Input/Output Connectors


**A**

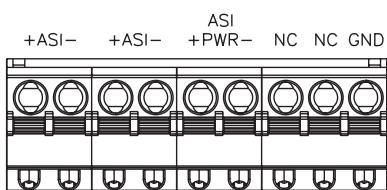

**A2**

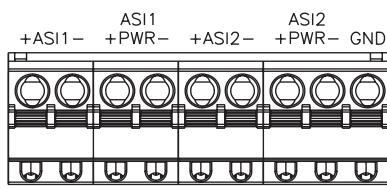

**E**

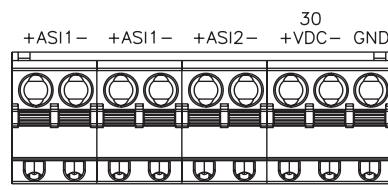

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I ProfiNET Gateways in  
Stainless Steel**

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 300 mA from V<sub>AS-I</sub> (Power Supply A)

**Power Distribution**

- From AS-I supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**



- Housing: Stainless Steel

**Diagnostics (Logical)**

- Health of AS-I network is available via Network interface

**Diagnostics (Physical)**

- LED to indicate status of network and AS-I communication and power supply

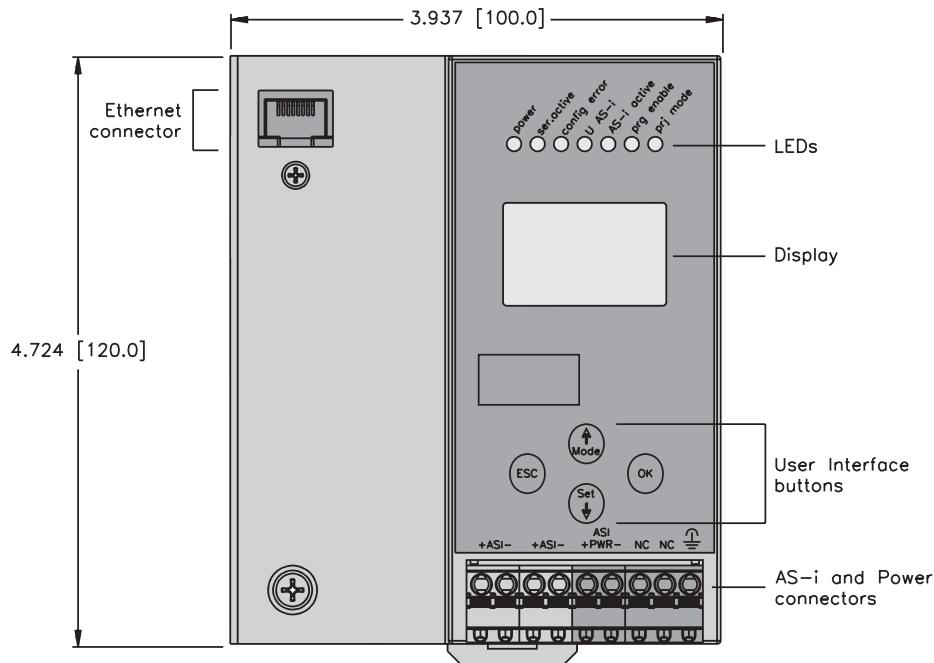

**ASI-PNG-SS BW1912**

**RJ45 Ethernet Standard**


- |   |               |
|---|---------------|
| 1 | = WH/or (+TX) |
| 2 | = OR (-TX)    |
| 3 | = WH/GN (+RX) |
| 4 | = BU          |
| 5 | = WH/BU       |
| 6 | = GN (-RX)    |
| 7 | = WH/BN       |
| 8 | = BN          |

Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-PNG-SS BW1912	PROFINET	A	3.0	1	X	X

### **Input/Output Connectors**

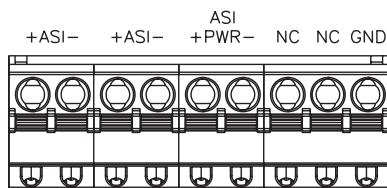**A**



A - Single AS-I network is powered by and AS-I power supply

**AS-I Profibus-DP Gateways in  
Stainless Steel**
**ASI-DPG-SS BW1567\*****ASI-DPG-SS BW1568\*****ASI-DPG-SS BW1569\*****ASI-DPG-SS-SE BW1773\*****ASI-DPG-SS-SE BW1774\*****ASI-DPG-SS-C1D2 BW1653****ASI-DPG-SS-C1D2 BW1654****ASI-DPG-SS-C1D2 BW1655**

\* Not ETL Listed

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)  
200 mA from  $V_{AS-i1}$ , 70mA from  $V_{AS-i2}$  (Power Supply A2)  
250 mA from  $V_{AUX}$  (Power Supply E)

**Power Distribution**

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**

- Health of AS-I network is available via Proximus-DP interface

**Diagnostics (Physical)**

- LED to indicate status of network and AS-I communication and power supply

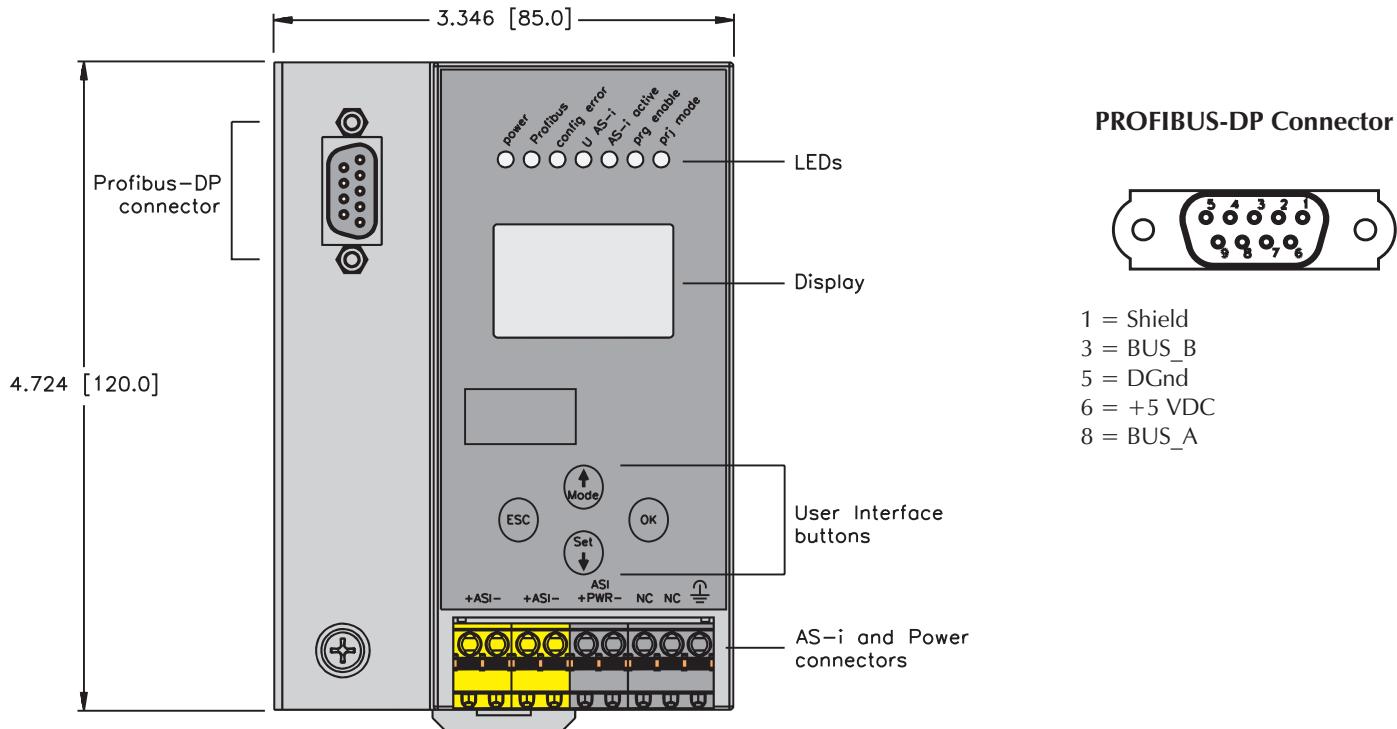


# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-DPG-SS BW1567	PROFIBUS-DP	A	2.1	1	X	X
ASI-DPG-SS BW1568	PROFIBUS-DP	A2	2.1	2	X	X
ASI-DPG-SS BW1569	PROFIBUS-DP	E	2.1	2	X	X
ASI-DPG-SS-SE BW1773	PROFIBUS-DP	A	2.1	1		
ASI-DPG-SS-SE BW1774	PROFIBUS-DP	A2	2.1	2		
ASI-DPG-SS-C1D2 BW1653*	PROFIBUS-DP	A	3.0	1		
ASI-DPG-SS-C1D2 BW1654*	PROFIBUS-DP	A2	3.0	2		
ASI-DPG-SS-C1D2 BW1655*	PROFIBUS-DP	E	3.0	2		

\* Approved for use in Class 1, Division 2 areas


**A**

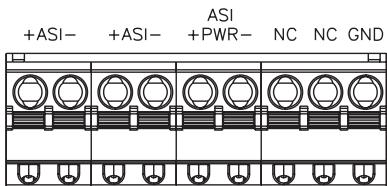

**A2**

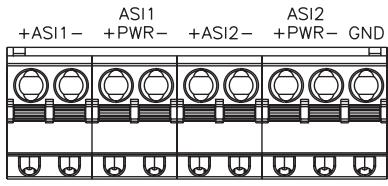

**E**

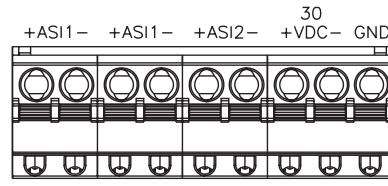

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I PROFIBUS-D Economy Gateways**

- AS-I v3.0 Supported
- LED Display
- PROFIBUS-DP Support
- Integrated AS-I Diagnostics


**Electrical**

- Operating Current: <300 mA from AS-I

**Power Distribution**

- From AS-I supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**

- AS-I diagnostic data is available via Network interface

**Diagnostics (Physical)**


- LEDs to indicate status of network and AS-I communication and power supply

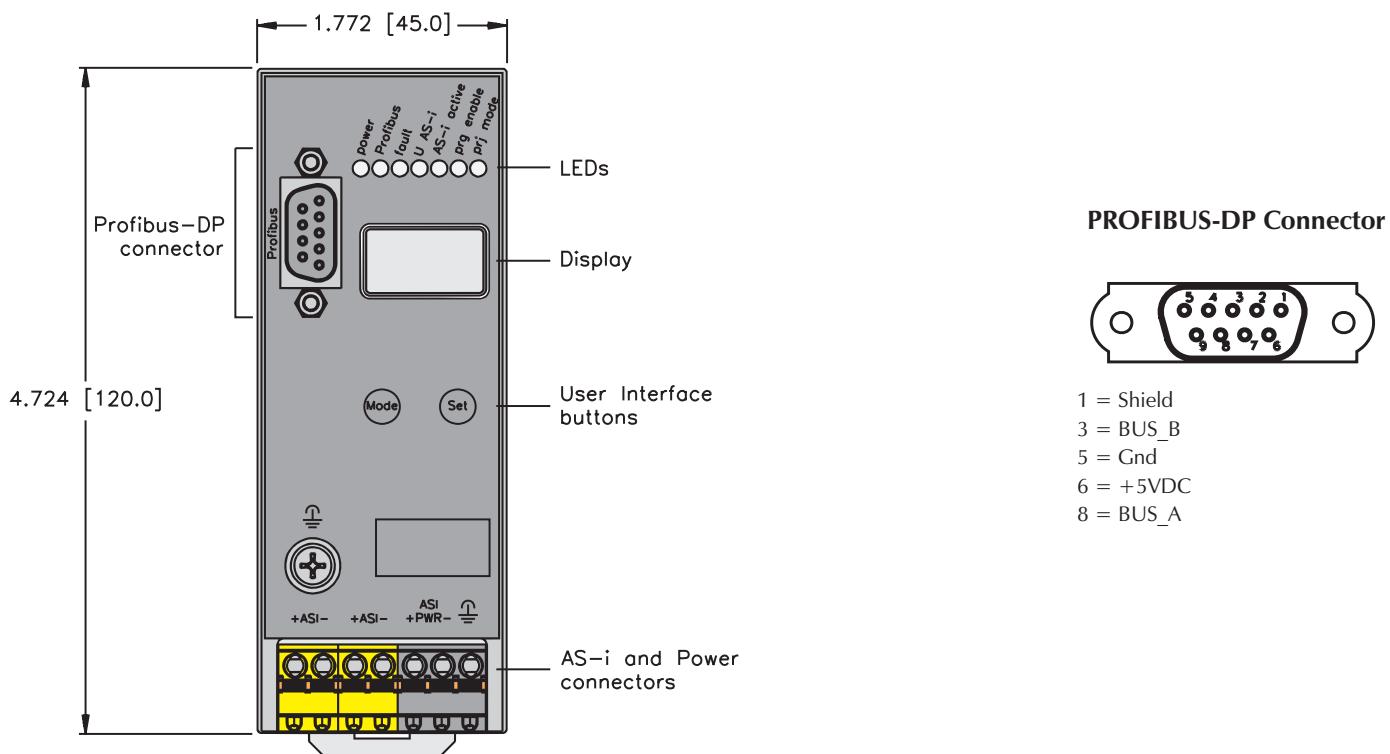**ASI-DPG-SS-B BW1746**


Part Number	Higher Level Network	Power Style	AS-I Version	Connection Diagram	# of AS-I Masters
ASI-DPB-SS BW1746	PROFIBUS-DP	A	2.1	A	1

### Input/Output Connectors

**A**

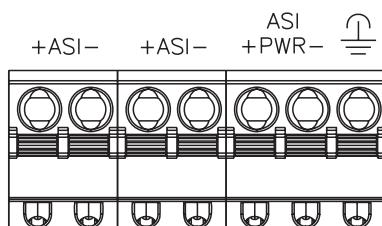

**AS-I CANopen Gateways in Stainless Steel**

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics


**ASI-COG-SS BW1821**
**ASI-COG-SS BW1822**
**ASI-COG-SS BW1823**

**Electrical**

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)  
200 mA from  $V_{AS-i1}$ , 70mA from  $V_{AS-i2}$  (Power Supply A2)  
250 mA from  $V_{AUX}$  (Power Supply E)

**Power Distribution**

- From AS-I supply for each network (Power Supply A, A2)  
From external supply (Power Supply E)

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**

- Health of AS-I network is available via CANopen interface

**Diagnostics (Physical)**

- LED to indicate status of network and AS-I communication and power supply

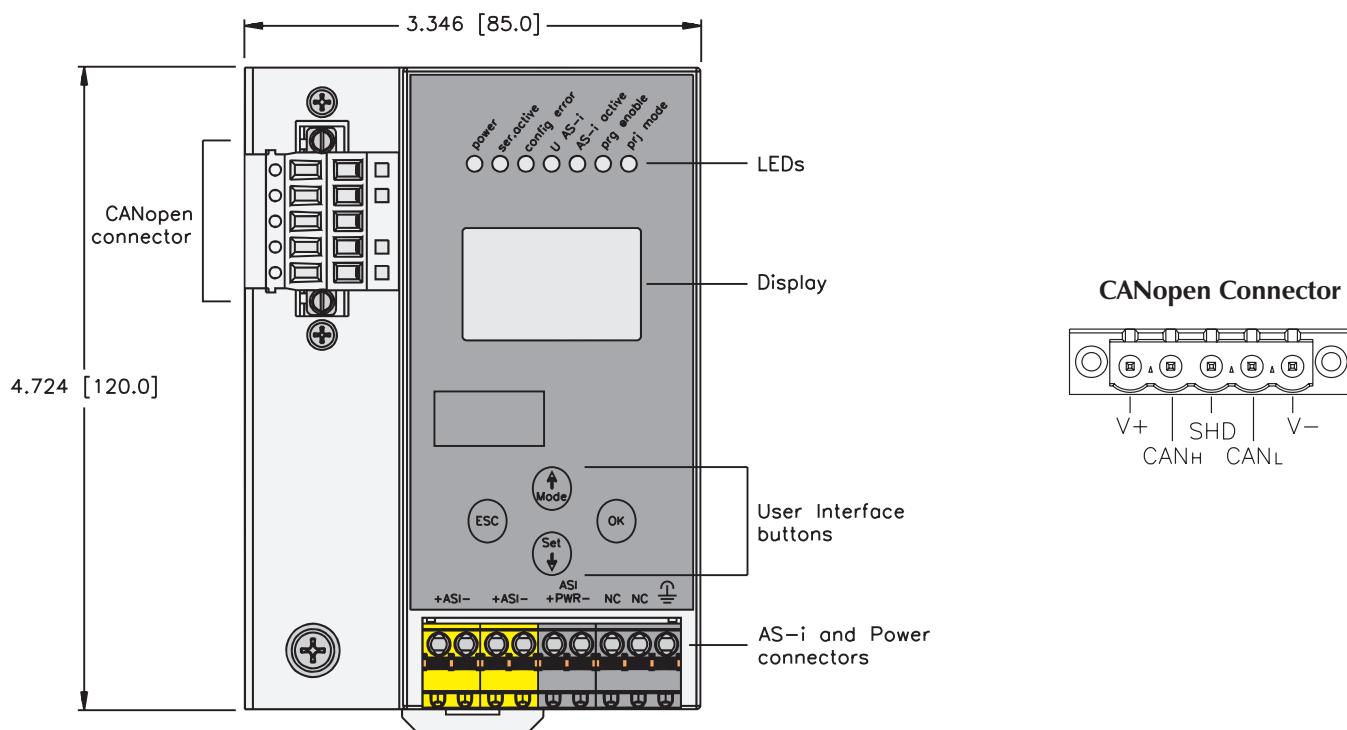


# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-COG-SS BW1821	CANopen	A	3.0	1	X	X
ASI-COG-SS BW1822	CANopen	A2	3.0	2	X	X
ASI-COG-SS BW1823	CANopen	E	3.0	2	X	X

## Input/Output Connectors


**A**

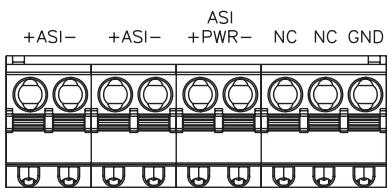

**A2**

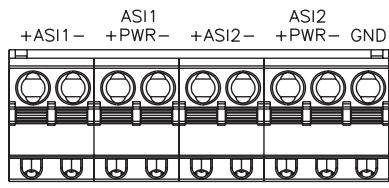

**E**

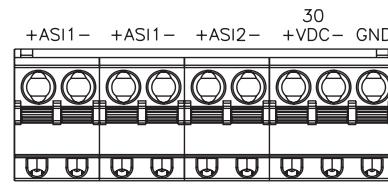


A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I Modbus Gateways in  
Stainless Steel**
**ASI-MBG-SS BW1641\*****ASI-MBG-SS BW1642\*****ASI-MBG-SS BW1643\*****ASI-MBG-SS-C1D2 BW1656****ASI-MBG-SS-C1D2 BW1657****ASI-MBG-SS-C1D2 BW1658**

\* not ETL listed

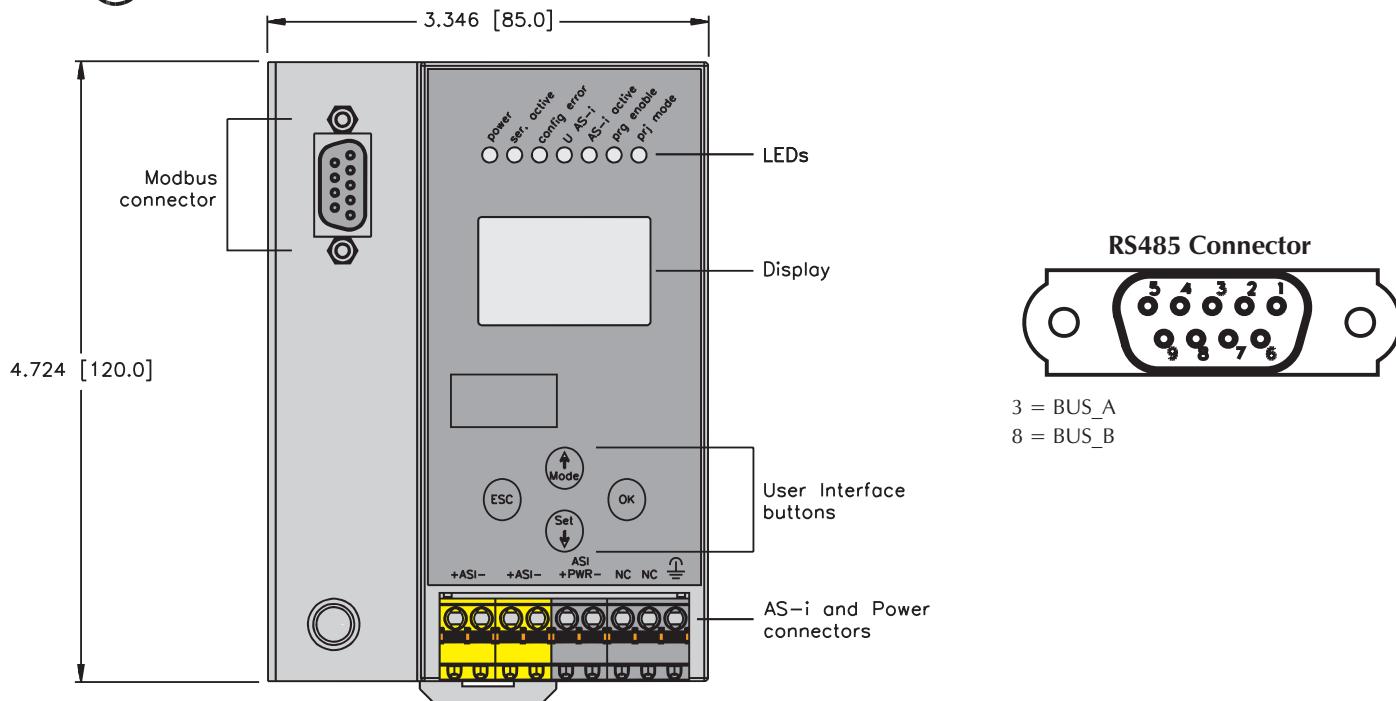

# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-MBG-SS BW1641	Modbus	A	3.0	1	X	X
ASI-MBG-SS BW1642	Modbus	A2	3.0	2	X	X
ASI-MBG-SS BW1643	Modbus	E	3.0	2	X	X
ASI-MBG-SS-C1D2 BW1656*	Modbus	A	3.0	1		
ASI-MBG-SS-C1D2 BW1657*	Modbus	A2	3.0	2		
ASI-MBG-SS-C1D2 BW1658*	Modbus	E	3.0	2		


\* Approved for use in Class 1, Division 2 areas

## Input/Output Connectors


**A**

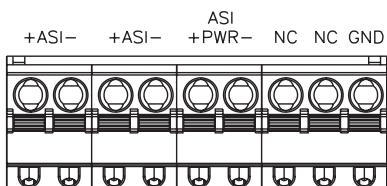

**A2**

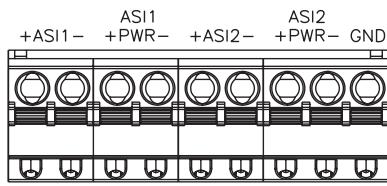

**E**

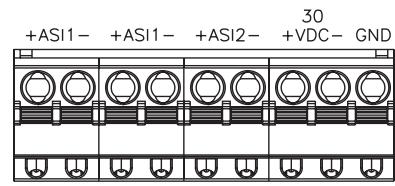

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I Gateways**

- Connect to Higher-Level Network
- 2-Digit Display
- Multiple Networks Supported
- Integrated AS-I Diagnostics

**ASI-MBPG BW1583****Electrical**

- Operating Current: 200 mA from  $V_{AS-i}$  (Power Supply A)

**Power Distribution**

- From AS-I supply for each network

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Plastic

**Diagnostics (Logical)**

- Health of AS-I network is available via Network interface

**Diagnostics (Physical)**


- LEDs to indicate status of network and AS-I communication and power supply

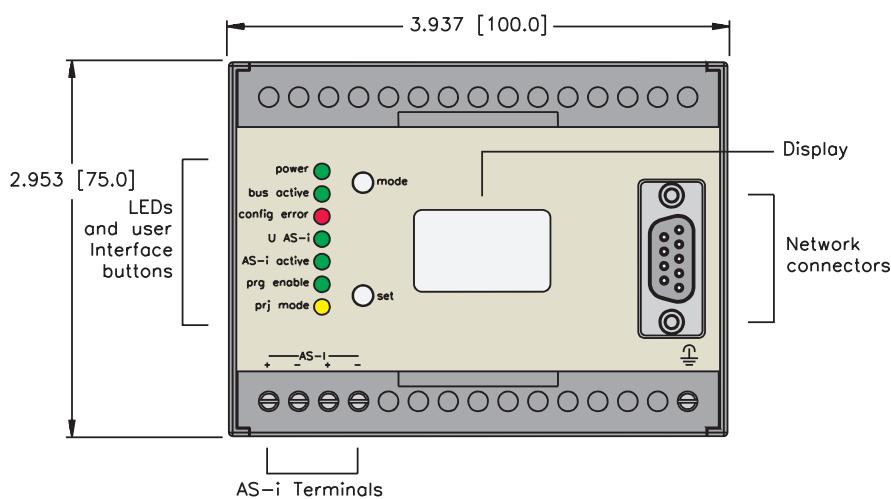**ASI-MBPG BW1583**

Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-MBPG BW1583	Modbus Plus	A	2.1	1		

### AS-I Connectors

A

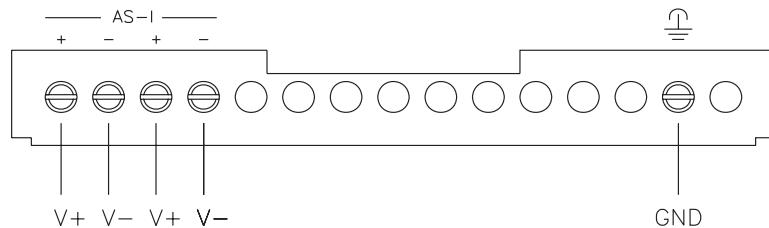

A - Single AS-I network is powered by an AS-I power supply

**AS-I Gateways****ASI-DPG BW1253****ASI-DPG BW1371****ASI-CCG BW1435**

- AS-I v2.1 Supported
- 2-Digit Display

- IP 65 Protection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from V<sub>AS-I</sub>

**Power Distribution**

- From AS-I supply for each network

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 65

**Material**


- Housing: Plastic

**Diagnostics (Logical)**


- Health of AS-I network is available via Network interface

**Diagnostics (Physical)**

- LEDs to indicate status of network and AS-I communication and power supply

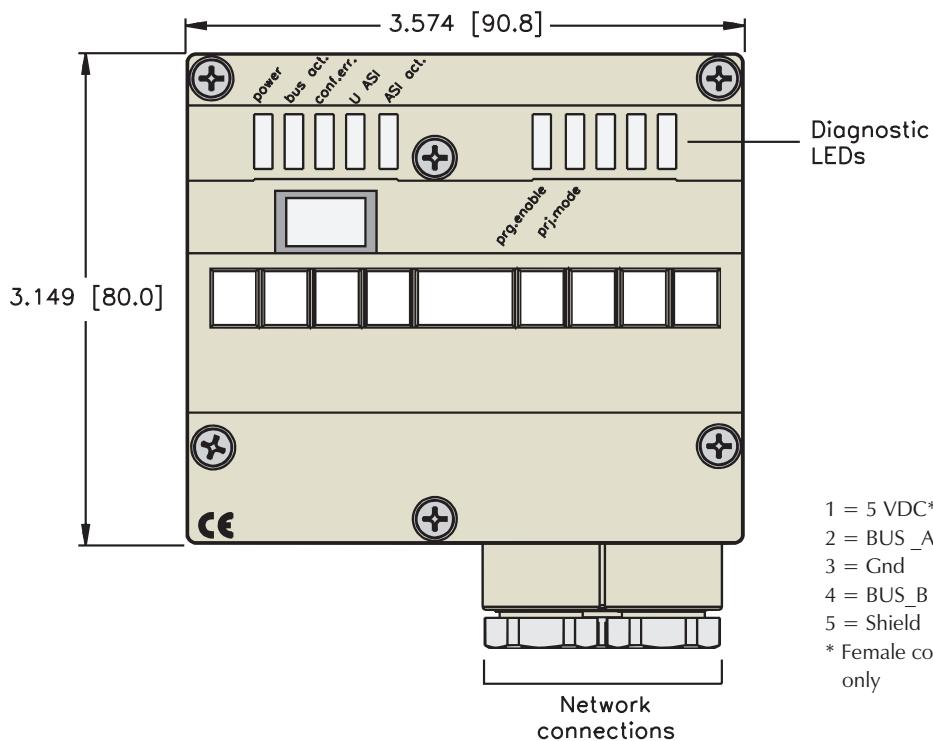

- PROFIBUS eurofast® Pinouts  
**Female**
- |            |
|------------|
| 1 = 5 VDC* |
| 2 = BUS_A  |
| 3 = Gnd    |
| 4 = BUS_B  |
| 5 = Shield |
- \* Female connector only

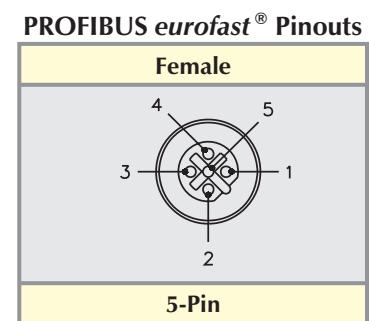
**ASI-DPG BW1371 only**

Part Number	Higher Level Network	Power Style	AS-I Version	Connection Diagram	* of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-DPG BW1253	PROFIBUS-DP	A	2.1	1	1		
ASI-DPG BW1371	PROFIBUS-DP	A	2.1	1	1		
ASI-CCG BW1435	CC-Link	A	2.1	2	1		


A - Single AS-I network is powered by and AS-I power supply

## Input/Output Connectors

1

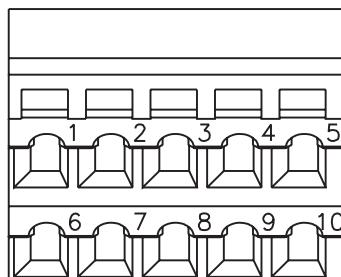

2

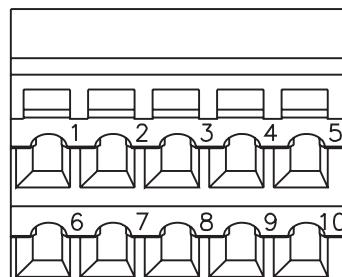

1	BUS_A
2	BUS_B
3	BUS_A
4	BUS_B
5	0V
6	Shield
7	FG (Function Gnd)
8	FG (Function Gnd)
9	Shield
10	+5V


1	FG (Function Gnd)
2	Shield
3	DG
4	DA
5	DB
6	FG (Function Gnd)
7	Shield
8	DG
9	DA
10	DB

Note: AS-I connections are made via standard AS-I base modules ASI-BM BW1180 or ASI-BM BW1182 (see pages E105-106).

**AS-i Masters**

- AS-I v3.0 Supported
- Graphical Display


- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

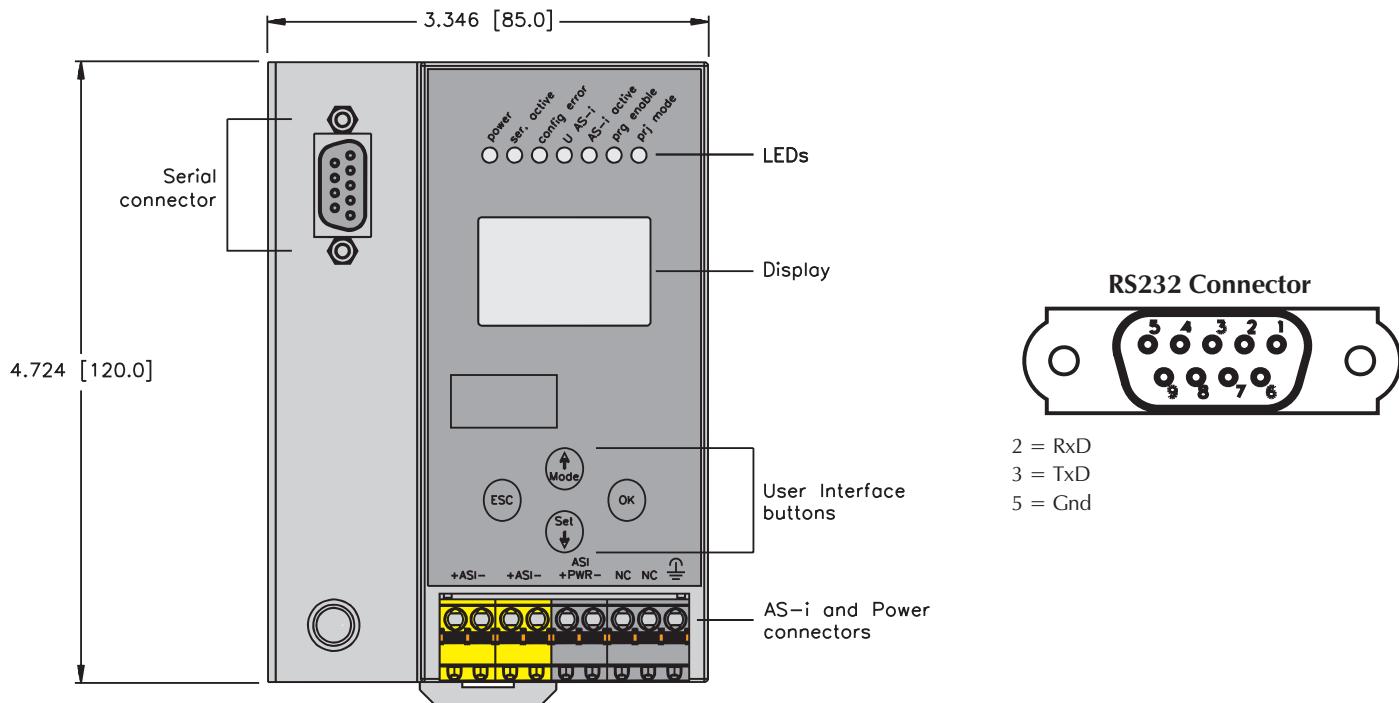**ASI-MM232-SS BW1955****ASI-MM232-SS BW1944****ASI-MM232-SS-CTL BW1986****CE**


Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface	Mini PLC
ASI-MM232-SS BW1955	RS232	A	3.0	1	X	X	
ASI-MM232-SS BW1944	RS232	A2	3.0	2	X	X	
ASI-MM232-SS-CTL BW1986	RS232	A	3.0	1	X	X	X

## Input/Output Connectors

A

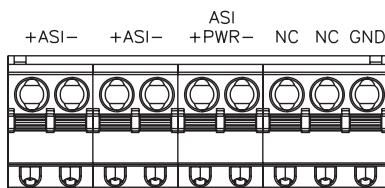

A2

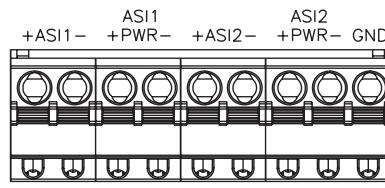

A - Single AS-I network is powered by one AS-I power supply  
 A2 - Dual AS-I networks are each powered by their own AS-I power supply

**AS-I Masters for PC Control****ASI-MMPCI BW1195 shown****ASI-MMPCI-V3 BW1922****ASI-MMPCI-V3 BW1911****ASI-MMPCI BW1195****ASI-MMISA BW1228****ASI-MMPCI104 BW1229**

- AS-I v2.1, 3.0 Supported
- Masters for PC Control

- Selection of Form Factors
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from PC (except BW1922 draws 300 mA @ 5 V, 100 mA @ 3.3 V)

**Power Distribution**


- From AS-I supply for each network
- From PC power supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)

**Diagnostics (Logical)**


- Health of AS-I network is available via PC interface

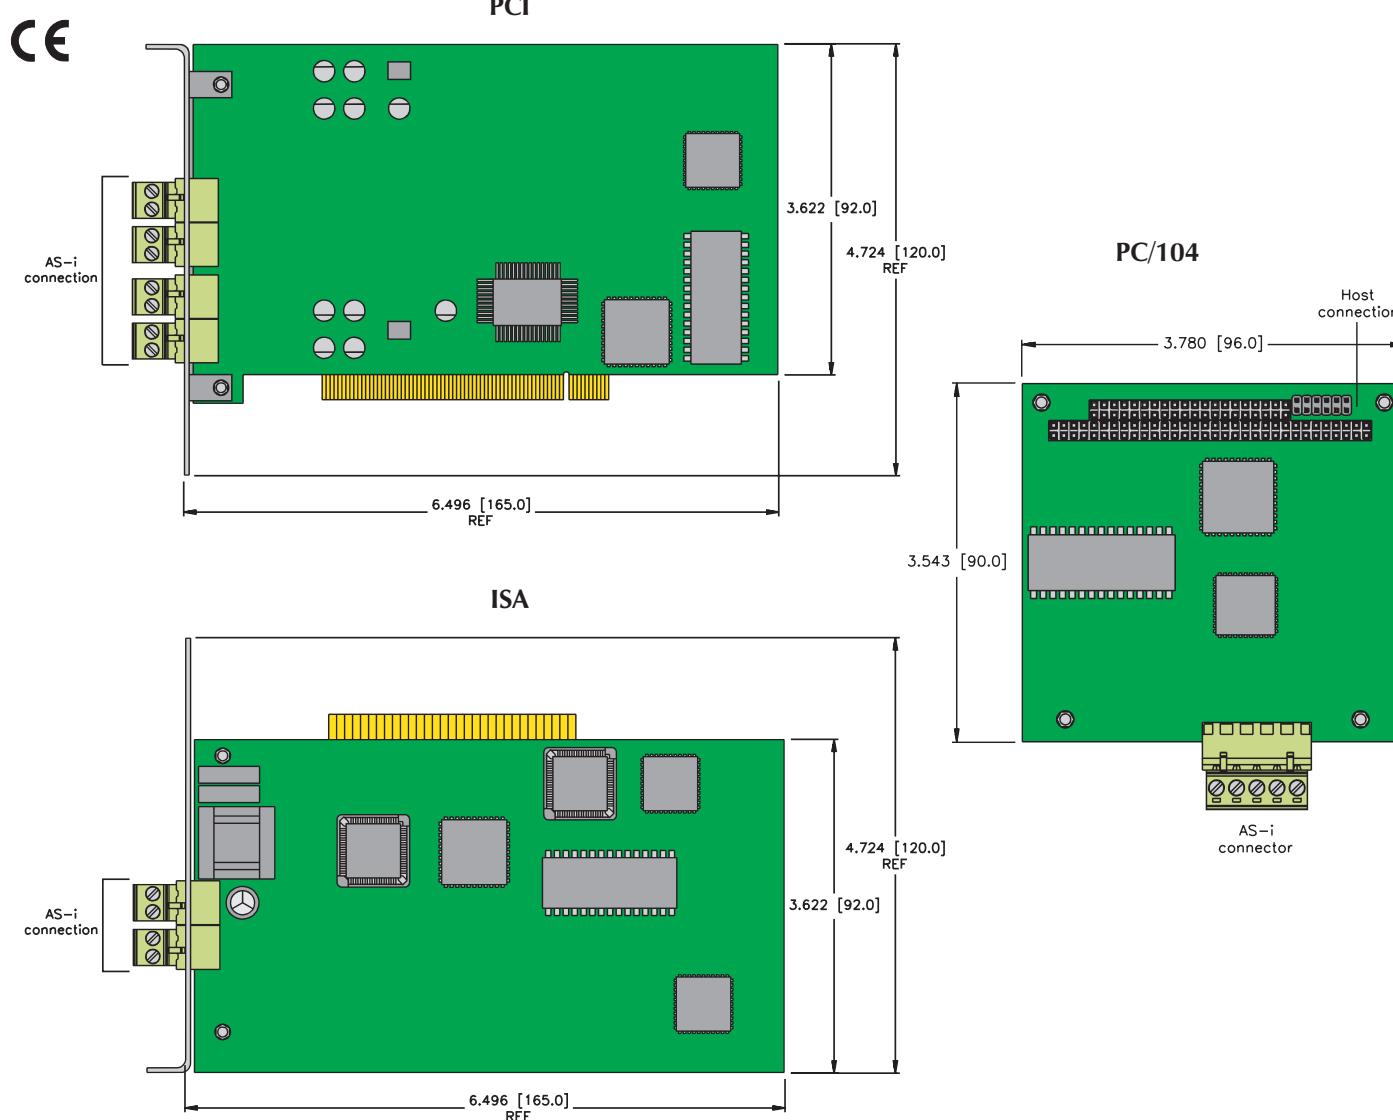


Part Number	Higher Level Network	Power Style	AS-i Version	Connection Diagram	# of AS-i Masters	Duplicate Address Detection	Ground Fault Detection
ASI-MMPCI-V3 BW1922	PCI	PC	3.0	4	2	X	
ASI-MMPCI-V3 BW1911	Compact PCI	PC	3.0	1	2		
ASI-MMPCI BW1195	PCI	PC	2.1	1	2		
ASI-MMISA BW1228	ISA	PC	2.1	2	1		
ASI-MMPC104 BW1229	PC/104	PC	2.1	3	1		

### Input/Output Connectors


1

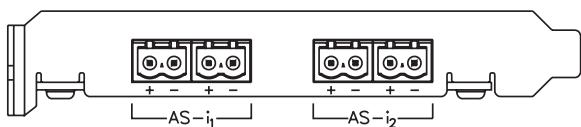


2

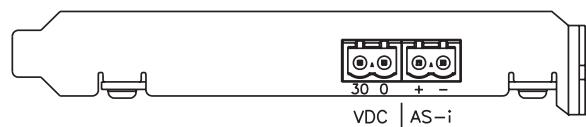

3

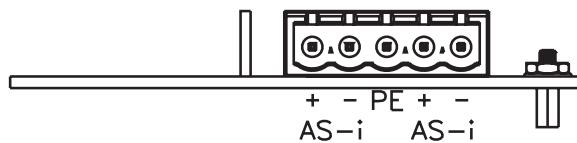

4

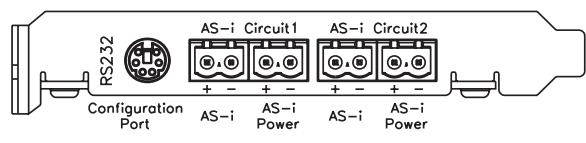

**Input Station****FAS4-S0400**

- Rugged, Fully Potted Stations
- IP 67 Protection
- Flat and Round Cable Support
- AS-I Version 2.1

**Electrical**

- Operating Current: <75 mA plus input currents (from AS-I)
- Sensor Current: <200 mA sum of all inputs (from AS-I)

**Power Distribution**

- Inputs: AS-I power supply

**Mechanical**



- Operating Temperature: -25 to +70°C (-25 to +158°F)
- Protection: IEC IP 67
- Vibration: 50 g @ 10-500 Hz

**Material**

- Connectors: Nickel-plated brass
- Housing: Nylon 6


**Diagnostics (Logical)**

- I/O faults are reported via the AS-I peripheral fault bit.

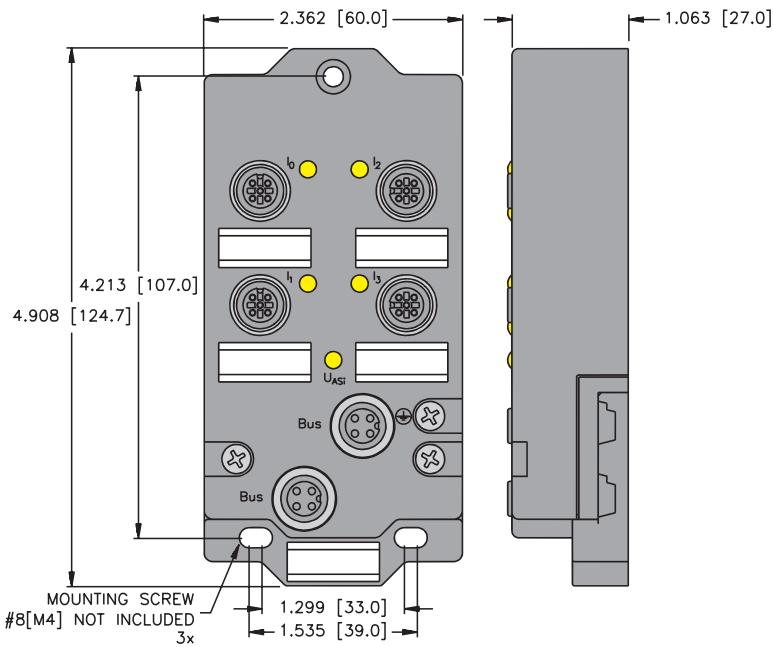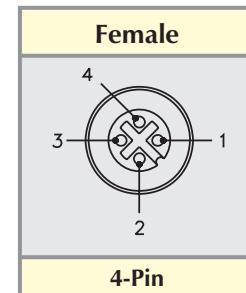**AS-I eurofast® Pinout**

Inputs										Data	
Part Number	AS-I Version	Addressing Style	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Slave Profile
FAS4-S0400	2.1	AB	4	0-3	S	1	PNP	X			0.A-E

### Input/Output Connectors

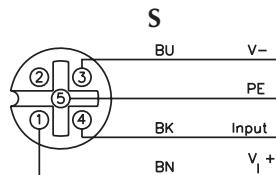

#### Mating cordset:

RK 4.4T-\* - RS 4.4T

## Input/Output Stations

- Rugged, Fully Potted Stations
- IP 67 Protection
- Flat and Round Cable Support
- AS-I Version 2.1



**FAS4-CSG44**

**FAS4-CSG43\***

\* Not UL



### Electrical

- Operating Current: <50 mA plus I/O currents (from AS-I)
- I/O Current: <200 mA sum of all inputs and outputs (from AS-I)  
(FAS4-CSG43) <400 mA sum of all inputs and outputs from AS-I (FAS4-CSG44)

### Power Distribution

- Inputs: AS-I power supply
- Outputs: AS-I power supply

### Mechanical



- Operating Temperature: -25 to +70 °C (-25 to +158°F)
- Protection: IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- I/O faults are reported via the AS-I peripheral fault bit

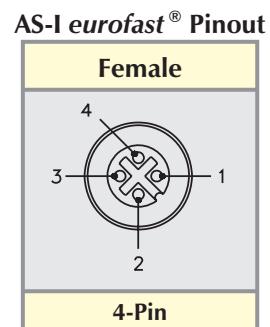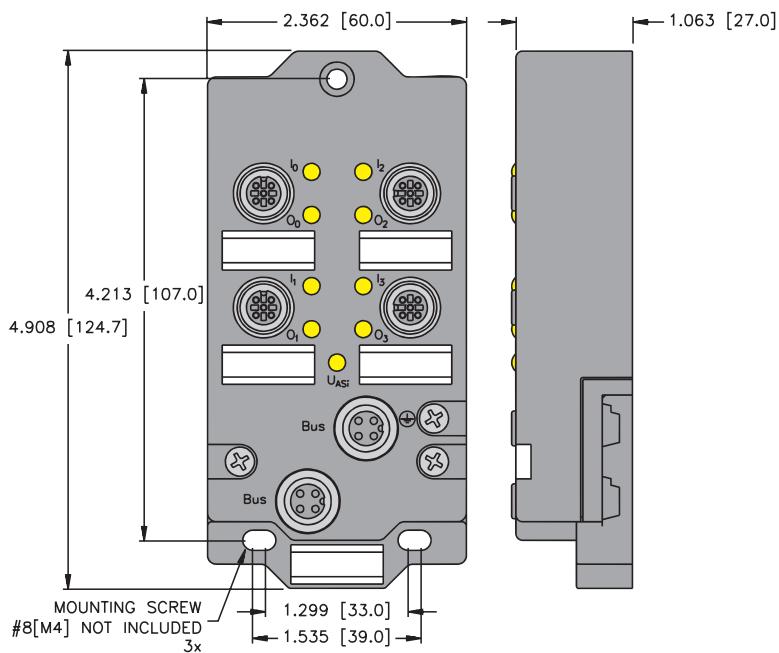

# Process Automation




Part	AS-I Version	Addressing Style	Inputs				Outputs				Data				
			In Count	Connector	Pinout	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output	Pinout	Current	Individual Diagnostics	Wire-Break Detection	Slave Profile
FAS4-CSG44	2.1	Single	4	CS	PNP	X				4	CS	0.4 A *			7.F-E
FAS4-CSG43	2.1	AB	4	CS	PNP	X				3	CS	0.2 A *			7.A-E

\* Total current is shared by all I/O on station

## Input/Output Connectors

**CS**

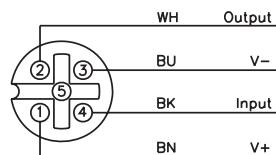

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VB2-RS 4.4T-1/2RK 4.4T-\*/\*S651

## Input/Output Stations



**FAS4-CSG44-A**

**FAS4-CSG43-A\***

\* Not UL



- Rugged, Fully Potted Stations
- IP 67 Protection
- Auxiliary Powered Outputs
- AS-I Version 2.1

### Electrical

- Operating Current: <50 mA plus Input currents (from AS-I)
- I/O Current: <200 mA sum of all inputs from AS-I (FAS4-CSG43-A)  
<400 mA sum of all inputs from AS-I Power  
(FAS4-CSG44-A)
- Output Current: <700 mA per output (from Aux. power)

### Power Distribution

- Inputs: AS-I power supply
- Outputs: AS-I power supply

### Mechanical


- Operating Temperature: -25 to +70 °C (-25 to +158°F)
- Protection: IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass
- Housing: Nylon 6


### Diagnostics (Logical)

- I/O faults are reported via the AS-I peripheral fault bit

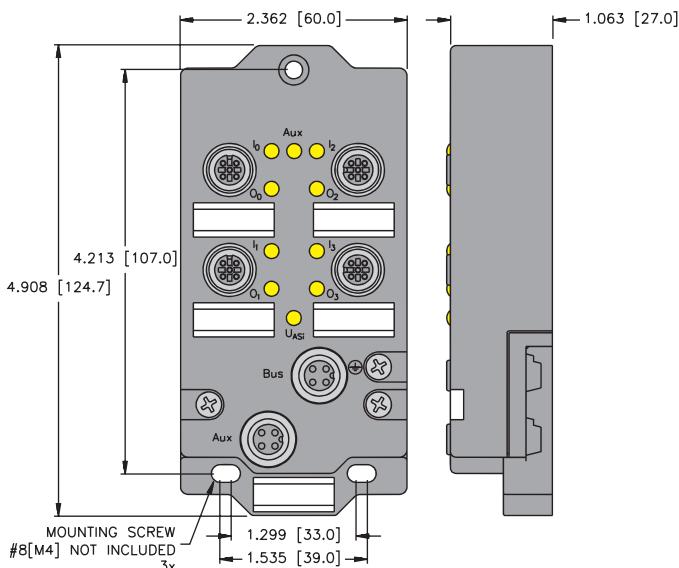


- |    |   |       |
|----|---|-------|
| 1. | = | AS-I+ |
| 2. | = | NC    |
| 3. | = | AS-I  |
| 4. | = | NC    |

**AS-I eurofast® Pinout**

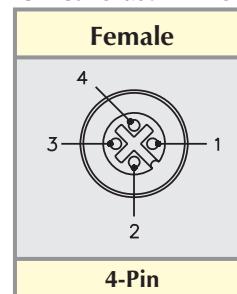

- |    |   |                    |
|----|---|--------------------|
| 1. | = | V <sub>AUX</sub> + |
| 2. | = | NC                 |
| 3. | = | V <sub>AUX</sub> - |
| 4. | = | NC                 |

**Aux. Power Pinout**

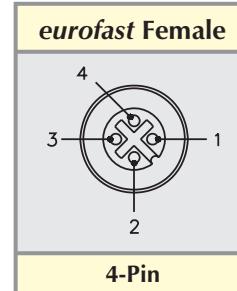


# Process Automation



Part Number	Inputs							Outputs							Data	
	AS-I Version	Addressing Style	In Count	Connectors	Pinout	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output	Connectors	Pinout	Current	Individual Diagnostics	Wire-Break Detection	Slave Profile
FAS4-CSG44-A	2.1	Single	4	0-3	CS	PNP	X			4	0-3	CS	0.7 A			7.F-E
FAS4-CSG43-A	2.1	AB	4	0-2	CS	PNP	X			3	0-2	CS	0.7 A			7.A-E

## Input/Output Connectors

**CS**

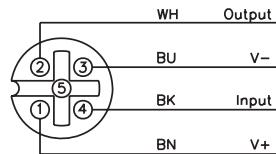

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VB2-RS 4.4T-1/2RK 4.4T-\*/\* / S651

## Input/Output Stations



FAS4-S0202G-A



- Rugged, Fully Potted Stations
- IP 67 Protection
- Auxiliary Powered Outputs
- AS-I Version 2.1

### Electrical

- Operating Current: <50 mA plus Input currents (from AS-I)
- Input Current: <200 mA sum of all inputs (from AS-I)
- Output Current: <400 mA sum of all outputs (from Aux. power)

### Power Distribution

- Inputs: AS-I power supply
- Outputs: AS-I power supply

### Mechanical

- Operating Temperature: -25 to +70°C (-25 to +158°F)
- Protection: IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Power Distribution


- 

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)


- I/O faults are reported via the AS-I peripheral fault bit

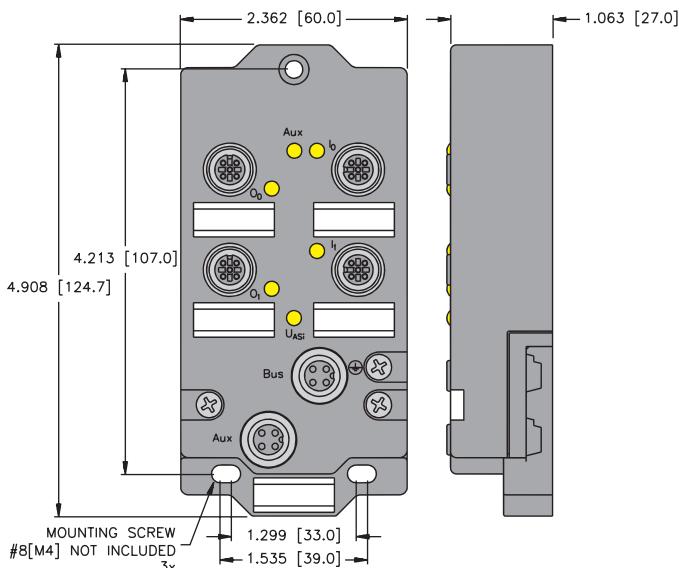

AS-I eurofast® Pinout

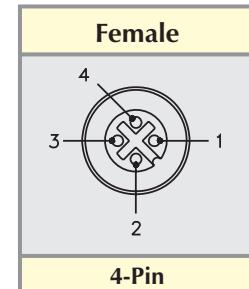

Aux. Power eurofast Pinout

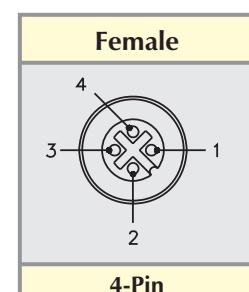


# Process Automation




Inputs								Outputs					Data			
Part Number	AS-I Version	Addressing Style	In Count	Connectors	Pinout	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output	Connectors	Pinout	Current	Individual Diagnostics	Wire-Break Detection	Slave Profile
FAS4-S0202G-A	2.1	AB	2	2-3	S	PNP	X			2	0-1	G	0.4 A			B.A-E

## Input/Output Connectors

**S**

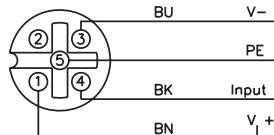

**G**

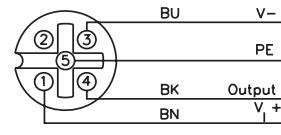

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

## Output Station



**FAS4-S0003G-A**



- Rugged, Fully Potted Stations
- IP 67 Protection
- Auxiliary Powered Outputs
- AS-I Version 2.1

### Electrical

- Operating Current: <50 mA (from AS-I)
- Output Current: <700 mA per output (from Aux. power)

### Power Distribution

- Outputs: Auxiliary power supply

### Mechanical


- Operating Temperature: -25 to +70°C (-25 to +158°F)
- Protection: IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)


- I/O faults are reported via the AS-I peripheral fault bit

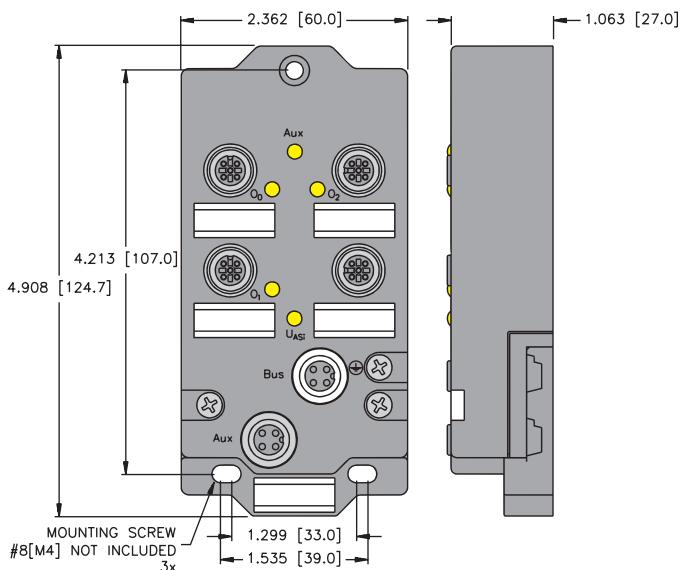

**AS-I eurofast® Pinout**

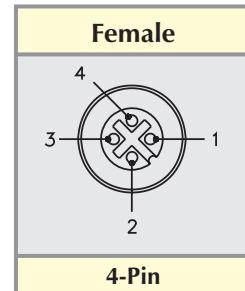


**Aux. Power eurofast Pinout**

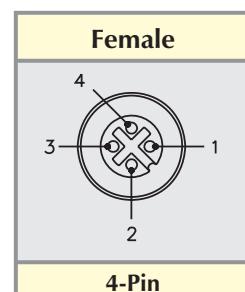

	Outputs							Data	
Part Number	AS-I Version	Addressing Style	Output Count	Connectors	Pinout	Current	Individual Diagnostics	Wire-Break Detection	Slave Profile
FAS4-S0003G-A	2.1	AB	3	0-2	GS	0.7 A			8.A-E

## Output Connectors

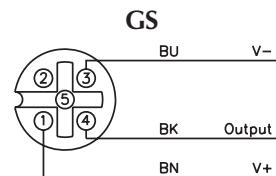

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**AS-I Conduit Adapter Slave**

- Slave Right in Conduit
- Fits Crouse-Hinds Bodies
- Ideal Where Conduit Is Required
- Bus Powered I/O

**BCS-ASI-CSG22****Electrical**

- Operating Current: <200 mA including all I/O current (from AS-I)
- Output Current: <80 mA sum of all outputs (from AS-I)

**Power Distribution**

- Inputs: AS-I power supply
- Outputs: AS-I power supply

**Mechanical**


- Operating Temperature: -25 to +70°C (-25 to +158°F)
- Protection: IEC IP 67

**Material**

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon (other materials available on request)

**Diagnostics (Logical)**

- I/O faults are reported via the AS-I peripheral fault bit

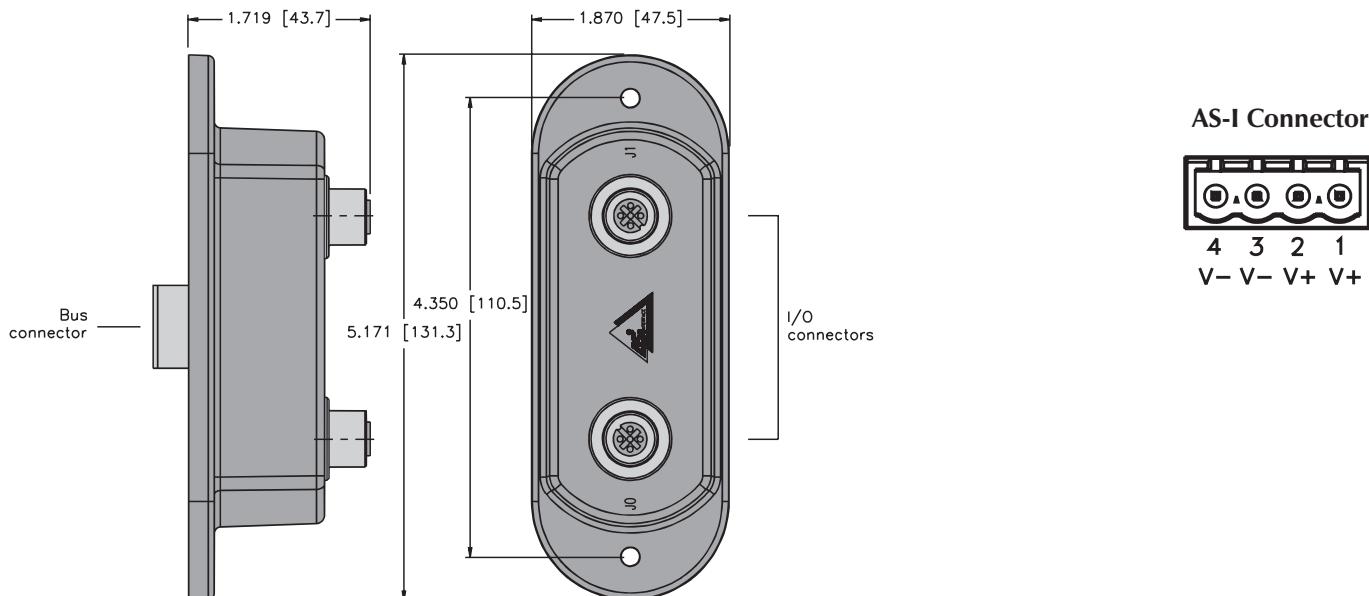


# Process Automation



	Inputs								Outputs								Data	
Part Number	AS-I Version	Addressing Style	Input Count	Connectors	Pinout	Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Current	Individual Diagnostics	OCD	Slave Profile		
BCS-ASI-CSG22	2.1	AB	2	0-1	CS	PNP	X			2	0-1	CS	80 mA			B.A-E		

## Input/Output Connectors

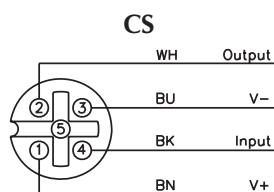

### Mating cordset:

RK 4.4T-\* - RS 4.4T

## Analog Input Stations



**ASI-AI-2 BW1345**  
**ASI-AI-2 BW1447**  
**ASI-AI-2A BW1726**



- Analog on AS-I
- IP 20 for In-the-Cabinet
- Powered by AS-I or Auxiliary Supply

### Electrical

- Operating Current: <80 mA (from AS-I)
- Sensor Current: <40 mA per input

### Power Distribution

- Inputs: AS-I or Auxiliary supply, selectable by user  
 BW1345, BW1447 default sensor current from AS-I  
 BW1726 default sensor current from auxiliary supply

### Mechanical


- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 20

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)

- One LED indicates an I/O fault (over or under-range for each channel)
- LEDs to indicate status of AS-I communication and power supply

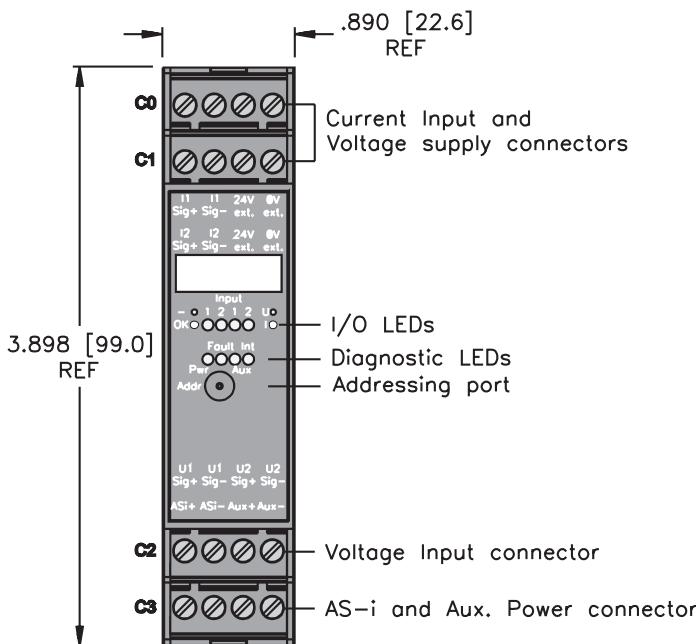


# Process Automation



Part Number	AS-I Version	Addressing Style	In Count	Style	Inputs		OCD	Slave Profile	Map
					Group Diagnostics	Individual Diagnostics			
ASI-AI-2 BW1345	2.1	Single	2	4 to 20 mA/0 to 10 V	X	X	X	7.3-D	1
ASI-AI-2 BW1447	2.1	Single	2	4 to 20 mA/0 to 10 V	X	X	X	7.3-D	1
ASI-AI-2A BW1726	2.1	Single	2	4 to 20 mA/0 to 10 V	X	X	X	7.3-D	1

## Input/Output Connectors

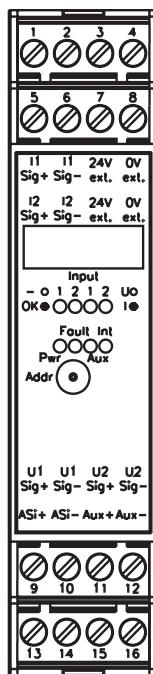

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

\* Notes: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode and 1 mV/bit in voltage mode.  
 BW1345 and BW1726 use range of 4000...20000 for current and 0...10000 for voltage inputs.  
 BW1447 uses range of 0...27648 (0x0000...0x6C00) for compatibility with existing Siemens based programs.

## Analog Input Stations



**ASI-AI-2 BW1232**  
**ASI-AI-2 BW1233**



- Analog on AS-I
- IP 65 Protection
- Powered by AS-I or Auxiliary Supply

### Electrical

- Operating Current: <80 mA from AS-I
- Sensor Current: <40 mA per input

### Power Distribution

- Inputs: AS-I or Auxiliary supply, selectable by user

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65
- Connections: Cage clamp block through gland fittings

### Material


- Housing: Plastic

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)

- LEDs indicate I/O faults (over- and under-current or voltage for each channel)
- LEDs to indicate status of AS-I communication and power supply

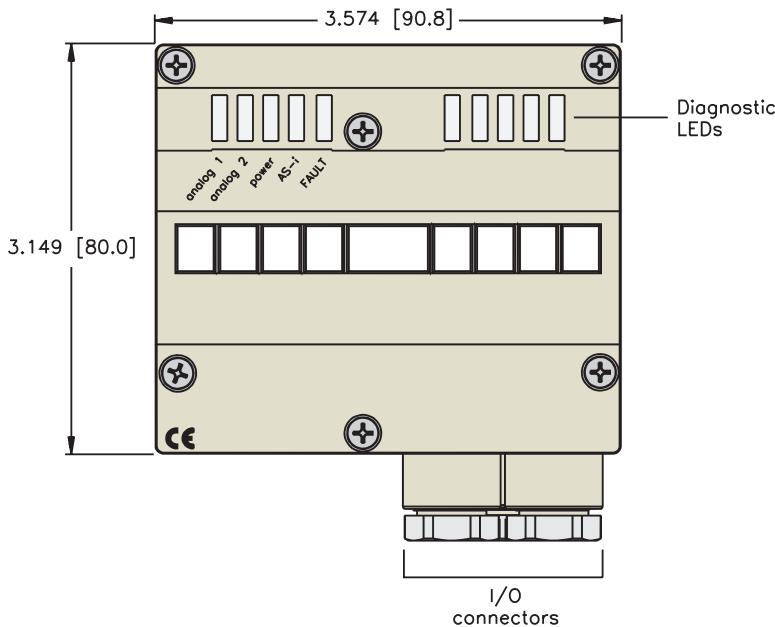


# Process Automation



Part Number	AS-I Version	Addressing Style	Inputs				Data		
			In Count	Style	Group Diagnostics	Individual Diagnostics	OCD	Slave Profile	Map
ASI-AI-2 BW1232	2.1	Single	2	4 to 20 mA	X	X	X	7.3-D	1
ASI-AI-2 BW1233	2.1	Single	2	0 to 10 V	X	X	X	7.3-D	1

## Input/Output Connectors

1

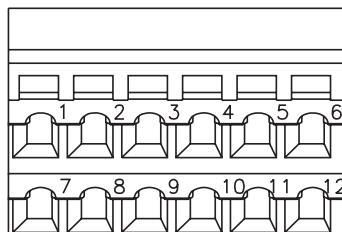

1	V <sub>AUX</sub> +
2	Signal1+
3	V <sub>AUX</sub> -
4	Signal1-
5	Shield
6	Shield
7	V <sub>AUX</sub> +
8	Signal0+
9	V <sub>AUX</sub> -
10	Signal0-
11	FG (Function Gnd)
12	FG (Function Gnd)

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode and 1 mV/bit in voltage mode. BW1232 range of values is 4000-20000. BW1233 range of values is 0-10000.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) if I/O is powered by AS-I or auxiliary supply base modules (ASI-BM BW1181, ASI-BM BW1183) if I/O is powered by auxiliary power (see pages E105-106).

## Analog Input Stations



**ASI-AI-4 BW1364**

**ASI-AI-4 BW1365**

**ASI-AI-4PT100 BW1368**

- Analog on AS-I
- IP 20 for In-The-Cabinet
- Powered by AS-I or Auxiliary Supply
- Voltage, Current or Temperature Inputs

### Electrical

- Operating Current: <80 mA from AS-I
- Sensor Current: <40 mA per input (BW1364 and BW1365)

### Power Distribution

- Inputs: AS-I or Auxiliary supply

### Mechanical


- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 20

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)


### Diagnostics (Physical)

- LEDs indicate faults for each input
- LEDs to indicate status of AS-I communication and power supply

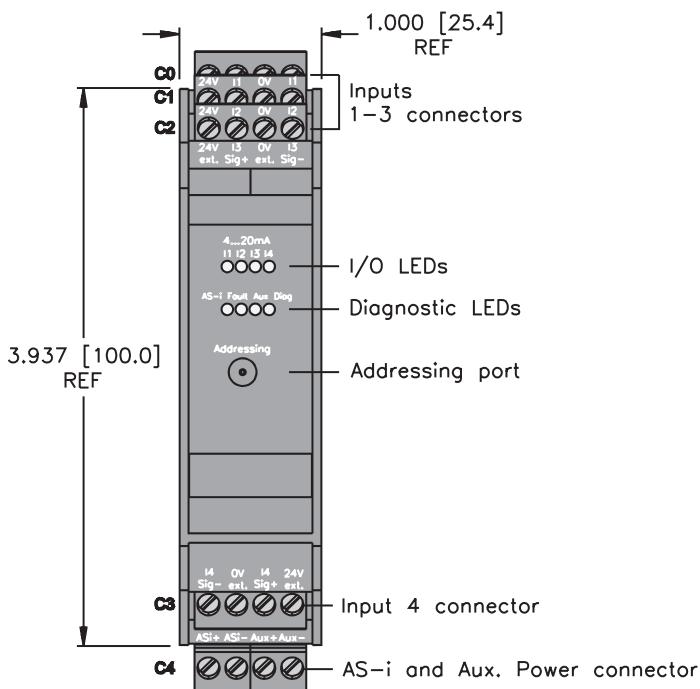

Part Number	AS-i Version	Addressing Style	Inputs				Data			
			In Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Slave Profile	Map
ASI-AI-4 BW1364	2.1	Single	4	1	4 to 20 mA	X	X	X	7.3-E	1
ASI-AI-4 BW1365	2.1	Single	4	1	0 to 10 V	X	X	X	7.3-E	1
ASI-AI-4PT100 BW1368	2.1	Single	4	2	RTD	X	X	X	7.3-5	1

## Input/Output Connectors

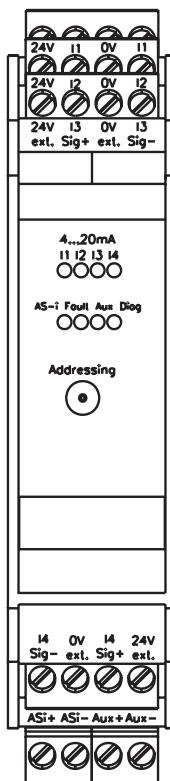

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode, 1 mV/bit in voltage mode and 0.1 °C in temperature mode (range is -200 to +850°C).

## Temperature Input Stations



**ASI-AI-4PT100 BW1254**

**ASI-AI/DO-2RTD/2R BW1552**



- Analog on AS-I
- IP 20 for In-The-Cabinet
- Powered by AS-I or Auxiliary Supply
- Relay Output Option

### Electrical

- Operating Current: <80 mA from AS-I

### Power Distribution

- Inputs: AS-I or Auxiliary supply (BW1368 is only powered from AS-I)

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65
- Connections: Cage clamp block through gland fittings

### Material


- Housing: Plastic

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)


- LEDs indicate faults for each input
- LEDs to indicate status of AS-I communication and power supply

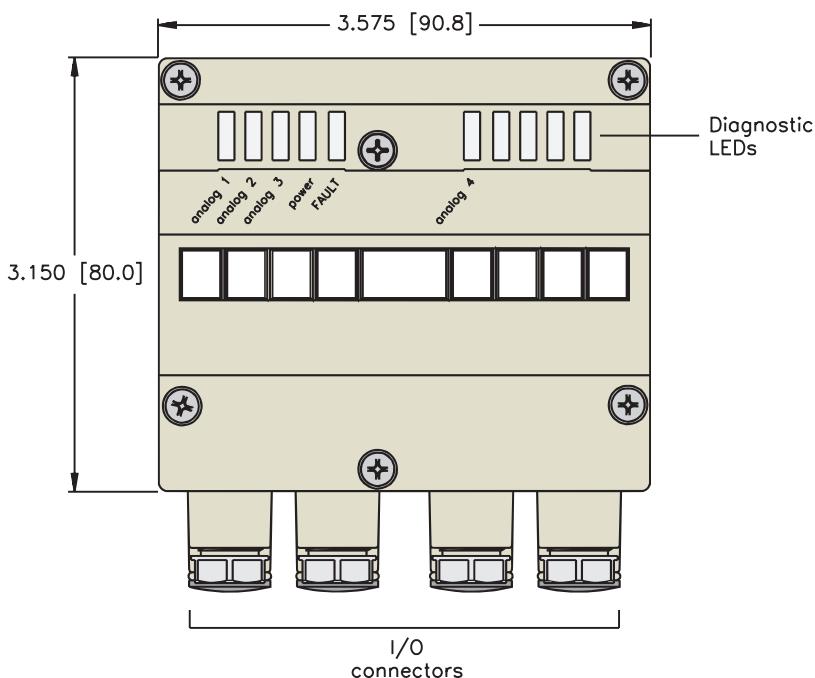


Part Number	Inputs						Outputs				Data			
	AS-I Version	Addressing Style	In Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Out Count	Pinout	Current	Individual Diagnostics	Slave Profile	Map
ASI-AI-4PT100 BW1254	2.1	Single	4	1	RTD	X	X	X	0				7.3-E	1
ASI-AI/D0-2RTD/2R BW1552	2.1	Single	2	2	RTD	X	X	X	2	2	0.5 A		7.3-D	1

## Input/Output Connectors

1

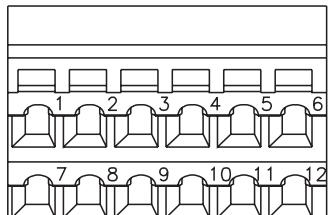

2

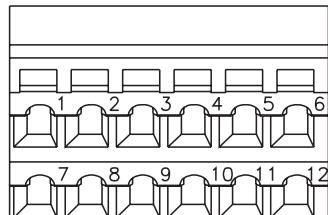

1	V+
2	Signal <sub>0</sub> -
3	V0-
4	V+
5	Signal <sub>1</sub> -
6	V <sub>1</sub> -
7	V+
8	Signal <sub>2</sub> -
9	V <sub>2</sub> -
10	V+
11	Signal <sub>3</sub> -
12	V <sub>3</sub> -

1	V+
2	Signal <sub>0</sub> -
3	V0-
4	V+
5	Signal <sub>1</sub> -
6	V <sub>1</sub> -
7	O <sub>0</sub> (NO)
8	O <sub>0</sub> -
9	O <sub>0</sub> (NC)
10	O <sub>1</sub> (NO)
11	O <sub>1</sub> -
12	O <sub>1</sub> (NC)

### I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 0.1 °C/bit in RTD mode (range is -200 to +850 °C).

For BW1552 relay outputs are set via parameter bits 2 and 3.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) if I/O is powered by AS-I or auxiliary supply base modules (ASI-BM BW1181, ASI-BM BW1183) if I/O is powered by auxiliary power (see pages E105-106).

## Analog Output Stations



ASI-AO-2 BW1412

ASI-AO-2A BW1727



- Analog on AS-I
- IP 20 for In-The-Cabinet
- Powered by AS-I or Auxiliary Supply
- Voltage and Current Outputs

### Electrical

- Operating Current: <80 mA from AS-I

### Power Distribution

- Outputs: AS-I or Auxiliary supply, selectable by switch inside housing  
BW1412 default from AS-I  
BW1727 default from auxiliary supply

### Mechanical


- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 20

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)

- LEDs indicate an I/O fault (over- or under-range for each channel)
- LEDs to indicate status of AS-I communication and power supply

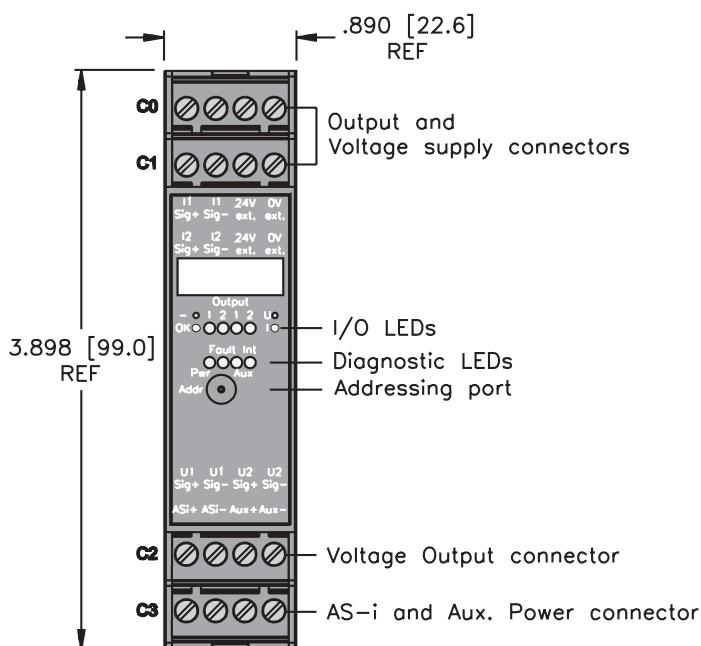


# Process Automation



Part Number	AS-I Version	Addressing	Outputs			Data		
			Output Count	Style	Individual Diagnostics	OCD	Slave Profile	
ASI-AO-2 BW1412	2.1	Single	2	0 to 20 mA/0 to 10 V	X	X	7.3-5	1
ASI-AO-2A BW1727	2.1	Single	2	0 to 20 mA/0 to 10 V	X	X	7.3-5	1

# **Input/Output Connectors**

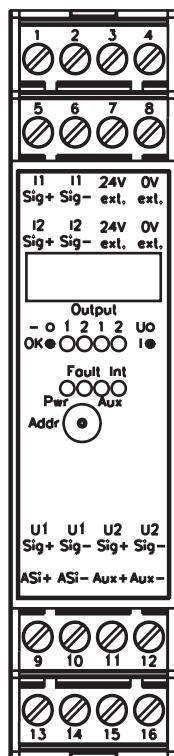

## I/O Data Map 1

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit (0-20000 in current mode and 1 mV/bit (0-10000) in voltage mode.

## Analog Output Stations



**ASI-AO-2 BW1234**

**ASI-AO-2 BW1235**



- Analog on AS-I
- IP 65 Protection
- Powered by AS-I or Auxiliary Supply
- Voltage or Current Outputs

### Electrical

- Operating Current: <80 mA from AS-I

### Power Distribution

- Outputs: AS-I or Auxiliary supply, selectable by internal jumpers

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65
- Connections: Cage clamp block through gland fittings

### Material


- Housing: Plastic

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)


- LEDs indicate an I/O fault (over- or under-range for each channel)
- LEDs to indicate status of AS-I communication and power supply

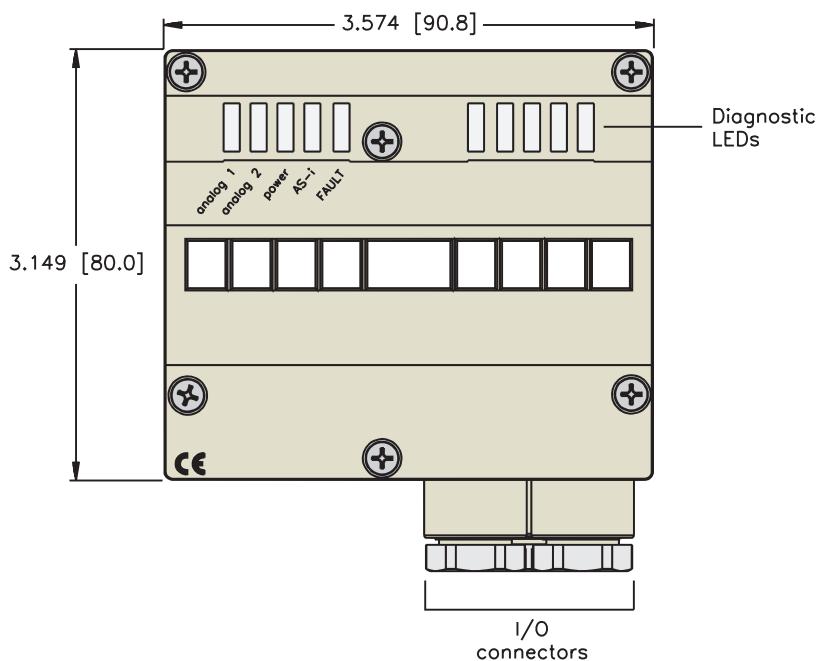

Part Number	AS-I Version	Addressing Style	Outputs				Data	
			Output Count	Style	Individual Diagnostics	OCD	Slave Profile	Map
ASI-A0-2 BW1234	2.1	Single	2	0 to 20 mA	X	X	7.3-5	1
ASI-A0-2 BW1235	2.1	Single	2	0 to 10 V	X	X	7.3-5	1

## Input/Output Connectors

1

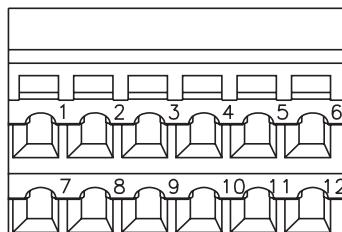

1	V <sub>AUX</sub> +
2	Signal1+
3	V <sub>AUX</sub> -
4	Signal1-
5	Shield
6	Shield
7	V <sub>AUX</sub> +
8	Signal0+
9	V <sub>AUX</sub> -
10	Signal0-
11	FG (Function Gnd)
12	FG (Function Gnd)

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode and 1 mV/bit in voltage mode. BW1234 range of values is 0-20000. BW1235 range of values is 0-10000.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) if I/O is powered by AS-I or auxiliary supply base modules (ASI-BM BW1181, ASI-BM BW1183) if I/O is powered by auxiliary power (see pages E105-106).

## Analog Output Stations



**ASI-AO-4 BW1366**

**ASI-AO-4 BW1367**



- Analog on AS-I
- IP 20 Protection
- Powered by AS-I or Auxiliary Supply
- Voltage or Current Outputs

### Electrical

- Operating Current: <80 mA from AS-I

### Power Distribution

- Outputs: AS-I or Auxiliary supply

### Mechanical


- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 20

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)


### Diagnostics (Physical)

- LEDs indicate an I/O fault (over- or under-range for each channel)
- LEDs to indicate status of AS-I communication and power supply

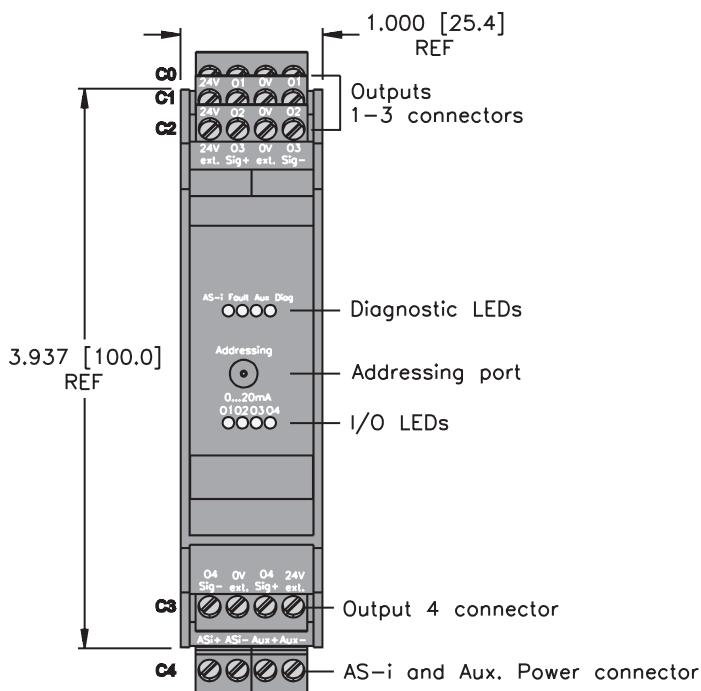

Part Number	Outputs				Data			
	Input Count	Addressing Style	Output Count	Style	Individual Diagnostics	OCD	Slave Profile	Map
ASI-A0-4 BW1366	2.1	Single	4	0 to 20 mA	X	X	7.3-6	1
ASI-A0-4 BW1367	2.1	Single	4	0 to 10 V	X	X	7.3-6	1

## Input/Output Connectors

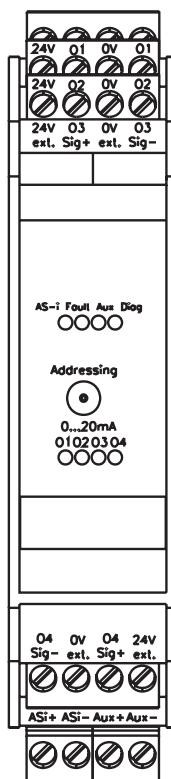

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode and 1 mV/bit in voltage mode. BW1366 range of values is 4000-20000. BW1367 range of values is 0-10000.

**Scale Input Station****ASI-AI-1SCALE BW1465**

Note: This station is designed for connecting a load cell to AS-I.

- Analog on AS-I
- IP 65 Protection
- Power from AS-I
- Unique I/O Configurations

**Electrical**

- Operating Current: <80 mA from AS-I

**Power Distribution**

- Inputs: AS-I power supply

**Mechanical**

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65
- Connections: Cage clamp block through gland fittings

**Material**


- Housing: Plastic

**Diagnostics (Logical)**

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

**Diagnostics (Physical)**

- LEDs indicate I/O faults
- LEDs to indicate status of AS-I communication and power supply

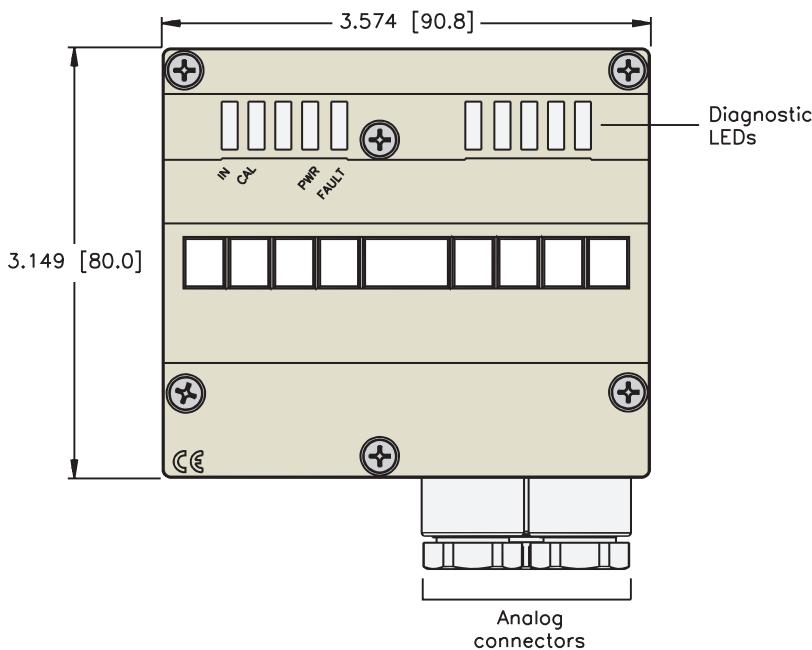


# Process Automation



Part Number	Inputs						Data		
	AS-I Version	Addressing Style	In Count	Style	Group Diagnostics	Individual Diagnostics	OCD	Slave Profile	Map
ASI-AI-1SCALE BW1465	2.1	Single	1	Scale		X		7.3-C	1

## Input/Output Connectors

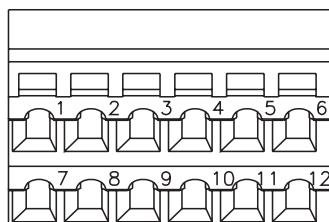

1, 7	V+
2, 8	Signal1+
3, 9	Output+
4, 10	Output-
5, 11	Signal-
6, 12	V-

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Resolution is 16 bits.

Calibration is done via Windows software and the special BW1260 master.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) (see pages E105-106).

## Analog Input Stations



**ASI-AI-02-M12-V3 BW1893**

**ASI-AI-02-M12 BW1894**

**ASI-AI-02RTD-M12-V3 BW1895**



- Analog on AS-I
- IP 65 Protection
- Power from AS-I
- Current or PT100 Inputs

### Electrical

- Operating Current: <200 mA (BW1893, BW1894) or <80 mA (BW1895) from AS-I
- Sensor Current: <40 mA per input (BW1893, BW1894)

### Power Distribution

- Outputs: AS-I power supply

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65

### Material


- Housing: Plastic

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)


### Diagnostics (Physical)

- LEDs indicate an I/O fault (over- or under-range for each channel)
- LEDs to indicate status of AS-I communication and power supply

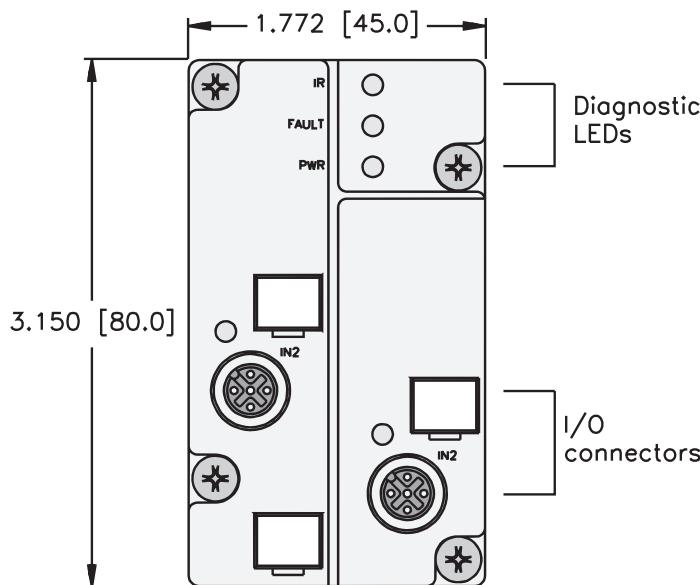

Part Number	AS-I Version	Addressing Style	Inputs						Data	
			In Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Slave Profile	Map
ASI-AI-02-M12-V3 BW1893	3.0	AB	2	1	4 to 20 mA	X	X	X	7.A-9	1
ASI-AI-02-M12 BW1894	2.1	Single	2	1	4 to 20 mA	X	X	X	7.3-D	1
ASI-AI-02RTD-M12-V3 BW1895	3.0	AB	2	2	RTD	X	X	X	7.A-9	1

## Input/Output Connectors

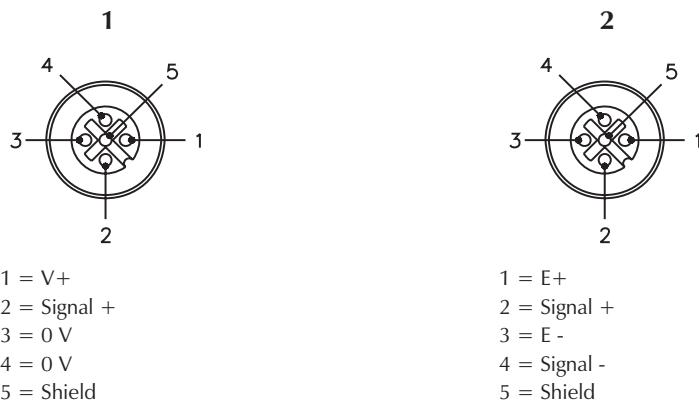

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	0	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode and 0.1 dC/bit in RTD mode.

BW1893 and BW1894 default range of values is 4000-20000 (can be configured for 0-27648). BW1895 default range of values is -200...+850 C (can be configured for -120 to +130 C).

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) (see pages E105-106).

## Analog Input Stations



**ASI-AI-4-M12 BW1359**

**ASI-AI-4-M12 BW1360**

**ASI-AI-4-M12 BW1742**

**ASI-AI-4PT100-M12 BW1363**



- Analog on AS-I
- IP 65 Protection
- Current, Voltage or PT100 Inputs
- Powered by AS-I or Auxiliary Supply

### Electrical

- Operating Current: <200 mA (except BW1363 is <80 mA) from AS-I
- Sensor Current: <40 mA per input (BW1359, BW1360, BW1742)

### Power Distribution

- Inputs: AS-I or Auxiliary power supply

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)  
(except BW1742 is -20 to +70° C (-4 to +158°F))
- Protection: IP 65

### Material


- Housing: Nylon

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)


- LEDs indicate an I/O fault (over or under-range for each channel)
- LEDs to indicate status of AS-I communication and power supply

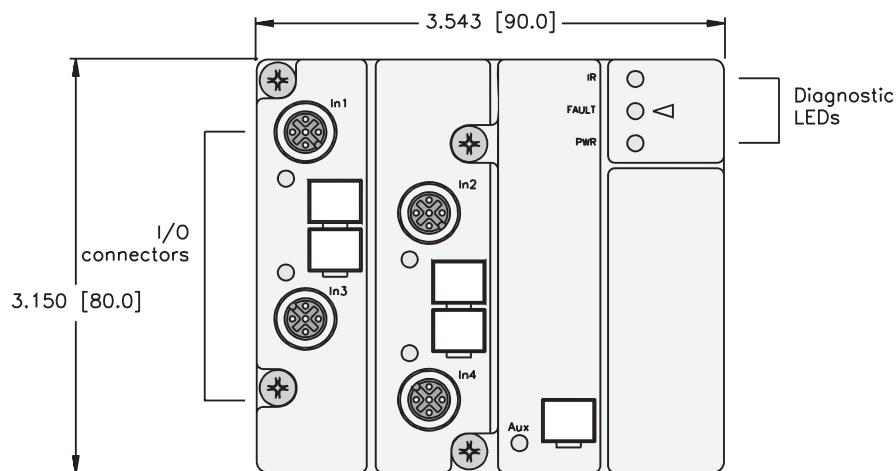

# Process Automation

Part Number	Inputs									Data	
	AS-I Version	Addressing Style	In Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Slave Profile	Map	
ASI-AI-4-M12 BW1359	2.1	Single	4	1	4 to 20 mA	X	X	X	7.3-E	1	
ASI-AI-4-M12 BW1360	2.1	Single	4	1	0 to 10 V	X	X	X	7.3-E	1	
ASI-AI-4-M12 BW1742	2.1	Single	4	1	0 to 10 V	X	X	X	7.3-E	1	
ASI-AI-4PT100-M12 BW1363	2.1	Single	4	2	RTD	X	X	X	7.3-E	1	

## Input/Output Connectors

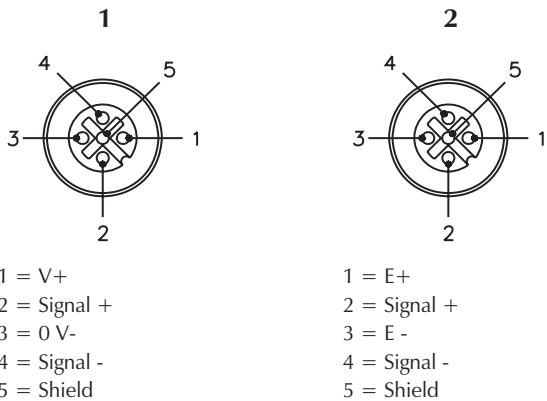

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode, 1 mV/bit in voltage mode and 0.1 C/bit in temperature mode.

BW1359 range of values is 4000-20000. BW1360, BW1742 range of values is 0-10000. BW1363 range is -200 to +850 C.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) if I/O is powered by AS-I or auxiliary supply base modules (ASI-BM BW1181, ASI-BM BW1183) if I/O is powered by auxiliary power (see pages E105-106).

## Analog Output Stations



**ASI-AO-4-M12 BW1361**

**ASI-AO-4-M12 BW1362**

**ASI-AO-4-M12 BW1722**

**ASI-AO-4-M12 BW1736**



- Analog on AS-I
- IP 65 Protection
- Voltage or Current Outputs
- Powered by AS-I or Auxiliary Supply

### Electrical

- Operating Current: <200 mA (except BW1722 is <100 mA) from AS-I
- Output Current: 1.1 A per output from auxiliary power (BW1722 only)

### Power Distribution

- Outputs: AS-I power supply (except BW1722 is auxiliary power supply)

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)  
(except BW1736 is -20 to +70°C) (-4 to +158°F)
- Protection: IP 65

### Material


- Housing: Plastic

### Diagnostics (Logical)

- I/O errors are indicated by the AS-I peripheral fault bit (v2.1 and higher)

### Diagnostics (Physical)

- LEDs indicate an I/O fault for each channel
- LEDs to indicate status of AS-I communication and power supply

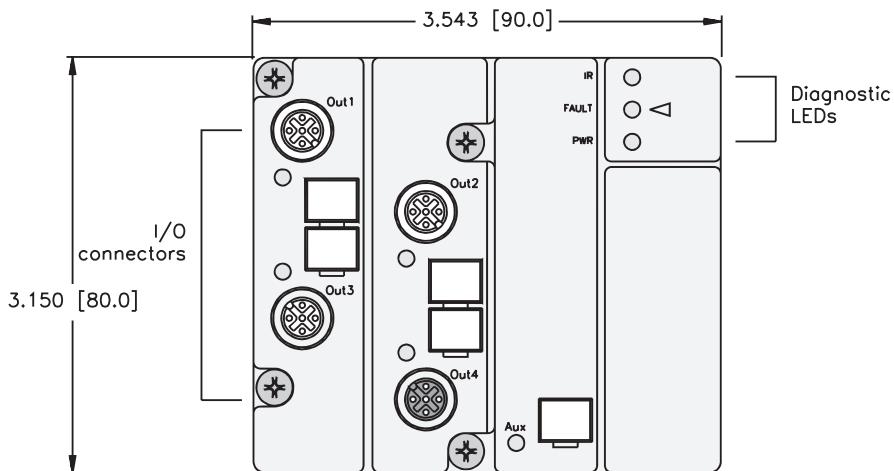


Note: ASI-AO-4-M12 BW1722 supplies up to 1.1 A for powering output devices.


# Process Automation

Part Number	AS-I Version	Addressing Style	Outputs			Data	
			Out Count	Style	Pinout	OCD	Slave Profile
ASI-A0-4-M12 BW1361	2.1	Single	4	0 to 20 mA	1	X	7.3-6
ASI-A0-4-M12 BW1362	2.1	Single	4	0 to 10 V	1	X	7.3-6
ASI-A0-4A-M12 BW1722	2.1	Single	4	0 to 20 mA	2	X	7.3-6
ASI-A0-4-M12 BW1736	2.1	Single	4	0 to 10 V	1	X	7.3-6

## Input/Output Connectors



1 = Signal +  
 2 = NC  
 3 = Signal -  
 4 = NC  
 5 = Shield



1 = Signal +  
 2 = V+  
 3 = Signal -/V-  
 4 = NC  
 5 = Shield

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Analog Value (LSB)							
	1	Analog Value (MSB)							

Note: Data map applies to each channel of analog data used. Resolution is 1 uA/bit in current mode and 1 mV/bit in voltage mode.

BW1361, BW1722 range of values is 0-20000. BW1362, BW1736 range of values is 0-10000.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) if I/O is powered by AS-I or auxiliary supply base modules (ASI-BM BW1181, ASI-BM BW1183) if I/O is powered by auxiliary power (see pages E105-106).

## AS-I Counter Stations



**ASI-AI-2C BW1574**

**ASI-AI-4C BW1710**

**ASI-AI-1C BW1723\***

**ASI-AI-1C BW1711\***

\* Not UL



- Count Signals Over AS-I
- 1 to 4 Channels
- IP 65 Protection
- Powered by AS-I or Auxiliary Supply

### Electrical

- Operating Current: <200 mA (from  $U_B$ )
- Sensor Current: <150 mA from AS-I (except BW1723 is <700 mA from aux. supply)

### Power Distribution

- Inputs: AS-I supply (except BW1723 from auxiliary supply)

### Mechanical

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65

### Material


- Housing: Plastic

### Diagnostics (Logical)

- Overflow and underflow errors are reported via the AS-I peripheral fault bit (except BW1711)

### Diagnostics (Physical)


- LEDs indicate the status of each I/O point
- LEDs to indicate status of AS-I communication and power supply

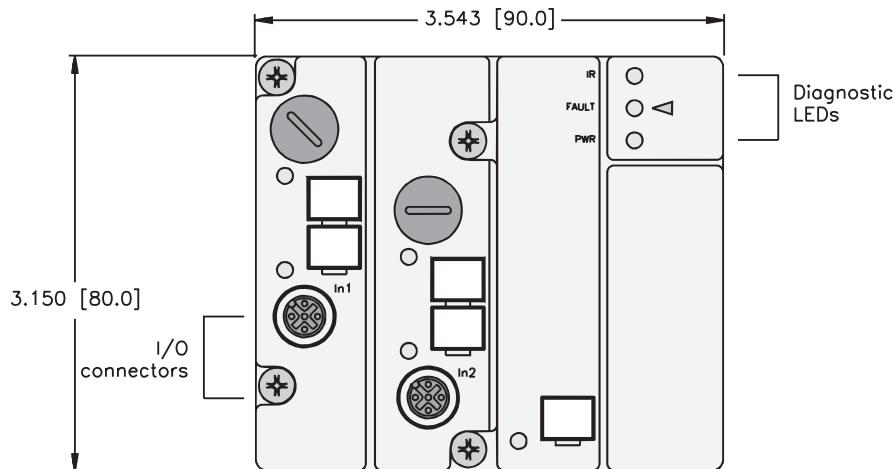


# Process Automation

Part Number	AS-I Version	Addressing Style	Inputs			Data	
			In Count	Pinout	Style	Resolution	Slave Profile
ASI-AI-2C BW1574	2.1	Single	2	1	Counter	16-bit	7.3-C
ASI-AI-4C BW1710	2.1	Single	4	2	Counter	16-bit	7.3-D
ASI-AI-1C BW1723	2.1	Single	1	3	Counter	16-bit	7.3-C
ASI-AI-1C BW1711	2.1	Single	1	4	Counter	4-bit	0.F-F-E
							1
							2


## Input/Output Connectors




1 = V+  
 2 = Channel 1  
 3 = 0 V  
 4 = Channel 2  
 5 = NC



1 = V+  
 2 = Channel 1, 3  
 3 = 0 V  
 4 = Channel 2, 4  
 5 = NC



1 = V+  
 2 = Input  
 3 = 0 V  
 4 = Status In  
 5 = NC



1 = V+  
 2 = Input  
 3 = 0 V  
 4 = NC  
 5 = NC

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Count Value (LSB)							
	1	Count Value (MSB)							

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Count Value							

Note: Range is 0...15.

Note: Data map applies to each counter channel.  
Range is -32768...+32767.

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) if I/O is powered by AS-I or auxiliary supply base modules (ASI-BM BW1181, ASI-BM BW1183) if I/O is powered by auxiliary power (BW1723 only) (see pages E105-106).

**AS-I Code Block****ASI-CODEBLK BW1527**

- Provides a Fixed Value
- IP 67 Protection
- Use to Code Tools or Machine Components
- Powered by AS-I

**Electrical**

- Operating Current: <50 mA from AS-I

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 65

**Material**


- Housing: Plastic

**Diagnostics (Logical)**

- Faults are reported via the AS-I peripheral fault bit (v2.1 and higher)

**Diagnostics (Physical)**

- LEDs indicate I/O faults
- LEDs to indicate status of AS-I communication and power supply

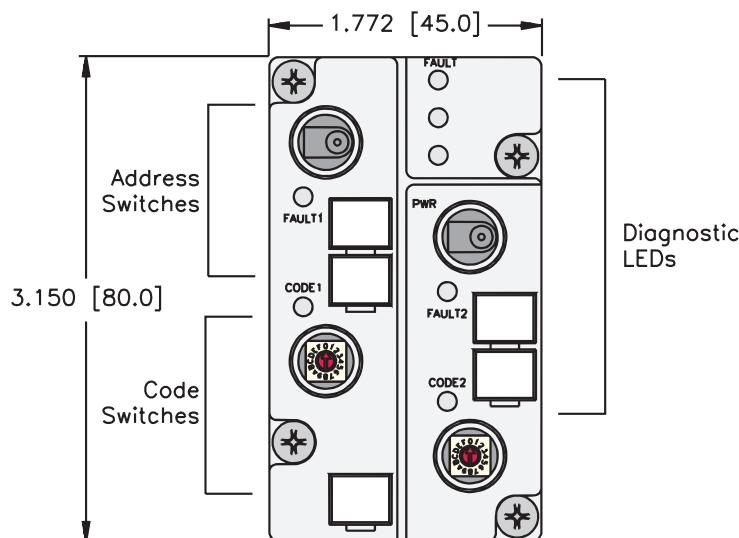

# Process Automation

Inputs							Data	
Part Number	AS-I Version	Addressing Style	In Count	# Addresses Occupied	Style	Range	Slave Profile	Map
ASI-CODEBLK BW1527	2.1	AB	8 bits	2	Code	0 to 255	0.A-F-E	1

Note: This station occupies two AS-I addresses, each with four inputs. The input values are fixed by two rotary switches to proved a code value

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	Code (High Nibble)				Code (Low Nibble)			

AS-I connections are made via standard AS-I base modules (ASI-BM BW1180, ASI-BM BW1182) (see pages E105-106).

**AS-I Repeaters**

- Extend AS-I Network Length
- IP 20 for In-The-Cabinet
- Isolate AS-I Power Segments
- Fault LED Aids in Diagnostics

**Electrical**

- Operating Current: <60 mA from each AS-I segment (<120 mA total)

**Power Distribution**


- Each isolated segment is powered from its respective AS-I power supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Diagnostics (Physical)**

- LEDs to indicate status of AS-I communication and power supply

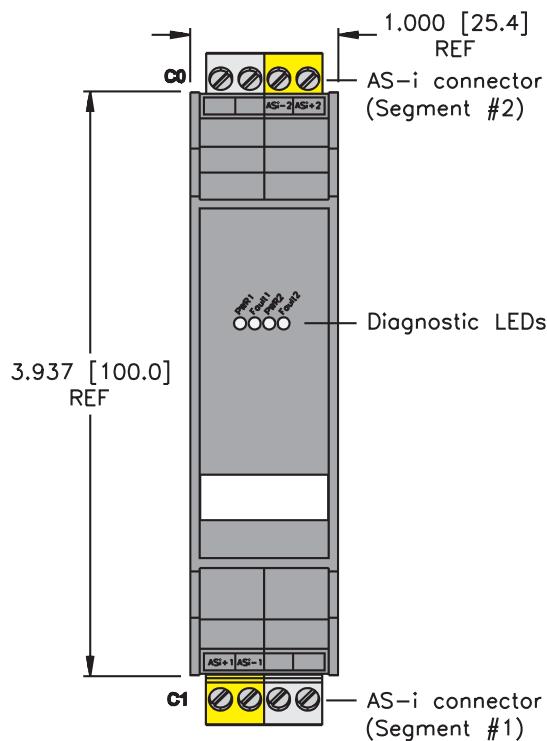**REP-ASI BW1855**

# Process Automation

## Enclosure Mounted AS-interface Repeater

The **REP-ASI BW1855** is an IP 20, DIN-rail mountable repeater for use an enclosure mounted AS-I extension solution. Network segments attached by a repeater are considered separate physical networks (trunk and drop lengths for each segment are determined as if the other segments are not present), but one logical network (addresses cannot be duplicated; the scanner and configuration tools work as a single network).


The repeater does not consume an address and is invisible to all the other devices on the network. The repeater supports a network extension of one full segment (an additional 100 m of AS-I cable). The REP-ASI BW1855 can be used in conjunction with an AS-I Tuner (ASI-TUNER BW1648 or ASI-TUNER-DIAG BW1843) to extend the network with segment lengths greater than 100 m. Repeaters can also be used to isolate power supplies on networks with multiple supplies, allowing greater than 8 A on the entire AS-I system (no individual segment may carry more than 8 A).

Up to two repeaters are allowed between any slave and the master. Placing the master in the middle of the system allows a maximum linear system of 500 m (if standard repeaters are used) or potentially 1000 m (if terminators and advanced repeaters are used), as shown in the diagram below.

A = Power supply

B = Master

C = Repeaters

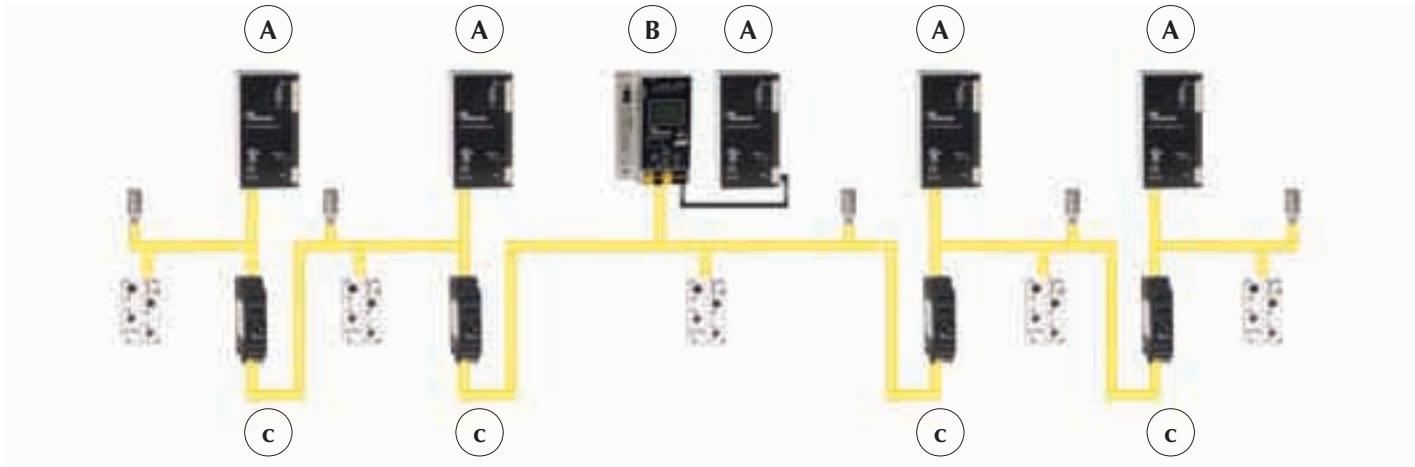

**AS-I Repeater**

- Extend AS-I Network Length
- IP65 Protection
- Isolate AS-I Power Segments
- Fault LED Aids in Diagnostics

**REP-ASI BW1273\*****REP-ASI-C1D2 BW1712**

\* Not ETL listed

**Electrical**

- Operating Current: <60 mA from each segment (<120 mA total)

**Power Distribution**

- Each isolated segment is powered from its respective AS-I power supply

**Mechanical**


- Operating Temperature: -10 to +55°C (+14 to +131°F)
- Protection: IP65
- Connection: Via standard AS-I base module (flat or round cable)

**Material**

- Housing: Plastic

**Diagnostics (Physical)**

- LEDs to indicate status of AS-I communication and power supply

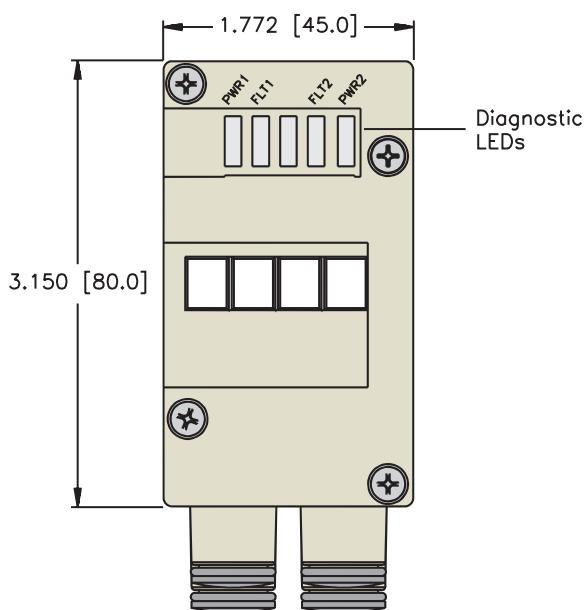

# Process Automation

## Machine Mounted AS-interface® Repeater

The **REP-ASI BW1273** is an IP 65 repeater for machine mounted AS-I extensions. Network segments attached by a repeater are considered separate physical networks (trunk and drop lengths for each segment are determined as if the other segments are not present), but one logical network (addresses cannot be duplicated; the scanner and configuration tools work as a single network).

The repeater does not consume an address and is invisible to all the other devices on the network. The **REP-ASI BW1273** supports a network extension of one full segment (an additional 100 m of AS-I cable). Repeaters can also be used to isolate power supplies on networks with multiple supplies, allowing greater than 8 A on the entire AS-I system (no individual segment may carry more than 8 A).


Up to two repeaters are allowed between any slave and the master. Placing the master in the middle of the system allows a maximum linear system of 500 m.

The **REP-ASI BW1273** physical wiring connections are made via standard AS-I base modules with two isolated ports (ASI-BM BW1181 for flat cable or ASI-BM BW1183 for round cable with screw terminal connections).

A = Power supplies

B = Master

C = Repeaters

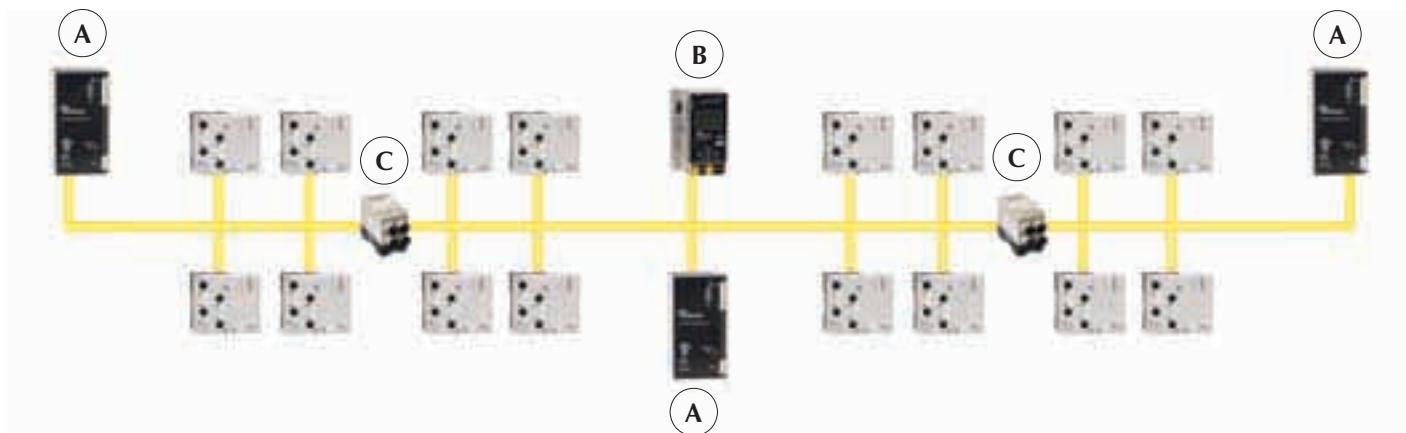

## AS-I Tuners



### ASI-TUNER BW1648\*

### ASI-TUNER-DIAG BW1843\*

### ASI-TUNER-C1D2 BW1715

\* Not ETL listed



- Extend AS-I Network Length
- IP65 Protection
- Correct AS-I Communication Problems
- Extended Diagnostics Available

### Electrical

- Operating Current: <60 mA (from AS-I)

### Power Distribution

- AS-I Power supply

### Mechanical

- Operating Temperature: 0 to +55 °C (+32 to +131°F)
- Protection: IP65

### Material


- Housing: Plastic

### Diagnostics (Logical)

- BW1843 can be configured to be a slave on the AS-I network and report system and station health

### Diagnostics (Physical)

- LEDs to indicate status of AS-I communication and power supply

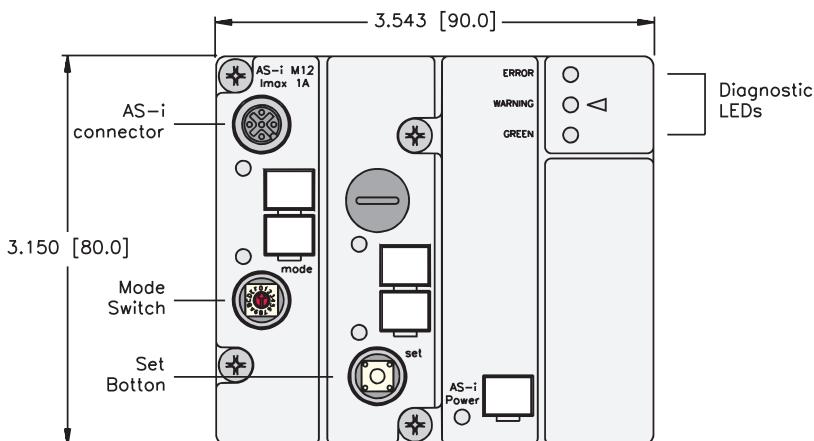


## Process Automation

### Machine Mounted AS-interface® Tuners

The **ASI-TUNER BW1648** and **ASI-TUNER-DIAG BW1843** are IP 65 tuners for machine mounted AS-I extension solutions. Tuners are active circuits designed to affect the impedance of an AS-I network so the system can communicate without errors at lengths longer than 100 m. The tuners are configured for the system by placing them in a "teach" mode where they "listen to" AS-I network traffic. In this mode, tuners cycle through LRC impedance values to find the setting where the errors are minimized. Once this value is found, tuners operate in the "run" mode. The tuners also provide a green/yellow/red LED indicating network status, so potential errors can be found early and corrected before they become critical.

The **ASI-TUNER BW1648** does not consume an address and is invisible to all the other devices on the network. The **ASI-TUNER-DIAG BW1843** may be configured as an AS-I slave to allow more detailed diagnostic information to be available as standard I/O data, as well as mailbox information per the AS-I v3.0 specification. The status of all AS-I slaves on the system, as well as the voltage level at the tuner, can be obtained in this mode. Tuners can be used to extend the network length up to 300 m for a single segment (without the need for a repeater). Ideal placement of the tuner on the network is at the furthest point from the power supply.

Tuners connect to the network via standard AS-I base modules (ASI-BM BW1180 for flat cable and ASI-BM BW1182 for round cable with screw terminal connections).

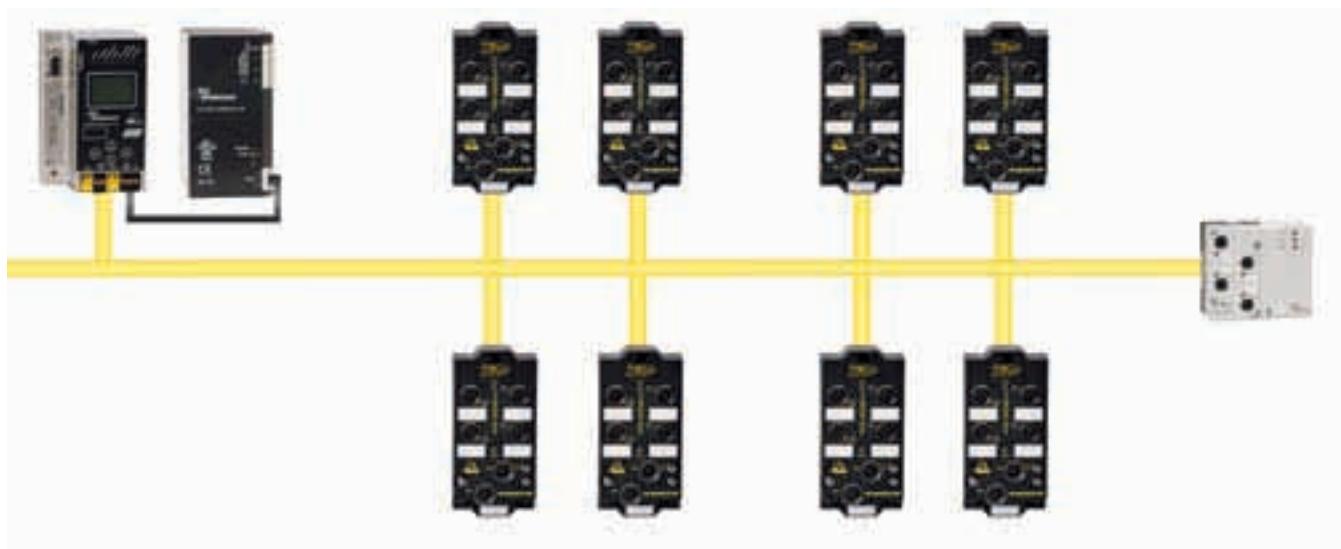

## AS-I Masters for OEM Applications



**ASI-MM-PCB BW1670**

**ASI-MM-PCB BW1588**

**ASI-MMPBCB BW1554 (shown)**



- Board-level Masters
- Advanced AS-I Diagnostics

- 8-bit Host Interface
- Small Form Factor

### Electrical

- Operating Current: <70 mA from AS-I, 100 mA from external supply (5 VDC)

### Power Distribution

- AS-I and external supplies

### Mechanical


- Operating Temperature: 0 to +55 °C (+32 to +131°F)

### Diagnostics (Logical)

- AS-I I/O errors can be reported via the peripheral fault bit for each slave (v2.1 and higher)

### Diagnostics (Physical)


- LEDs to indicate status of AS-I communication and power supply (BW1554 only)

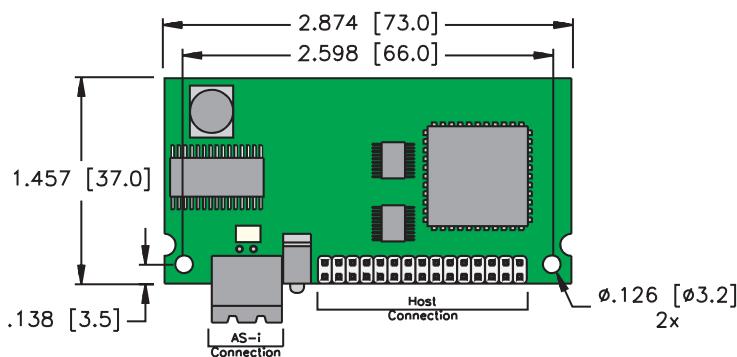


# Process Automation

Part Number	AS-I Version	AS-I Connection	Diagram	* of AS-I Masters
ASI-MM-PCB BW1670*	2.1	Solder	A	1
ASI-MM-PCB BW1588	2.1	Solder	B	1
ASI-MM-PCB BW1554	2.1	Connector	C	1


A

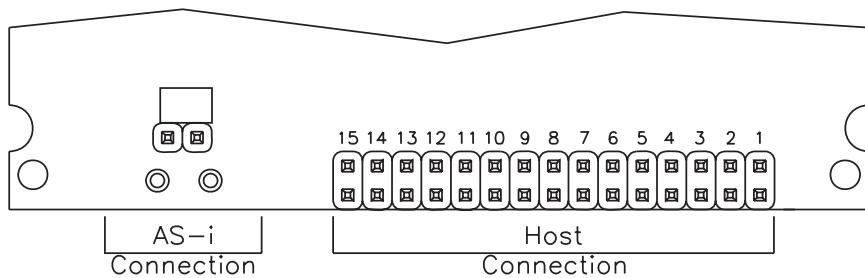

B

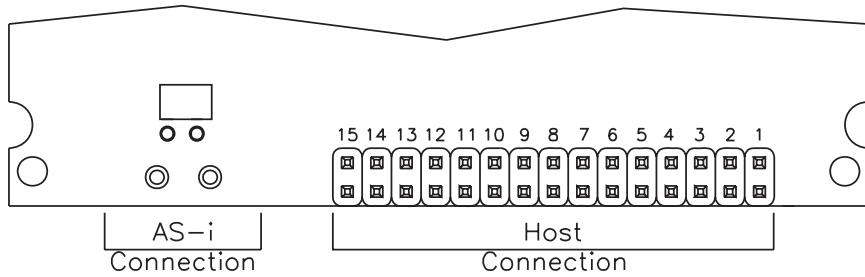

C

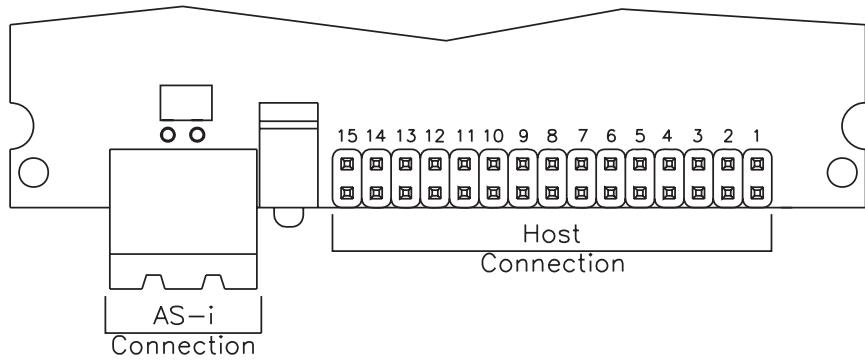

\*Note: ASI-MM-PCB BW1670 is intended for use with the evaluation kit ASI-EVAL-KIT BW1565 (M108).

**OEM AS-I Slaves**

- PC-board Level Slaves
- Connection Options
- Various I/O Configurations
- Powered by AS-I



ASI-IOM-0202-PCB BW1421 shown

**Electrical**

- Operating Current: <200 mA from AS-I (including all I/O)

**Power Distribution**

- Inputs: AS-I supply
- Outputs: AS-I supply

**Mechanical**


- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Vibration: 15 g @ 10...55 Hz

**Diagnostics (Logical)**

- I/O faults are indicated by the peripheral fault bit

**Diagnostics (Physical)**

- One LED indicates an I/O fault for the slave

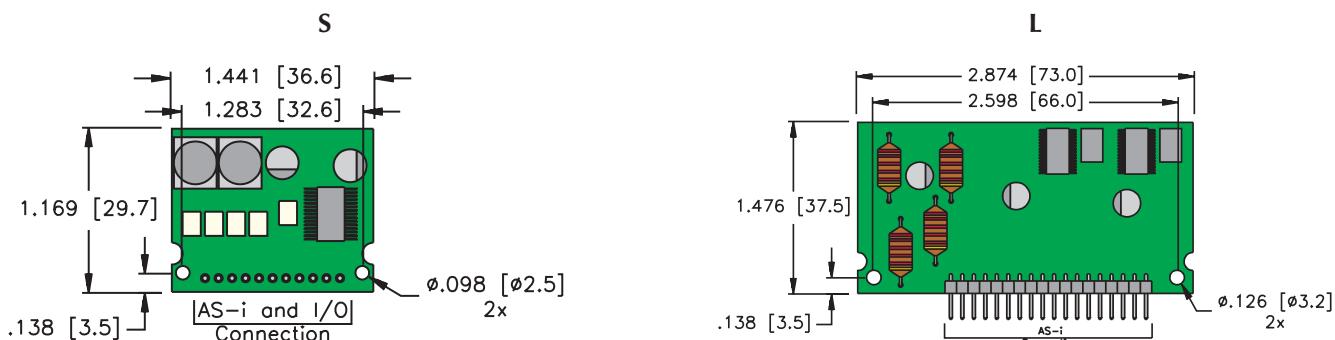


# Process Automation


Part Number	Input Count	Output Count	Output Current (per Output)	Output Current (sum of all Outputs)	I/O Power	LEDs	Connector	A/B Address	Addresses	Slave Profile	Drawing	Pinout
ASI-IOM-0202-PCB BW1421	2	2	80 mA	80 mA	AS-I		NONE	Y	1	B.A-E	S	A
ASI-IOM-0202-PCB BW1443	2	2	80 mA	80 mA	AS-I		SCR	Y	1	B.A-E	S	A
ASI-IOM-0202-PCB BW1444	2	2	80 mA	80 mA	AS-I		PIN	Y	1	B.A-E	S	A
ASI-IOM-0403-PCB BW1386	4	3	80 mA	80 mA	AS-I		PIN	Y	1	7.A-E	L	C
ASI-IOM-0403-PCB BW1387	4	3	80 mA	80 mA	AS-I		SCR	Y	1	7.A-E	L	C
ASI-IOM-0404-PCB BW1218	4	4	100 mA	180 mA	AS-I		PIN	N	1	7.0-F	L	B
ASI-IOM-0404-PCB-L BW1470	4	4	100 mA	180 mA	AS-I	X	SCR	N	1	7.0-F	L	B
ASI-IOM-0006-PCB BW1627	0	6	100 mA	180 mA	AS-I		SCR	Y	2	8.A-0	L	E
ASI-IOM-0800-PCB BW1351	8	0	-	-	AS-I		PIN	Y	2	0.A-2	L	D
ASI-IOM-0800-PCB BW1352	8	0	-	-	AS-I		SCR	Y	2	0.A-2	L	D

Note: SCR=Screw Terminal connection; PIN=Edge Pin connection


A

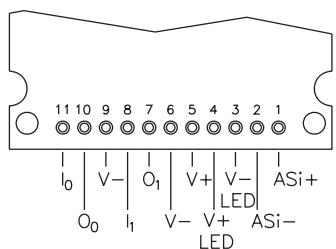


B

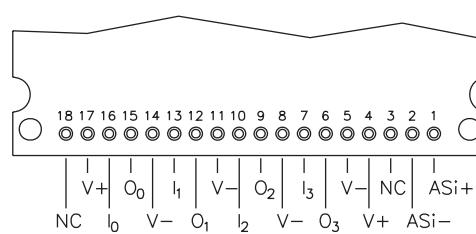


C

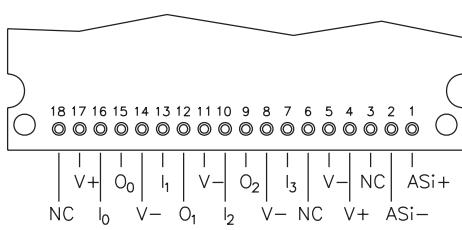

D

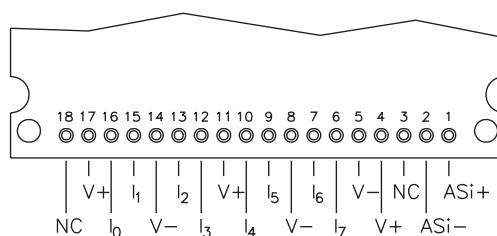

E

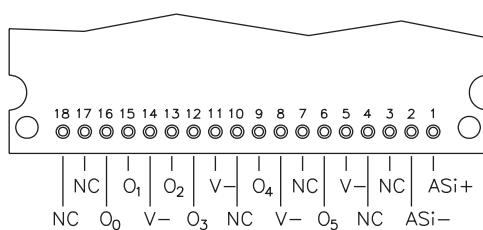

**OEM AS-I Slaves**

- PC-board Level Slaves
- Connection Options
- A/B Address Support
- Powered by Auxiliary Power

**Electrical**

- Operating Current: <20 mA from AS-I
- Input Current: <180 mA from AS-I (BW1628 only)
- Output Current: see table on facing page

**Power Distribution**

- Inputs: AS-I supply (BW1628)  
Auxiliary supply (BW1388, BW1389)
- Outputs: Auxiliary supply


**Mechanical**

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Vibration: 15 g @ 10 to 55 Hz

**Diagnostics (Logical)**

- I/O faults are indicated by the peripheral fault bit

CE

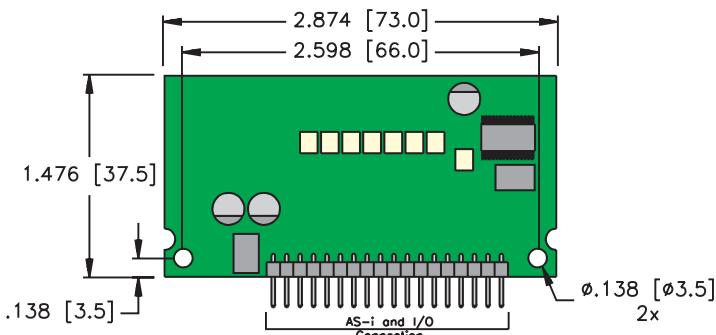


# Process Automation


Part Number	Input Count	Output	Output Current (per)	Output Current (sum of all Outputs)	I/O Power Source	LEDs	Connector	A/B Address	Addresses	Slave Profile	Drawing	Pinout
ASI-IOM-0404A-PCB-L-BW1628	4	4	150 mA	500 mA	AS-i/Aux	X	SCR	N	1	7.0-E	L	F
ASI-IOM-0404A-PCB-BW1388	4	4	100 mA	200 mA	Aux		PIN	N	1	7.0-F	L	G
ASI-IOM-0404A-PCB-BW1389	4	4	100 mA	200 mA	Aux		SCR	N	1	7.0-F	L	G

Note: SCR=Screw Terminal connection; PIN=Edge Pin connection

F

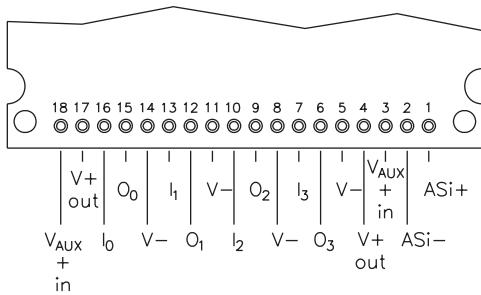

G

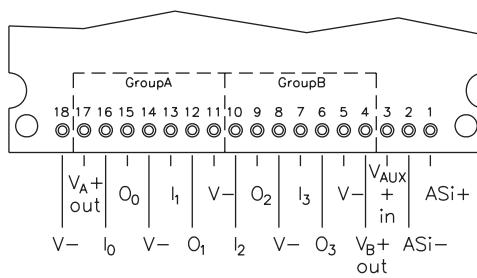

**OEM AS-I Slaves**

ASI-IOM-0808-PCB BW1898 shown

**ASI-IOM-0808-PCB -BW1898****ASI-IOM-0808-PCB-V3-BW1899****ASI-IOM-1616-PCB-BW1900****ASI-IOM-1616-PCB-V3-BW1901**

- PC-board Level Slaves
- Multiple Slaves on One Board
- I/O Count Choices
- Powered by AS-I

**Electrical**

- Operating Current: <400 mA (BW1898, BW1899), <500 mA (BW1900, BW1901) from AS-I (including all I/O)

**Power Distribution**


- Inputs: AS-I supply
- Outputs: AS-I supply

**Mechanical**

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Vibration: 15 g @ 10 to 55 Hz

**Diagnostics (Logical)**

- I/O faults are indicated by the peripheral fault bit

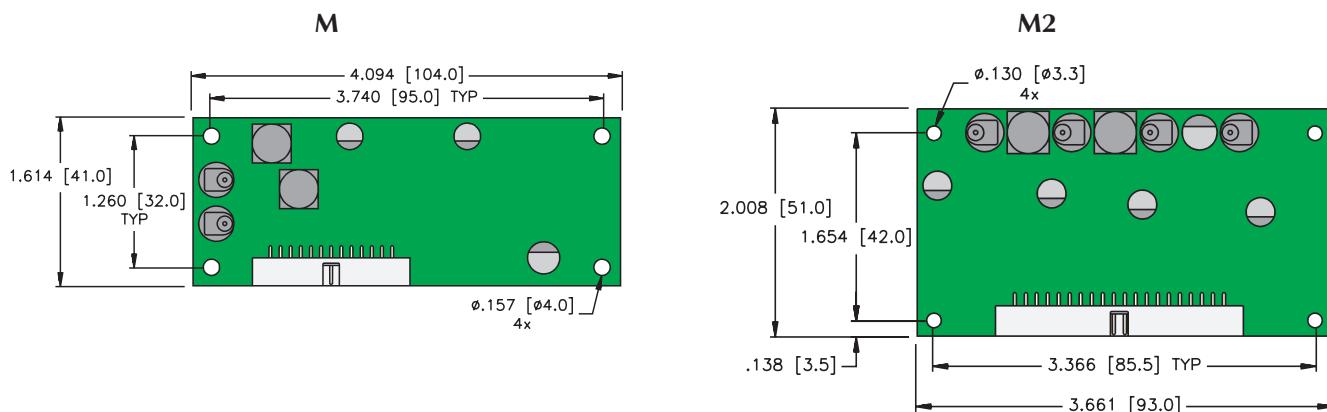


# Process Automation


Part Number	Input Count	Output Count	Output Current (per Output)	Output Current (sum of all Outputs)	I/O Power	LEDs	Connector	A/B Address Addresses	Slave Profile	Drawing	Pinout
ASI-IOM-0808-PCB -BW1898	8	8	70	200 mA	AS-I		CON	N	2	7.F-F-E	M H
ASI-IOM-0808-PCB-V3-BW1899	8	8	70	200 mA	AS-I		CON	Y	2	7.A-7-7	M H
ASI-IOM-1616-PCB-BW1900	16	16	70	200 mA	AS-I		CON	N	4	7.F-F-E	M2 I
ASI-IOM-1616-PCB-V3-BW1901	16	16	70	200 mA	AS-I		CON	Y	4	7.A-7-7	M2 I

Note: CON=Plug In connection

**H**

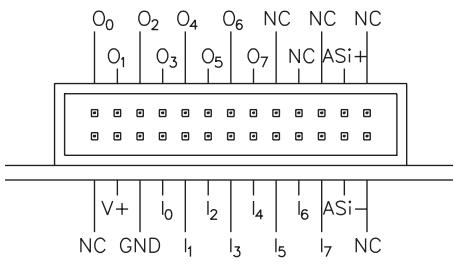

**I**

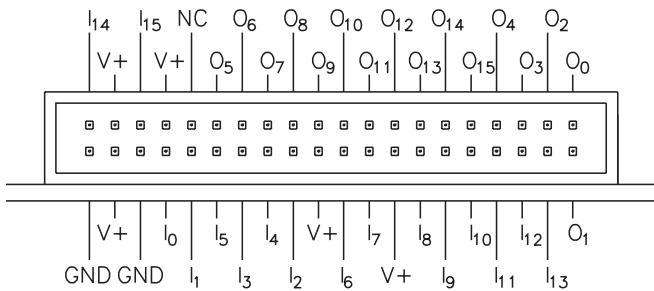

**OEM AS-I Slaves**

- PC-board Level Slave
- Relay Outputs
- For AC Control
- Powered by AS-I

**Electrical**


- Operating Current: <85 mA from AS-I (including all I/O)
- Output Current: <10 A total (through relays)

**Power Distribution**

- Inputs: AS-I supply
- Outputs: AS-I supply (switching)

**Mechanical**


- Operating Temperature: 0 to +60°C (+32 to +140°F)

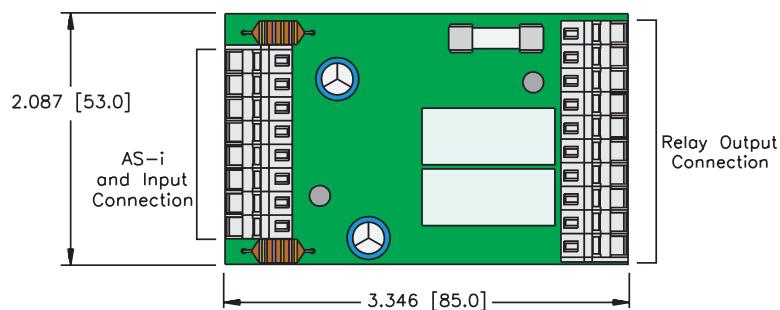**ASI-IOM-0202R-PCB BW1101****CE**

# Process Automation

Part Number	Input Count	Output Count	Output Current (sum of all)	I/O Power Source	LEDs	Connector	A/B Address	Addresses Consumed	Slave Profile	Drawing	Pinout
ASI-IOM-0202R-PCB BW1101	2	2	10 A	AS-I		CAG	N	1	B.F	R	J

Note: CAG=Cage Clamp connection

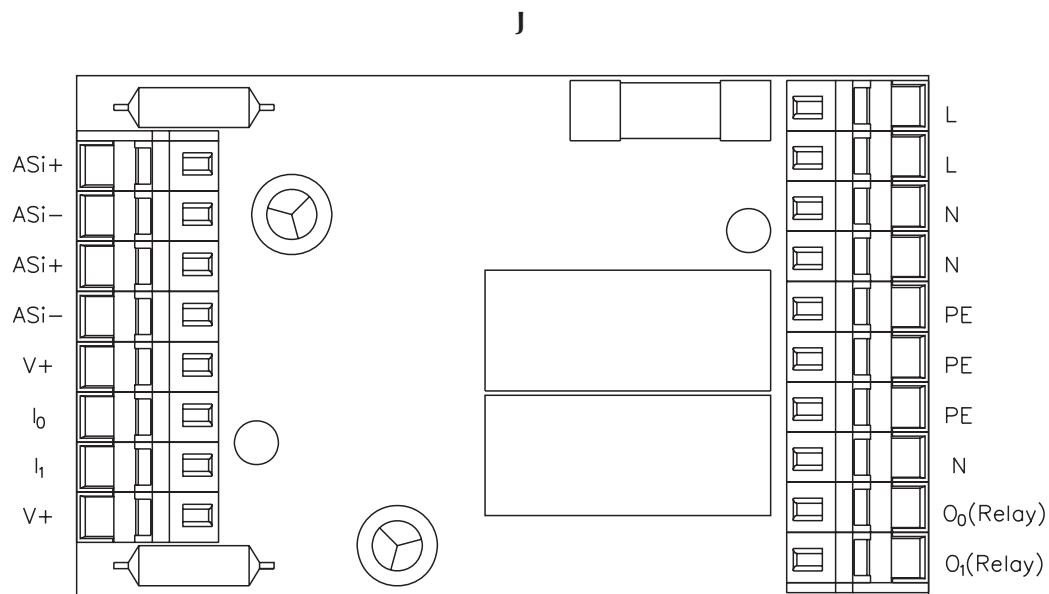

**OEM Power Converter****ASI-OEM-PWR BW1485**

- Coated PC-board
- Aux. Power From AS-I
- Can Eliminate the Need for a Separate Auxiliary Supply

**Electrical**


- Operating Voltage: 20 to 30 VDC (from AS-I)
- Output Current: <1.5 A

**Mechanical**

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Vibration: 15 g @ 10 to 55 Hz

**CE****OEM AS-I Accessories****ASI-PCB-CARRIER BW1484****CE**

- Carrier of OEM Slaves
- Holds Up To 3 Boards
- Supports Wiring Pin Connections

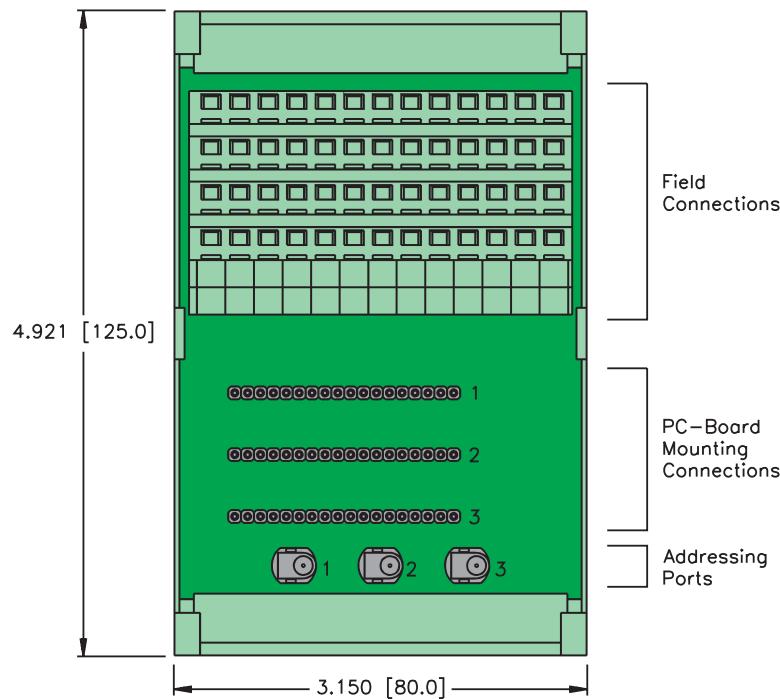

# **Process Automation**

**Notes:**

## AS-I Power Supply



- Provide Decoupled Power to AS-I
- DIN-rail Mounting
- Status LEDs
- Maximum 4 A to AS-I

### Electrical

- Input Voltage: 90 to 265 VAC (BW1649)  
115 VAC or 230 VAC, switchable (BW1997)
- Input Current: ~0.6 A @ 230 VAC (BW1649)  
~1.2 A @ 230 VAC (BW1997)
- Output Current: 4 A (BW1649)  
8 A (BW1997)

### Mechanical

- Operating Temperature: -10 to +55°C (-13 to +131°F)
- Protection: IP 20


## ASI-PS BW1649

## ASI-PS-8A BW1997\*

\* Not UL listed




**BW1649**

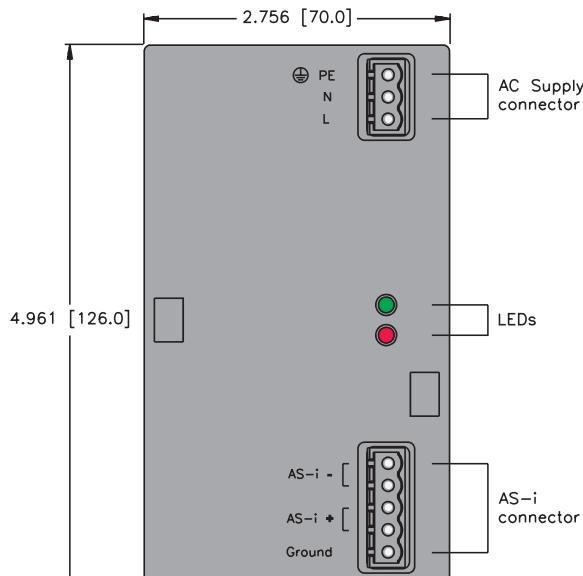

Depth = 5.079 (129.0)

**BW1997**

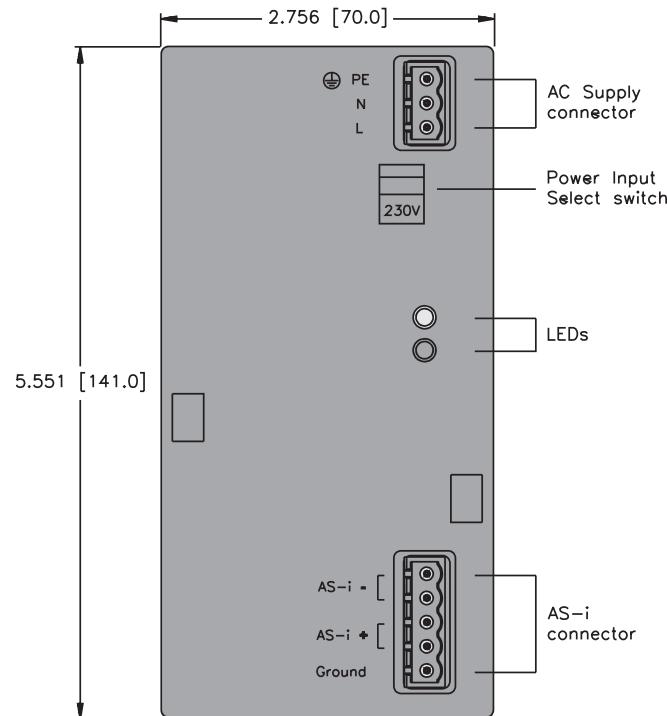

Depth = 5.945 (151.0)

# Process Automation

## AS-I Power Supply

- Provide Decoupled Power to AS-I
- DIN-rail Mounting
- Status LEDs
- Power from 24VDC Supply



### Electrical


- Input Voltage: 20 to 32 VDC (24 VDC nominal)
- Input Current: <6.3 A (fused internally)
- Output Voltage: 29.5 to 31.6 VDC, AS-I decoupled
- Output Current: 2 A

### Mechanical

- Operating Temperature: 0 to +55°C (32 to +131°F)
- Protection: IP 20

**ASI-PS-24/30VDC-2A BW1760**

CE

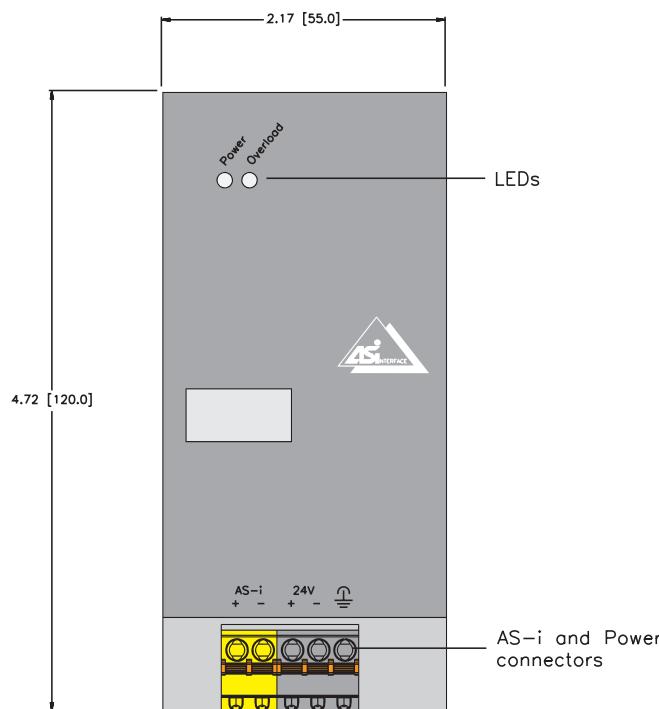

## DC Power Supplies

- For Use With Stainless Steel AS-I Gateways
- 30 VDC Supplies
- Power One or More AS-I Networks with One Supply



### Electrical

- Input Voltage: 93 to 132 VAC / 187 to 265 VAC
- Input Current: 0.9 A @ 230 VAC / 2.2 A @ 115 VAC (BW1597)  
1.8 A @ 230 VAC / 4.2 A @ 115 VAC (BW1593,  
BW1598)
- Output Current: 4 A, limited at 6 A (BW1597)  
8 A, limited at 12 A (BW1593, BW1598)

### Mechanical


- Operating Temperature: 0 to +60°C (+32 to +140°F)

**PS-30VDC-8A BW1593**

**PS-30VDC-4A-C1D2 BW1597\***

**PS-30VDC-8A-C1D2 BW1598\***

\* Not UL

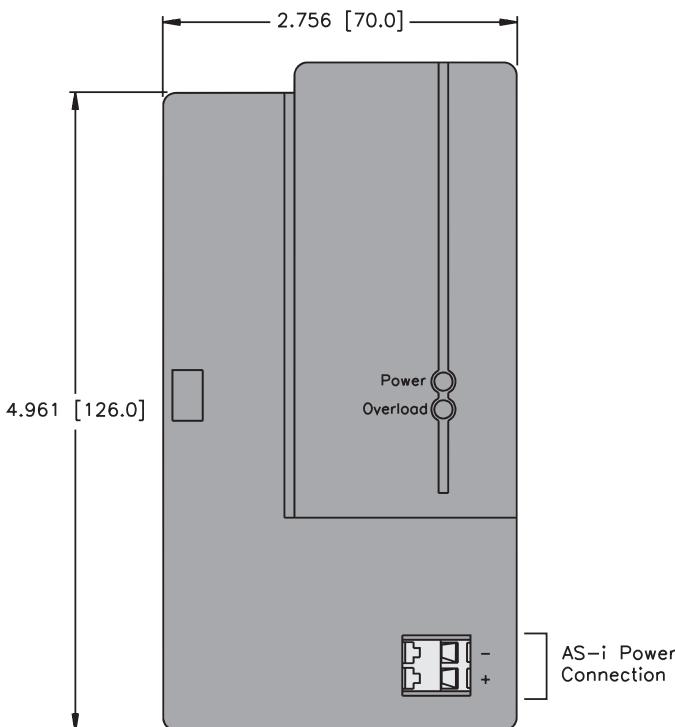

# Process Automation

## 3-Phase Power Supply



- For Use with AS-I Decoupling Products
- 30 VDC Output
- Power One or More AS-I Networks with One Supply


### Electrical

- Input Voltage: 3 x 340 to 550 VAC (3-phase)
- Input Current: 3 x 0.7 A @ 400 VAC
- Output Current: <8 A (DC)

### Mechanical

- Operating Temperature: 0 to +55°C (32 to +131°F)

**PS-30VDC-3PH BW1676**

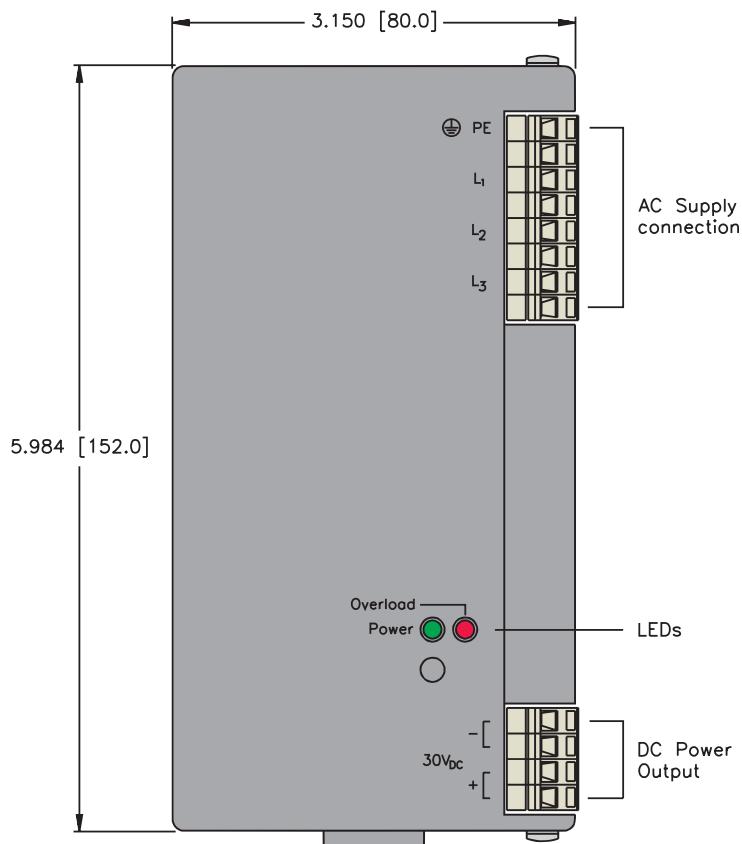

**AS-I Power Extenders**

- Convert Standard Power to AS-I
- 2.8 or 4 A Available

- IP 65 Protection
- Use One Supply for Multiple Segments

**Electrical**

- Input Voltage: 30 VDC
- Output Voltage: 30 VDC
- Output Current: 2.8 A, limited to 3 A (BW1197, BW1713)  
4 A, limited to 6 A (BW1477, BW1714)

**Mechanical**

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Protection: IP 65

**Material**


- Housing: Plastic

**Diagnostics (Physical)**

- LEDs to indicate power supply status

**ASI-PE BW1197\*****ASI-PE BW1477\*****ASI-PE-2.8A-C1D2 BW1713****ASI-PE-4A-C1D2 BW1714**

\* Not ETL Listed

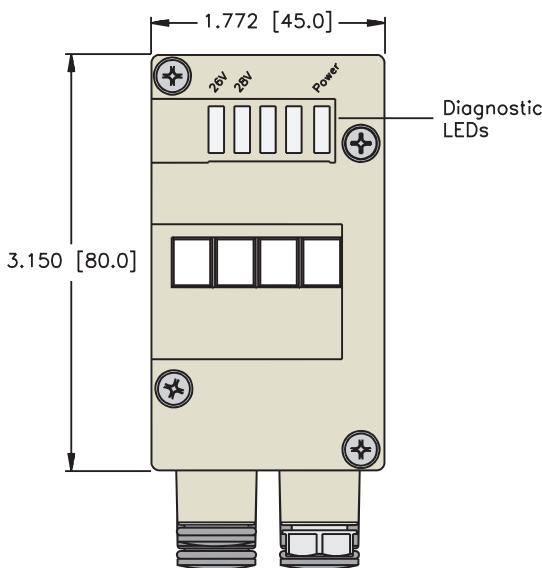

Note: AS-I and power connections are made via standard AS-I base modules with two isolated ports (ASI-BM BW1181 for flat cable, ASI-BM BW1183 for round cable with screw terminals). See pages E105-106.

## AS-I Power Decoupler



- Convert Standard Power to AS-I
- 4 A per Network
- IP 20 Protection
- Use One Supply for Multiple Segments

### Electrical

- Input Voltage: 30 VDC
- Output Voltage: 30 VDC
- Output Current: 4 A max. For each of up to 2 isolated AS-I networks

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

### Material


- Housing: Plastic

### Diagnostics (Physical)

- LEDs to indicate power supply status

**ASI-PE-2 BW1943**

CE

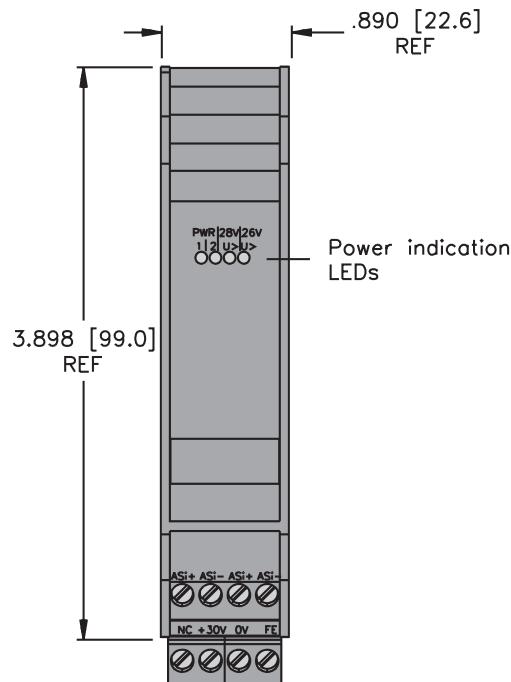

## AS-I Safety Monitors



**ASI-SM-1 BW1764**

**ASI-SM-2 BW1765**

CE

- AS-I Safety-at-Work
- 1 or 2 Safety Circuits
- Emergency Stop System over AS-I
- Fast Diagnosis of E-Stops

### Electrical

- Operating Current: ~45 mA from AS-I
- ~150 mA (BW1764), ~200 mA (BW1765) from separate power
- Response Delay: <40 ms

### Mechanical


- Operating Temperature: -20 to +60°C (+32 to +131°F)
- Protection: IP 20

### Diagnostics (Logical)

- E-stop fault information is transmitted via the AS-I master

### Diagnostics (Physical)


- LEDs to indicate status of AS-I communication and e-stop system

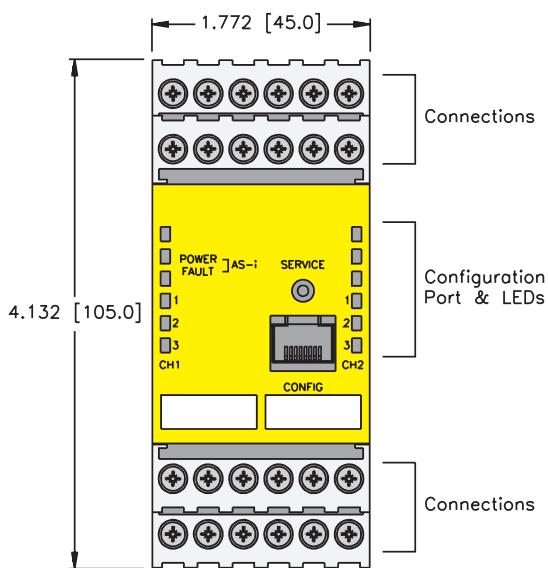

# Process Automation


Part Number	Number of Safety Circuits	Connection Diagram	Configuration Port
ASI-SM-1 BW1764	1	A	X
ASI-SM-2 BW1765	2	B	X

A

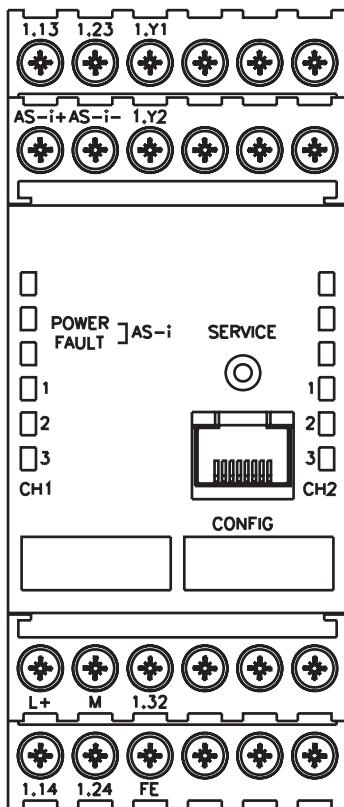

L+ = +24 VDC  
M = Ref. Gnd  
FE = Earth Gnd  
1.Y1 = EDM 1  
1.Y2 = Start 1  
1.13/1.14 = Output 1  
1.23/1.24 = Output 2  
1.32 = Indicator Output

B

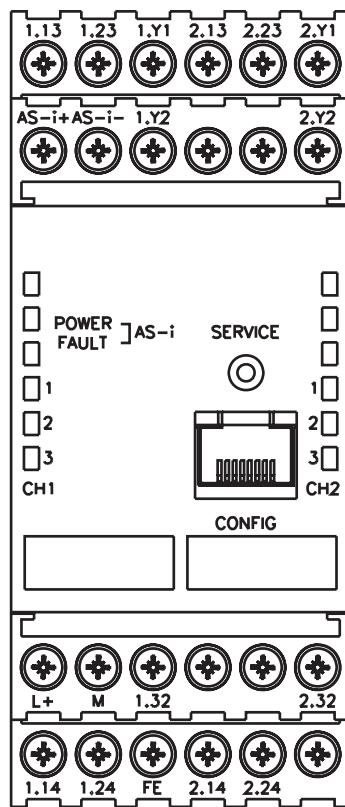

L+ = +24 VDC  
M = Ref. Gnd  
FE = Earth Gnd  
1.Y1 = EDM 1  
1.Y2 = Start 1  
1.13/1.14 = Output 1 (Circuit 1)  
1.23/1.24 = Output 2 (Circuit 1)  
1.32 = Indicator Output (Circuit 1)  
2.Y1 = EDM 2  
2.Y2 = Start 2  
2.13/2.14 = Output 1 (Circuit 2)  
2.23/2.24 = Output 2 (Circuit 2)  
2.32 = Indicator Output (Circuit 2)

Note: AS-I safety monitors are programmed via the ASIMON BW1770 software (sold separately).

**OEM AS-I Safety Slaves**

- PC-board Slaves
- AS-I Safety-at-Work
- Emergency Stop System Over AS-I
- Ideal for Push Button Stations

**Electrical**

- Operating Current: <80 mA from AS-I
- Output Current: <100 mA per output from aux. power

**Power Distribution**

- Inputs: AS-I supply
- Outputs: Auxiliary supply


**Mechanical**

- Operating Temperature: 0 to +70°C (+32 to +158°F)
- Vibration: 15 g @ 10 to 55 Hz

**Diagnostics (Logical)**

- AS-I safety information can be accessed from the safety monitor

CE

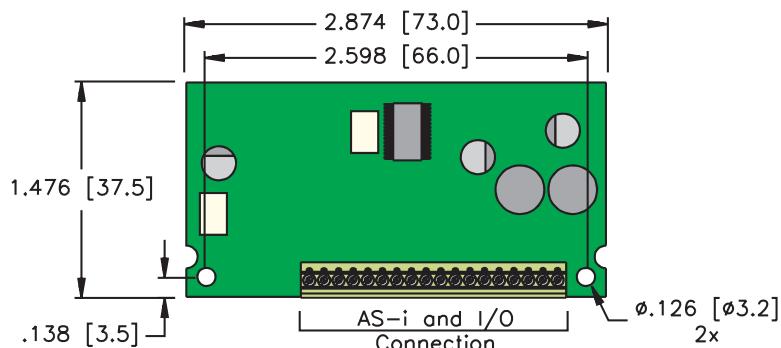


# Process Automation

Part Number	Input Count	Output Count	Output Current (sum of all)	I/O Power Source	LEDs	Connector	A/B Address	Addresses Consumed	Slave Profile	Drawing	Pinout
ASI-IOM-E0202A-PCB-ES BW1896	2	2	100 mA	AS-i/Aux		REM	N	1	7.B-0	S	K
ASI-IOM-E0202A-PCB-ES BW1751	2	2	100 mA	AS-i/Aux		SCR	N	1	7.B-0	S	K
ASI-IOM-E0202A-PCB-ES BW1801	2	2	100 mA	AS-i/Aux		PIN	N	1	7.B-0	S	K

Note: REM=Pull-out COMBICON style connection; SCR=Screw Terminal connection; PIN=Edge Pin connection

**K**

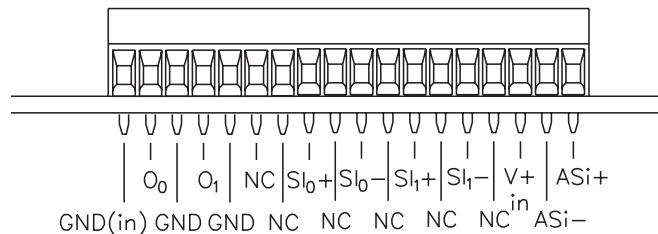

## AS-I Couplers



**ASI-CPL BW1187**

**ASI-CPL BW1280**

**CE**

- Connect 2 AS-I Networks Together
- Communicate Via Internal Slaves

### Electrical

- Operating Current: <80 mA per AS-I Network

### Power Distribution

- From each AS-I network

### Mechanical


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20 (BW1187), IP65 (BW1280)

### Material


- Housing: Plastic

### Diagnostics (Physical)

- LEDs to indicate status of AS-I communication and power supply

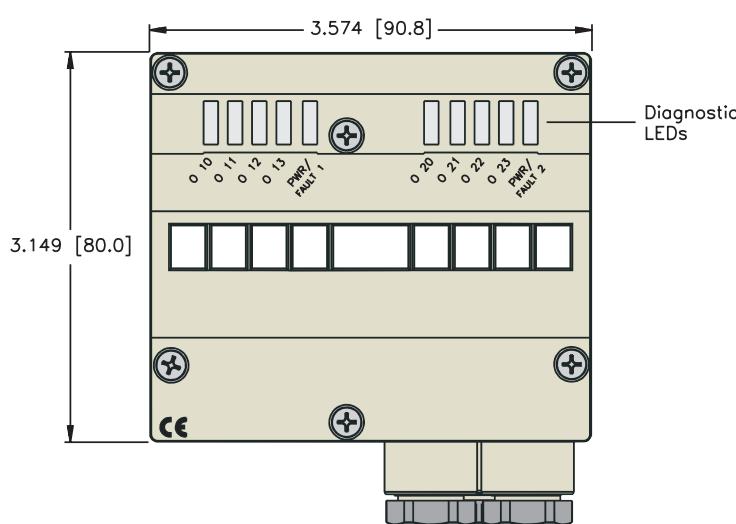

**ASI-CPL BW1280**

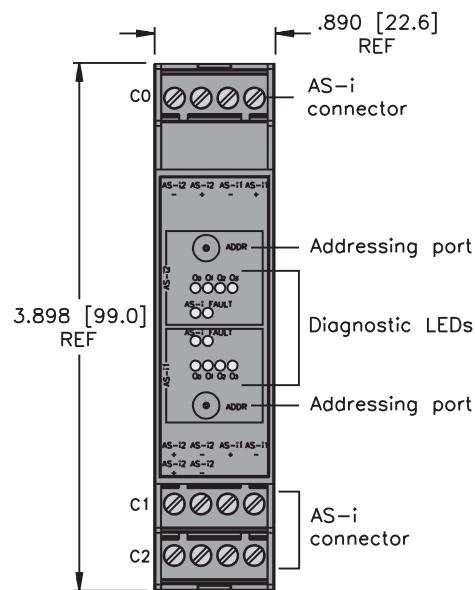

**ASI-CPL BW1187**

Note: ASI-CPL BW1280 makes connections to each AS-I network via standard base modules with two isolated ports (ASI-BM BW1181 for flat cable, ASI-BM BW1183 for round cable with screw terminals). See pages 105-106.

# Process Automation

## AS-interface® Couplers

AS-I Couplers provide a means to route data between two PLC's using AS-i. The couplers (similar to a DeviceNet™ spanner) directly connect AS-I networks, eliminating the need for a high level control network pyramid. This simple approach is extremely powerful and economical. It is simple because the coupler appears as a standard AS-I slave to each PLC; any AS-I scanner can send I/O data to the coupler without additional software or complex configuration procedures. It is economical because it replaces the high level control network, eliminating two control cards, wiring, conduit and programming.

### Theory of Operation

A coupler transfers data between PLC A and PLC B by appearing as I/O to each PLC. The coupler immediately copies the output data from PLC A to the input data for PLC B. Similarly, PLC B's output data is copied to PLC A's input data. The data transfer may be four bits in each direction (the maximum allowable data size for one slave on one AS-I scan cycle).

### Electrically


The coupler optically isolates network A from network B; the networks do not interact electrically in any way. The coupler is powered internally by the AS-I power supply for the two connected networks.

### Addressing

Because the coupler is essentially two AS-I devices, one on network A and one on network B, it must be addressed as a slave on each network. The addresses for the two networks are independent of each other and do not need to be set to the same value.

### Coupler Topology

The coupler is typically used to correct and coordinate multiple work cells.

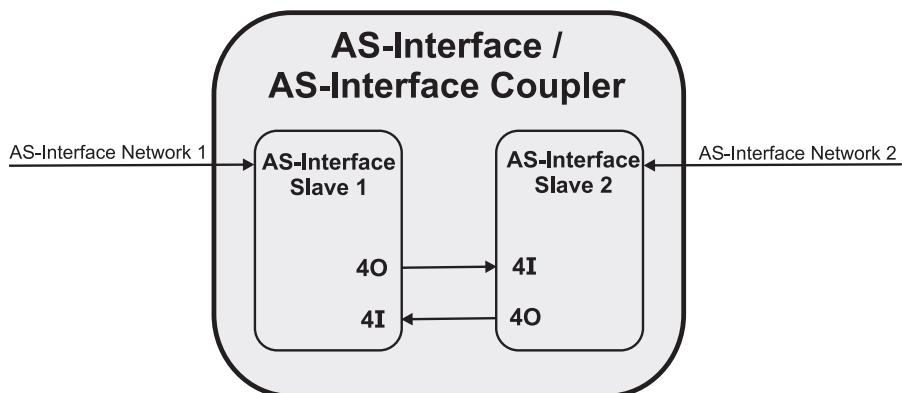

Note: Physical AS-I connections are made via standard dual isolated port AS-I base modules (ASI-BM BW1181 for flat cable or ASI-BM BW1183 for round cable with screw terminal connections) on pages E105-106.

### Network Master Simulators

- Connect AS-I Gateways to PC for Configuration and Troubleshooting
- Test and Troubleshoot Network Devices

#### MS-DP BW1131



**MS-DP BW1131** is a PROFINET®-DP Master Simulator designed to connect PROFINET stations to a PC via the serial port. It is ideal for testing, troubleshooting and demonstrating PROFINET products. It communicates at rates up to 19.2 kbaud.

---

#### MS-DP BW1257



**MS-DP BW1257** is a PROFINET-DP Master Simulator designed to connect PROFINET stations to a PC via the serial port. It features DPV1 communication capability. It is ideal for testing, troubleshooting and demonstrating PROFINET products. It communicates at rates up to 19.2 kbaud.

---

#### MS-DP BW1258



**MS-DP BW1258** is a PROFINET-DP Master Simulator designed to connect PROFINET stations to a PC via the serial port. It features DPV1 communication capability. It is ideal for testing, troubleshooting and demonstrating PROFINET products. This version is powered from a separate 24 VDC supply, and communicates at rates up to 1.5 Mbaud.

---

#### IC-232-485 BW1094



**IC-232-485 BW1094** is an interface converter that allows RS-485 devices to be connected to a PC RS232 serial port. It is used for connecting the RS-485 AS-I masters to the AS-I Control Tools software for configuration and maintenance.

### **MS-DN BW1420**



**MS-DN BW1420** is a DeviceNet™ Master Simulator designed to connect DeviceNet stations to a PC via the USB port. It is ideal for testing, troubleshooting and demonstrating DeviceNet products.

### **MS-DN BW1625**



**MS-DN BW1625** is a DeviceNet Master Simulator designed to connect DeviceNet stations to a PC via the PCI backplane. It is ideal for testing and troubleshooting DeviceNet products.

### **MS-CO BW1453**



**MS-CO BW1453** is a CANopen Master Simulator designed to connect CANopen stations to a PC via the USB port. It is ideal for testing, troubleshooting and demonstrating CANopen products.

### **CORD-DSUB BW1097**



**CORD-DSUB BW1097** is an RS-485 compatible cord that connects IP 65 masters and gateways (i.e. ASI-DPG BW1253) to a PC for commissioning and programming.

## CORD-DSUB BW1058



**CORD-DSUB BW1058** is a serial 9-in DSUB extension cord that connects masters and gateways to a PC for commissioning and programming.

## CORD-DSUB BW1226



**CORD-DSUB BW1226** is a CAN compatible cord that connects DeviceNet™ and CANopen gateways to the DeviceNet master simulators (BW1420, BW1625) for commissioning and programming.

## ASI-PD BW1646



**ASI-PD BW1646** is a handheld addressing tool for AS-I. It also allows the user to test I/O and slave functionality.


## ASI-ANALYZER BW1415



The **ASI-ANALYZER BW1415** is a diagnostic and troubleshooting tool for AS-I systems. The analyzer displays the status of each slave on the network, as well as other details (such as power supply level), and can be used to provide diagnostics for low level AS-I messages. It allows the user to track and observe potential communication failures before they become real problems.

# Process Automation

## ASI-MON BW1770

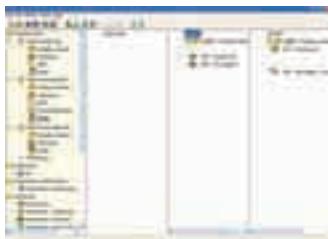

**ASI-MON BW1770** is a Windows program for use in configuring and diagnosing AS-I Safety at Work systems using the AS-I Safety Monitors. Connection to the safety monitors is made via the PC serial port.

## ASI-SIM-SW BW1902



**ASI-SIM-SW BE1902** is a MS Windows program that allows simulation and download of AS-I control programs for supported AS-I masters (masters with mini PLC capability). The package includes the ASI-SIM software, ASI-CT BW1203 AS-I Control Tools program and a cable to connect to the stainless steel programming port.

## ASI-CT-SS BW1602

## ASI-CT-AB BW1563

## ASI-CT BW1203



AS-I Control Tools is a MS Windows program for commissioning and programming Bihl+Wiedemann AS-I masters and gateways. The program allows the user to set addresses of slaves, test and manipulate I/O and view diagnostic information.

The **BW1602** package includes a cable to connect gateways in the stainless steel housing to a PC serial port.

The **BW1563** package includes a cable to connect the ASI-SCAN-AB BW1416 and ASI-SCAN-AB BW1488 PLC cards to a PC serial port.

## ASI-EVAL-KIT BW1565



The **ASI-EVAL-KIT BW1565** enables easy commissioning of the AS-I OEM master module (ASI-MM-PCB BW1670, p. E79-80). The carrier board has a 5 V controller and an RS232 converter to communicate with the OEM module via the AS-I Control Tools software. The board also has a terminal connector for connection to the AS-I system.

The kit is designed to aid users in developing applications for the OEM AS-I masters.

## ASI-TERM BW1644



**ASI-TERM BW1644** is an AS-I terminator designed to allow an AS-I segment to be extended up to 200 m. It includes an LED for basic system diagnostic information. It is a passive device, used in a similar manner to the active AS-I tuner (pages E69-70).

**AS-I Standard Base  
Modules**

- Connect IP 65 Stations to AS-I and Power
- Round or Flat Cable Supported

**ASI-BM BW1180**



Standard AS-I base module with two AS-I flat cable ports.

**ASI-BM BW1181**



Standard AS-I base module with one AS-I flat cable port and one isolated flat cable port. For use with AS-I devices requiring two separate connections (i.e. repeaters, power extenders, couplers, slaves with auxiliary powered I/O).

**ASI-BM BW1438**



Standard AS-I base module with two AS-I flat cable ports. Includes addressing port for handheld device.

**ASI-BM BW1182**



Standard AS-I base module with two AS-I round cable ports. Connections are made via screw terminals.

---

**ASI-BM BW1183**



Standard AS-I base module with one AS-I round cable port and one isolated round cable port. For use with AS-I devices requiring two separate connections (i.e. repeaters, power extenders, couplers, slaves with auxiliary powered I/O). Connections are made via screw terminals.

---




**Notes:**

# Process Automation

## AS-interface®, Cable Specifications

- AS-interface Cable that Meets the Requirements of EN50295e for Communication up to 167 Kbaud
- Maximum Cable Length per Segment is 100 Meters

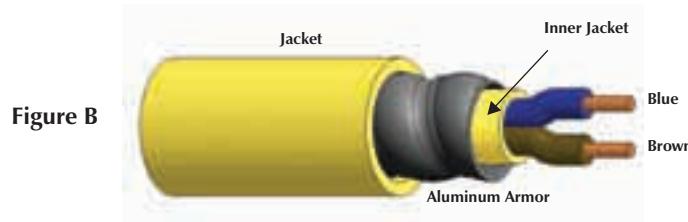

Type	Approvals	Data Pair		Outer Jacket	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation			
<b>252BK</b> AWM 2517 105°C 300 Volts	<b>NEC ITC PLTC</b> <b>CEC [CMG]</b>	2/18 AWG BU/BN	6.6 Ohms PVC	PVC Black 6.0 mm (.235 in)	RB50791-*M 34.4 lbs.	A
<b>254</b> AWM 2517 105°C 300 Volts	<b>NEC ITC PLTC</b> Open Wiring Direct Burial <b>CEC [CMG]</b>	2/16 AWG BU/BN	4.1 Ohms PVC/Nylon	PVC Yellow 7.3 mm (.285 in)	RB50852-*M 53 lbs.	A
<b>254B</b> AWM 2517 105°C 300 Volts	<b>NEC ITC PLTC</b> Open Wiring Direct Burial <b>CEC [CMG]</b>	2/16 AWG BU/BN	4.1 Ohms PVC/Nylon	PVC Blue 7.3 mm (.285 in)	RB50962-*M 53 lbs.	A
<b>255A</b> 105°C 300 Volts	<b>NEC ITC PLTC</b> <b>CEC [CMG] HL BCD</b>	2/16 AWG BU/BN	4.1 Ohms PVC	Armor PVC Yellow 13.5 mm (.530 in)	RB50966-*M 105 lbs. <i>armorfast®</i>	B
<b>256</b> AWM 21002 105°C 600 Volts	<b>NEC AWM</b> <b>CEC AWM I/II A/B FT1</b>	2/16 AWG BU/BN	4.5 Ohms PE	TPE Yellow 6.2 mm (.244 in)	RB51179-*M 36 lbs. <i>flexlife-10®</i>	A
<b>257</b> AWM 21002 105°C 300 Volts	<b>NEC PLTC/ITC</b> <b>CEC AWM I/II A/B FT4</b>	2/16 AWG BU/BN	4.1 Ohms PE	PUR Yellow 7.3 mm (.285 in)	RB51178-*M 53 lbs.	A

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.

### AS-interface®, Cable and Cordset Selection Matrix

		minifast®				eurofast®
		Pin (Male)	Socket (Female)			Pin (Male)
		1 RSM	2 WSM	3 RKM	4 WKM	5 RSC
	Bare	RSM 25x-*M	WSM 25x-*M	RKM 25x-*M	WKM 25x-*M	RSC 25x-*M
minifast	Pin (Male)	1 RSM RSM 25x-*M	WSM WSM 25x-*M	RSM RKM 25x-*M	RSM WKM 25x-*M	RSM RSC 25x-*M
	Pin (Male)	2 WSM		WSM RKM 25x-*M	WSM WKM 25x-*M	WSM RSC 25x-*M
minifast	Socket (Female)	3 RKM		RKM RKM 25x-*M	RKM WKM 25x-*M	RKM RSC 25x-*M
	Socket (Female)	4 WKM			WKM WKM 25x-*M	WKM RSC 25x-*M
eurofast	Pin (Male)	5 RSC				RSC RSC 25x-*M
	Pin (Male)	6 WSC				
eurofast	Socket (Female)	7 RKC				
	Socket (Female)	8 WKC				

See pages G115 - G116 for dimensional drawings.

\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.



Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15...50 Meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSM... to RSV, WSM... to WSV. For eurofast armorfast® change part number RSC... to RSA.

minifast		Pinouts	eurofast	
Male	Female		Male	Female
		1. Brown (+ Voltage) 2. N/C 3. Blue (- Voltage) 4. N/C		

# Process Automation

## AS-interface®, Cable and Cordset Selection Matrix


eurofast®			minifast® Bulkhead		eurofast Bulkhead	
Pin (Male)	Socket (Female)		Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)
 6 WSC	 7 RKC	 8 WKC	 9 RSFP	 10 RKFP	 11 FSFD	 12 FKFD
WSC 25x-*M	RKC 25x-*M	WKC 25x-*M	RSFP 25x-*M	RKFP 25x-*M	FSFD 25x-*M	FKFD 25x-*M
RSM WSC 25x-*M	RSM RKC 25x-*M	RSM WKC 25x-*M	RSM RSFP 25x-*M	RSM RKFP 25x-*M	RSM FSFD 25x-*M	RSM FKFD 25x-*M
WSM WSC 25x-*M	WSM RKC 25x-*M	WSM WKC 25x-*M	WSM RSFP 25x-*M	WSM RKFP 25x-*M	WSM FSFD 25x-*M	WSM FKFD 25x-*M
RKM WSC 25x-*M	RKM RKC 25x-*M	RKM WKC 25x-*M	RKM RSFP 25x-*M	RKM RKFP 25x-*M	RKM FSFD 25x-*M	RKM FKFD 25x-*M
WKM WSC 25x-*M	WKM RKC 25x-*M	WKM WKC 25x-*M	WKM RSFP 25x-*M	WKM RKFP 25x-*M	WKM FSFD 25x-*M	WKM FKFD 25x-*M
RSC WSC 25x-*M	RSC RKC 25x-*M	RSC WKC 25x-*M	RSC RSFP 25x-*M	RSC RKFP 25x-*M	RSC FSFD 25x-*M	RSC FKFD 25x-*M
WSC WSC 25x-*M	WSC RKC 25x-*M	WSC WKC 25x-*M	WSC RSFP 25x-*M	WSC RKFP 25x-*M	WSC FSFD 25x-*M	WSC FKFD 25x-*M
	RKC RKC 25x-*M	RKC WKC 25x-*M	RKC RSFP 25x-*M	RKC RKFP 25x-*M	RKC FSFD 25x-*M	RKC FKFD 25x-*M
		WKC WKC 25x-*M	WKC RSFP 25x-*M	WKC RKFP 25x-*M	WKC FSFD 25x-*M	WKC FKFD 25x-*M

## AS-interface®, minifast® Cordset and Receptacle Connector Dimensions

### Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +105°C (-40° to +221°F)


1

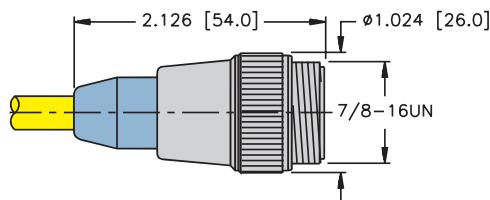

RSM ..

Pages G113 - G114


3

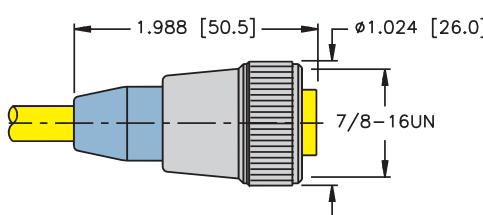

RKM ..

Pages G113 - G114


2

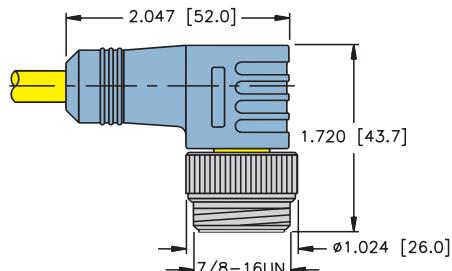

WSM ..

Pages G113 - G114


4

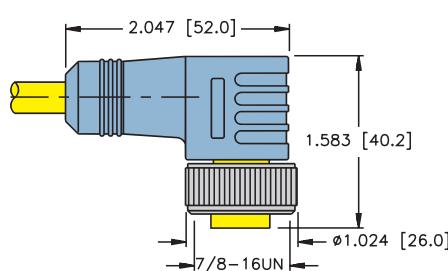

WKM ..

Pages G113 - G114


9

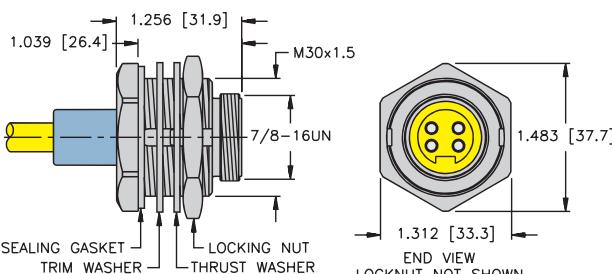

RSFP ..

Pages G113 - G114

10

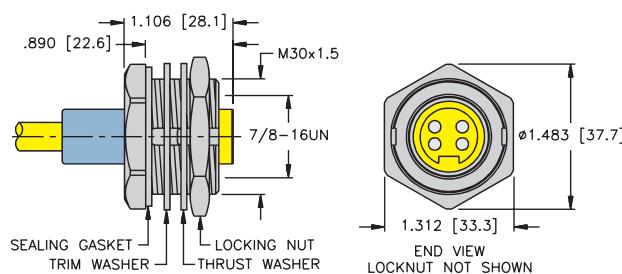

RKFP ..

Pages G113 - G114


# Process Automation

## AS-interface®, eurofast® Cordset Connector Dimensions / Configuration


### Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40°C to +105°C (-40° to +221°F)

5

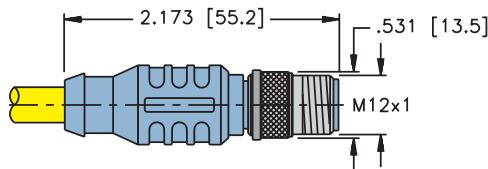

7

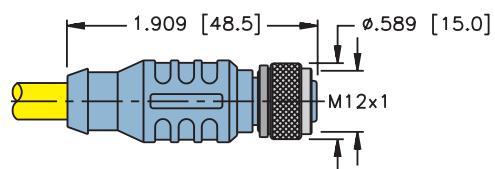


RSC ..

Pages G113 - G114


RKC ..

Pages G113 - G114

6

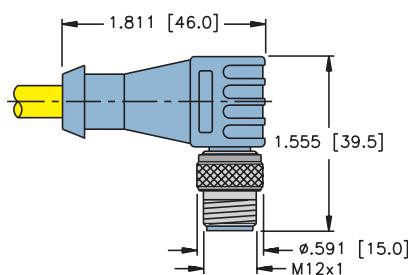

8

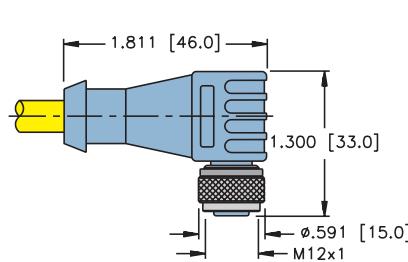


WSC ..

Pages G113 - G114


WKC ..

Pages G113 - G114

11

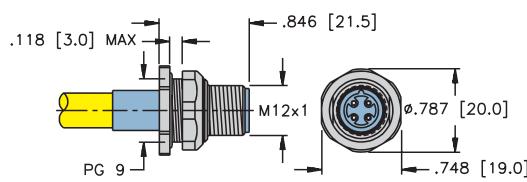

12

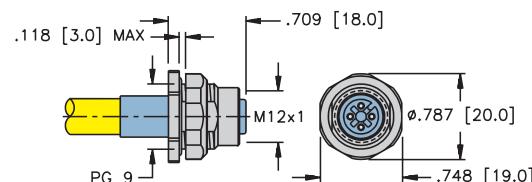

FSFD ..

Pages G113 - G114

FKFD ..

Pages G113 - G114

### AS-interface®, *minifast*® to *eurofast*® Passive Multiport Junction (Brick)

- For Connecting I/O in Concentrated Areas
- Available in Standard and With Short-Circuit Protection



Part Number	Application	Wiring Diagram
JBBS-25-E812	8 port Junction Tee • (7/8-16UN) <i>minifast</i> bus-in/bus-out connections • Eight (M12x1) <i>eurofast</i> device ports	<pre>           graph TD             J1((J1)) --- 1_1[1]             J1 --- 2_1[2]             J1 --- 3_1[3]             J1 --- 4_1[4]             J2((J2)) --- 1_2[1]             J2 --- 2_2[2]             J2 --- 3_2[3]             J2 --- 4_2[4]             J3((J3)) --- 1_3[1]             J3 --- 2_3[2]             J3 --- 3_3[3]             J3 --- 4_3[4]             J4((J4)) --- 1_4[1]             J4 --- 2_4[2]             J4 --- 3_4[3]             J4 --- 4_4[4]             P1((P1)) --- 1_P[1]             P1 --- 2_P[2]             P1 --- 3_P[3]             P1 --- 4_P[4]         </pre>


# Process Automation

## Specifications

<b>Housing:</b>	POM (Nylon)
<b>Coupling Nut:</b>	Nickel Plated CuZn
<b>Contact Carrier:</b>	Nylon
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

8-port

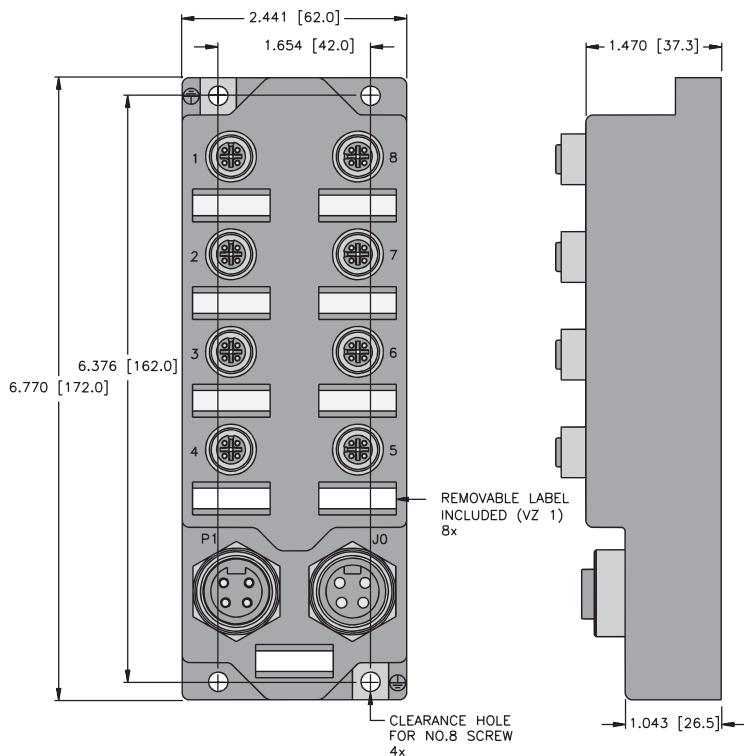

## Pinouts

minifast		eurofast	
<b>Male</b> 	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C	<b>Female</b> 	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C

## AS-interface®, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications



Part Number	Specs	Application	Wiring Diagrams
JBBS-25-M414	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Four <b>minifast</b> connectors for field devices</li> </ul>	
JBBS-25-M613 JBBS-25-M614	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Six <b>minifast</b> connectors for field devices</li> </ul>	
JBBS-25-M814	No short-circuit protection	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Eight <b>minifast</b> connectors for field devices</li> </ul>	


# Process Automation

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions


**8-Port**

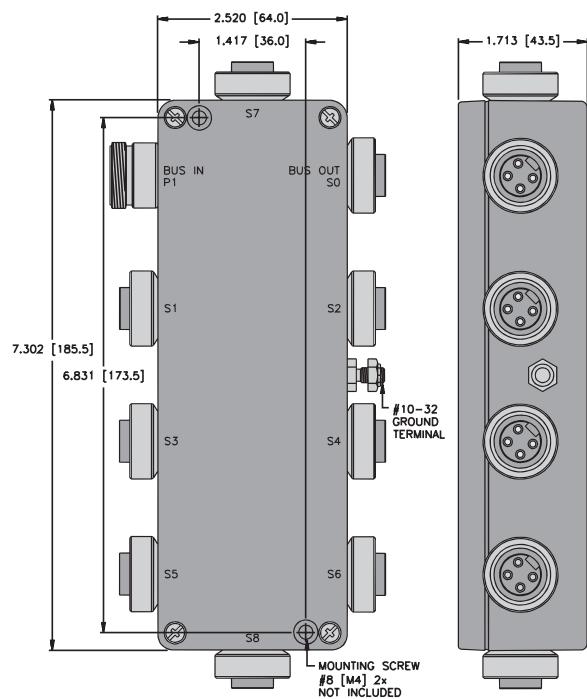

**6-Port**

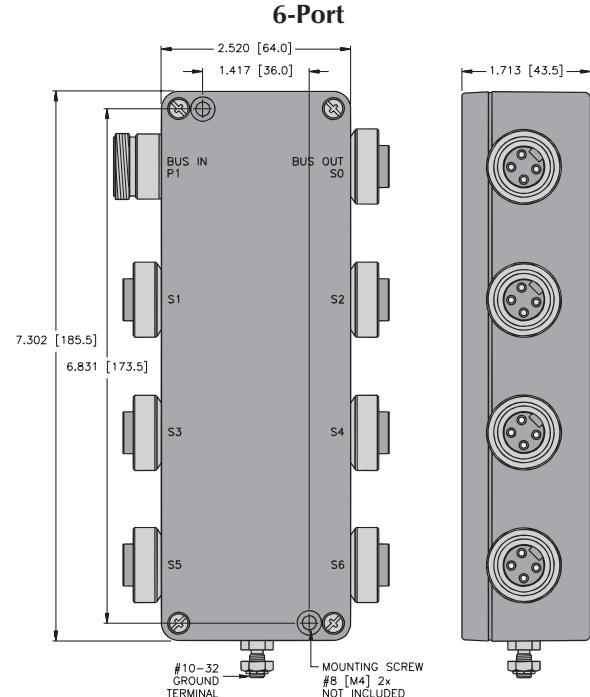


**4-Port**

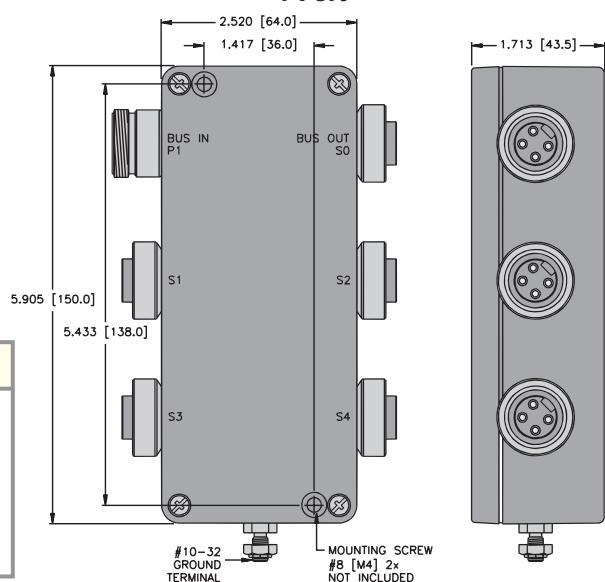

## Pinouts


*minifast*

**Male**



1 = Voltage+  
2 = N/C  
3 = Voltage-  
4 = N/C

**Female**



1 = Voltage+  
2 = N/C  
3 = Voltage-  
4 = N/C

## AS-interface®, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25SC-M413	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 280 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: 11 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> </ul> <p>Four <i>minifast</i> connectors for field devices</p>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

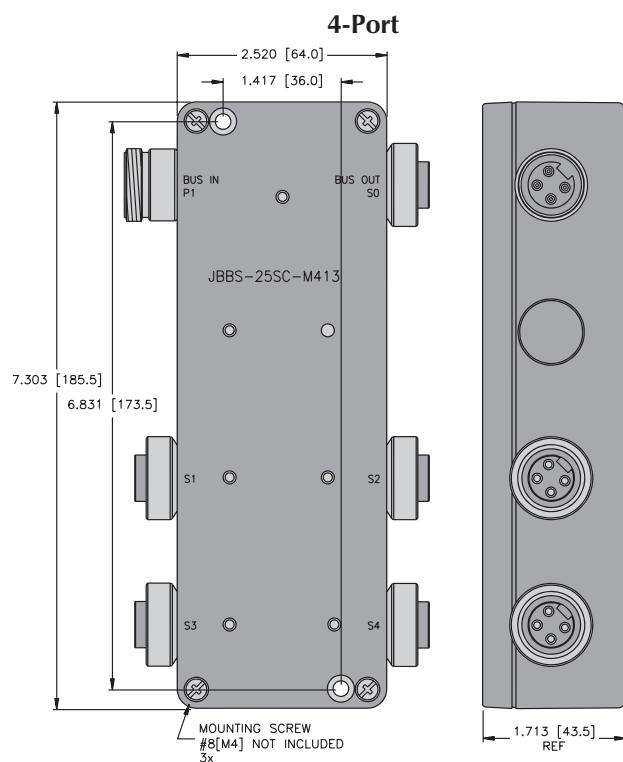

## Pinouts

minifast			
Male	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C	Female	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C

## AS-interface®, *minifast*® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25SC-M613	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 280 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: 11 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> </ul> <p>Six <i>minifast</i> connectors for field devices</p>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

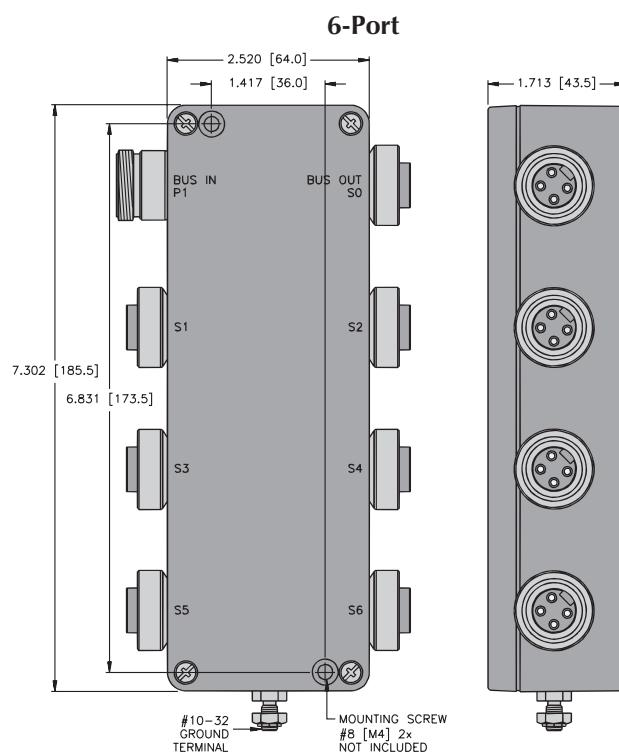

## Pinouts

minifast			
Male	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C	Female	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C

## AS-interface®, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25-E413	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Four <b>eurofast</b> connectors for field devices</li> </ul>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

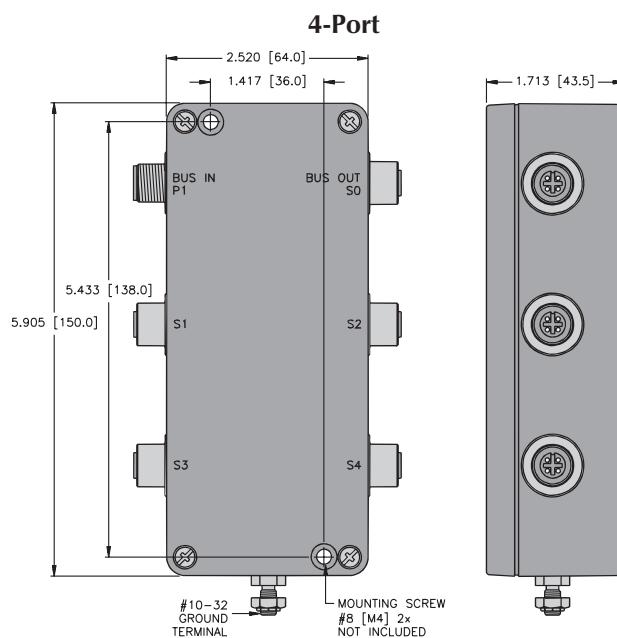

## Pinouts

eurofast			
Male	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C	Female	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C

## AS-interface®, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25-E613	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six <b>eurofast</b> connectors for field devices</li> </ul>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

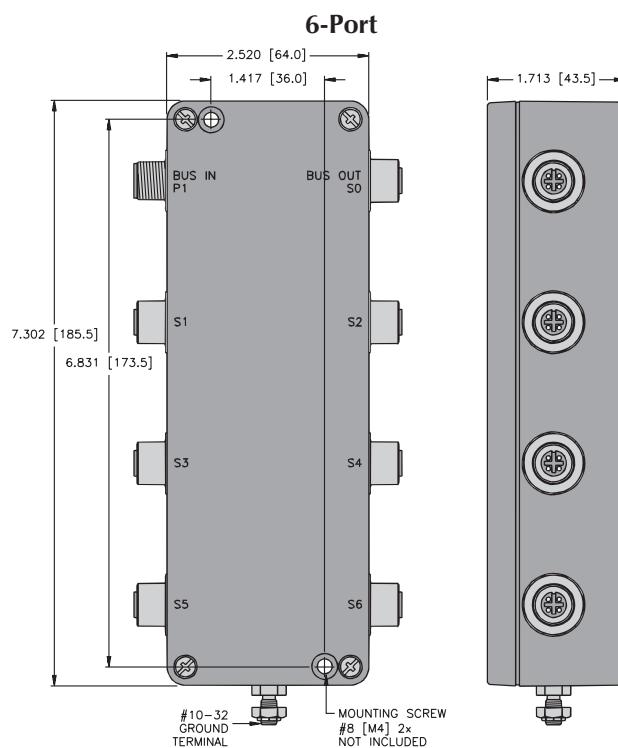

## Pinouts

eurofast			
Male	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C	Female	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C

## AS-interface®, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications



Part Number	Specs	Application	Wiring Diagrams
JBBS-25-E813	No short-circuit protection	<p>8-port junction</p> <ul style="list-style-type: none"> <li>• bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• eight <b>eurofast</b> connectors for field devices</li> </ul>	


# Process Automation

## Specifications



<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

### 8-Port

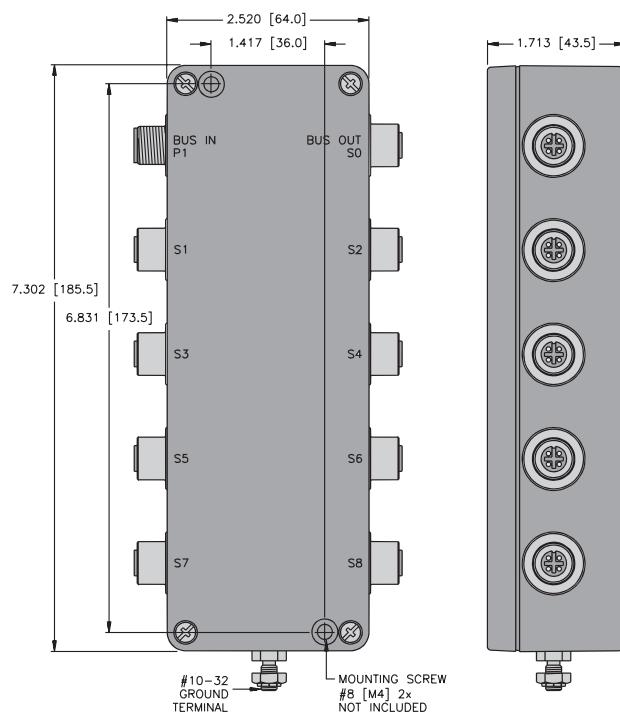

## Pinouts

eurofast			
Male	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C	Female	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C
			

## AS-interface®, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25-E623	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six <b>eurofast</b> connectors for field devices</li> </ul>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

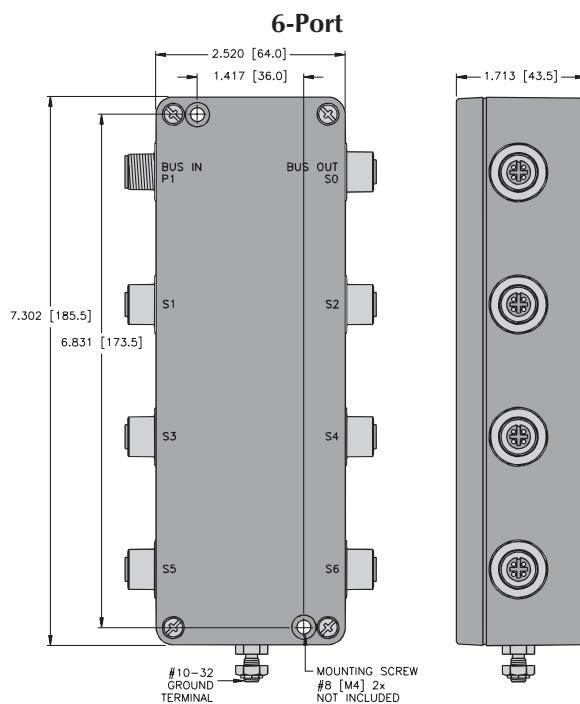

## Pinouts

eurofast			
Male	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C	Female	1 = Voltage+ 2 = N/C 3 = Voltage- 4 = N/C

## AS-interface®, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25SC-E413	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 280 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: 11 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> </ul> <p>Four <b>minifast</b> connectors for field devices</p>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

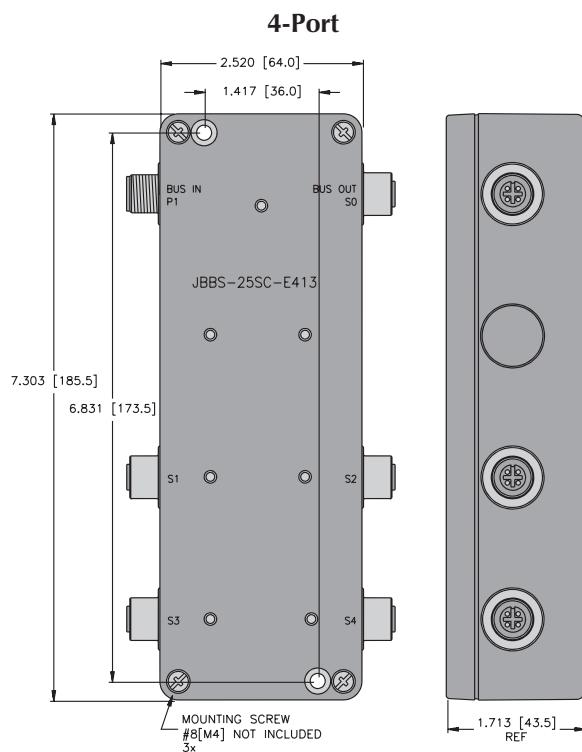

## Pinouts

minifast			
Male	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C	Female	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C

## AS-interface®, eurofast® Passive Multiport Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-25SC-E613	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 280 mA (Isc)</li> <li>• Open circuit voltage: 33 VDC</li> <li>• Current consumption: 11 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b> Six <b>minifast</b> connectors for field devices</li> </ul>	

# Process Automation

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	36 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

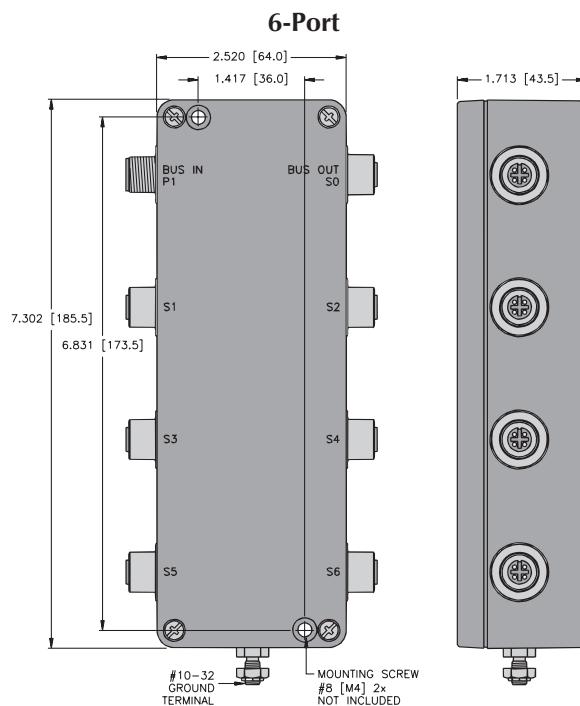

## Pinouts

minifast			
Male	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C	Female	1 = BN (Voltage+) 2 = N/C 3 = BU (Voltage-) 4 = N/C


## AS-interface®, minifast® Conduit Adapters

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 25-M123	Nylon Housing 300 V, 9 A -40° to +75°C	Attaches to standard conduit body* for transition to 4-wire (7/8-16UN) <b>minifast</b> connector	<b>Female</b> 
	BCA 25-M223	Nylon Housing 300 V, 9 A -40° to +75°C	*Crouse Hinds 3/4" Form 8, Mark 9 or equivalent	

1-port Wiring Diagram

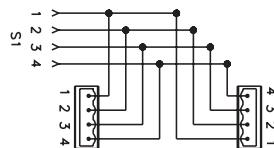

2-port Wiring Diagram

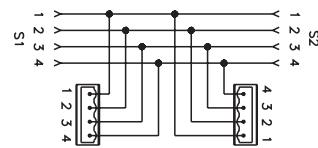

# Process Automation


## AS-interface®, eurofast® Conduit Adapters

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 25-E123 BCA 25SC-E123	<p>Nylon Housing 250 V, 4 A -40° to +75°C</p> <p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>Short-circuit protection: 280 mA</li> <li>Open circuit voltage: 33 VDC</li> <li>Current consumption: 11 mA</li> </ul> <p><b>Diagnostics</b></p> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	Attaches to standard conduit body* for transition to 4-wire (M12x1) eurofast connector	
	BCA 25-E223 BCA 25SC-E223	<p>Nylon Housing 250 V, 4 A -40°C to +75°C</p> <p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>Short-circuit protection: 280 mA</li> <li>Open circuit voltage: 33 VDC</li> <li>Current consumption: 11 mA</li> </ul> <p><b>Diagnostics</b></p> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	*Crouse Hinds 3/4" Form 8, Mark 9 or equivalent	

1-port Wiring Diagram

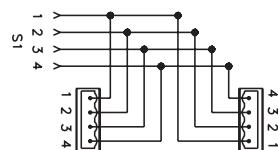

2-port Wiring Diagram

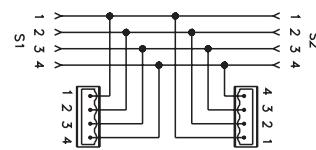

## AS-interface®, Tees

- Creates a Drop or Branch from the Main Bus Line
- Available in *minifast*® or *eurofast*® Bus or Drop Lines



Housing	Part Number	Specs	Application	Wiring Diagrams
	RSV 2RKV 25		<i>minifast</i> Tee • <i>minifast</i> drop connector	
	RSV FKV RKV 25	TPU (Polyurethane) Stainless Steel 250 V, 4 A ( <i>eurofast</i> ), 9 A ( <i>minifast</i> ) -40° to +75°C	<i>minifast</i> Tee • <i>eurofast</i> drop connector	
	RSCV 2RKC 25		<i>eurofast</i> Tee • <i>eurofast</i> female drop connector	
	RKC 2RSC 25		<i>eurofast</i> Tee • <i>eurofast</i> male drop connector	

<i>minifast</i>		Pinouts	<i>eurofast</i>	
<b>Male</b> 	<b>Female</b> 	1. Brown (+ Voltage) 2. N/C 3. Blue (- Voltage) 4. N/C	<b>Male</b> 	<b>Female</b> 


# Process Automation

## AS-interface®, Gender Changers and Elbow Connectors

- Allows Quick and Easy Change from Male to Female *minifast*® Connectors




Housing	Part Number	Specs	Application	Wiring Diagrams
	RSM RSM 25		<b>minifast</b> Male Gender Changer <ul style="list-style-type: none"> <li>Female cordset to male receptacle</li> </ul>	
	RKM RKM 25	TPU (Polyurethane) 250 V, 4 A -40° to +75°C	<b>minifast</b> Female Gender Changer <ul style="list-style-type: none"> <li>Male cordset to female receptacle</li> </ul>	
	WSM RKM 25		<b>minifast</b> Elbow <ul style="list-style-type: none"> <li>Right angle male to female connector</li> </ul>	

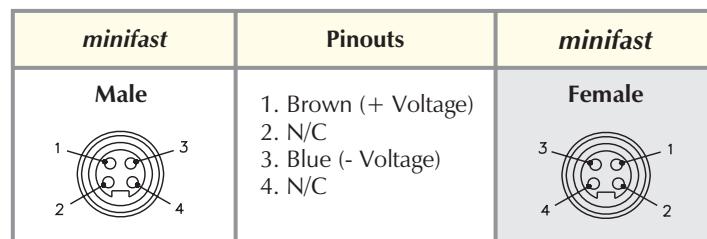


## AS-interface®, Field Wireable Tees

- A Hybrid Connection System Offering Reliable Connections on the Short Drops and Ease of Installation on the Long Trunk Runs
- Features Standard *minifast*® Connector for the Drop Connection and Terminal Connectors on the Trunk Connections




Housing	Part Number	Specs	Application	Pinout
See Drawing 1	SPTT1-A25	Anodized Aluminum 300 V, 9 A -40° to +75°C NEMA 1, 3, 4, 6P and IEC IP 68	Field wireable terminals and (7/8-16UN) <i>minifast</i> connector on drop connection	<b>Female</b> 
See Drawing 2	SPTTM13-A25			

1

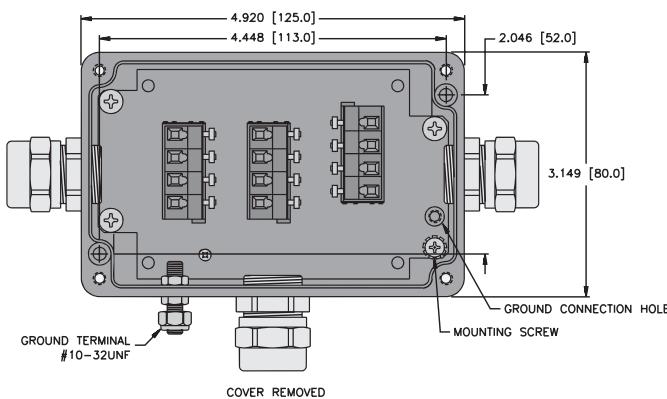

2

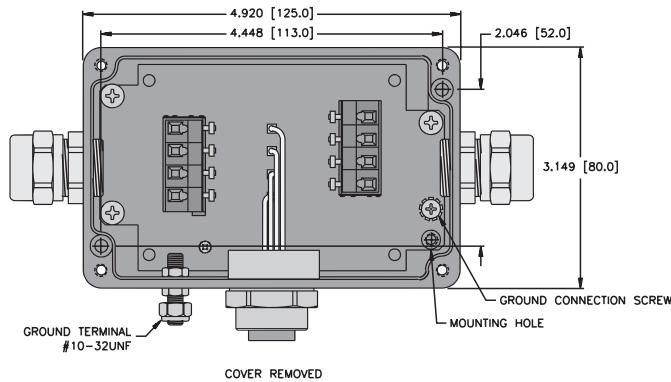

# Process Automation

## AS-interface®, eurofast® Flat Cable Adapter

- Allows the Mixing of Standard AS-i Flat Cable with eurofast Round Cable in Same System
- May be Needed when Going from a Dry to a Wet Environment or an Area Where Better Sealing and Rugged Connectors are Required



Housing	Part Number	Specs	Pinout
	ASI-PM-1 BW1238		
	ASI-PM-1 BW1239	TPU (Polyurethane) 250 V, 4 A -40° to +75°C	<b>Female</b> 
	ASI-PM 41		

Type	Approvals	Data Pair		Outer Jacket	Bulk Cable Part Number / Weight/300 M
		AWG Color Code	DCR (/1000 feet) Insulation		
<b>250</b> 105°C 300 Volts		2/18 AWG BU/BN	6.5 Ohms TPE-S	TPE Yellow Flat	RB21603-*M 40 lbs.
<b>251</b> 105°C 300 Volts		2/18 AWG BU/BN	6.5 Ohms TPE-S	TPE Black Flat	RB21605-*M 40 lbs.
<b>253</b> 105°C 300 Volts	NEC ITC PLTC CEC [CMG]	2/18 AWG BU/BN	6.5 Ohms PVC	PVC Light Grey Flat	RB50782-*M 42 lbs.
<b>253G</b> 105°C 300 Volts	NEC PLTC CEC AWM I/II A/B FT4	16 AWG BU/BN	4.1 Ohms PVC	TPE Grey Flat	RB51240-*M 42 lbs.
<b>253BK</b> 105°C 300 Volts	NEC PLTC CEC AWM I/II A/B FT4	16 AWG BU/BN	4.1 Ohms PVC	TPE Black Flat	RB51241-*M 42 lbs.
<b>253Y</b> 105°C 300 Volts	NEC PLTC CEC AWM I/II A/B FT4	16 AWG BU/BN	4.1 Ohms PVC	TPE Yellow Flat	RB51242-*M 42 lbs.

\* Indicates length in meters.  
Standard cable lengths are 30, 75, 150, 225 and 300 meters.

## AS-interface®, *minifast*® Male Receptacles

- Provides Quick Connection to Field Devices or Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads
- (7/8-16UN) *minifast* Connection



Housing	Part Number	Specs	Application	Pinouts
13 	RSF 25-*M/14.5		1/2-14NPT full length threads	
15 	RSF 25-*M/14.75		3/4-14NPT full length threads	
14 	RSF 25-*M/M20	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. N/C
16 	RSF 25-*M		1/2-14NPSM threads	
17 	RSF 25-*M/NPT		1/2-14NPT modified length threads	


See page G147 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.

For locknuts to be included, add "W/LN" to the end of the part number.



# Process Automation

## AS-interface®, minifast® Female Receptacles

- Provides Quick Connection to Field Devices or Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads
- (7/8-16UN) minifast Connection



Housing	Part Number	Specs	Application	Pinouts
18 	RKF 25-*M/14.5		1/2-14NPT full length threads	
20 	RKF 25-*M/14.75		3/4-14NPT full length threads	
19 	RKF 25-*M/M20	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. N/C
21 	RKF 25-*M		1/2-14NPSM threads	
22 	RKF 25-*M/NPT		1/2-14NPT modified length threads	

Female



See page G148 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.

For locknuts to be included, add "W/LN" to the end of the part number.

## AS-interface®, eurofast® Male Receptacles

- Mounted for Quick Connection to Enclosures
- (M12x1) eurofast Connectors




Housing	Part Number	Specs	Application	Pinout
23 	FS 25-*M/14.5	1/2-14NPT full length threads		
25 	FS 25-*M/14.75	3/4-14NPT full length threads		
24 	FS 25-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. N/C
26 	FS 25-*M	PG 9 threads		
27 	FS 25-*M/NPT	1/2-14NPT modified length threads		

See page G149 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.




# Process Automation

## AS-interface®, eurofast® Female Receptacles

- Mounted for Quick Connection to Enclosures
- (M12x1) eurofast Connectors



Housing	Part Number	Specs	Application	Pinouts
28 	FK 25-*M/14.5		1/2-14NPT full length threads	
30 	FK 25-*M/14.75		3/4-14NPT full length threads	
29 	FK 25-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. N/C
31 	FK 25-*M		PG 9 threads	
32 	FK 25-*M/NPT		1/2-14NPT modified length threads	




See page G150 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.


Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.

**minifast® Male Receptacles**

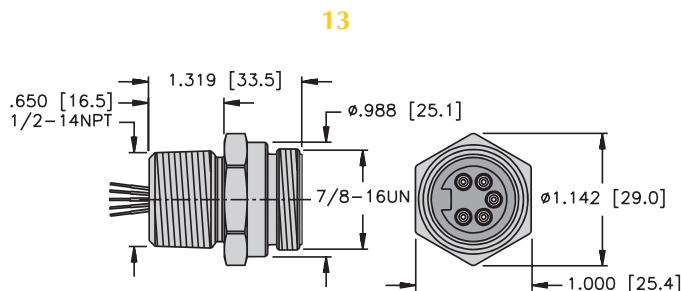


RSF .. 14.5

Page G143

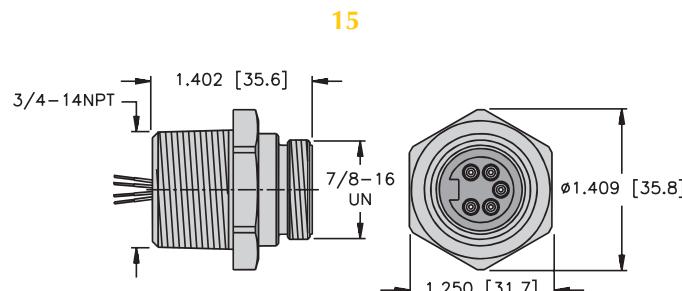


RSF .. 14.75

Page G143

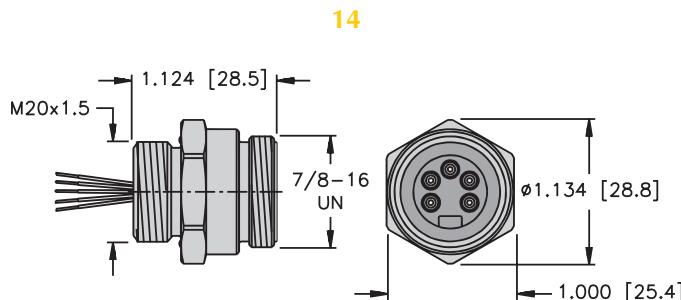


RSF .. M20

Page G143

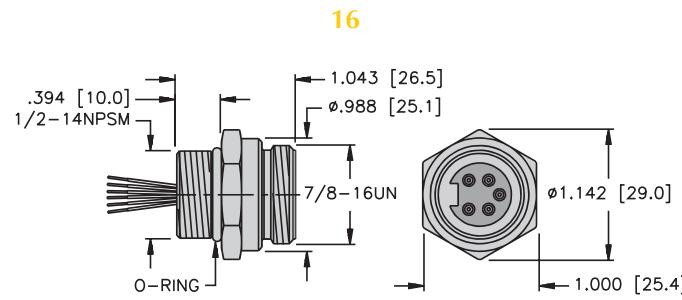

RSF ..

Page G143

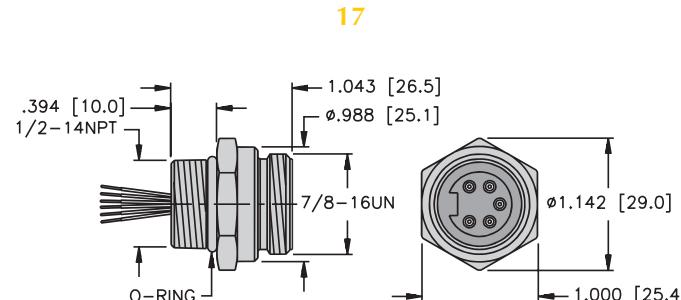


RSF .. NPT

Page G143

# Process Automation

## minifast® Female Receptacles


**18**

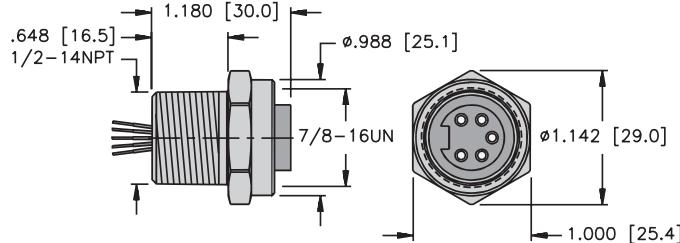

RKF .. 14.5

Page G144


**20**

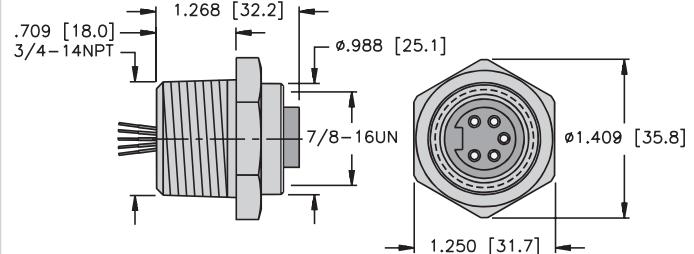

RKF .. 14.75

Page G144


**19**

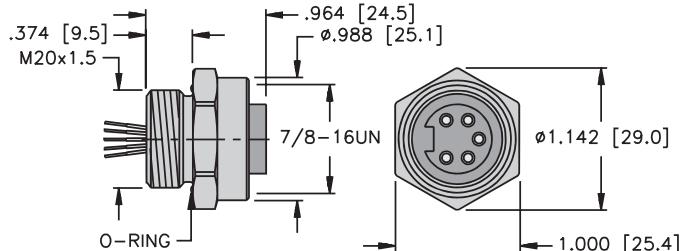

RKF .. M20

Page G144


**21**

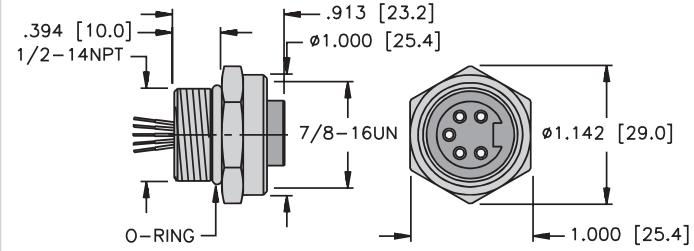

RKF ..

Page G144

**22**

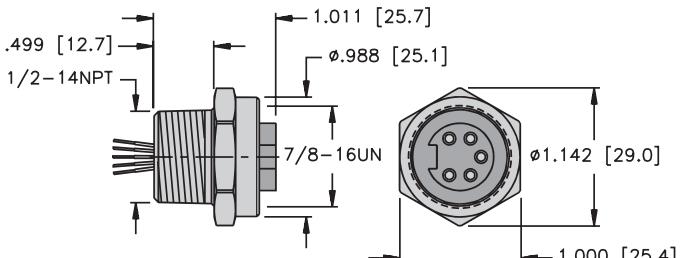


RKF .. NPT

Page G144

**eurofast® Male Receptacles**


**23**

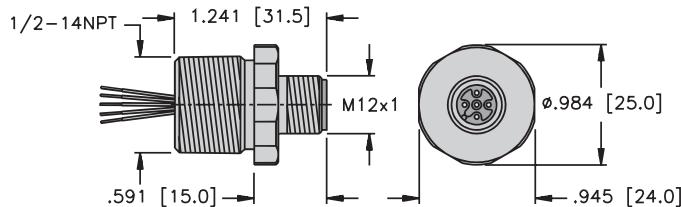

FS .. 14.5

Page G145


**25**

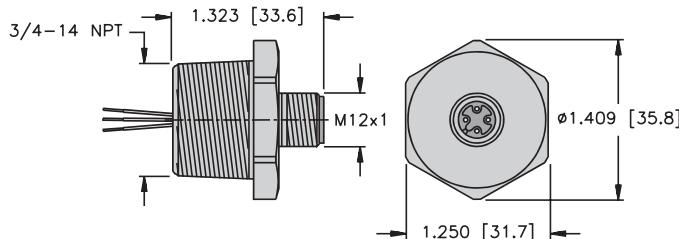

FS .. 14.75

Page G145


**24**

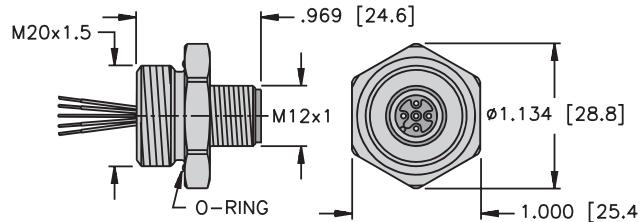

FS .. M20

Page G145


**26**

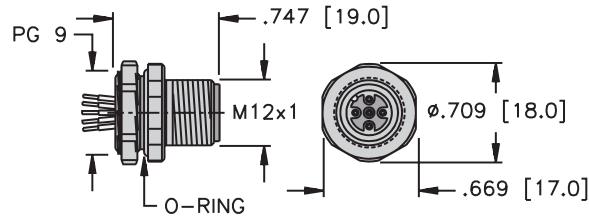

FS ..

Page G145

**27**

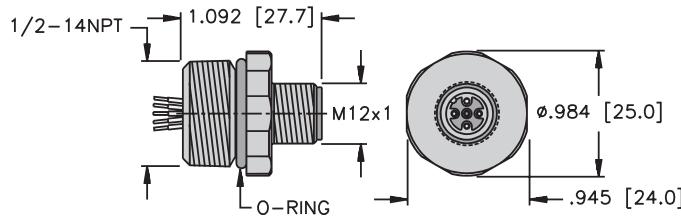


FS .. NPT

Page G145

# Process Automation

## eurofast® Female Receptacles


28

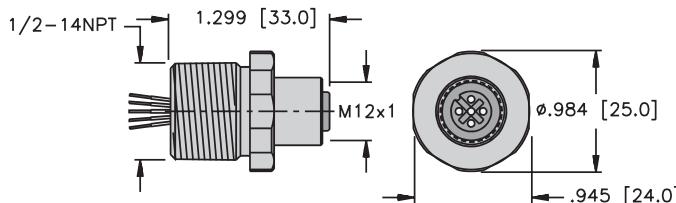

FK .. 14.5

Page G146


30

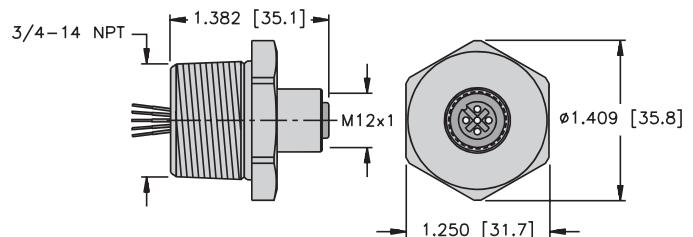

FK .. 14.75

Page G146


29

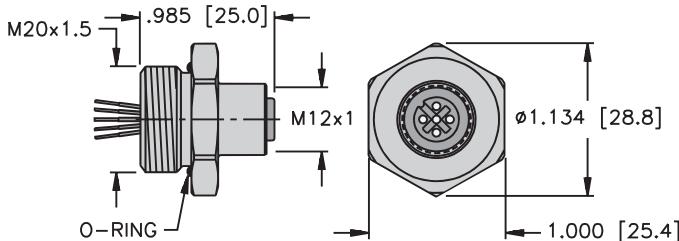

FK .. M20

Page G146


31

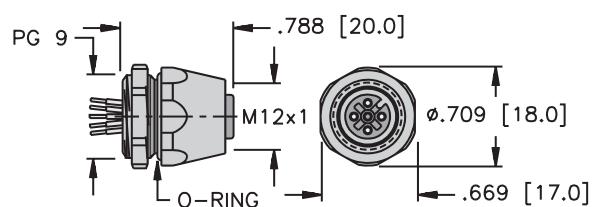

FK ..

Page G146

32

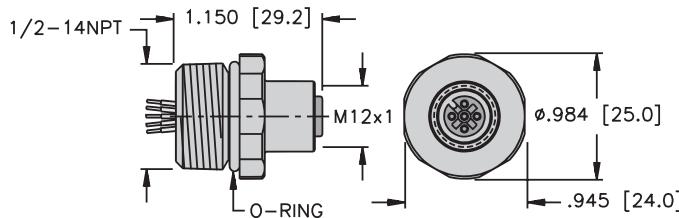

FK .. NPT

Page G146

## AS-interface®, *minifast*® Field Wireable Connectors

- Screw Terminals Accept up to 16 AWG Conductors



Housing	Part Number	Specs	Application	Pinouts
	BS 4149-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter 85°C 250 V, 9 A	Mates with all 4-pin <b>minifast</b> cordsets and receptacles	<b>Male</b> 
	BS 4149-0/13.5	Glass filled nylon PG 13.5 cable gland accepts 10-12 mm cable diameter 85°C 250 V, 9 A		
	B 4149-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter 85°C 250 V, 9 A	Mates with all 4-pin <b>minifast</b> cordsets and receptacles	<b>Female</b> 
	B 4149-0/13.5	Glass filled nylon PG 13.5 cable gland accepts 10-12 mm cable diameter 85°C 250 V, 9 A		

# Process Automation

## AS-interface®, eurofast® Field Wireable Connectors

- Screw Terminals Accept up to 18 AWG Conductors



Housing	Part Number	Specs	Application	Pinouts
	BS 8141-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 125 V, 4 A		<b>Male</b> 
	BS 8241-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 125 V, 4 A	Mates with 4-pin eurofast cordsets and receptacles	<b>Female</b> 
	B 8141-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 250 V, 4 A		
	B 8241-0/PG9	PBT, Black PG 7 cable gland accepts 6-8 mm cable diameter 85°C 250 V, 4 A		

## AS-interface®, Gender Changer

- Allows Quick and Easy Change from Male to Female and (7/8-16UN) *minifast*® to (M12x1) *eurofast*® Connectors



Housing	Part Number	Specs	Application	Wiring Diagram
	RSM 25-FK 4.5	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40°C to +75°C	Female <i>eurofast</i> , male <i>minifast</i> , 4-pin	<b>MALE</b>  <b>FEMALE</b> 

### Pinouts

<i>minifast</i>	<i>eurofast</i>
<b>Male</b> 	<b>Female</b> 

# **Process Automation**

**Notes:**

## PROFIBUS®-DP Selection Guide



AIM	Page
Discrete Input	H11
Discrete Output	H17
Discrete Input & Ouput	H21

FDP20	Repeater	AS-I
H33	H37	H39



BL67	BL20	Cables	Terminating Resistors
H47	H49	H52	H60



Feed Through Receptacles	Bus Tees	Field Wireable Connectors	Receptacles
H61	H62	H63	H64

## PROFIBUS®-PA Selection Guide



Cables	Terminating Resistors	Feed Through Connectors	Junctions
H68	H73	H74	H75



Conduit Adapters	Tees	Gender Changers	Surge Suppressor
H89	H91	H92	H93



Field Wireable Tees	Receptacles	Field Wireable Connectors
H94	H95	H103


# PROFIBUS®-DP System Description

PROFIBUS-DP is an industrial network protocol that connects field I/O devices in order to eliminate hard wiring. The network connection increases device-level diagnostic capabilities, while also providing high-speed communication between devices.

PROFIBUS-DP is based on the RS-485 serial data transfer standard. In most cases, the termination and physical media rules for PROFIBUS-DP are the same as those required for RS-485 communication. A PROFIBUS-DP network supports up to 126 nodes and virtually an unlimited amount of I/O. The bus uses a trunkline/dropline topology. Power and communication are provided via separate cables, allowing easy segmentation of the power structure to avoid overloading.

PROFIBUS-DP is capable of running at data rates as high as 12 Mbaud. When used at high data rates, the cable drop length from the trunk to a node is severely limited. For example, when used at 12 Mbaud, nodes must be directly connected to the trunk, with no drop length allowed.

## Typical System Configuration

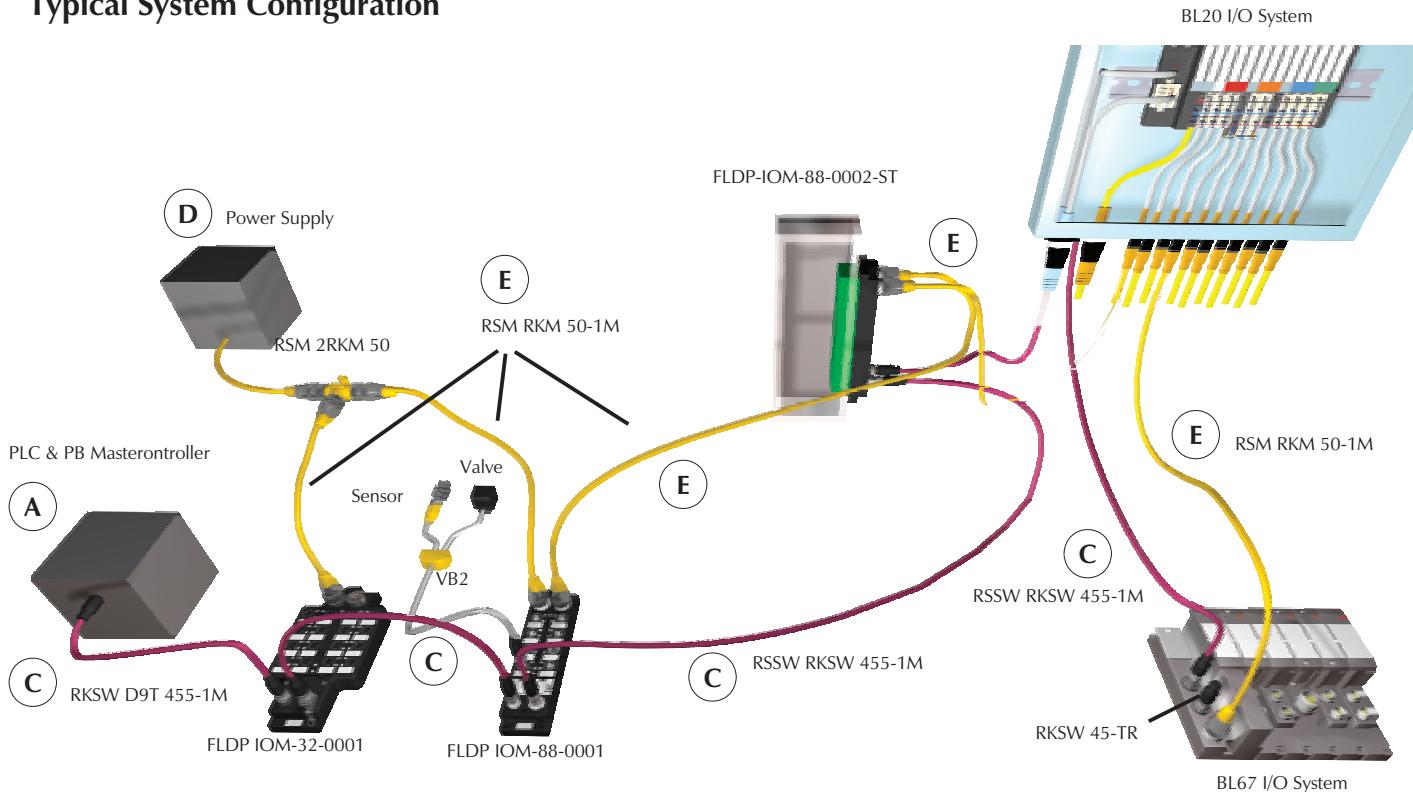

## **Basic Parts List**

A typical PROFIBUS-DP system consists of the following parts:

- A - Master
  - B - Slaves
  - C - Communication cable
  - D - Power supply
  - E - Power cable

PROFIBUS-DP stations require a network master (also called a scanner) to interface the stations to the host controller.

**TURCK PROFIBUS-DP** stations are designed to be fully compatible with PROFIBUS-DP equipment from other manufacturers.



## Cordsets

TURCK offers a complete line of molded PROFIBUS-DP cordsets to facilitate network installation, resulting in a faster start-up and fewer wiring errors. The bus and drop cables are specially designed foil-shielded, high-flex cables with very low inductance and capacitance to minimize propagation delay time. PROFIBUS-DP cables consist of a shielded and twisted data pair with a bare drain wire.

In most cases, connections of the bus cable to the stations are made using 5-pin reverse-key **eurofast**® (M12) connectors. A variety of stations are also available that support D9 type connections. Power for most stations is provided through one or two 5-pin **minifast**® (7/8-16UN) connectors.

**TURCK** cordsets for the PROFIBUS-DP system are available in standard lengths. Please contact your local sales representative to order custom lengths.

## Diagnostics

**TURCK** network stations provide increased diagnostics over using traditional hard-wired I/O systems. **TURCK** stations also serve as a buffer between I/O devices and the PROFIBUS-DP network by detecting short circuits without disrupting communication.

The PROFIBUS-DP system includes a provision for special diagnostic data messages. These messages are triggered when a fault occurs at the station (for example a short circuit on a sensor). When the master asks the station for data, the station responds and includes a flag to indicate that diagnostic data is present. The master then asks for the diagnostic data, which is mapped to a special location in the controller's memory.

## Addressing

The valid range of PROFIBUS-DP node addresses is 0 to 125. **TURCK** station's addresses are usually set via rotary dials or switches on the node. Changes to the address settings take effect when the station power is cycled or when the station receives a software reset. Care must be taken to prevent the same address from being assigned to more than one node in a system. Bihl+Wiedemann PROFIBUS-DP to AS-I gateways addresses are set in software using the on-unit display.

## Communication Rate/Cycle Time

PROFIBUS-DP specifications define multiple transmission speeds ranging from 9.6 kbaud to 12 Mbaud. All nodes on a network must communicate at the same rate.

The complete cycle time of a PROFIBUS-DP system is affected by several factors:

- Number of nodes being scanned
- Amount of data produced and consumed by the nodes
- Network communication rate
- Cycle time of the control program

All of these factors must be considered when calculating the cycle time of a particular network.

## GSD Files

GSD files contain detailed information about a PROFIBUS-DP device, including I/O data size and the devices configurable parameters. The information in an GSD file, when used with a PROFIBUS-DP configuration tool, guides a user through the steps necessary to configure a device. GSD files are available on the **TURCK** website ([www.turck.com](http://www.turck.com)).

## Maximum Ratings

The PROFIBUS-DP bus uses a trunkline/dropline topology. The trunk is the main communication cable and requires the appropriate RS-485 termination at both ends of the trunk. Terminating resistors are available as plug-in **eurofast®** modules or can be built into the D9 connectors. The length of the trunk depends on the communication rate. Drops or branches off the trunk are allowed, but are greatly limited as the communication rate increases. The table shows the maximum ratings for a trunk at different communication rates.

Communication Rate	Max. Segment Length
9.6 kbps	1200 m
19.2 kbps	1200 m
93.75 kbps	1200 m
187.5 kbps	1000 m
500 kbps	400 m
1.5 Mbps	200 m
12 Mbps	100 m

# Process Automation



Notes:

## PROFIBUS-DP AIM™ Stations

TURCK's Advanced I/O Module (AIM) PROFIBUS stations are extremely rugged stations designed for machine mounting. These stations allow easy connection of standard I/O devices such as sensors, limit switches, valves and pilot lights to a PROFIBUS network, typically without a protective enclosure. This is made possible by epoxy-filled station housings, all-metal connectors and visible rotary address switches, among other things.


### Mechanical Specifications

TURCK PROFIBUS AIM stations are designed for machine mounting with no separate enclosure or housing necessary. Quick-disconnect capability, combined with an epoxy-filled housing, creates an extremely durable station that can be mounted in most industrial environments. Detailed environmental specifications are as follows:

- Housing material: Nylon 6
- Connector material: Nickel-plated brass
- Protection level: NEMA 1,3,4,12,13; IEC IP 67
- Operating temperature: FLDP style 0° to +55°C (-40° to +158°F)
- FXDP style -25° to +55°C (-40° to +158°F)
- Vibration: 50 g @ 10 to 500 Hz

Other housing and connector materials available upon request.

The station's components are identified in the following figure.

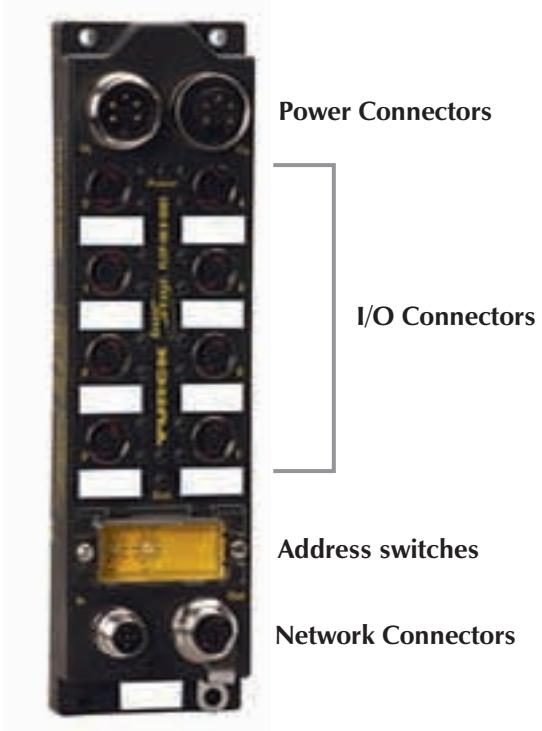


## Connectors

PROFIBUS® AIM™ stations provide connections for the bus, I/O and auxiliary power.

### Bus Connectors

**eurofast®** (M12) (reverse keyed) is the standard bus connector for PROFIBUS AIM stations.

**PROFIBUS eurofast Pinouts**

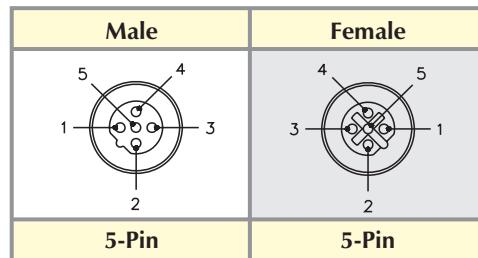


- 1 = 5 VDC\*
- 2 = BUS\_A
- 3 = Gnd
- 4 = BUS\_B
- 5 = Shield

\* Female connector only

Different I/O connector pinouts are used for different station types. Stations are available with one or two inputs per connector, one or two outputs per connector, or one input and one output per connector. The pin assignments for these styles are:


**eurofast Pinouts**

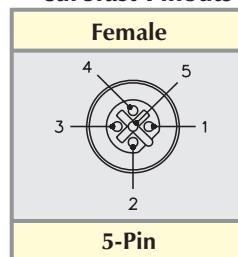

- 1 - V+ (24 VDC)
- 2 - Signal B (Odd numbered input)
- 3 - V- (0 VDC)
- 4 - Signal A (Even numbered input)
- 5 - N/C

### Screw Terminal I/O Connection

AIM stations with part numbers ending in "ST" support screw terminal I/O and bus connections. The screw terminals for these stations are located on the back of the station. The back of the station is also fitted with a foam gasket to allow the station to be mounted to the outside of a cabinet or field I/O box (i.e. motor control center).

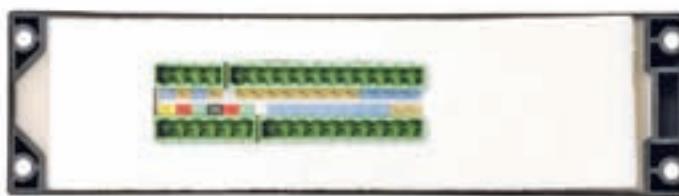

## Auxiliary Power Connectors

PROFIBUS® AIM™ stations accept one or two 24 VDC power supplies via the **minifast**® (7/8-16UN) connectors located at the top of the station. Stations with only inputs require the  $U_B$  supply to power station electronics and I/O. Stations with both inputs and outputs need both supplies ( $U_B$  and  $U_L$ ) to be connected. In this case,  $U_B$  powers the station electronics and the inputs, while  $U_L$  powers the outputs. For further details, see the individual station entries in this catalog.

**minifast Power Pinouts**

Male	Female
1 = Gnd	
2 = Gnd	
3 = PE	
4 = $U_B$	
5 = $U_L$	
5-Pin	5-Pin


## Power

Common power ratings for AIM stations include:

- Voltage: 18-30 VDC (both  $U_B$  and  $U_L$ )
- Input Voltage: 18-30 VDC (From  $U_B$ )
- Input Signal Current (each input): OFF < 2 mA; ON 4 mA (@ nominal 24 VDC)
- Input Delay: 2.5 ms

## Addressing

PROFIBUS AIM stations must have a network address for communication. The address for AIM stations may be set via the visible rotary switches under the clear plastic cover on the front of the station.

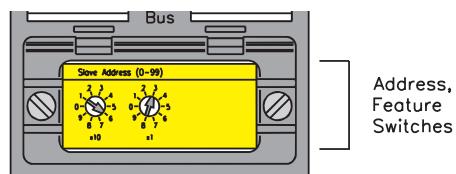

The pair of switches represents the address as a decimal number; the left switch being the 10's multiplier and the right switch the 1's multiplier. To program the station, rotate the switches with a small slotted screwdriver until the arrows on the switch point to the appropriate numbers for the chosen address. Some stations (with outputs) have a third switch. This switch is used to enable auxiliary power diagnostics. If the switch is on, the loss of output power ( $U_L$ ) will trigger a PROFIBUS diagnostic message.

## Diagnostics

AIM™ stations provide two LEDs for diagnosing communication and power problems.

### Bus

- Green: Working properly
- Red: No communication


### Power

- Off: No power
- Green: Power present
- Red:  $U_B$  present, but  $U_L$  missing (stations with outputs only)

**There is an additional LED for each I/O point on the station. This LED indicates:**

- Off: Point is off
- Green: Point is on
- Red: Point is in short-circuit state (advanced diagnostic stations only)


Abbreviations Used in Diagnostic Data Maps	
$V_I$	Missing input supply voltage
$V_O$	Missing output supply voltage
SC	Short circuit at the station (or at the particular I/O point if specified)

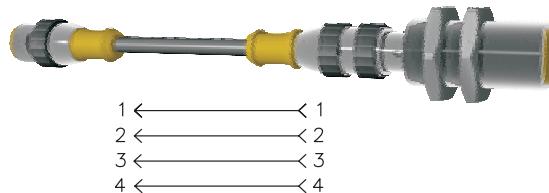


## Connecting Devices to an AIM Station

AIM stations typically provide a **eurofast**® (M12) connection for each I/O point. Standard **TURCK** I/O cordsets can be used to connect physical devices in the field to the AIM station. Some AIM stations, specifically those with I/O counts greater than eight total points, connect two signals to each connector. If the signals being connected are on the same physical device (for example a sensor with two outputs), a simple four or five-wire cordset can be used for connection.

If the signals are on two separate devices, a splitter can be used to separate the AIM I/O connector into two individual **eurofast** connectors. The recommended splitter is wired such that the second signal pin on the AIM station (pin 2) is wired to the default signal pin (pin 4) on the second splitter arm - requiring no special wiring by the user. The splitter is simply plugged into the AIM I/O connector and each arm is plugged into the appropriate I/O devices, as shown:

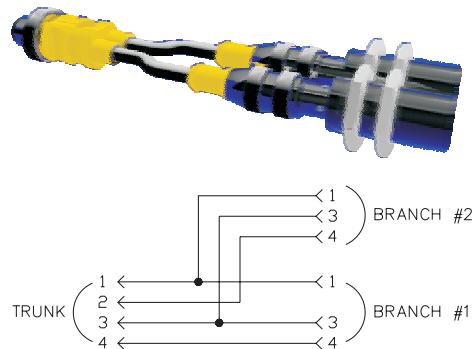

## Standard Input Stations

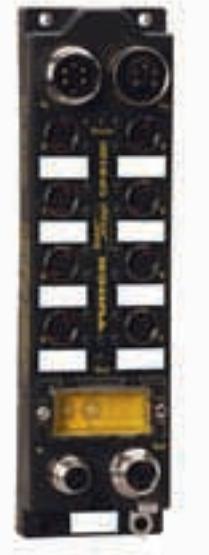

FLDP-IM 8-0001

FLDP-IM 16-0001



- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <110 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA per four inputs (from  $U_B$ )

### Power Distribution

- Inputs:  $U_B$  power supply

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- One (...IM 8-0001) or two (...IM 16-0001) LEDs indicates short-circuit for I/O groups
- LEDs to indicate status of PROFIBUS communication and power supply

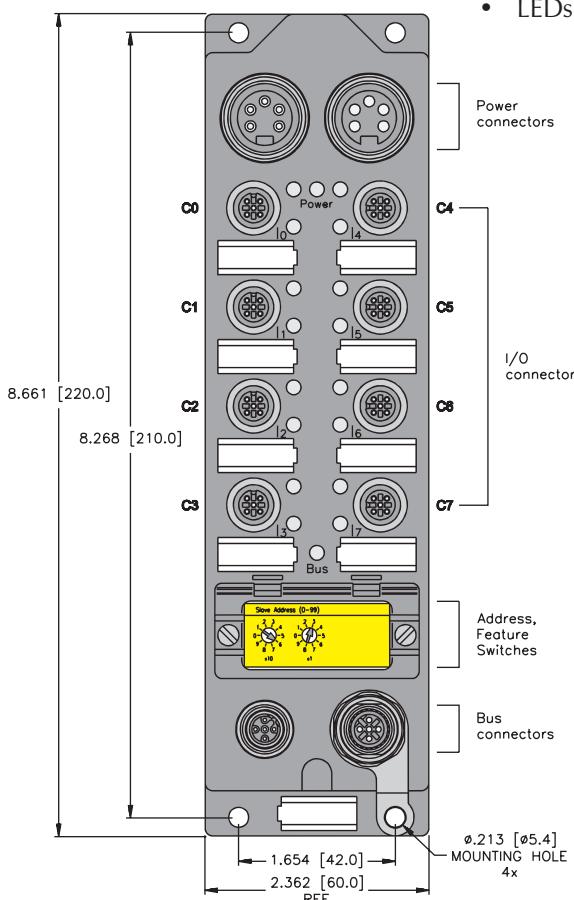

minifast® Power Pinouts

Male	Female
1 = Gnd 2 = Gnd 3 = PE 4 = $U_B$ 5 = NC	2 3 4 5 1
5-Pin	5-Pin



\* Female connector only

PROFIBUS eurofast® Pinouts

Male	Female
1 = 5 VDC* 2 = BUS_A 3 = Gnd 4 = BUS_B 5 = Shield	4 5 1 3 2
5-Pin	5-Pin

Inputs								Data	
Part Number	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-IM 8-0001	8	0-7	S	1	PNP	X			1
FLDP-IM 16-0001	16	0-7	2S	2	PNP	X			2

## Input Connectors

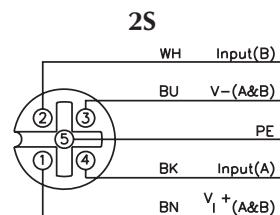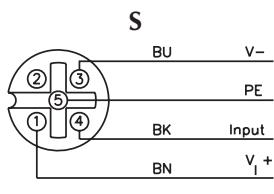

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0

### Diagnosis

Status	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	V <sub>I</sub>	-	SC	

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8

### Diagnosis

Status	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	-	V <sub>I</sub>	-	SC

**Standard Input Station****FLDP-IM 32-0001**

- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

**Electrical**

- Operating Current: <110 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA per eight inputs (from  $U_B$ )

**Power Distribution**

- Inputs:  $U_B$  power supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

**Material**


- Connectors: Nickel-plated brass
- Housing: Nylon 6

**Diagnostics (Logical)**

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

**Diagnostics (Physical)**

- Four LED short-circuits for I/O (groups of eight inputs)
- LEDs to indicate status of PROFIBUS communication and power supply

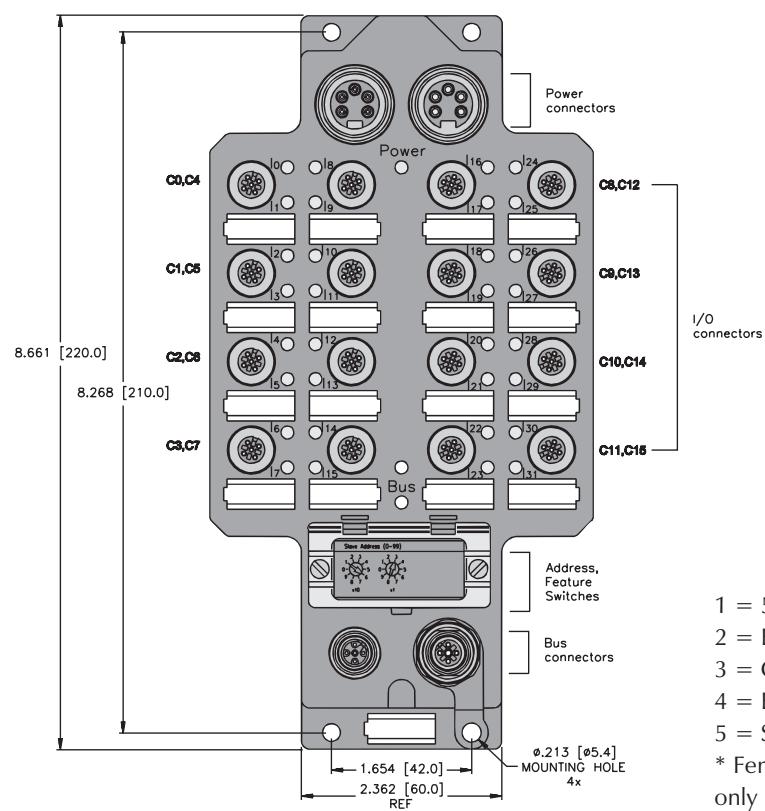**minifast® Power Pinouts**

Male	Female
1 = Gnd 2 = Gnd 3 = PE 4 = $U_B$ 5 = NC	2 3 4 5 1
5-Pin	5-Pin

1 = 5 VDC\*  
2 = BUS\_A  
3 = Gnd  
4 = BUS\_B  
5 = Shield  
\* Female connector only

**PROFIBUS eurofast® Pinouts**


Male	Female
5 4 3 2 1	4 5 3 2 1
5-Pin	5-Pin

# Process Automation



Inputs								Data	
Part Number	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-IM 32-0001	32	0-15	2S	2	PNP	X			1

## Input Connectors

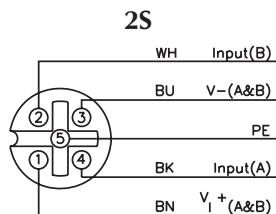

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	
2	I-23	I-22	I-21	I-20	I-19	I-18	I-17	I-16	
3	I-31	I-30	I-29	I-28	I-27	I-26	I-25	I-24	
Diagnosis									
Status	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	V <sub>I</sub>	-	SC


## Deluxe Input Stations



**FXDP-IM 8-0001**

**FXDP-IM 16-0001**

CE

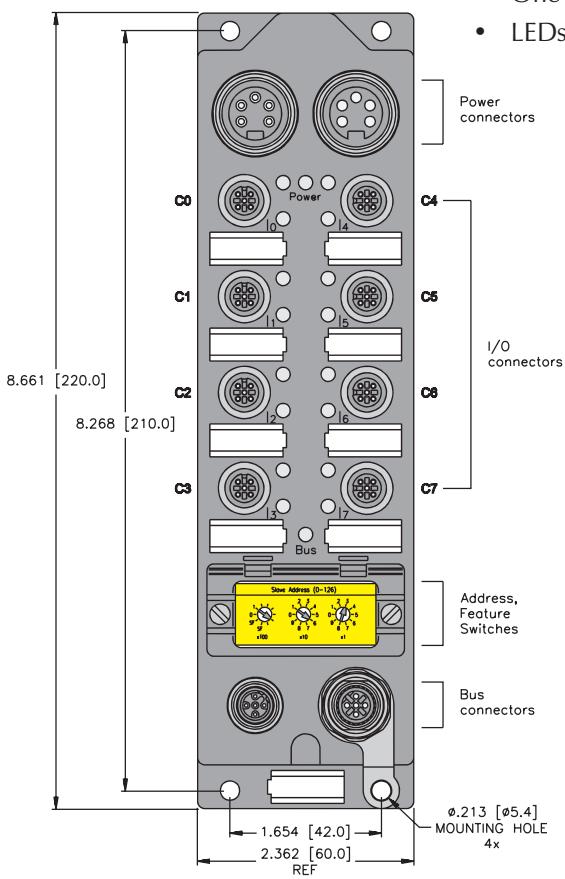

- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <70 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <120 mA per connector (input or pair of inputs) (from  $U_B$ )

### Power Distribution

- Inputs:  $U_B$  power supply

### Mechanical

- Operating Temperature: -25 to +55°C (-13 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit mapped to PROFIBUS diagnostic table, one bit indicating a fault for each connector (input or pair of inputs)
- One bit is mapped to PROFIBUS diagnostic table indicating the status of the power supply

### Diagnostics (Physical)

- One LED indicates short-circuit for each I/O point
- LEDs to indicate status of PROFIBUS communication and power supply

#### minifast® Power Pinouts

Male	Female
5-Pin	5-Pin

1 = Gnd  
 2 = Gnd  
 3 = PE  
 4 =  $U_B$   
 5 = NC

#### PROFIBUS eurofast® Pinouts

Male	Female
5-Pin	5-Pin



1 = 5 VDC\*  
 2 = BUS\_A  
 3 = Gnd  
 4 = BUS\_B  
 5 = Shield  
 \* Female connector only

# Process Automation



Part Number	Inputs							Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FXDP-IM 8-0001	8	0-7	S	1	PNP	X	X		1
FXDP-IM 16-0001	16	0-7	2S	2	PNP	X	X		2

## Input Connectors

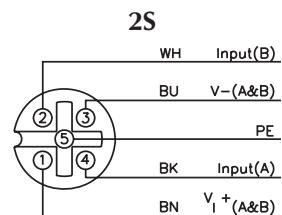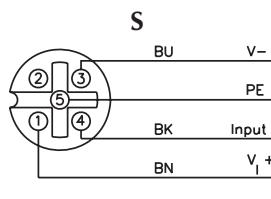

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-\*/\*


## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	V <sub>I</sub>	-	SC
	1	-	-	-	-	-	-	-	-
	2	-	-	-	-	-	-	-	-
	3	SC-7	SC-6	SC-5	SC-4	SC-3	SC-2	SC-1	SC-0

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
	0	-	-	-	-	-	-	V <sub>I</sub>	-	
	1	-	-	-	-	-	-	-	-	
	2	-	-	-	-	-	-	-	-	
	3	SC-15 14	SC-13 12	SC-11 10	SC-9 8	SC-7 6	SC-5 4	SC-3 2	SC-1 0	

## Standard Output Stations

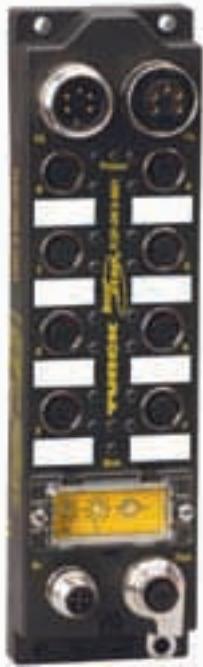

**FLDP-OM 8-0001**

**FLDP-OM 8-0002**

**FLDP-OM 16-0001**



- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <150 mA (from  $U_B$ )
- Output Current: <500 mA per output (...0001) or 2 A per output (...0002) (from  $U_L$ )

### Power Distribution

- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: 0 to +55 °C (-13 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- $U_B$  and  $U_L$  power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- LEDs to indicate status of PROFIBUS communication and power supplies

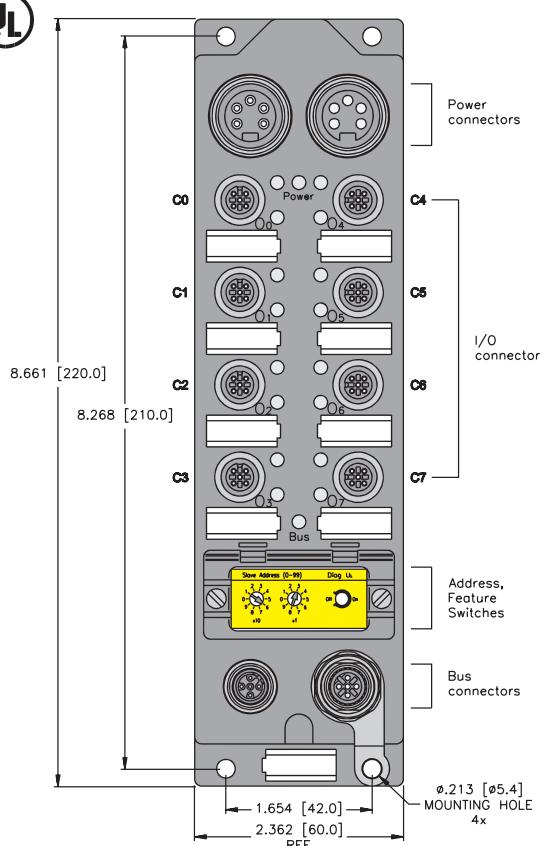

- 1 = Gnd  
2 = Gnd  
3 = PE  
4 =  $U_B$   
5 =  $U_L$

**minifast® Power Pinouts**

Male	Female
5-Pin	5-Pin

- 1 = 5 VDC\*  
2 = BUS\_A  
3 = Gnd  
4 = BUS\_B  
5 = Shield  
\* Female connector only

**PROFIBUS eurofast® Pinouts**

Male	Female
5-Pin	5-Pin


# Process Automation




Part Number	Outputs							Data	
	Output Count	Connectors	Pinout	Outputs per Connector	Current	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-OM 8-0001	8	0-7	G	1	0.5 A				1
FLDP-OM 8-0002	8	0-7	H	1	2 A				1
FLDP-OM 16-0001	16	0-7	2G	2	0.5 A				2

## Input/Output Connectors


**G**

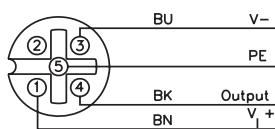

**2G**

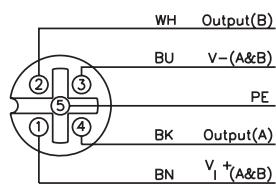

**H**

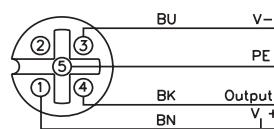

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Mating cordset:

RK 4.5T-\* - RS 4.5T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0	

### Diagnosis

Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	V <sub>I</sub>	V <sub>O</sub>	-	


## I/O Data Map 2

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0	
1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8	

### Diagnosis

Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	-	V <sub>I</sub>	V <sub>O</sub>	-


## Deluxe Output Stations

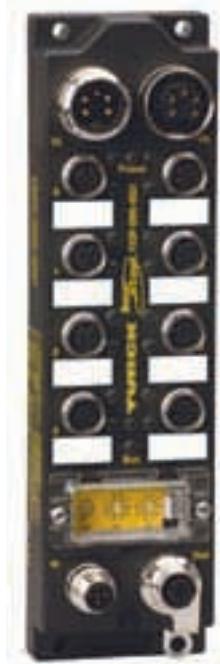

FXDP-OM 8-0001

FXDP-OM 16-0001

CE

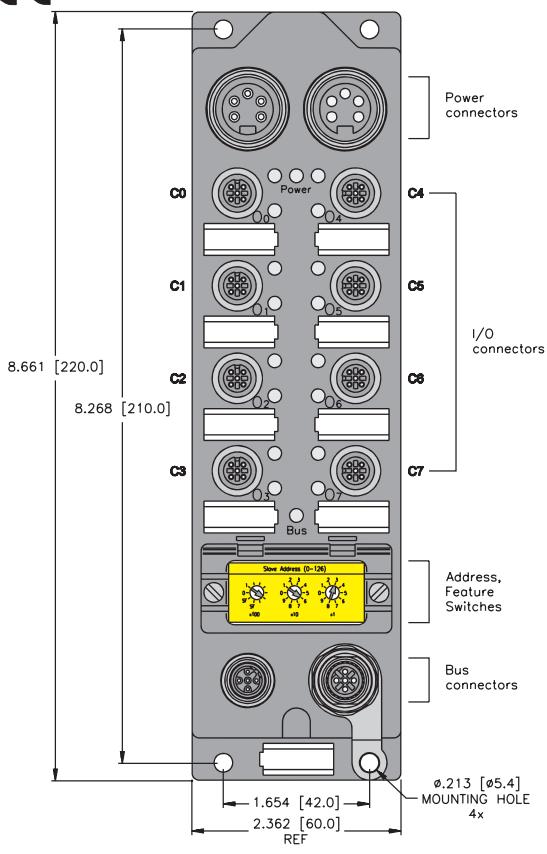

- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <70 mA (from  $U_B$ )
- Output Current: <1.4 A per output (from  $U_L$ )

### Power Distribution

- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: -25 to +55°C (-13 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Output short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating a fault for each output point

### Diagnostics (Physical)

- One LED indicates short-circuit for each output point
- LEDs to indicate status of PROFIBUS communication and power supply

minifast® Power Pinouts

Male	Female
1 = Gnd 2 = Gnd 3 = PE 4 = $U_B$ 5 = $U_L$	1 2 3 4 5
5-Pin	5-Pin

PROFIBUS eurofast® Pinouts

Male	Female
1 = 5 VDC* 2 = BUS_A 3 = Gnd 4 = BUS_B 5 = Shield	1 2 3 4 5
* Female connector only	5-Pin


# Process Automation




Part Number	Outputs						Data		
	Output Count	Connectors	Pinout	Outputs per Connector	Current	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FXDP-OM 8-0001	8	0-7	H	1	1.4 A	X	X		1
FXDP-OM 16-0001	16	0-7	2H	2	1.4 A	X	X		2

## Input/Output Connectors

**H**

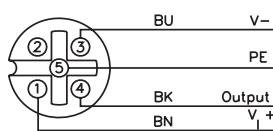

**2H**

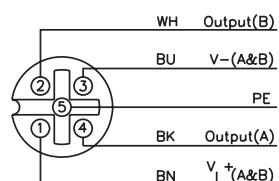

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	V <sub>I</sub>	V <sub>O</sub>	SC
	1	SC-7	SC-6	SC-5	SC-4	SC-3	SC-2	SC-1	SC-0
	2	-	-	-	-	-	-	-	-
	3	-	-	-	-	-	-	-	-

## I/O Data Map 2

Out	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	V <sub>I</sub>	V <sub>O</sub>	SC
	1	SC-7	SC-6	SC-5	SC-4	SC-3	SC-2	SC-1	SC-0
	2	SC-15	SC-14	SC-13	SC-12	SC-11	SC-10	SC-9	SC-8
	3	-	-	-	-	-	-	-	-

## Standard Input/Output Stations



**FLDP-IOM 84-0001**

**FLDP-IOM 88-0001**

**FLDP-IOM 88-0002**

**FLDP-IOM 88-0004**



- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <150 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA per group inputs (from  $U_B$  group is all inputs for IOM 84 and IOM 88-0002, two groups of four inputs for IOM 88-0001)
- Output Current: See table on facing page (from  $U_L$ )

### Power Distribution

- Inputs:  $U_B$  power supply
- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- One LED indicates short-circuit for all inputs
- LEDs to indicate status of PROFIBUS communication and power supply

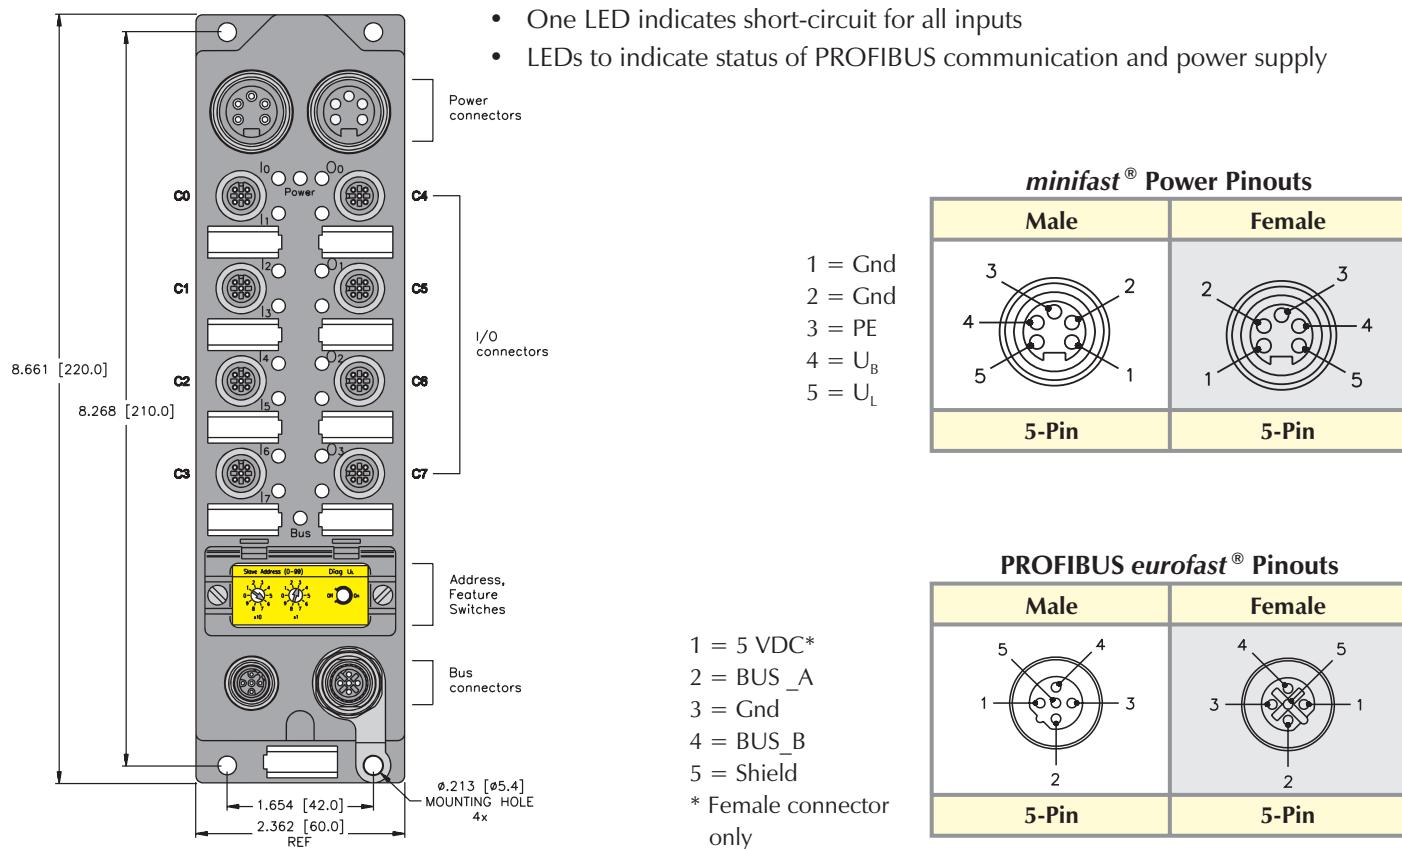

- 1 = 5 VDC\*  
 2 = BUS\_A  
 3 = Gnd  
 4 = BUS\_B  
 5 = Shield  
 \* Female connector only

**minifast® Power Pinouts**

Male	Female
5-Pin	5-Pin

**PROFIBUS eurofast® Pinouts**


Male	Female
5-Pin	5-Pin

Part Number	Inputs						Outputs						Data		
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection
FLDP-IOM 84-0001	8	0-3	2S	2	PNP	X			4	4-7	H	1	2 A		1
FLDP-IOM 88-0001	8	0-7	C	1	PNP	X			8	0-7	C	1	0.5 A		2
FLDP-IOM 88-0002	8	0-3	2S	2	PNP	X			8	4-7	2G	2	0.5 A		2
FLDP-IOM 88-0004*	8	0-3	2S	2	PNP	X			8	4-7	2G	2	0.5 A		2


\* High speed (0.2 ms) inputs

## Input/Output Connectors

2S

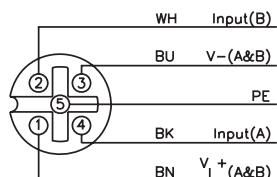

C

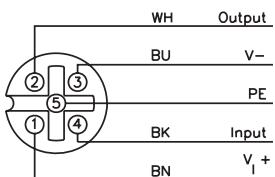

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*


### Mating cordset:

RK 4.4T-\* - RS 4.4T


### Splitter:

VB2-RS 4.4T-1/2RK 4.4T-\*/\* / S651

2G

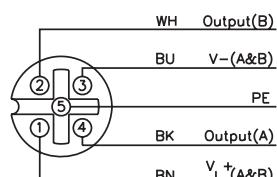

H

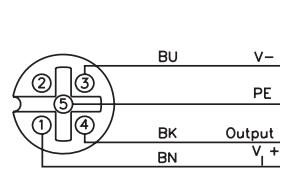

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

### Mating cordset:

RK 4.4T-\* - RS 4.4T

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Out	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Diag	0	-	0-6	-	0-4	-	0-2	-	0-0

## Diagnosis

Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diag	0	-	-	-	-	V <sub>I</sub>	V <sub>O</sub>	SC	

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Out	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Diag	0	-	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Diagnosis

Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diag	0	-	-	-	-	-	V <sub>I</sub>	V <sub>O</sub>	SC

## Standard Input/Output Station



**FLDP-IOM 88-0002-ST**

**CE**

- Rugged, Fully Potted Stations
- IP 67 Protection
- Screw Terminal Connections
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <150 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA sum of all inputs (from  $U_B$ )
- Output Current: <500 mA per output (from  $U_L$ )

### Power Distribution

- Inputs:  $U_B$  power supply
- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: 0 to +55 °C (+32 to +131 °F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- One LED indicates short-circuit for all inputs
- LEDs to indicate status of PROFIBUS communication and power supply

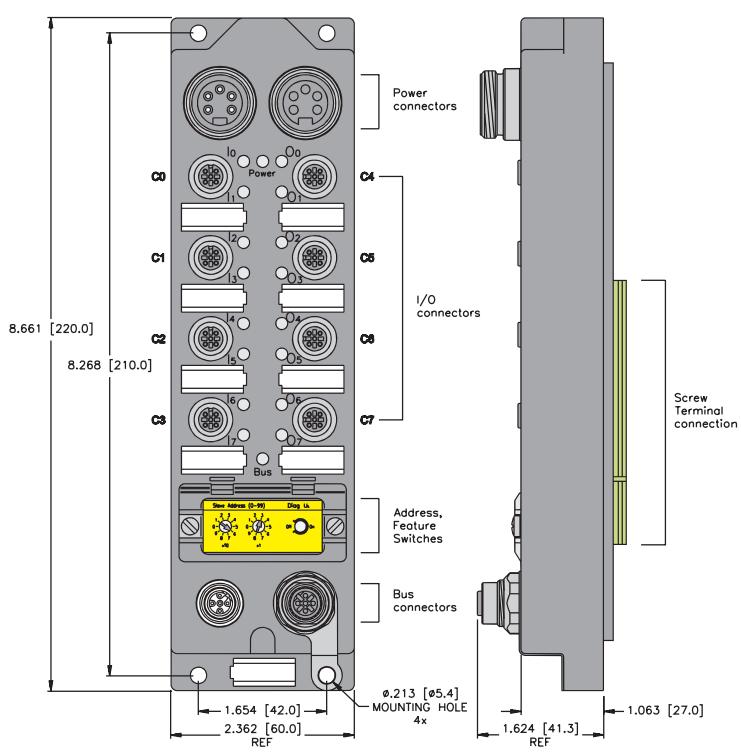

**minifast® Power Pinouts**

Male	Female
1 = Gnd 2 = Gnd 3 = PE 4 = $U_B$ 5 = $U_L$	2 3 4 5 1
5-Pin	5-Pin

1 = Gnd  
2 = Gnd  
3 = PE  
4 =  $U_B$   
5 =  $U_L$




**PROFIBUS eurofast® Pinouts**

Male	Female
5 4 3 2 1	4 5 3 2 1
5-Pin	5-Pin

1 = 5 VDC\*  
2 = BUS\_A  
3 = Gnd  
4 = BUS\_B  
5 = Shield  
\* Female connector only

Part Number	Inputs								Outputs					Data		
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-IOM 88-0002-ST	8	0-3	ST, 2S	2	PNP	X			8	4-7	ST, 2G	2	0.5 A			1

## Input/Output Connectors

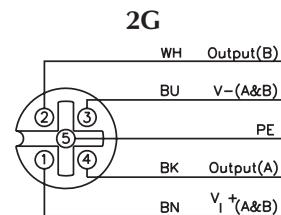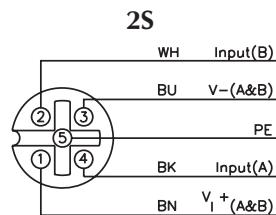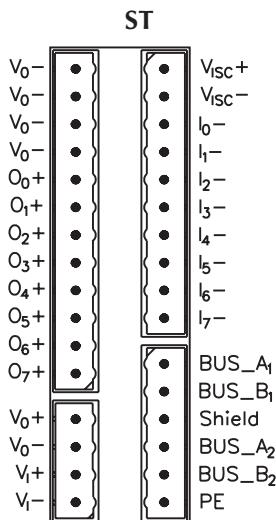

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**Splitter:**  
VBRS 4.4-2RK 4T-/\*

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**Splitter:**  
VBRS 4.4-2RK 4T-/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Out	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	V <sub>I</sub>	V <sub>0</sub>	SC

## Standard Input/Output Stations



**FLDP-IOM 1616-0001**

**FLDP-IOM 248-0001**



- Rugged, Fully Potted Stations

- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <110 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA per eight inputs (from  $U_B$ )
- Output Current: <500 mA per output (from  $U_L$ )

### Power Distribution

- Inputs:  $U_B$  power supply
- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- One LED indicates short-circuit for each group of eight inputs
- LEDs to indicate status of PROFIBUS communication and power supply

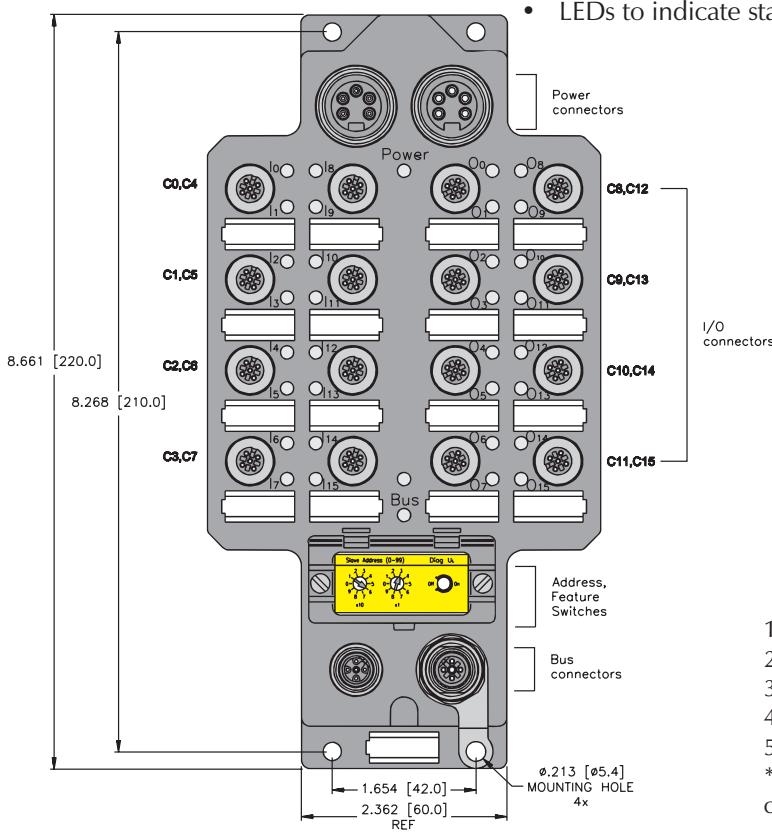

1 = Gnd  
2 = Gnd  
3 = PE  
4 =  $U_B$   
5 =  $U_L$

### minifast® Power Pinouts

Male	Female
5-Pin	5-Pin

1 = 5 VDC\*  
2 = BUS\_A  
3 = Gnd  
4 = BUS\_B  
5 = Shield  
\* Female connector only


### PROFIBUS eurofast® Pinouts

Male	Female
5-Pin	5-Pin


Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-IOM 1616-0001	16	0-7	2S	2	PNP	X			16	8-15	2G	2	0.5 A			1
FLDP-IOM 248-0001	24	0-11	2S	2	PNP	X			8	12-15	2G	2	0.5 A			2

## Input/Output Connectors

2S

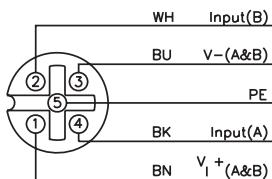

2G

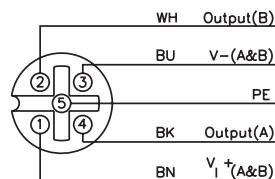

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
	2	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8

## Diagnosis

Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	V <sub>1</sub>	V <sub>0</sub>	SC	

## I/O Data Map 2

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
	2	I-23	I-22	I-21	I-20	I-19	I-18	I-17	I-16
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Diagnosis

Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	-	V <sub>1</sub>	V <sub>0</sub>	SC

## Input/Output Station for Robot Control

- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing



FLDP-IOM 2012-0001



### Electrical

- Operating Current: <110 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA per group of eight or twelve inputs (from  $U_B$ )
- Output Current: <500 mA per output (from  $U_L$ )

### Power Distribution

- Inputs:  $U_B$  power supply
- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- One LED indicates short-circuit for each group of inputs
- LEDs to indicate status of PROFIBUS communication and power supply

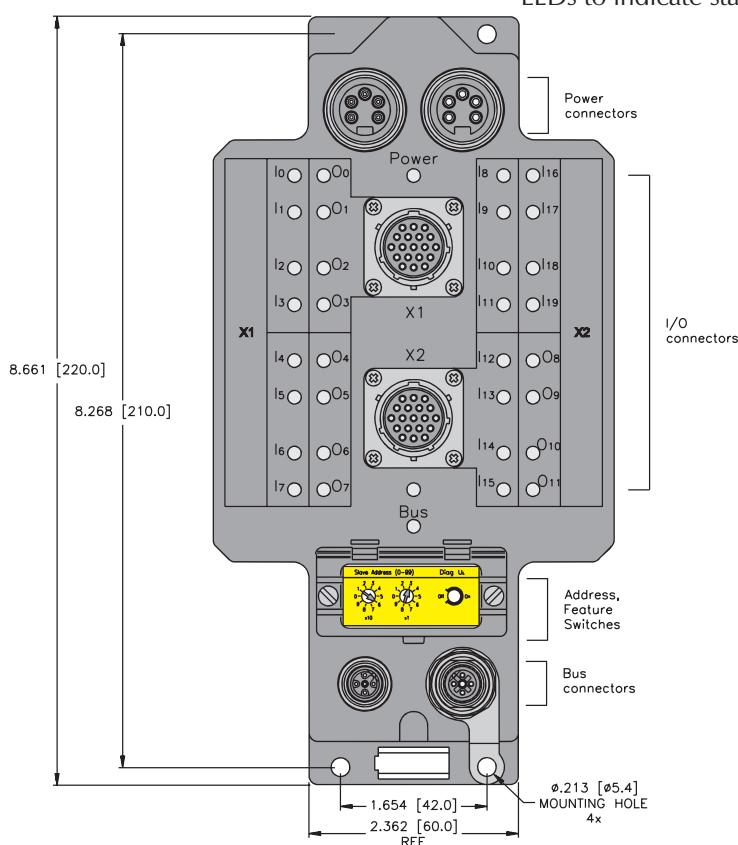

PROFIBUS eurofast® Pinouts

Male	Female
5 4 1 2 3	4 5 3 2 1
5-Pin	5-Pin

1 = 5 VDC\*

2 = BUS\_A

3 = Gnd

4 = BUS\_B

5 = Shield

\* Female connector only

minifast® Power Pinouts

Male	Female
3 2 4 5 1	2 3 4 1 5
5-Pin	5-Pin


# Process Automation



Part Number	Inputs								Outputs					Data		
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-IOM 2012-0001	20	X1,X2	B2	8, 12	PNP	X			12	X1,X2	B2	8,4	0.5 A			1

## Input/Output Connectors

B2




	X1	X2
A	V+	V+
B	V-	V-
S	I <sub>0</sub>	I <sub>0</sub>
R	I <sub>1</sub>	I <sub>1</sub>
M	I <sub>2</sub>	I <sub>2</sub>
L	I <sub>3</sub>	I <sub>3</sub>
H	I <sub>4</sub>	I <sub>4</sub>
G	I <sub>5</sub>	I <sub>5</sub>
D	I <sub>6</sub>	I <sub>6</sub>
C	I <sub>7</sub>	I <sub>7</sub>
U	O <sub>0</sub>	I <sub>8</sub>
T	O <sub>1</sub>	I <sub>9</sub>
P	O <sub>2</sub>	I <sub>10</sub>
N	O <sub>3</sub>	I <sub>11</sub>
K	O <sub>4</sub>	O <sub>0</sub>
J	O <sub>5</sub>	O <sub>1</sub>
F	O <sub>6</sub>	O <sub>2</sub>
E	O <sub>7</sub>	O <sub>3</sub>
V	PE	PE

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	X1I7	X1I6	X1I5	X1I4	X1I3	X1I2	X1I1	X1I0
	1	X2I7	X2I6	X2I5	X2I4	X2I3	X2I2	X2I1	X2I0
	2	-	-	-	-	X2I11	X2I10	X2I9	X2I8
Out	0	X107	X106	X105	X104	X103	X102	X101	X100
	1	-	-	-	-	X203	X202	X201	X200
Diagnosis									
Status	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	U <sub>I</sub>	U <sub>0</sub>	SC

## Standard Input/Output Stations

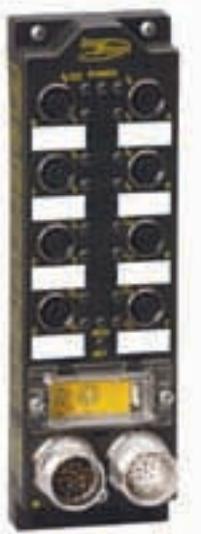

FLDP-IOM124-0001

FLDP-IOM124-0002



- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <150 mA plus sum of input currents (from  $U_B$ )
- Sensor Current: <500 mA per group inputs (from  $U_B$  group is all inputs for IOM 84 and IOM 88-0002, two groups of four inputs for IOM 88-0001)
- Output Current: See table on facing page (from  $U_L$ )

### Power Distribution

- Inputs:  $U_B$  power supply
- Outputs:  $U_L$  power supply

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Logical)

- Input short-circuit and power supply status mapped to PROFIBUS diagnostic table, one bit indicating each fault for the entire station

### Diagnostics (Physical)

- One LED indicates short-circuit for all inputs
- LEDs to indicate status of PROFIBUS communication and power supply

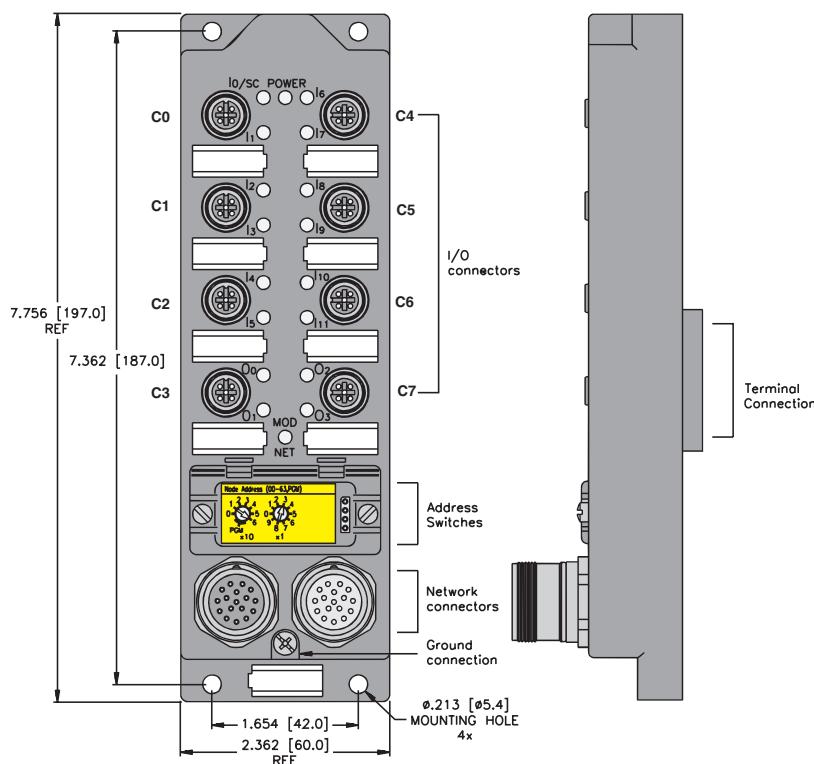

DeviceNet multifast Pinout

Male	Female
17-Pin	17-Pin

- |              |                  |
|--------------|------------------|
| 1 = 0 V, us1 | 10 = KSR1        |
| 2 = 0 V, US2 | 11 = *           |
| 3 = +24, US2 | 12 = Us CAN high |
| 4 = +24, US1 | 13 = Devnet high |
| 5 = PE       | 14 = Devnet low  |
| 6 = *        | 15 = RBST        |
| 7 = Us COM   | 16 = UL          |
| 8 = *        | 17 = Us CAN low  |
| 9 = KSR2     |                  |


# Process Automation




Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FLDP-IOM124-0001	12	6	2S	2	PNP	X			4	2	2G	2	2 A			1
FLDP-IOM124-0002	12	6	2S	2	PNP	X			4	2	2G	2	2 A			1

## Input/Output Connectors

2S

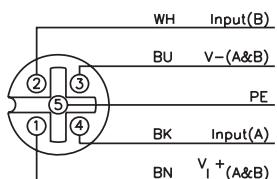

2G

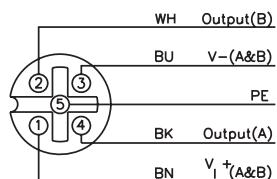

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

**Mating cordset:**

RK 4.4T-\* - RS 4.4T


**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	C4P2	C4P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4
Out	0	-	-	-	-	C7P2	C7P4	C3P2	C3P4
<b>Diagnosis</b>									
Diag	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	U <sub>B</sub>	U <sub>L</sub>	SC


## Deluxe Input/Output Stations

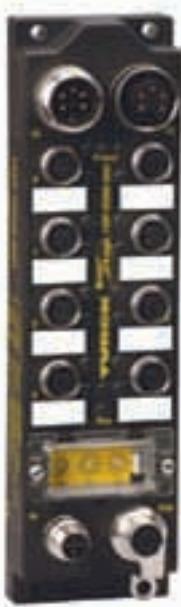

FXDP-IOM 88-0001

FXDP-CSG 88-0001

FXDP-XSG 16-0001




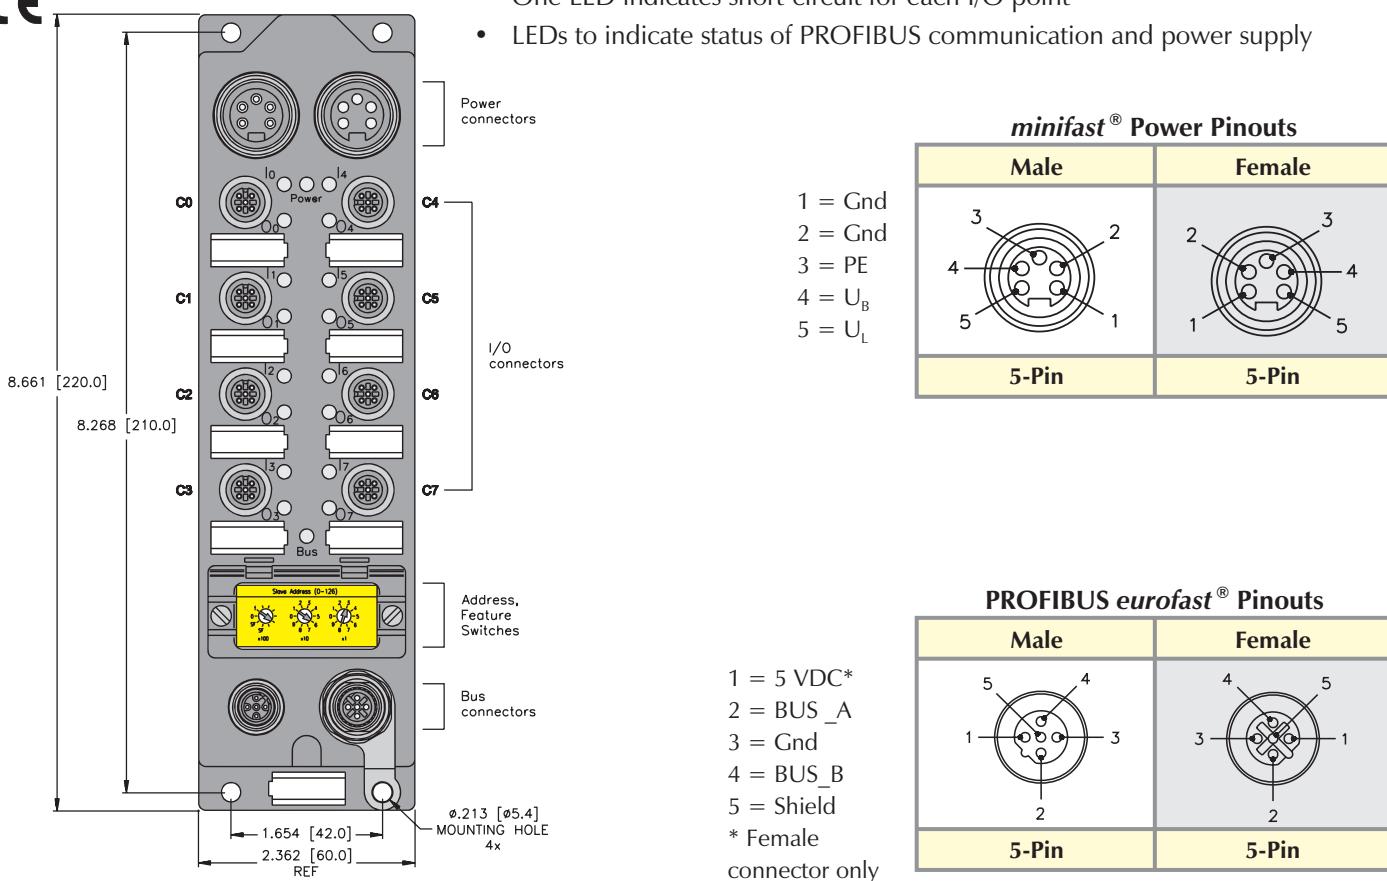


# Process Automation



Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FXDP-IOM 88-0001	8	0-3	2S	2	PNP		X		8	4-7	2G	2	1.4 A	X		1
FXDP-CSG 88-0001	8	0-7	C	1	PNP		X		8	0-7	C	1	1.4 A	X		2
FXDP-XSG 16-0001	16	0-7	2X	1	PNP		X		16	0-7	2X	1	1.4 A	X		3

## Input/Output Connectors

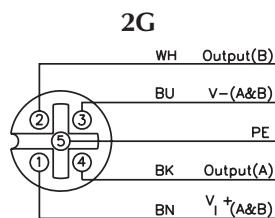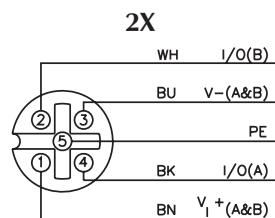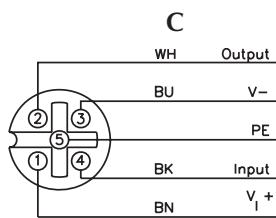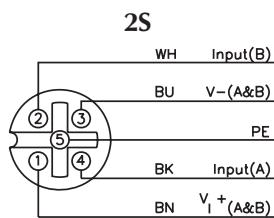

### Mating cordset:

RK 4.4T-\*RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

### Mating cordset:

RK 4.4T-\*RS 4.4T

### Splitter:

VB2-RS 4.4T-1/2RK 4.4T-\*/\*S651

### Mating cordset:

RK 4.4T-\*RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

### Mating cordset:

RK 4.4T-\*RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diag	0	-	-	-	-	-	UB	UL	SC
	1	SC-15	SC-14	SC-13	SC-12	SC-11	SC-10	SC-9	SC-8
	2	-	-	-	-	SC-7,6	SC-5,4	SC-3,2	SC-1,0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diag	0	-	-	-	-	-	UB	UL	SC
	1	SC-7	-	SC-5	-	SC-3	-	SC-1	-
	2	SC-15	-	SC-13	-	SC-11	-	SC-9	-
	3	SC-I7	SC-I6	SC-I5	SC-I4	SC-I3	SC-I2	SC-I1	SC-I0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## I/O Data Map 3

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Diag	0	-	-	-	-	-	UB	UL	SC
	1	SC-7	SC-6	SC-5	SC-4	SC-3	SC-2	SC-1	SC-1
	2	SC-15	SC-14	SC-13	SC-12	SC-11	SC-10	SC-9	SC-8
	3	SC-I 15,14	SC-I 13,12	SC-I 11,10	SC-I 9,8	SC-I 7,6	SC-I 5,4	SC-I 3,2	SC-I 1,0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
	1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8

## PROFIBUS-DP FDP20 Stations

TURCK's FDP20 PROFIBUS stations are low-cost screw-terminal connection stations designed for mounting in an enclosure. These stations provide easy connection of standard I/O devices such as push buttons, pilot lights, motor starters and drives to a PROFIBUS network. FDP20 stations are designed to easily upgrade existing equipment to a PROFIBUS network.

### Mechanical Specifications

TURCK FDP20 stations are designed to be mounted in standard equipment enclosures (operator stations, motor control centers, etc.). These stations use screw terminal connections for all I/O and network wiring. Detailed environmental specifications include:

- Housing material: Nylon 6
- Protection level: IP 20
- Operating temperature: 0 to +55°C (32 to +131°F)

The station's components are identified in the figure below.

### Connectors


#### Bus connectors



I/O

connectors

**PROFIBUS-DP Connector**

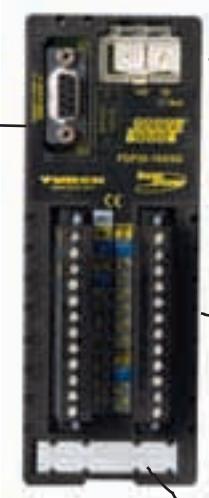

**Address Switches**


**I/O and Power Connectors**

**Label**

Each FDP20 version uses a different screw terminal connector. Detailed pinout information is given in the product information on the following pages.

## Power

FDP20 stations provide an auxiliary power connection for I/O devices and station electronics. Power can be applied separately to different I/O groups as shown in the following diagram.

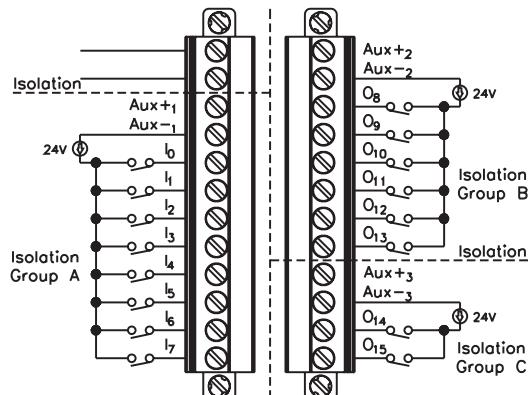


Power ratings for FDP20 stations:

- Operating Voltage: 18-30 VDC (24 VDC nominal)
- Internal Current Consumption: <75 mA (@ nominal 24 VDC) plus sum of I/O currents
- Input Signal Current (each input): OFF < 0.5 mA; ON 1-3.4 mA
- Input Delay: 2.5 ms
- Output Current: 1.8 A max per output (XSG version only)

## Addressing

PROFIBUS® stations must have a network address for communication. The address for FDP20 stations may be set via the visible rotary switches on the front of the station.



The pair of switches represents the address as a decimal number; the left switch being the 10's multiplier and the right switch the 1's multiplier. To program the stations, rotate the switches with a small slotted screwdriver until the arrows are pointing at the appropriate numbers for the chosen address.

## Diagnostics

FDP20 stations provide LEDs for diagnosing communication problems.

### Bus

- Green: Normal operation
- Red: No communication

### Voltage Supply

- Green: Power present
- Red: No power

### Input/Output Status

- Off: Point is off
- Green: Point is on

### Common short-circuit Indication (Two LEDs for entire station)

## **Enclosure Mounted Input/Output Station**



FDP20-16XSG

FDP20-16S



- In-Cabinet I/O
  - IP 20 Protection
  - Ideal for Retrofits
  - Automatic Baud Rate Detection

# Electrical

- Operating Current: <75 mA plus sensor currents (from Auxiliary power)
  - Input Current: <700 mA sum of all inputs (from Auxiliary power)
  - Output Current: <1.8 A per output (from Auxiliary power)

## Power Distribution

- Inputs: Auxiliary power
  - Outputs: Auxiliary power supply

## Mechanical


- Operating Temperature: 0 to +55°C (+32 to +131°F)
  - Protection: IEC IP 20

## Material

- Housing: Nylon

### Diagnostics (Physical)


- LEDs to indicate status of PROFIBUS-DP communication

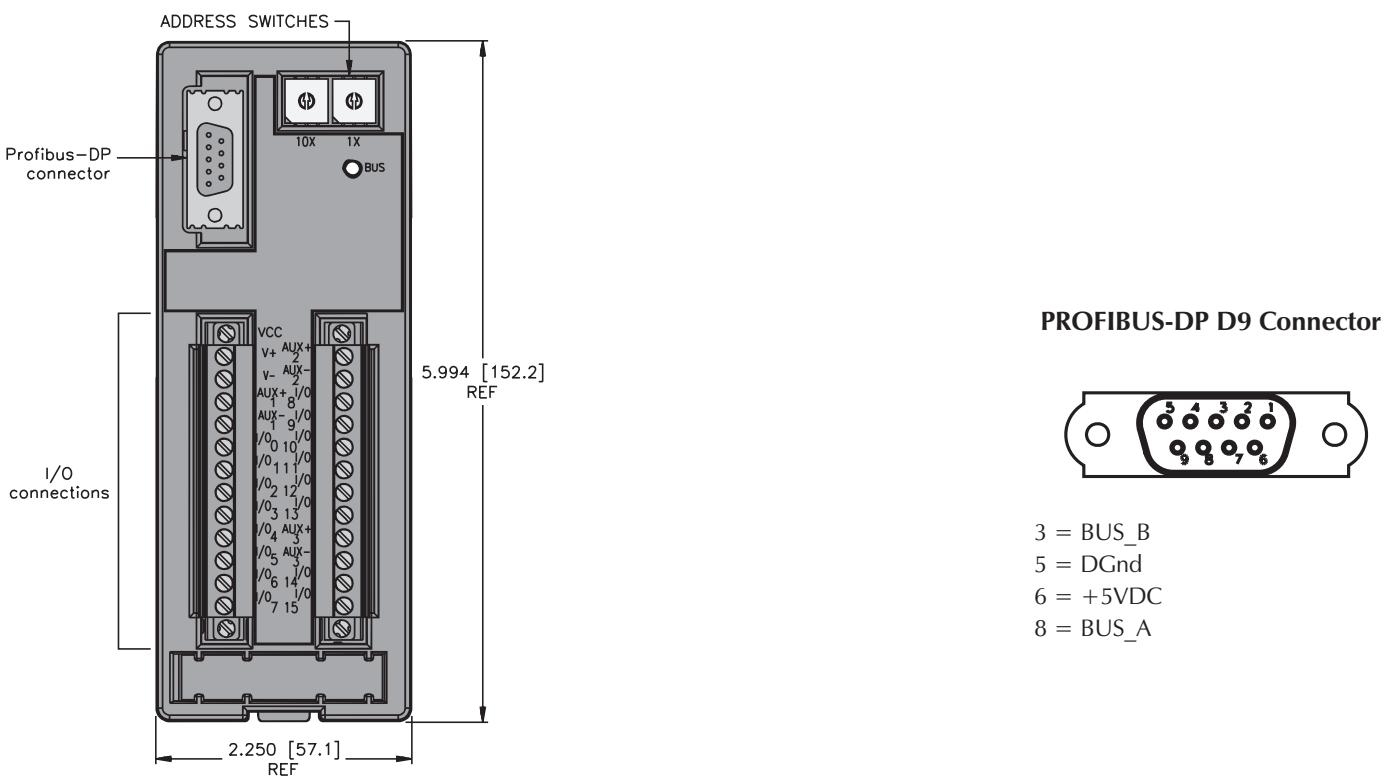


Part Number	Inputs				Outputs				Data			
	Input Count	Pinout	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Pinout	Current	Individual Diagnostics	Wire-Break Detection	Data Map
FDP20-16XSG	16	FLX-DP	PNP				16	FLX-DP	0.5 A			1
FDP20-16S	16	FL-DP	PNP				0					2

## Input/Output Connectors

FL-DP

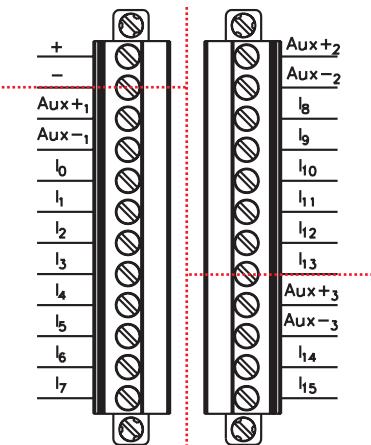

FLX-DP

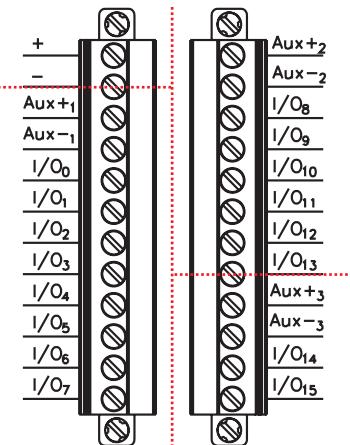

..... Indicates I/O groups which can be powered from separate Aux. power supplies if desired

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8	

I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	


## PROFIBUS®-DP Repeater

The **REP-DP** repeater serves to assemble two galvanically isolated PROFIBUS-DP segments in RS-485 technology with 32 participants each, and provides IP 67 protection. Up to four repeaters can be connected in series, so that up to 127 nodes can be operated via a single master; thus PROFIBUS networks can be extended significantly by using repeaters (depending on the baud rate).

The transmission rate is detected automatically (up to 12 Mbaud), and the signals are regenerated in amplitude. If there are faulty protocols in one of the segments (a wire-break, short-circuit in the bus line or by a defective node), that segment is decoupled and an error indication is provided by the LED.

### Connection:

Individual PROFIBUS segments are connected via M12 connectors (see technical guidelines for PROFIBUS connection technology). The repeater is equipped with three female and one male connector; unused connections must be terminated with a terminating resistor (type: RSSW 45-TR). The shield of the PROFIBUS cable can be grounded directly via a grounding screw (internally the shield is coupled capacitively with the ground). Power (24 VDC) is supplied via standard 7/8 inch connectors.

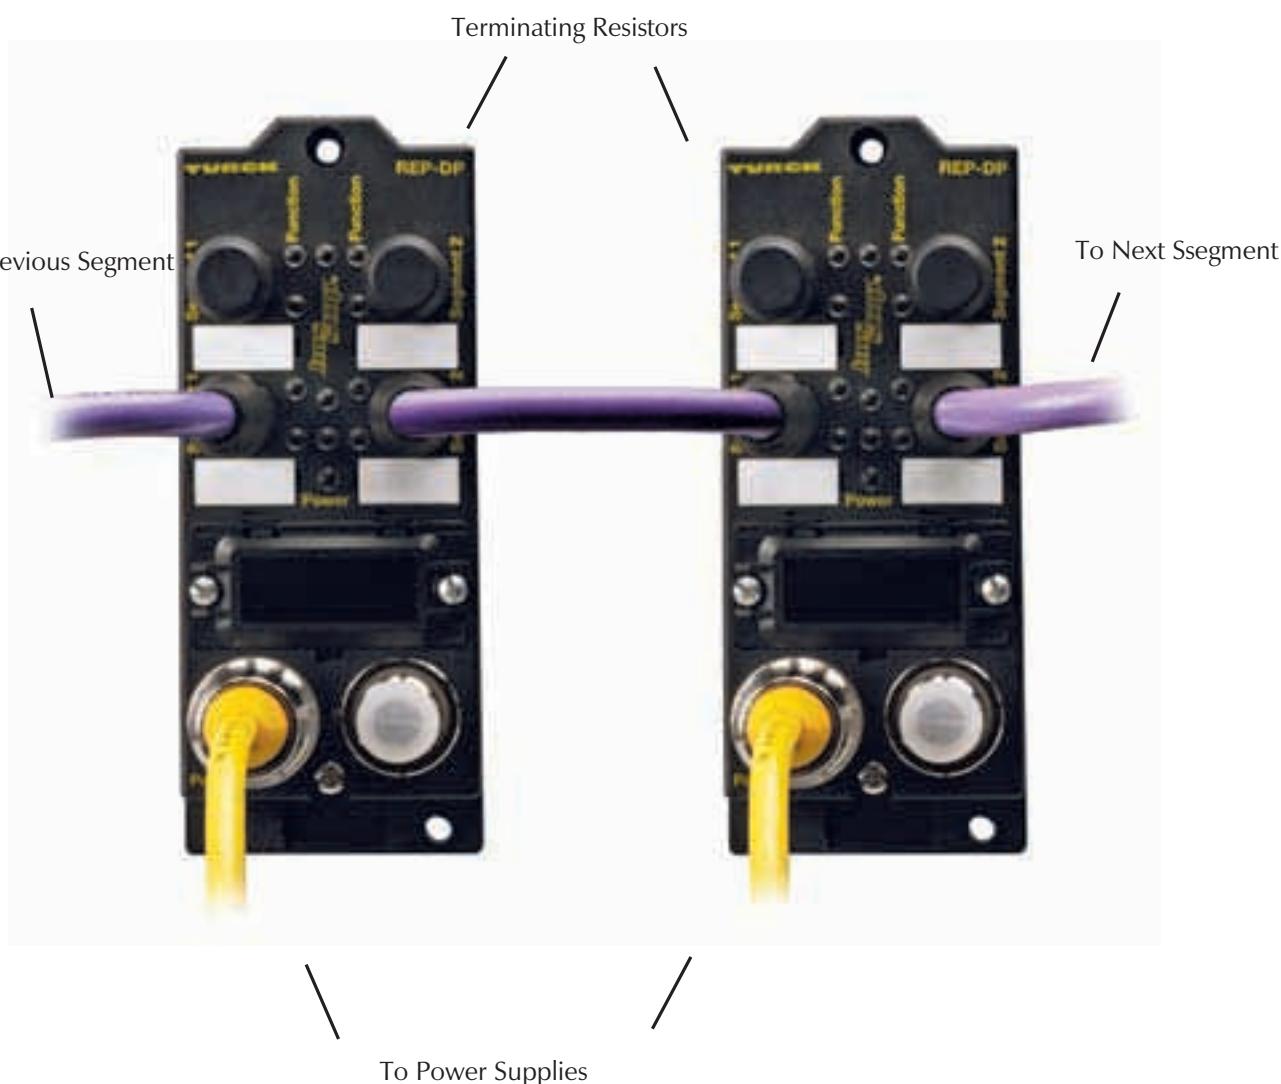

## Profibus-DP Repeater



**REP-DP-0002**

- Extend Network Length
- Extend Drop Lengths
- Allows More Than 32 Stations on Network
- Isolate Communication Segments

### Electrical

- Operating Current: <60 mA

### Power Distribution

- Station: Auxiliary power supply ( $U_B$ )

### Mechanical


- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: NEMA 1,3,4,12,13 and IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass
- Housing: Nylon 6

### Diagnostics (Physical)

- LEDs indicate communication status for each segment and power supply

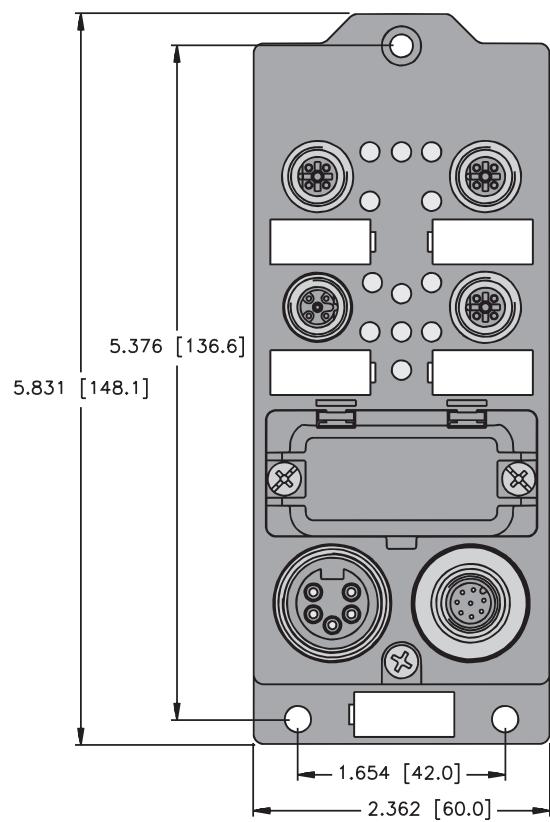

1 = 5 VDC\*  
 2 = BUS\_A  
 3 = Gnd  
 4 = BUS\_B  
 5 = Shield  
 \* Female connector only

**PROFIBUS eurofast® Pinouts**

Male	Female
<b>5-Pin</b>	<b>5-Pin</b>

**minifast® Power Pinouts**


1 = Gnd  
 2 = Gnd  
 3 = PE  
 4 =  $U_B$   
 5 = NC

Male

## PROFIBUS-DP to AS-interface Gateways

AS-I systems can be easily connected to a higher-level network, like PROFIBUS, through a gateway master. The gateway acts as a master to the AS-I system(s) and a slave to the PROFIBUS system, mapping all of the AS-I data for PROFIBUS in a single block.

For AS-I specifications and rating details see section G of this catalog.

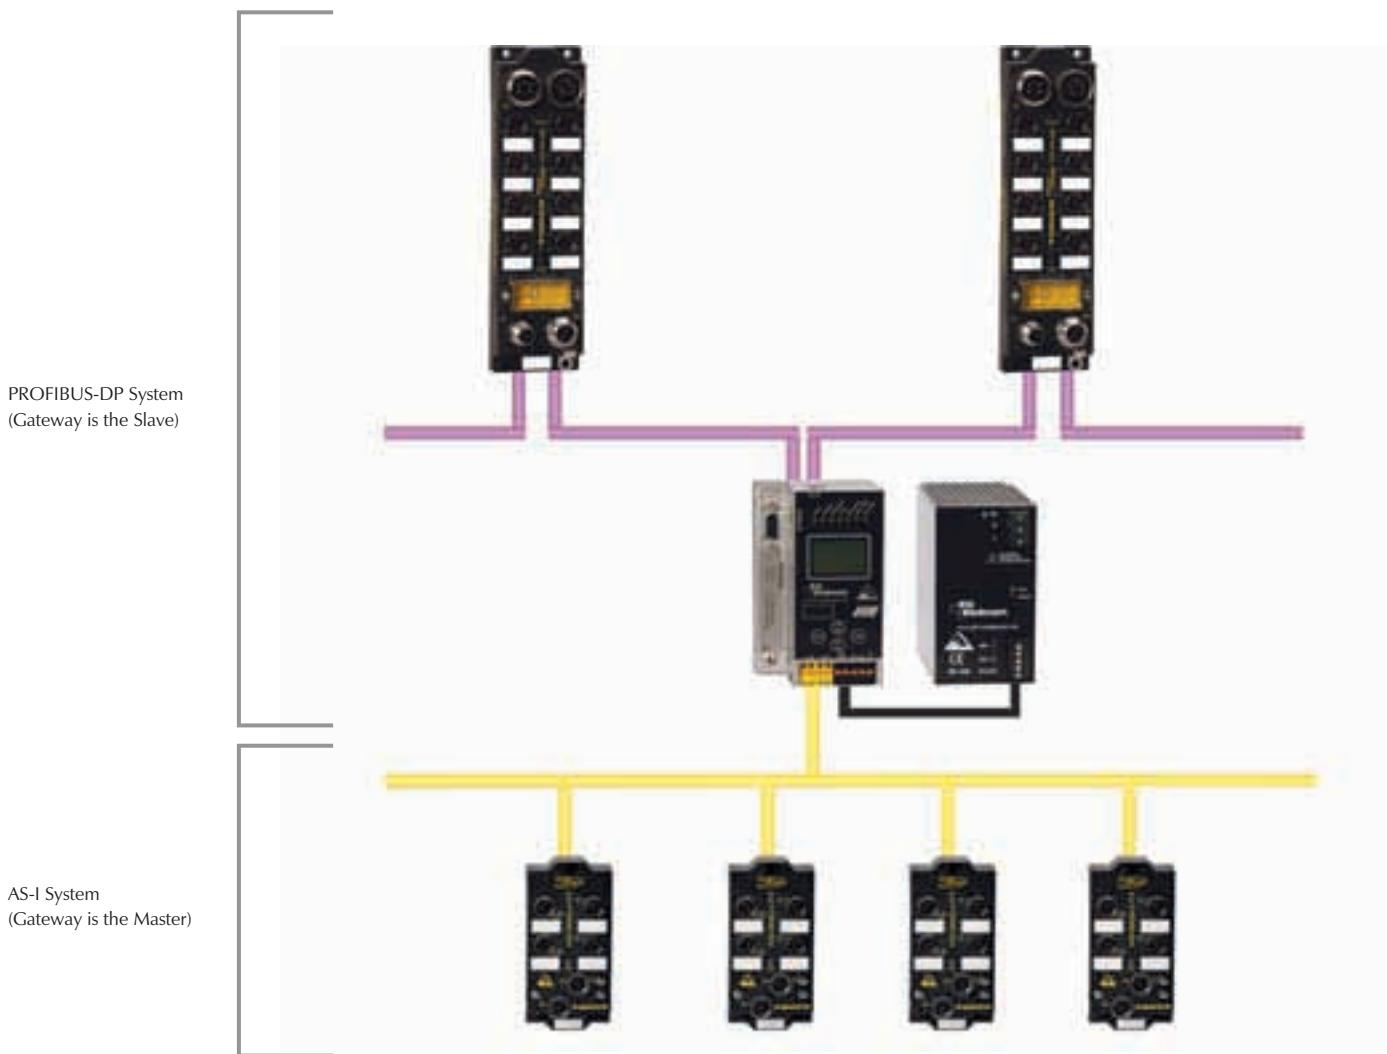

## Addressing

PROFIBUS® stations must have a network address for communication. The address for AS-I/ PROFIBUS gateways may be set via the on-unit display and push buttons. Please consult the manual for a particular gateway for instruction on the procedure.

## Diagnostics

AS-I/ PROFIBUS gateways contain LEDs for diagnosing I/O and communication problems for AS-I and PROFIBUS. For a detailed description of the LED states please see the Bihl+Wiedemann AS-I/ PROFIBUS Gateway User Manual available for download from [www.bihl-wiedemann.com](http://www.bihl-wiedemann.com).

## Power

Most AS-I/ PROFIBUS gateways draw power from the AS-I power supply. The option to use a separate, non-AS-I power supply is also available. Consult the gateway documentation to ensure that the gateway being selected meets the requirements of your system.

**AS-I Profibus-DP Gateways in Stainless Steel**
**ASI-DPG-SS BW1567\*****ASI-DPG-SS BW1568\*****ASI-DPG-SS BW1569\*****ASI-DPG-SS-SE BW1773\*****ASI-DPG-SS-SE BW1774\*****ASI-DPG-SS-C1D2 BW1653****ASI-DPG-SS-C1D2 BW1654****ASI-DPG-SS-C1D2 BW1655**

\* Not ETL Listed

- AS-I v3.0 Supported
- Graphical Display

- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)  
200 mA from  $V_{AS-i1}$ , 70mA from  $V_{AS-i2}$  (Power Supply A2)  
250 mA from  $V_{AUX}$  (Power Supply E)

**Power Distribution**

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**

- Health of AS-I network is available via Proximus-DP interface

**Diagnostics (Physical)**

- LED to indicate status of network and AS-I communication and power supply

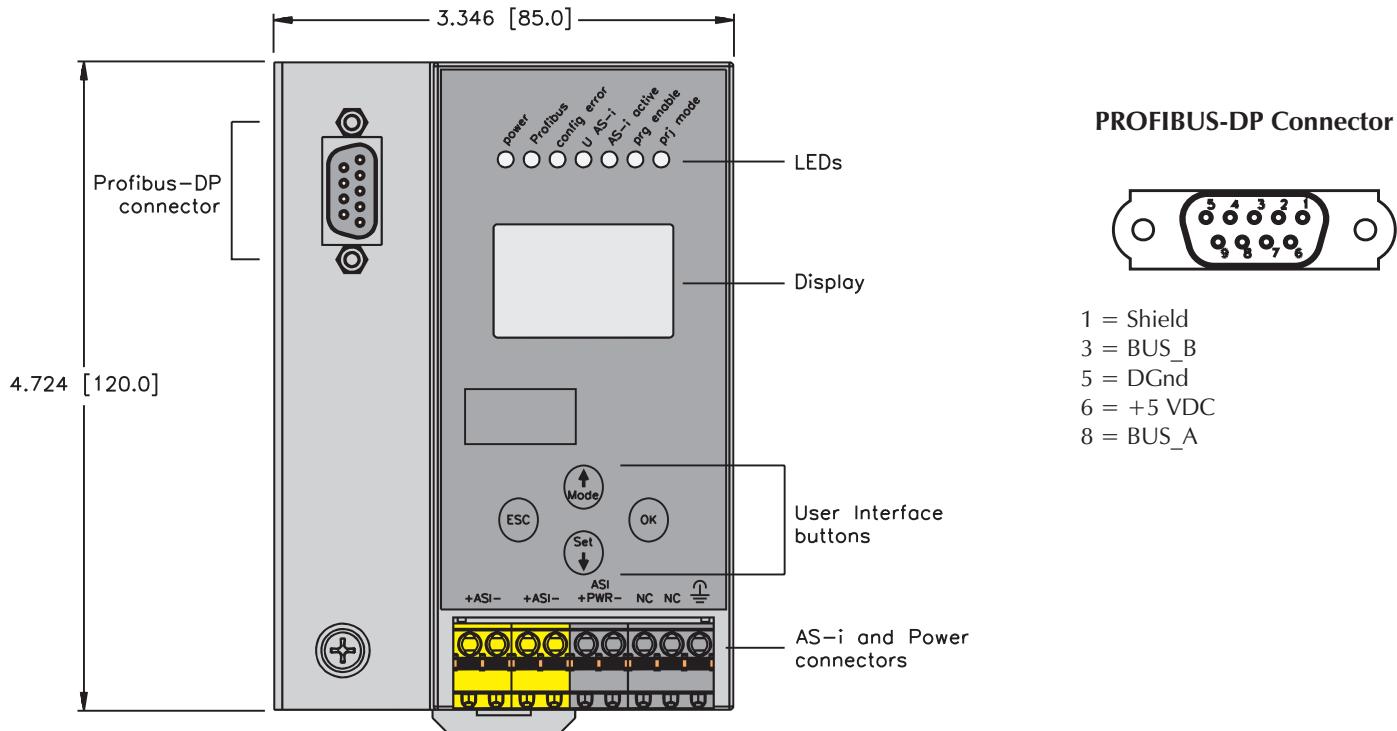


# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	# of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-DPG-SS BW1567	PROFIBUS-DP	A	2.1	1	X	X
ASI-DPG-SS BW1568	PROFIBUS-DP	A2	2.1	2	X	X
ASI-DPG-SS BW1569	PROFIBUS-DP	E	2.1	2	X	X
ASI-DPG-SS-SE BW1773	PROFIBUS-DP	A	2.1	1		
ASI-DPG-SS-SE BW1774	PROFIBUS-DP	A2	2.1	2		
ASI-DPG-SS-C1D2 BW1653	PROFIBUS-DP	A	3.0	1		
ASI-DPG-SS-C1D2 BW1654	PROFIBUS-DP	A2	3.0	2		
ASI-DPG-SS-C1D2 BW1655	PROFIBUS-DP	E	3.0	2		


**A**

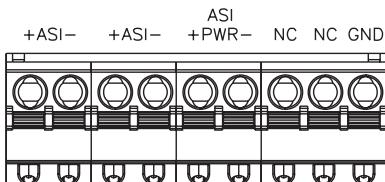

**A2**

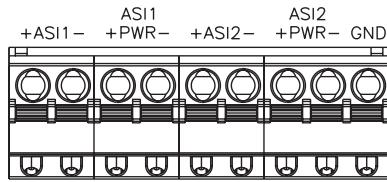

**E**

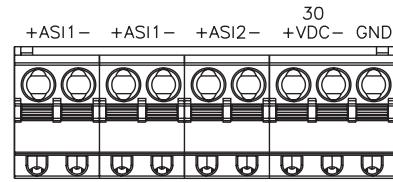

A - Single AS-I network is powered by one AS-I power supply

A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**AS-I PROFIBUS-D Economy Gateways**

- AS-I v3.0 Supported
- LED Display

- PROFIBUS-DP Support
- Integrated AS-I Diagnostics


**Electrical**

- Operating Current: <300 mA from AS-I

**Power Distribution**

- From AS-I supply

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20

**Material**


- Housing: Stainless Steel

**Diagnostics (Logical)**

- AS-I diagnostic data is available via Network interface

**Diagnostics (Physical)**

- LEDs to indicate status of network and AS-I communication and power supply

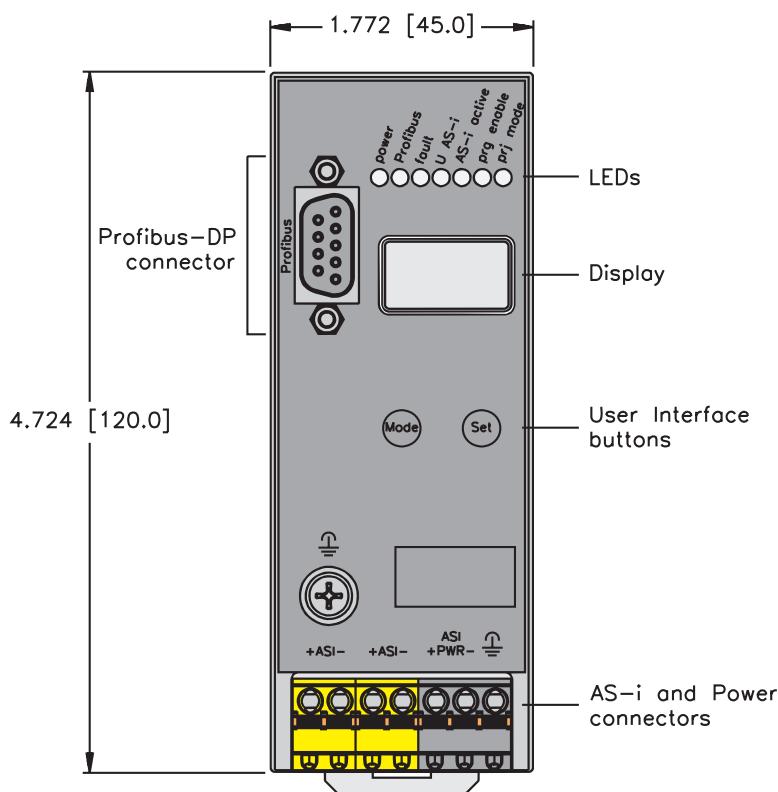**ASI-DPG-SS-B BW1746**

**PROFIBUS-DP Connector**



1 = Shield  
3 = BUS\_B  
5 = DGnd  
6 = +5 VDC  
8 = BUS\_A

# Process Automation



Part Number	Higher Level Network	Power Style	AS-I Version	Connection Diagram	# of AS-I Masters
ASI-DPB-SS BW1746	PROFIBUS-DP	A	2.1	A	1

A

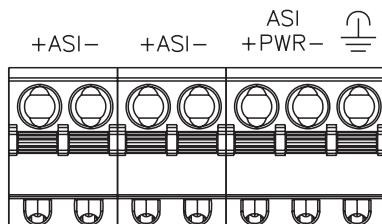

**AS-I PROFIBUS®-DP Gateways****ASI-DPG BW1253****ASI-DPG BW1371**

- AS-I v2.1 Supported
- 2-Digit Display

- IP 65 Protection
- Integrated AS-I Diagnostics

**Electrical**

- Operating Current: 200 mA from  $V_{AS-I}$

**Power Distribution**

- From AS-I supply for each network

**Mechanical**

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 65

**Material**


- Housing: Plastic

**Diagnostics (Logical)**


- Health of AS-I network is available via Network interface

**Diagnostics (Physical)**

- LEDs to indicate status of network and AS-I communication and power supply

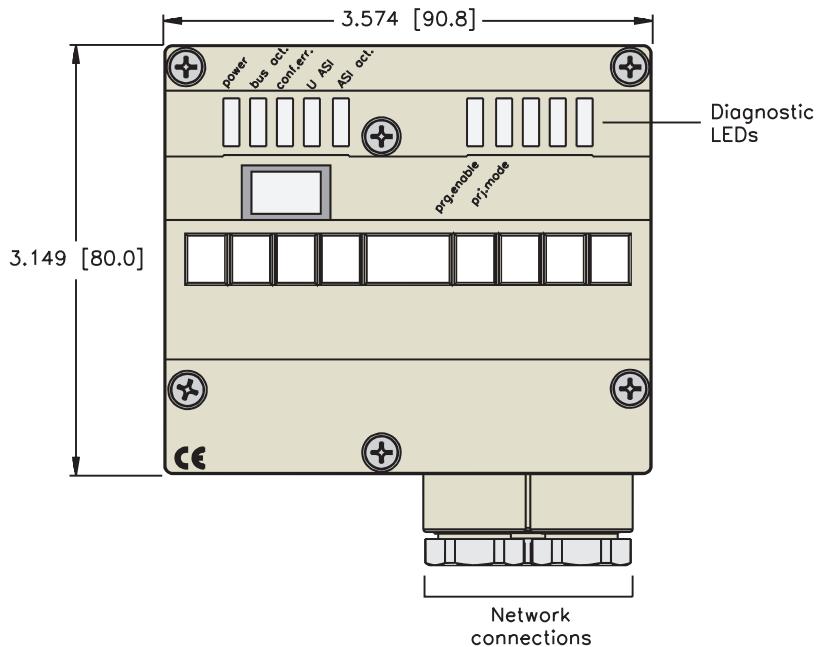

**PROFIBUS eurofast® Pinouts**

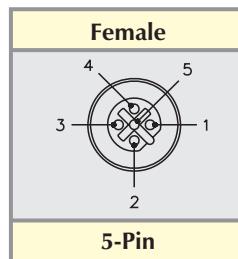

1 = 5 VDC\*

2 = BUS\_A

3 = Gnd

4 = BUS\_B


5 = Shield

\* Female connector only

Part Number	Higher Level Network	Power Style	AS-I Version	Connection Diagram	* of AS-I Masters	Duplicate Address Detection	Programming Interface
ASI-DPG BW1253	PROFIBUS-DP	A	2.1	1	1		
ASI-DPG BW1371	PROFIBUS-DP	A	2.1	1	1		

A - Single AS-I network is powered by and AS-I power supply

1

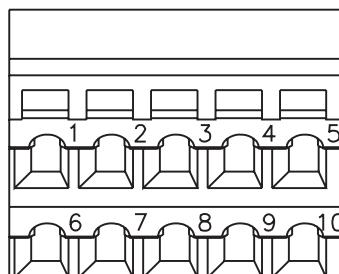

1	BUS_A
2	BUS_B
3	BUS_A
4	BUS_B
5	0V
6	Shield
7	FG (Function Gnd)
8	FG (Function Gnd)
9	Shield
10	+5V

Note: AS-I connections are made via standard AS-I base modules ASI-BM BW1180 or ASI-BM BW1182 (see p. E103-104)


## PROFIBUS®-DP BL67 Stations

TURCK's BL67 is a modular, user configurable network I/O system designed to allow installation of nodes containing different types and sizes of I/O depending on the users needs for a particular area. Featuring IP 67 protection and metal threaded connectors, the BL67 can often be mounted in the physical process environment or directly on a machine without a separate enclosure for the I/O. This saves planning and installation time, as well as the cost of the enclosure itself.

The BL67 system supports several different network protocols, including PROFIBUS-DP. A BL67 station consists of a gateway module that interfaces to the PROFIBUS system, and several I/O modules that interface with the physical I/O in the field. Different connector options are available to allow a greater level of customization to the user.

For more details on the BL67 system, please see section G of this catalog.

TURCK's I/O Assistant software package is used to configure the BL67 system.

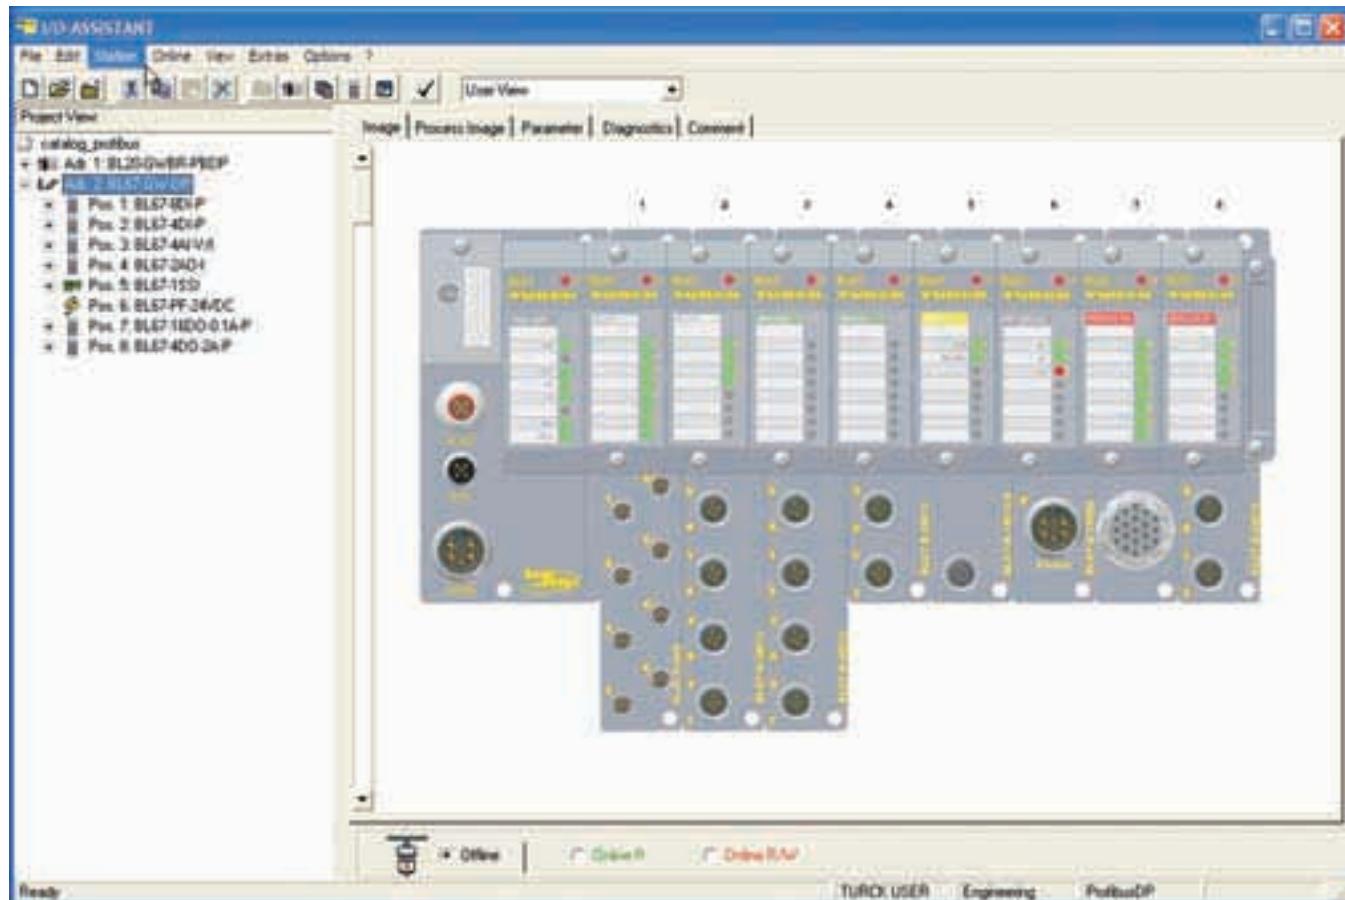

## BL67 Gateway



**BL67-GW-DP**



- Modular I/O
- Fieldbus Independent Configuration
- IP 67 Protection
- Various I/O Styles

### Electrical

- Operating Current: <50 mA from  $V_I$
- Supply Current: <10 A to I/O (from  $V_I$  and  $V_O$ )
- Backplane Current: <1.5 A (from  $V_I$ )

### Mechanical

- Operating Temperature: -25 to +55°C (+32 to +131°F)
- Protection: IP 67
- Vibration: 5 g @ 10-500 Hz

### Material

- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)

- Diagnostic information available through the PROFIBUS-DP interface


### Diagnostics (Physical)

- LEDs to indicate status of PROFIBUS-DP and Module Bus communication

1 = 5 VDC\*  
 2 = BUS\_A  
 3 = Gnd  
 4 = BUS\_B  
 5 = Shield  
 \* Female connector only

### PROFIBUS eurofast® Pinouts

Male	Female
<b>5-Pin</b>	<b>5-Pin</b>

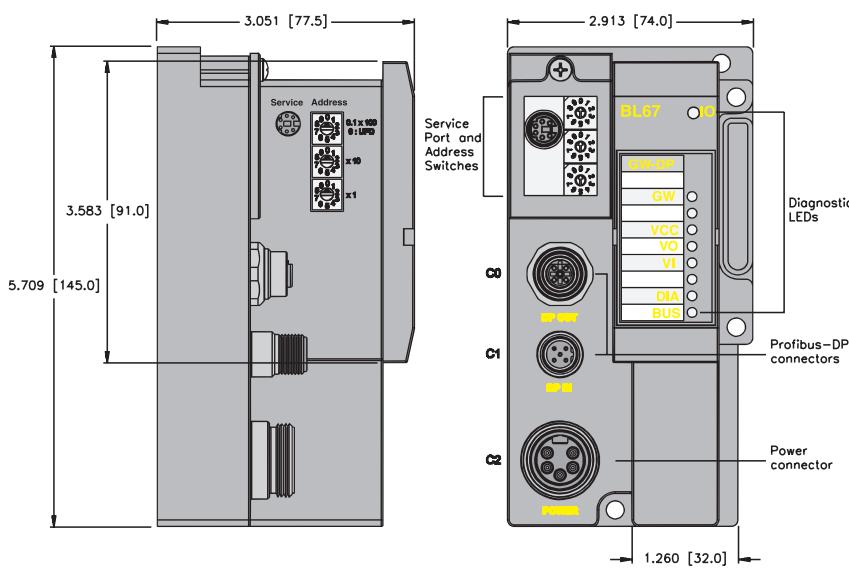

### minifast® Power Pinouts

1 = Gnd  
 2 = Gnd  
 3 = PE  
 4 =  $V_I$   
 5 =  $V_O$

**5-Pin**

Note: Power feeding modules may be used for I/O current supply to prevent overloading the gateway power supply.


## PROFIBUS®-DP BL20 Stations

TURCK's BL20 is a modular, user configurable network I/O system designed to allow installation of nodes containing different types and sizes of I/O depending on the users needs for a particular area. Featuring IP 20 protection and terminal point connections, the BL20 is intended to be mounted in the control cabinet or in a field enclosure.

The BL20 system supports several different network protocols, including PROFIBUS-DP. A BL20 station consists of a gateway module that interfaces to the PROFIBUS system, and several I/O modules that interface with the physical I/O in the field. The terminal bases are available with tension clamp or screw terminal connector types.

For more details on the BL20 system, please see section H of this catalog.

TURCK's I/O Assistant software package is used to configure the BL20 system.

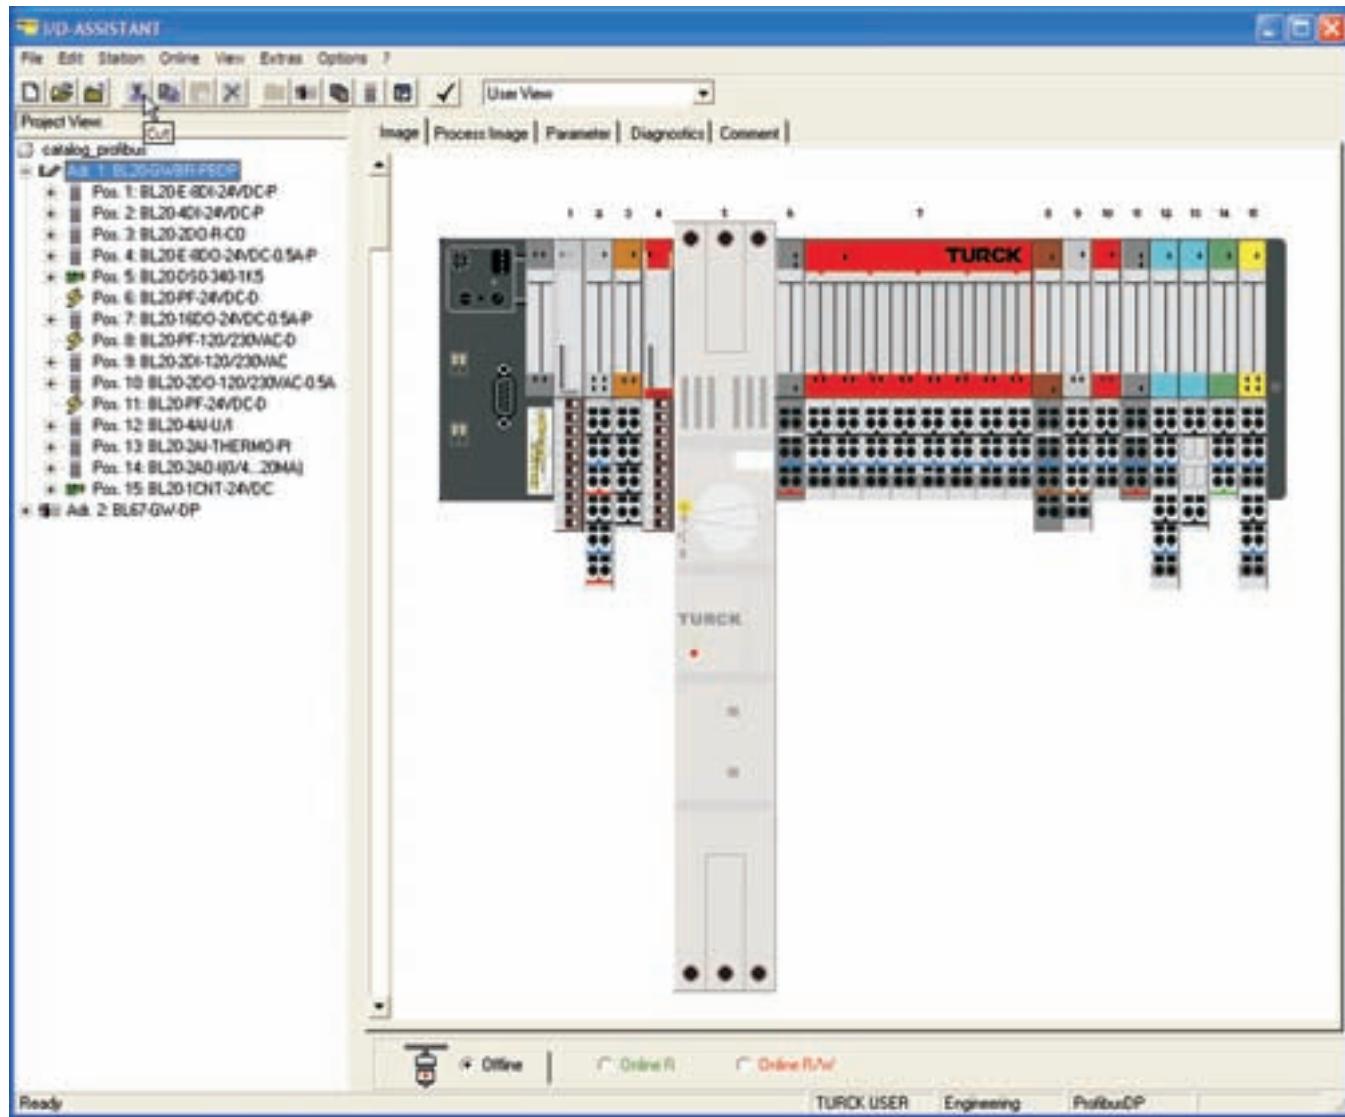

## BL20 Gateway



## BL20-GWBR-PBDP



- Modular I/O
- Fieldbus Independent Configuration

- IP 20 Protection
- Various I/O Styles

### Electrical

- Operating Current: <430 mA from BR power supply ( $U_{SYS}$ )
- Supply Current: <10 A to I/O (from  $U_L$ )  
<1.5 A to backplane (from  $U_{SYS}$ )

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: 1 g @ 5...100 Hz

### Material

- Housing: PC-V0 (Lexan)




### Diagnostics (Logical)

- Diagnostic information available through the PROFIBUS-DP interface

### Diagnostics (Physical)

- LEDs to indicate status of PROFIBUS-DP and Module Bus communication

### Power Connectors

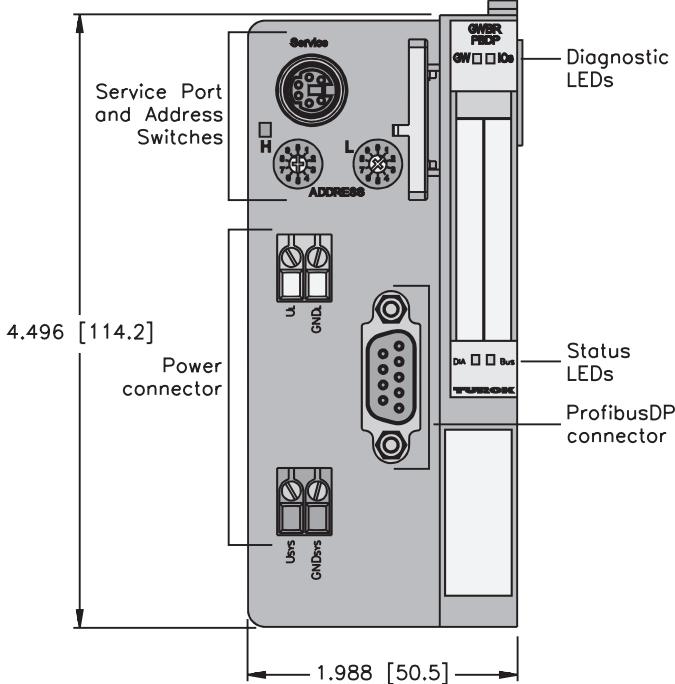

### PROFIBUS-DP Connector



- 1 = Shield  
3 = BUS\_B  
5 = Gnd  
6 = +VDC  
8 = BUS\_A

**TURCK**

**Process Automation – Networks**

**Notes:**

## PROFIBUS®-DP, Cable Specifications

- Cable that Meets the Requirements of EN50170-2-2:1996 for Communications Up to 12 Mbaud

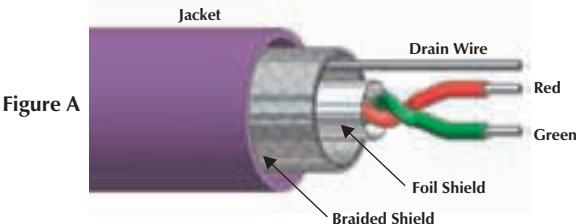


Figure A

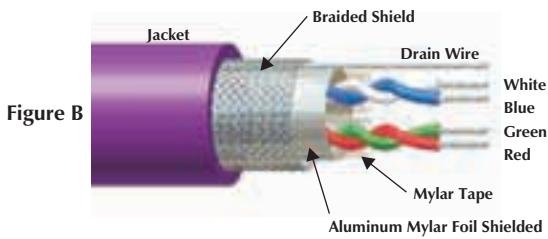


Figure B

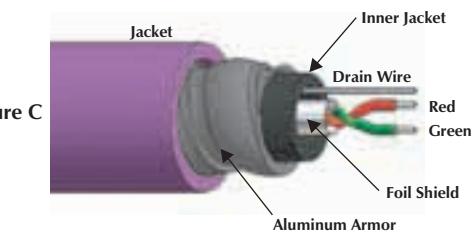


Figure C

Baud Rate (k baud)	9.6	19.2	93.75	187.5	500	1500	1200
Maximum Trunk Length	1200 meters	1200 meters	1200 meters	1000 meters	400 meters	200 meters	100 meters

Type	Approvals	Data Pair		2nd Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	DCR (/1000 feet) Insulation				
<b>455</b> AWM 2464 75°C 300 Volts	NEC PLTC CEC AWM-I/II A/B FT4	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	PVC Purple 8.5 mm (.335 in)	Foil/Braid 22 AWG	RB50672-*M 62 lbs.	A
<b>456</b> AWM 20233 80°C 300 Volts	NEC AWM CEC AWM-I/II A/B FT4	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	PUR Purple 7.9 mm (.310 in)	Foil/Braid 22 AWG	RB50683-*M 48 lbs.	A
<b>457</b> 75°C 300 Volts	NEC CMX	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	PUR Purple 8.0 mm (0.315 in)	Foil/Braid No Drain	RB50708-*M 51 lbs.	A
<b>458</b> AWM 20233 80°C 300 Volts	NEC AWM CEC AWM-I/II A/B FT4	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	TPU Plum 8.5 mm (0.335 in)	Foil/Braid 22 AWG	RB50692-*M 58 lbs. <i>flexlife-10</i> ®	A
<b>4511</b> AWM 2464 75°C 300 Volts	NEC PLTC CEC AWM-I/II A/B FT4	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	PVC Purple 8.5 mm (.319 in)	Foil/Braid 22 AWG	RB50881-*M 64 lbs. <i>flexlife-10</i> ®	A
<b>4510A</b> 75°C 300 Volts	NEC PLTC CEC CM-CMG HL ABCD	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	Aluminum Armor/PVC 15.4 mm (.605 in)	Foil/Braid 22 AWG	RB50875-*M 112 lbs. <i>armorfast</i> ®	C
<b>4515</b> 80°C 300 Volts		2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	PUR Purple 7.5 mm (0.295 in)	Foil/Braid 22 AWG	RB51225-*M 42 lbs. <i>Halogen-Free</i> ® <sup>††</sup>	A
<b>4516</b> 105° 300 Volt	NEC PLTC/ISO Open Wiring CEC CMG	2/22 AWG RD/GN	16.5 Ohms PE	None	N/A	PVC Purple 11.1 mm (.435 in)	Foil/Braid 22 AWG	RB51259-*M 93 lbs.	A
<b>590</b> AWM 2464 75°C 300 Volts	NEC PLTC CEC AWM-I/II A/B FT4	2/22 AWG RD/GN	16.5 Ohms PE	2/22 AWG BU/WH	16.5 Ohms PE	PVC Purple 9.6 mm (.380 in)	Foil/Braid 22 AWG	RB51057-*M 75 lbs.	B

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters. Consult factory for other lengths.

†† Zero Halogen: to DIN VDE 0472 part 815 + IEC 60754-1

## PROFIBUS®-DP, (M12x1) eurofast® Cable and Cordset Selection Matrix

		eurofast			
		Pin (Male)	Socket (Female)		
		1 RSSW	3 WSSW	2 RKS W	4 WKSW
		RSSW	WSSW	RKS W	WKSW
eurofast	Bare	RSSW 45x-*M	WSSW 45x-*M	RKS W 45x-*M	WKSW 45x-*M
	1 RSSW	RSSW RSSW 45x-*M	RSSW WSSW 45x-*M	RSSW RKS W 45x-*M	RSSW WKSW 45x-*M
	3 WSSW		WSSW WSSW 45x-*M	WSSW RKS W 45x-*M	WSSW WKSW 45x-*M
	2 RKS W			RKS W RKS W 45x-*M	RKS W WKSW 45x-*M
	4 WKSW				WKSW WKSW 45x-*M

See page H54 for dimensional drawings.

\* Indicates length in meters.

x Indicates cable type.



Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 Meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSSW...RSSWV.

Change 45 to 59 for 59x series cordsets.

## Pinouts


eurofast	45 series pinout	59 series pinout	eurofast
Male 	1. N/C 2. Green (TxD) 3. N/C 4. Red (RxD) 5. Bare (Shield Drain Wire)	1. Blue (TxD_1) 2. Green (TxD) 3. White (RxD_1) 4. Red (RxD) 5. Bare (Shield Drain Wire)	Female 

## PROFIBUS®-DP, (M12x1) *eurofast*® Cable and Cordsets

### Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)


1

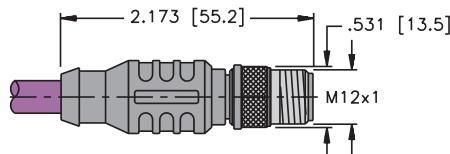

RSSW ..


Pages H53 - H56

2

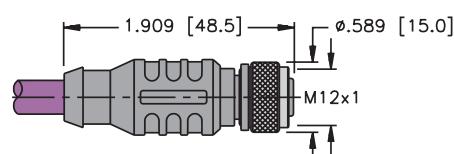

Pages H53 - H56


3

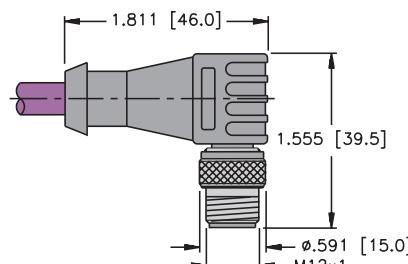

WSSW ..

Pages H53 - H56


4

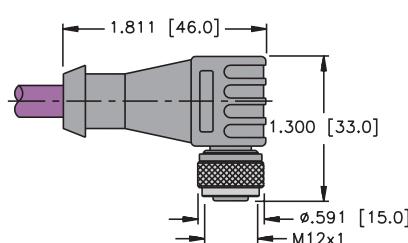

Pages H53 - H56


RSAW ..

(*armorfast* only)

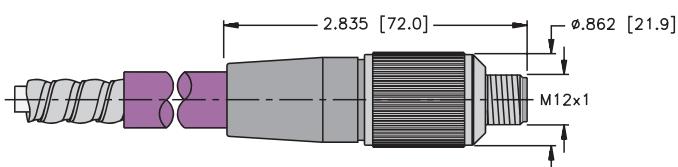

WKSW ..

(*armorfast* only)

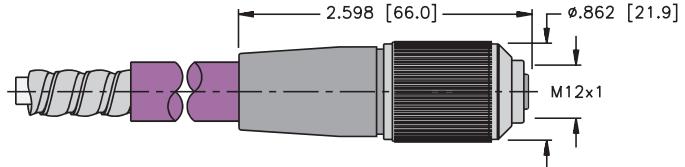

## PROFIBUS®-DP, (M12x1) eurofast® Cable and Cordset Selection Matrix

		eurofast						
		Pin (Male)		Socket (Female)		Pin (Male)		Socket (Female)
9-Pin Sub D Connector	Terminator	Bare	1 RSSW	3 WSSW	2 RKS	4 WKSW	10 FSSDWE	11 FKSDWE
	7 D9S/T	D9S/T 45x-*M	RSSW D9S/T 45x-*M	WSSW D9S/T 45x-*M	RKS D9S/T 45x-*M	WKSW D9S/T 45x-*M	FSSDWE D9S/T 45x-*M	FKSDWE D9S/T 45x-*M
	Master	8 D9SM/T	D9SM/T 45x-*M	RSSW D9SM/T 45x-*M	WSSW D9SM/T 45x-*M	RKS D9SM/T 45x-*M	WKSW D9SM/T 45x-*M	FSSDWE D9SM/T 45x-*M

See page H54 &amp; H58 for dimensional drawings.

\* Indicates length in meters.


x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.




Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSSW...RSSW.

## Extension example:

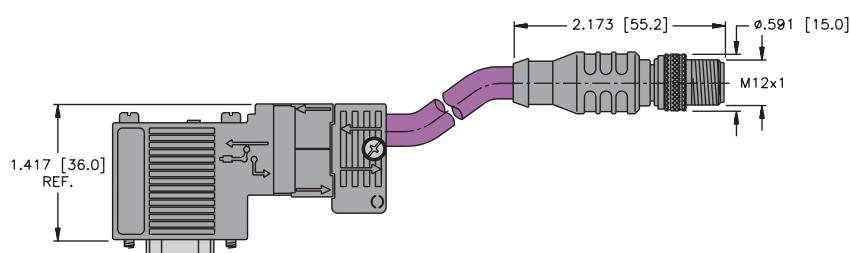

## Pinouts

eurofast	45 series pinout	eurofast	D9
<b>Male</b> 	1. N/C 2. Green (Tx) 3. N/C 4. Red (Rx) 5. Bare (Shield Drain Wire)	<b>Female</b> 	<b>Male</b> 

## PROFIBUS®-DP, (M12x1) eurofast® Cable and Cordset Selection Matrix

		eurofast						
		Pin (Male)		Socket (Female)		Pin (Male)		Socket (Female)
		Bare	RSSW	WSSW	RKSW	WKS	FSSDWE	FKSDWE
Node	7	D9S	RSSW D9S RSSW 45x-*M-*M	WSSW D9S WSSW 45x-*M-*M	RKSW D9S RKSW 45x-*M-*M	WKS D9S WKS 45x-*M-*M	FSSDWE D9S FSSDWE 45x-*M-*M	FKSDWE D9S FKSDWE 45x-*M-*M
	9	SD9S	RSSW SD9S RSSW 45x-*M-*M	WSSW SD9S WSSW 45x-*M-*M	RKSW SD9S RKSW 45x-*M-*M	WKS SD9S WKS 45x-*M-*M	FSSDWE SD9S FSSDWE 45x-*M-*M	FKSDWE SD9S FKSDWE 45x-*M-*M

		eurofast			
		Pin (Male)		Socket (Female)	
		Bare	RSSW/RKSW	WSSW/WKS	RSSW/RKSW
Node	7	D9S	RSSW D9S RKSW 45x-*M-*M	WSSW D9S WKS 45x-*M-*M	FSSDWE D9S FKSDWE 45x-*M-*M
	9	SD9S	RSSW SD9S RKSW 45x-*M-*M	WSSW SD9S WKS 45x-*M-*M	FSSDWE SD9S FKSDWE 45x-*M-*M

See page H54 & H58 Tfor dimensional drawings.

\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSSW...RSSW.

### Pinouts

eurofast	45 series pinout	eurofast	D9
<b>Male</b> 	1. N/C 2. Green (TxD) 3. N/C 4. Red (RxD) 5. Bare (Shield Drain Wire)	<b>Female</b> 	<b>Male</b> 


## PROFIBUS®-DP (M12x1), eurofast® Retractile Cordsets

- Single or Double Ended
- Available in 1, 2, 5 Meter Extended Lengths



Part Number	Specs	Application	Pinouts
RSSW 456SP-1M		(M12x1) eurofast male connector 1 M extended length .25 M retracted length	
RSSW 456SP-2M	PUR (Polyurethane) 250 V, 4 A -40° to +80°C	(M12x1) eurofast male connector 2 M extended length .5 M retracted length	1. NC 2. GN 3. NC 4. RD 5. Drain
RSSW 456SP-5M		(M12x1) eurofast male connector 5 M extended length 1.12 M retracted length	

Single ended cordset part numbers shown. Also available in double ended (M12x1) eurofast connectors.

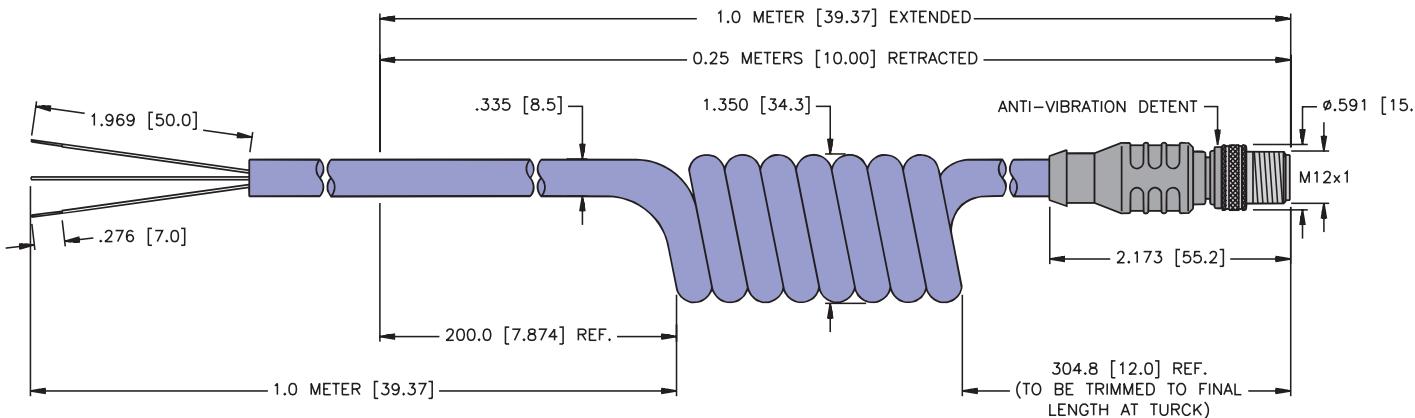

## PROFIBUS®-DP, Field Wireable D9 Connectors

### Specifications - (D9)


<b>Housing:</b>	TPU (Polyurethane)
<b>Terminating Switch:</b>	Yes
<b>Protection:</b>	IEC IP 20
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	5 A
<b>Temperature Rating:</b>	40° to +60°C

\*Max. Cable diameter: 8.5 mm

### Specifications (FKSDWE .. FSFDWE)

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Temperature Rating:</b>	-40° to +75°C


7

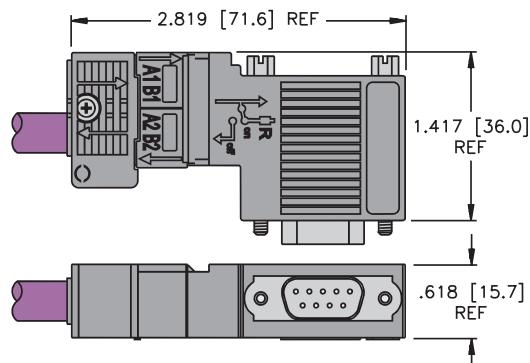

Connector, PDP, D9S

Pages H55 - H56


8

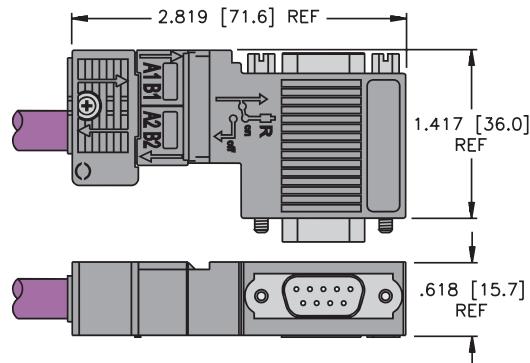

Connector, PDP, D9SM

Pages H55 - H56

9

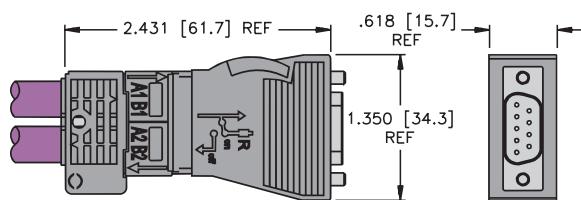


Connector, PDP, SD9S

Pages H55 - H56

Note: Part numbers are for ordering connector only.  
Cable must be ordered separately.


10

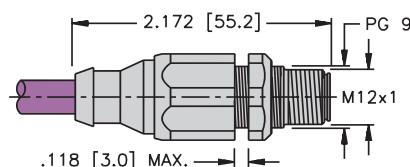

FSSDWE ..

Pages H55 - H56

11




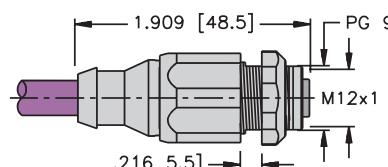


FKSDWE ..

Pages H55 - H56

## PROFIBUS®-DP, Field Wireable D9 Connectors

- Provides Connection to Master or Node in the field
- Maximum Cable O.D. is 8.5 mm

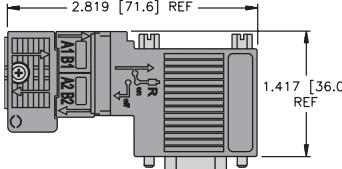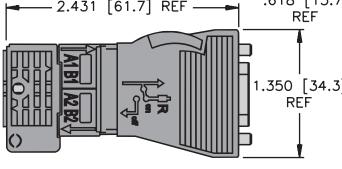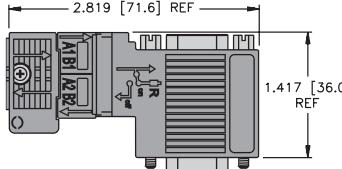Housing	Part Number	Specs	Application	Pinouts
	Connector, PDP, D9S		<i>Right Angle, Terminating Switch</i>	
	Connector, PDP, SD9S	250 V, 5 A -25° to +80°C	<i>Straight, Terminating Switch</i>	<p>1. N/C 2. N/C 3. RD (Bus_B) 4. N/C 5. N/C 6. N/C 7. N/C 8. Green (Bus_A) 9. N/C</p> 
	Connector, PDP, D9SM	250 V, 4 A -25° to +80°C	<i>Right Angle, Master, Terminating Switch</i>	


## PROFIBUS®-DP, Terminating Resistors

- **Terminating Resistors Stabilize and Minimize Reflections on the Bus Line**
- **A Terminating Resistor is Required at the Beginning and End of the Main Bus Line**




Housing	Part Number	Specs	Application	Pinouts
	RSSW 45-TR		<b>eurofast® Terminating Resistor</b> <ul style="list-style-type: none"> <li>• Internal resistor</li> <li>• Male <b>eurofast</b> connector</li> <li>• Reverse keyed</li> </ul>	1. N/C 2. GN 3. N/C 4. RD 5. BARE
	RKSW 45-TR	Nickel Plated Brass or Stainless Steel 250 V, 4 A -40° to +75°C	<b>eurofast</b> Terminating Resistor <ul style="list-style-type: none"> <li>• Internal resistor</li> <li>• Female <b>eurofast</b> connector</li> <li>• Reverse keyed</li> </ul>	1. N/C 2. GN 3. N/C 4. RD 5. BARE
	PDP-TRA		<b>Active Terminating Resistor</b> <ul style="list-style-type: none"> <li>• External power supply <b>minifast®</b> and <b>eurofast</b> connector</li> <li>• LED signal for power status</li> </ul>	1. N/C 2. BUS_A 3. N/C 4. BUS_B 5. N/C
				<b>Male</b> 

**Pinout Diagram, RSSW 45-TR**

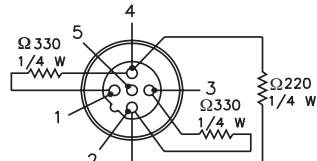


**eurofast Male Connector**

**Pinout Diagram, RKSW 45-TR**

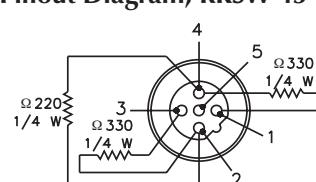

**eurofast Female Connector**

**Pinout Diagram, PDP-TRA**



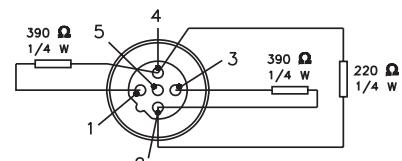


**eurofast Male Connector**

PROFIBUS®-DP, *eurofast*® Feed Through Receptacle

- Provides Bulkhead Panel Mount Connection




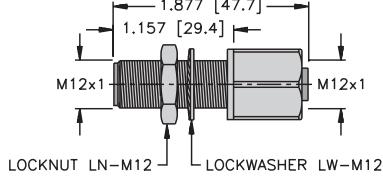




Housing	Part Number	Specs	Application	Pinouts
	FKW FSW 45/M12	Nickel Plated Brass or Stainless Steel 250 V, 4 A -40° to +75°C	<i>eurofast</i> Feed Through Connection <ul style="list-style-type: none"> <li>• Straight male/female connector</li> <li>• For pre-molded reverse keyed <i>eurofast</i> cables</li> </ul>	<b>Male</b>  <b>Female</b> 

## PROFIBUS®-DP, eurofast® Bus Tees


- Creates a Branch from the Main Bus Line

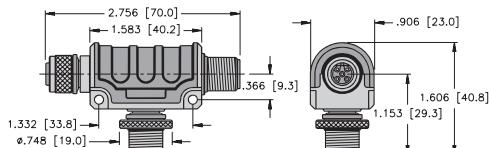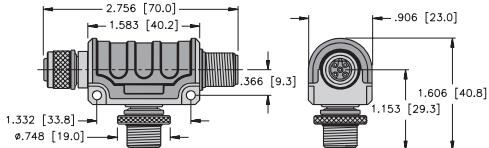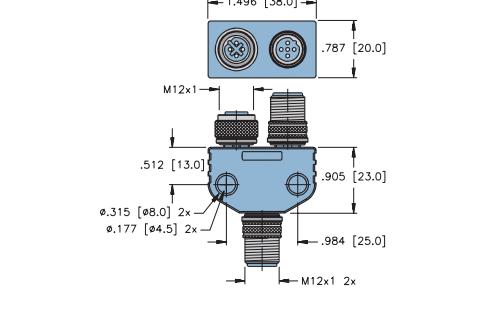

Housing	Part Number	Specs	Application	Wiring Diagrams
	RKS 2RSSW 45		<b>eurofast</b> Bus Tee <ul style="list-style-type: none"> <li>Male <b>eurofast</b> drop connector</li> <li>Fully shielded <b>eurofast</b> tee</li> </ul>	
	* RKS 2RSSW 45-0001	PUR (Polyurethane) Nickel Plated Brass 250 V, 4 A -40° to +75°C	<b>eurofast</b> Terminating Resistor <ul style="list-style-type: none"> <li>Male <b>eurofast</b> connector</li> <li>Fully shielded <b>eurofast</b> tee</li> </ul>	
	VB2/FSW/FKW/FSW 45		<b>Y</b> Junction <ul style="list-style-type: none"> <li>Fully shielded <b>eurofast</b> connectors</li> </ul>	

\* This part must be used when joining two tees together directly. A female terminating resistor will not work with this tee since there is no ground and power connection on the male side.

### Pinouts

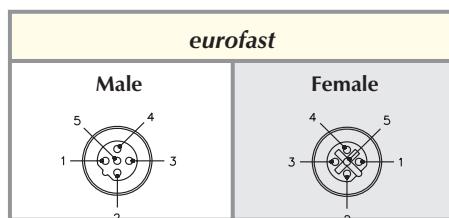

## PROFIBUS®-DP, eurofast® Field Wireable Connectors

- Allows Transition from Hard Wiring to Quick Connection to Network





Housing	Part Number	Specs	Application	Pinouts
	BMSWS 8151-8.5	Nickel Plated Brass PG 9 cable gland, accepts 4-9 mm cable diameter Screw terminal accepts up to 18 AWG conductors 85°C 125 V, 4 A		<b>Male</b> 
	BMSWS 8251-8.5	Nickel Plated Brass PG 9 cable gland, accepts 4-9 mm cable diameter Screw terminal accepts up to 18 AWG conductors 85°C 125 V, 4 A	<ul style="list-style-type: none"> <li>• Metal, fully shielded</li> <li>• Mates with reverse key 5-pin cordsets and receptacles</li> </ul>	
	BMWWS 8151-8.5	Nickel Plated Brass PG 9 cable gland, accepts 4-9 mm cable diameter Screw terminal accepts up to 18 AWG conductors 85°C 125 V, 4 A		<b>Female</b> 
	BMWWS 8251-8.5	Nickel Plated Brass PG 9 cable gland, accepts 4-9 mm cable diameter Screw terminal accepts up to 18 AWG conductors 85°C 125 V, 4 A		

## PROFIBUS®-DP, Circuit Board Connectors and OEM Receptacles

- Provides (M12x1) **eurofast®** Connection to Field Devices




Housing	Part Number	Specs	Application	Pinouts
13	FSFDW 45 PCB		Male <b>eurofast</b> PCB pins	
12	FSFDLW 45		Male <b>eurofast</b> solder cups	
14	WFSW 45 PCB	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	Male <b>eurofast</b> right angle PCB pins	1. N/C 2. GN 3. N/C 4. RD 5. BARE
16	FKFDW 45 PCB		Female <b>eurofast</b> PCB pins	
15	FKFDLW 45		Male <b>eurofast</b> solder cups	


See pages H65 for dimensional drawings.

Standard housing material is nickel plated brass "FKFD ..", "FKFDV .." indicates 316 stainless steel.


**Panel Cutout**  
**FKFD ... FSFD**

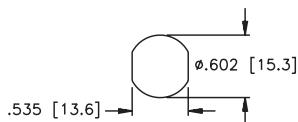


**Board Layout (reference only)**  
**FKFD ... FSFD**

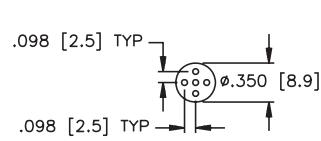


**Panel Cutout**  
**WFS**




**Board Layout (reference only)**  
**WFS**

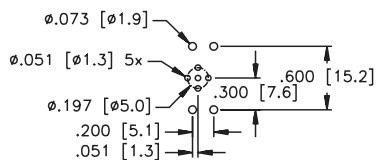

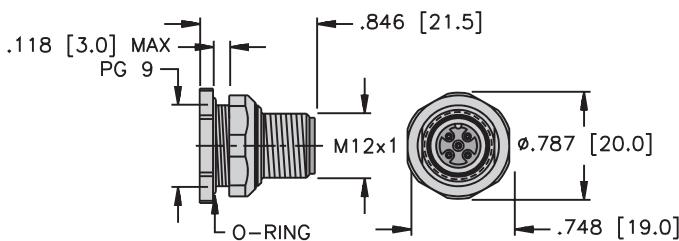**eurofast® PCB Mount Male and Female Receptacles****12**


FSFDLW ..

Page H64

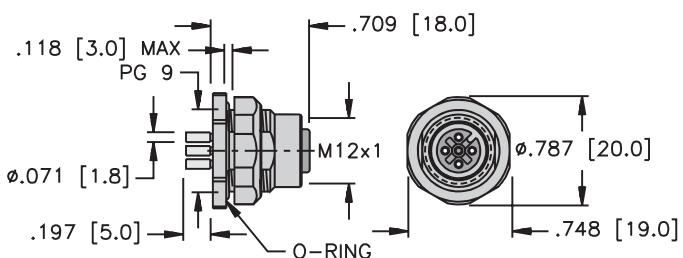**15**


FKFDLW ..

Page H64

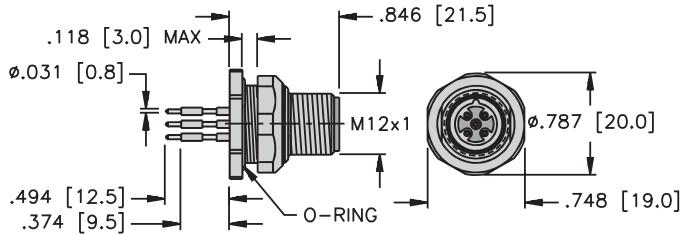**13**


FSFDW ..PCB

Page H64

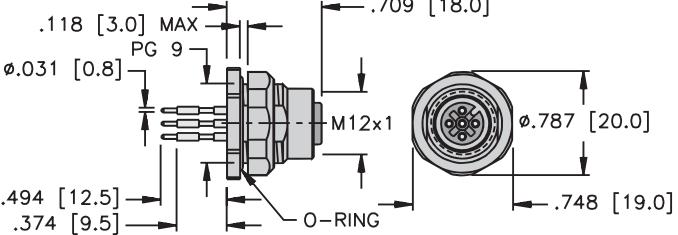**16**

FKFDW ..PCB

Page H64

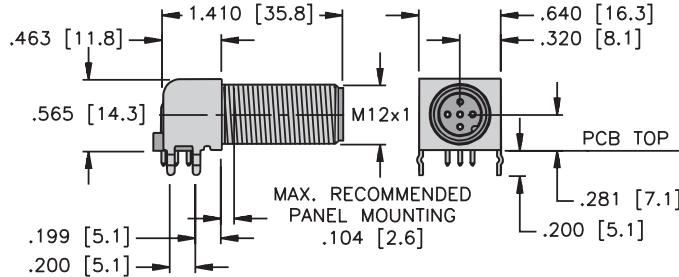**14**

WFSW ..PCB


Page H64

## PROFIBUS®-DP, eurofast® Wall Plate Adapters

- Gasket and Mounting Screws Provided
- For Use with a Single Gang Electrical Box



Part Number	Specs	Application	Pinouts
BPA-45-E113	Stainless Steel 250 V, 4.0 A -40 to +70°C (-40 to +158°F)	Attaches to standard single gang electrical box for transition to 5-wire (M12x1) <b>eurofast</b> connector	

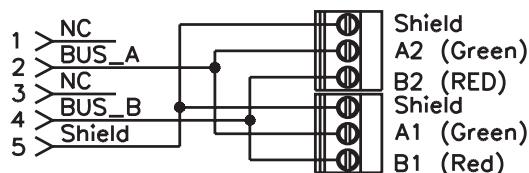


## PROFIBUS®-PA Media Overview

PROFIBUS-PA (Process Automation) uses synchronous transfer mode technology, as defined in IEC 61158-2, to communicate between field devices and the RS 485 backbone of PROFIBUS®-DP. A segment coupler, or gateway is installed to bridge PROFIBUS-DP with PROFIBUS-PA. Otherwise, the protocols are identical, allowing transparent communication between general purpose automation systems and decentralized field devices.

PROFIBUS-PA is a master-slave bus. Transmitters used in the process industry are typically slave devices or passive stations which only communicate at the request of the master.

## General Layout Topologies

The topology for PROFIBUS-DP is a linear bus. Branching can be accomplished with repeaters or, in the case of PROFIBUS-PA, this can be accomplished with the segment couplers. The PROFIBUS-PA topology follows the physical layer as defined in ISA SP50.02. Daisy chain or star topologies are allowed.

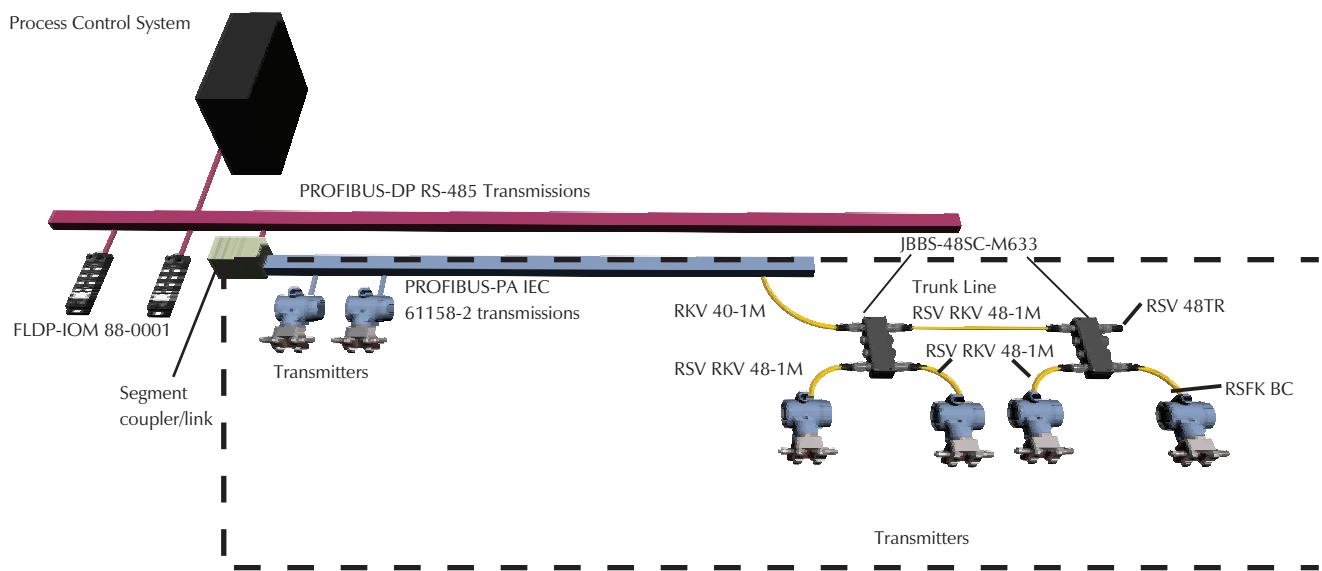

## PROFIBUS®-PA, Cable Specifications

- Cable that Meets the Requirements of ISA/SP50 and PROFIBUS-PA Requirements for Type A Cable**
- All Cables are Rated -40° to +105°C and are Sunlight Resistant**
- Available in 3-wire Versions with a Device Ground or 2-wire Versions**

### Type A Cable Specifications

- Designed for harsh environments
- Temperature range: -40° to +105°C
- Governed by: ISA SP50.02 specification
- Sunlight resistant per test
- PLTC and ITC rated (CSA FT4)
- Impedance [ $Z_0$  at  $f_r$  (31.25 kHz)] = 100 Ohms  $\pm$  20 %
- Maximum attenuation at 1.25  $f_r$  (39 kHz) = 3.0 dB/km
- Maximum capacitive unbalance to shield = 2 nF/km
- Maximum DC resistance (per conductor) = 24 Ohms /km
- Maximum propagation delay variance 0.25  $f_r$  to 1.25  $f_r$  = 1.7  $\mu$ s/km
- Conductor cross-sectional area (wire size) = nominal 0.8 mm<sup>2</sup> (#18 AWG)
- Minimum shield coverage shall be 90%.

Figure A


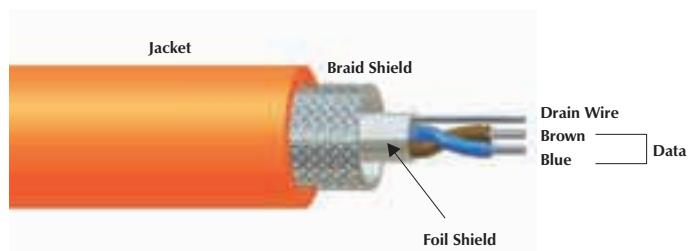


Figure B

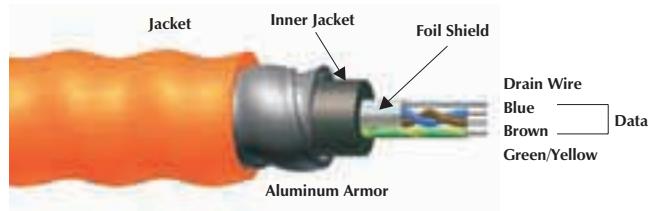

Type	Approvals	Data Pair		Device Ground	Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	Material Color Nominal O.D.	Type Drain Wire		
<b>483</b> 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG]	2/18 AWG BU/BN	6.5 Ohms XLPE	None	PVC Orange 7.9 mm (.310 in)	Foil/Braid 20 AWG	RB50785-*M 59 lbs.	A
<b>483B</b> 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG]	2/18 AWG BU/BN	6.5 Ohms XLPE	None	PVC Blue 7.9 mm (.310 in)	Foil/Braid 20 AWG	RB50786-*M 59 lbs.	A
<b>482A</b> 105°C 300 Volts	NEC ITC PLTC/CM CEC [CMG HLCBD]	2/18 AWG BU/BN	6.5 Ohms PVC	18 AWG GN/YE	Armor/PVC Orange 13.5 mm (0.53 in)	Foil 20 AWG	RB50929-*M 96 lbs.	B
<b>482BA</b> 105°C 300 Volts	NEC ITC PLTC CEC [CMG]	2/18 AWG BU/BN	6.5 Ohms PE	18 AWG GN/YE	Armor/PVC Blue 13.5 mm (0.53 in)	Foil 20 AWG	RB50952-*M 96 lbs.	B
<b>483BK</b> 105°C 300 Volts	NEC ITC PLTC Open Wiring CEC [CMG]	2/18 AWG BU/BN	6.5 Ohms PE	None	PVC Black 7.9 mm (.310 in)	Foil/Braid 20 AWG	RB50860-*M 59 lbs.	A

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.

## PROFIBUS®-PA, Cable and Cordset Selection Matrix

		minifast®				eurofast®				
		Pin (Male)		Socket (Female)		Pin (Male)				
minifast	1		2		3		4		5	
	RSV		WSV		RKV		WKV		RSCV	
		Bare	RSV 48x-*M	WSV 48x-*M	RKV 48x-*M	WKV 48x-*M	RSCV 48x-*M			
	1		RSV RSV 48x-*M	RSV WSV 48x-*M	RSV RKV 48x-*M	RSV WKV 48x-*M	RSV RSCV 48x-*M			
	RSV									
	2			WSV WSV 48x-*M	WSV RKV 48x-*M	WSV WKV 48x-*M	WSV RSCV 48x-*M			
	WSV									
	3				RKV RKV 48x-*M	RKV WKV 48x-*M	RKV RSCV 48x-*M			
	RKV									
eurofast	4					WKV WKV 48x-*M	WKV RSCV 48x-*M			
	WKV									
	5						RSCV RSCV 48x-*M			
	RSCV									
eurofast	6									
	WSCV									
	7									
eurofast	RKCV									
	8									
	WKCV									





See pages H71 - H72 for dimensional drawings.

\* Indicates length in meters.




x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 Meters. Consult factory for other lengths.


minifast		Pinouts	eurofast	
Male	Female		Male	Female
		1. Brown (+ Voltage) 2. N/C 3. Blue (- Voltage) 4. Bare (Shield Drain Wire)		

## PROFIBUS®-PA, Cable and Cordset Selection Matrix

eurofast®			minifast® Bulkhead		eurofast Bulkhead	
Pin (Male)	Socket (Female)		Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)
 6 WSCV	 7 RKCV	 8 WKCV	 9 RSFPV	 10 RKFPV	 11 FSFDV	 12 FKFDV
WSCV 48x-*M	RKCV 48x-*M	WKCV 48x-*M	RSFPV 48x-*M	RKFPV 48x-*M	FSFDV 48x-*M	FKFDV 48x-*M
RSV WSCV 48x-*M	RSV RKCV 48x-*M	RSV WKCV 48x-*M	RSV RSFPV 48x-*M	RSV RKFPV 48x-*M	RSV FSFDV 48x-*M	RSV FKFDV 48x-*M
WSV WSCV 48x-*M	WSV RKCV 48x-*M	WSV WKCV 48x-*M	WSV RSFPV 48x-*M	WSV RKFPV 48x-*M	WSV FSFDV 48x-*M	WSV FKFDV 48x-*M
RKV WSCV 48x-*M	RKV RKCV 48x-*M	RKV WKCV 48x-*M	RKV RSFPV 48x-*M	RKV RKFPV 48x-*M	RKV FSFDV 48x-*M	RKV FKFDV 48x-*M
WKV WSCV 48x-*M	WKV RKCV 48x-*M	WKV WKCV 48x-*M	WKV RSFPV 48x-*M	WKV RKFPV 48x-*M	WKV FSFDV 48x-*M	WKV FKFDV 48x-*M
RSCV WSCV 48x-*M	RSCV RKCV 48x-*M	RSCV WKCV 48x-*M	RSCV RSFPV 48x-*M	RSCV RKFPV 48x-*M	RSCV FSFDV 48x-*M	RSCV FKFDV 48x-*M
WSCV WSCV 48x-*M	WSCV RKCV 48x-*M	WSCV WKCV 48x-*M	WSCV RSFPV 48x-*M	WSCV RKFPV 48x-*M	WSCV FSFDV 48x-*M	WSCV FKFDV 48x-*M
	RKCV RKCV 48x-*M	RKCW WKCW 48x-*M	RKCW RSFPV 48x-*M	RKCW RKFPV 48x-*M	RKCW FSFDV 48x-*M	RKCW FKFDV 48x-*M
		WKCW WKCW 48x-*M	WKCW RSFPV 48x-*M	WKCW RKFPV 48x-*M	WKCW FSFDV 48x-*M	WKCW FKFDV 48x-*M


**PROFIBUS®-PA, minifast® Cordset and Receptacle Connector Dimensions****Specifications**

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40°C to +105°C (-40° to +221°F)

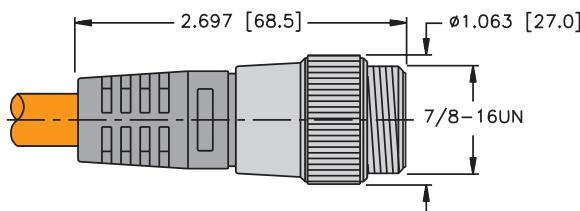
**1**

RSV ..

Pages H69 - H70

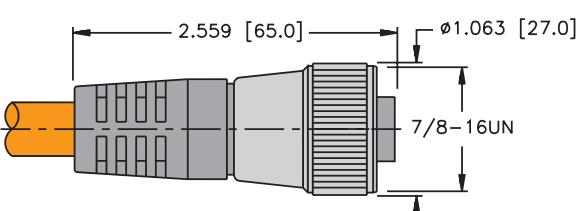
**3**

RKV .. Pages H69 - H70

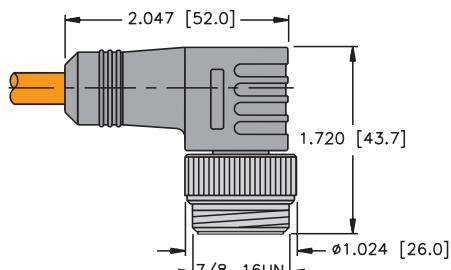
**2**

WSV ..

Pages H69 - H70

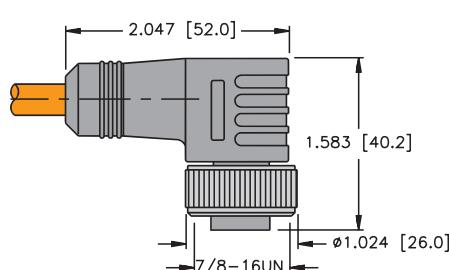
**4**

WKV .. Pages H69 - H70

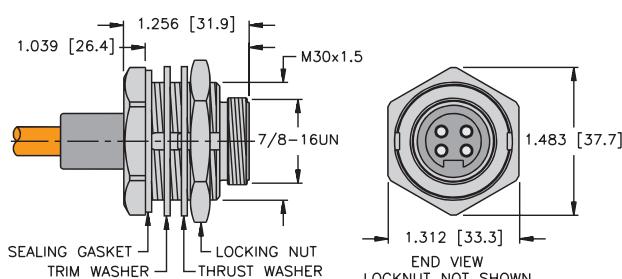**9**

RSFPV ..

Pages H69 - H70

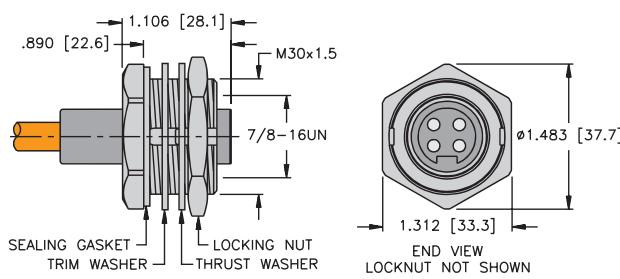**10**

RKFPV ..


Pages H69 - H70

## PROFIBUS®-PA, eurofast® Cordset and Receptacle Connector Dimensions

### Specifications

<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +105°C (-40° to +221°F)


5

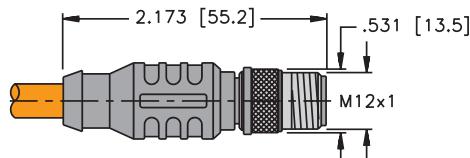

RSCV ..


Pages H69 - H70

7

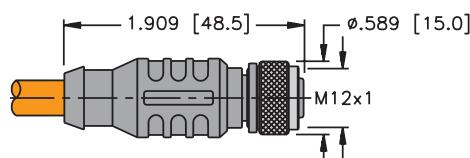

Pages H69 - H70


6

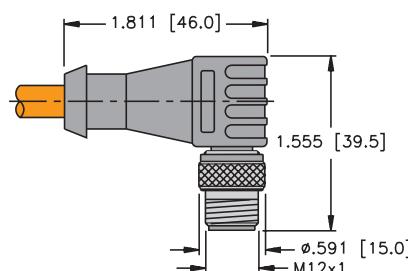

WSCV ..


Pages H69 - H70

8

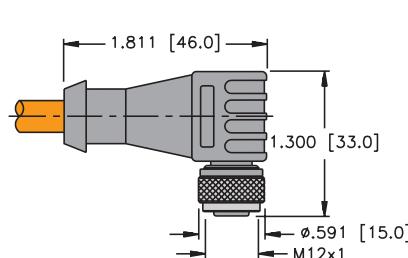

Pages H69 - H70


11

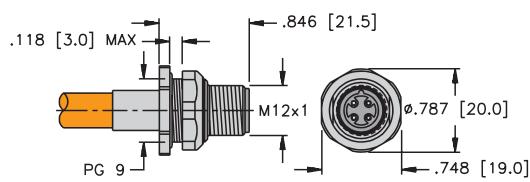

FSFDV ..

Pages H69 - H70

12

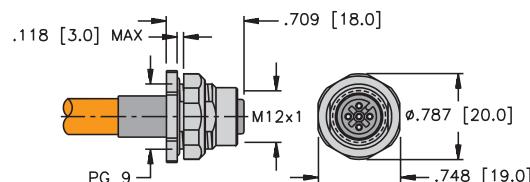





FKFDV ..

Pages H69 - H70

## PROFIBUS®-PA, Terminating Resistors

- **Terminating Resistors Stabilize and Minimize Reflections on the Bus Line**
- **A Terminating Resistor is Required at the Beginning and End of the Main Bus Line**

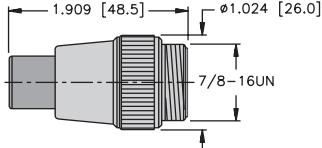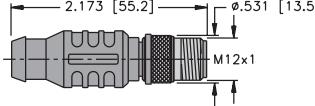

Housing	Part Number	Specs	Application	Pinouts
	RSV 48-TR	Nickel Plated Brass or Stainless Steel 300 V, 9 A -40° to +75°C	<b>minifast®</b> Terminating Resistor • Male <b>minifast</b> connector	<b>Male</b> 
	RSEV 48-TR	Nickel Plated Brass or Stainless Steel 250 V, 4 A -40° to +75°C	<b>eurofast®</b> Terminating Resistor • Male <b>eurofast</b> connector	<b>Male</b> 

## PROFIBUS®-PA, Feed Through Connectors


- Receptacles Provide Transition from Male to Female Connectors
- Available for Bulkhead and Feed Through Applications




Housing	Part Number	Specs	Application	Pinouts
	RSFV RKFV 48/22	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +75°C	<b>minifast®</b> Bulkhead Receptacle <ul style="list-style-type: none"> <li>• Straight male/female feed through</li> <li>• For use with DeviceNet <b>minifast</b> cordsets</li> </ul>	
	FKV FSV 48/M12	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	<b>eurofast®</b> Feed Through Connection <ul style="list-style-type: none"> <li>• straight male/female connector</li> <li>• for pre-molded <b>eurofast</b> cables</li> </ul>	

Standard housing material is nickel plated brass. "RSF RKF..", "RSFV RKFV.." indicates stainless steel housing.

**Panel Cutout**  
**RSFV RKFV 48/22**

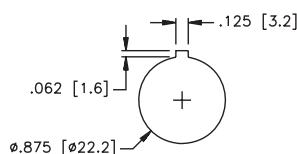

**Panel Cutout**  
**FKV FSV 48/M12**



PROFIBUS®-PA, *minifast*® Passive Multiport Junctions (Bricks)

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48-M413	No short-circuit protection	4-port Junction	
JBBS-48SC-M413	<b>Electrical</b> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA (Isc)</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <b>Diagnostic</b> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	4-port Junction <ul style="list-style-type: none"> <li>Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>Four (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-48-M613	No short-circuit protection	6-port Junction	
JBBS-48SC-M613	<b>Electrical</b> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA (Isc)</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <b>Diagnostic</b> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	6-port Junction <ul style="list-style-type: none"> <li>Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>Six (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-48-M813	No short-circuit protection	8-port Junction	
JBBS-48SC-M813	<b>Electrical</b> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA (Isc)</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <b>Diagnostic</b> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	8-port Junction <ul style="list-style-type: none"> <li>Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>Eight (7/8-16UN) <i>minifast</i> connectors for field devices</li> <li>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	

## Specifications



<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions



**8-Port**

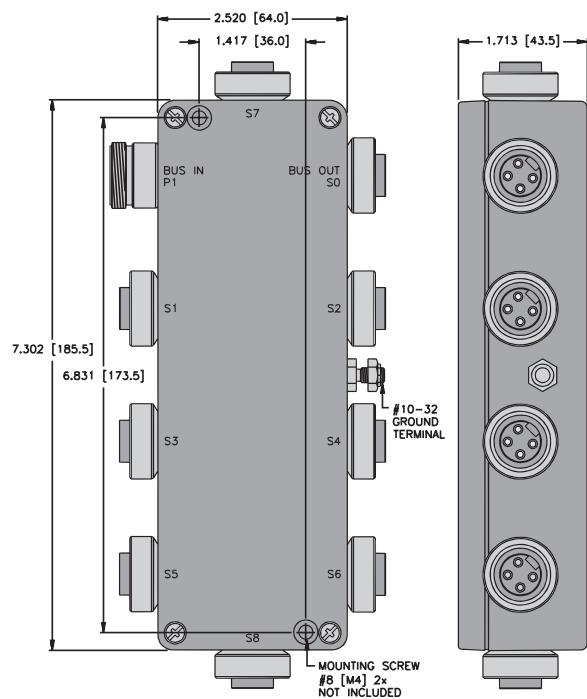

**6-Port**

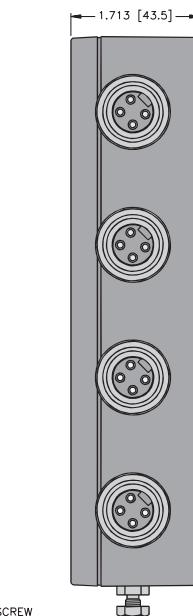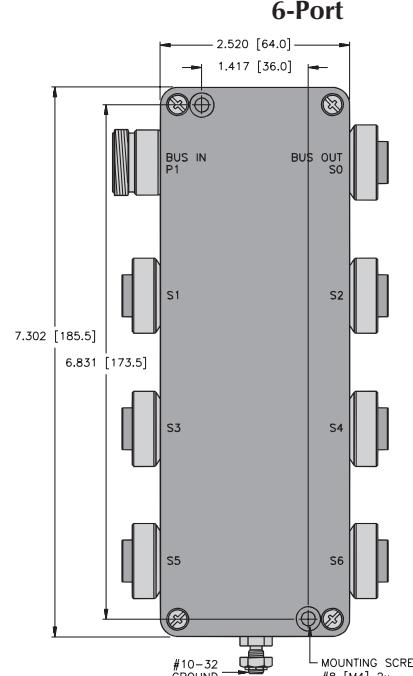


**4-Port**

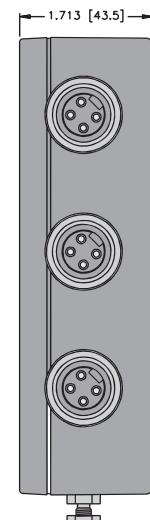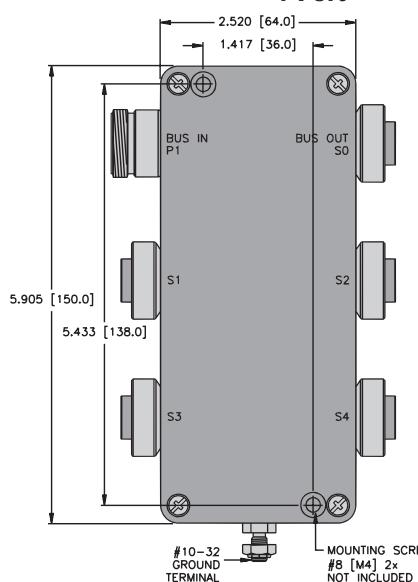

## Pinouts

*minifast*

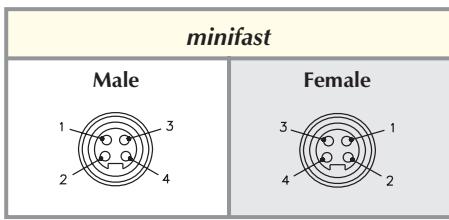

PROFIBUS®-PA, *minifast*® Passive Multiport Junctions (Bricks)

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48-M423	No short-circuit protection Fiberglass housing	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Four (7/8-16UN) <i>minifast</i> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	
JBBS-48-M623	No short-circuit protection Fiberglass housing	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <i>minifast</i></li> <li>• Six (7/8-16UN) <i>minifast</i> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	


## Specifications

<b>Housing:</b>	Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

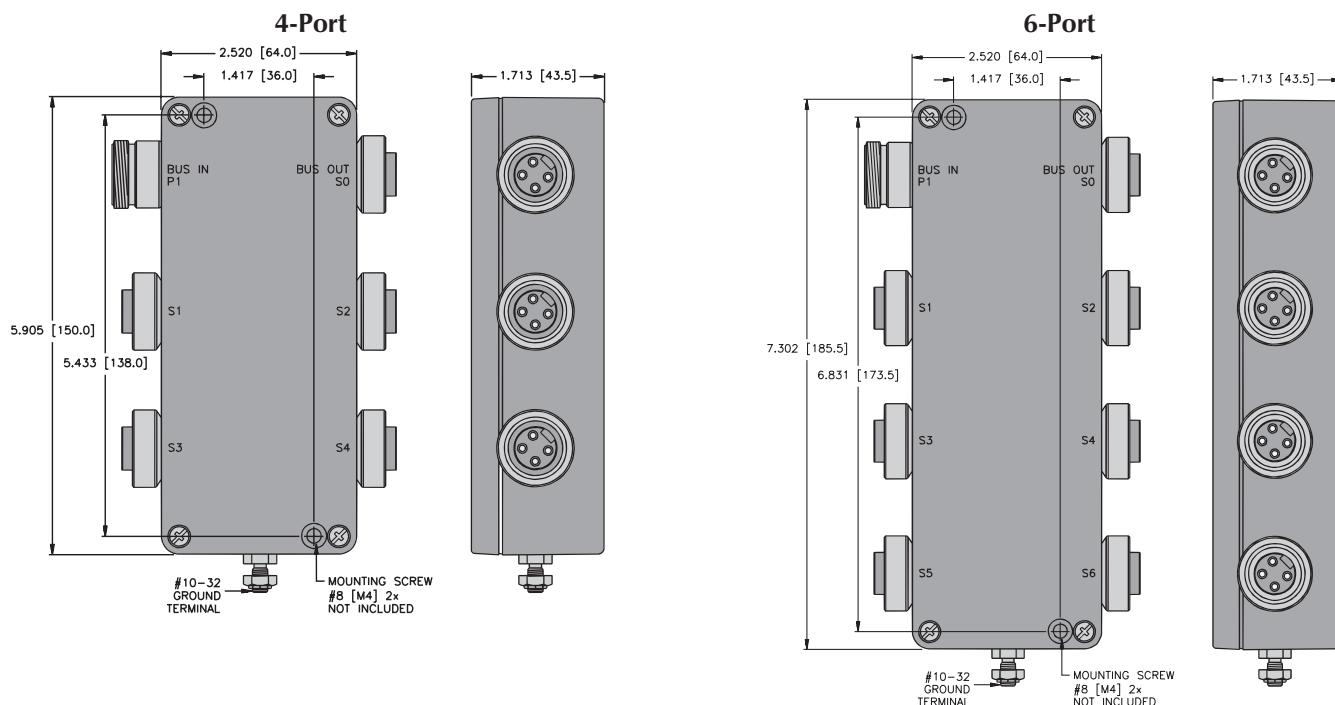

## Pinouts

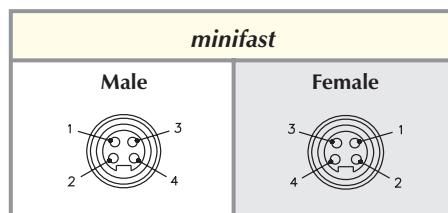

## PROFIBUS®-PA, eurofast® Passive Multipoint Junctions (Bricks)

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48-E413	No short-circuit protection	4-port Junction	
JBBS-48SC-E413	<b>Electrical</b> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA (Isc)</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <b>Diagnostic</b> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	4-port Junction <ul style="list-style-type: none"> <li>Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>Four (M12x1) <b>eurofast</b> connectors for field devices</li> <li>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	
JBBS-48-E613	No short-circuit protection	6-port Junction	
JBBS-48SC-E613	<b>Electrical</b> <ul style="list-style-type: none"> <li>Short-circuit protection: 55 mA (Isc)</li> <li>Open circuit voltage: 35 VDC</li> <li>Current consumption: 5 mA</li> </ul> <b>Diagnostic</b> <ul style="list-style-type: none"> <li>LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	6-port Junction <ul style="list-style-type: none"> <li>Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>Six (M12x1) <b>eurofast</b> connectors for field devices</li> <li>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

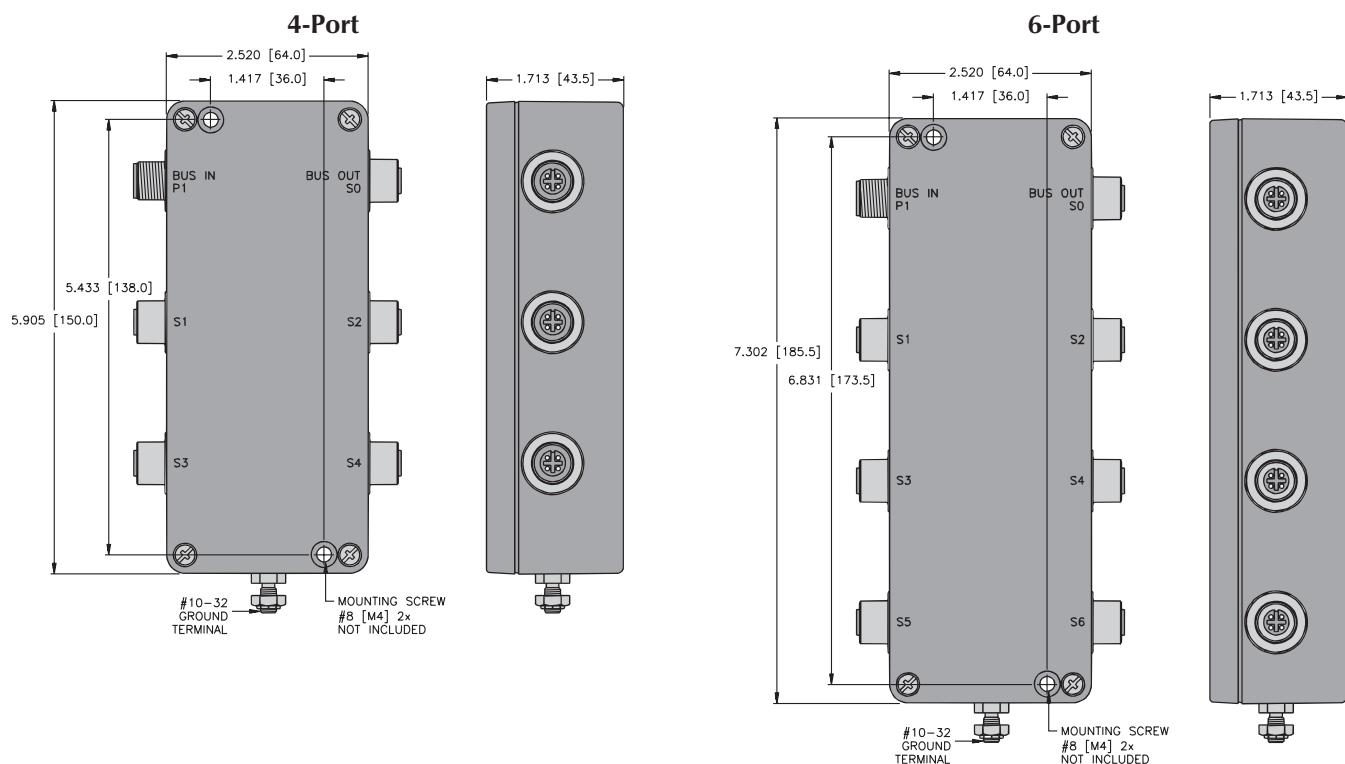

## Pinouts

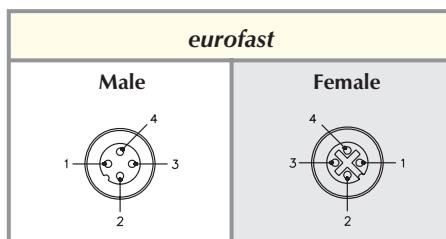

## PROFIBUS®-PA, eurofast® Passive Multiport Junctions (Bricks)

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48-E813	No short-circuit protection		
JBBS-48SC-E813	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Short-circuit protection: 55 mA (Isc)</li> <li>• Open circuit voltage: 35 VDC</li> <li>• Current consumption: 5 mA</li> </ul> <p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> </ul>	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field devices</li> <li>• CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

### 8-Port

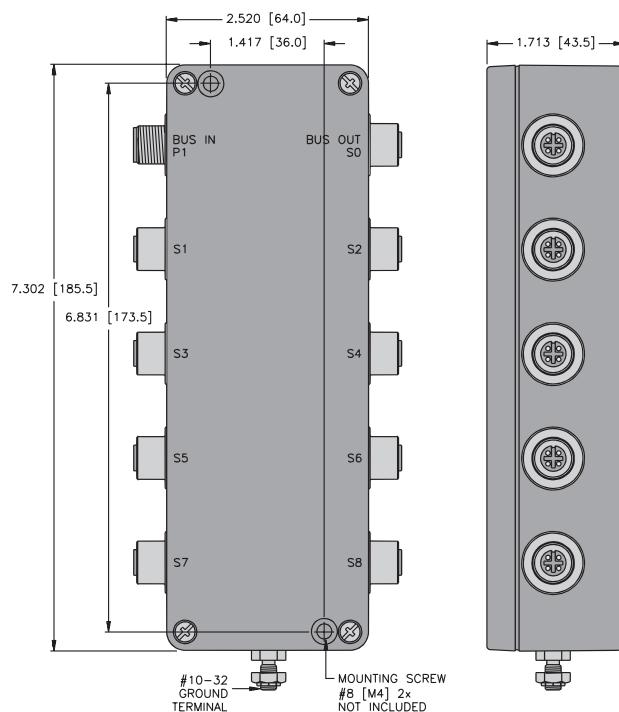

## Pinouts

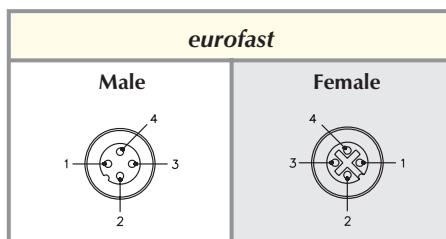

## PROFIBUS®-PA, eurofast® Passive Multipoint Junctions (Bricks), Short-Circuit Protected

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48SC-E613/EX	<p><b>Diagnostic</b></p> <ul style="list-style-type: none"> <li>• LED indicators Power: Green = On Short-circuit: Red = Shorted</li> <li>• Short-Circuit Protection <math>\leq 35</math> mA</li> <li>• Current consumption <math>\leq 7</math> mA</li> <li>• Voltage drop <math>\leq 0.3</math> V</li> </ul>	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six (M12x1) <b>eurofast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only) FISCO/ENTITY Field Device</p>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

### 6-Port

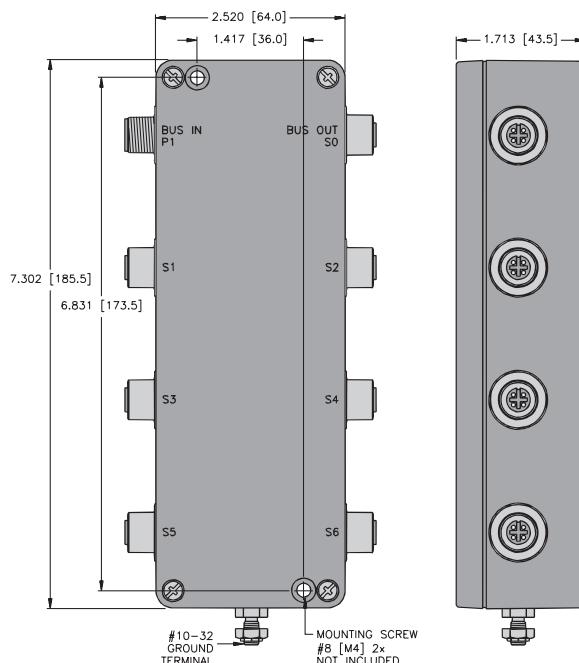

## Pinouts

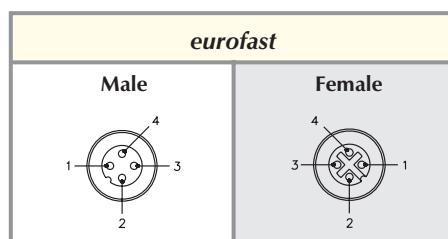

## PROFIBUS®-PA, eurofast® Passive Multiport Junctions (Bricks)

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48-E414	No short-circuit protection	<p>4-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Four (M12x1) <b>eurofast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	
JBBS-48-E614	No short-circuit protection	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Six (M12x1) <b>eurofast</b> connectors for field devices</li> </ul> <p>CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</p>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

**4-Port**

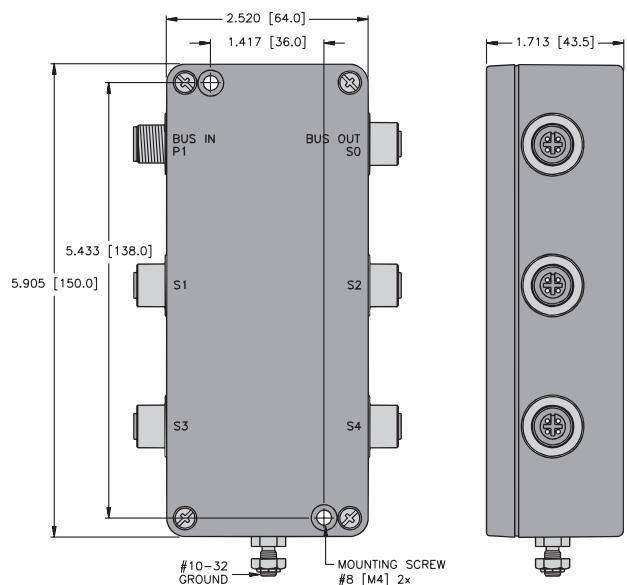

**6-Port**

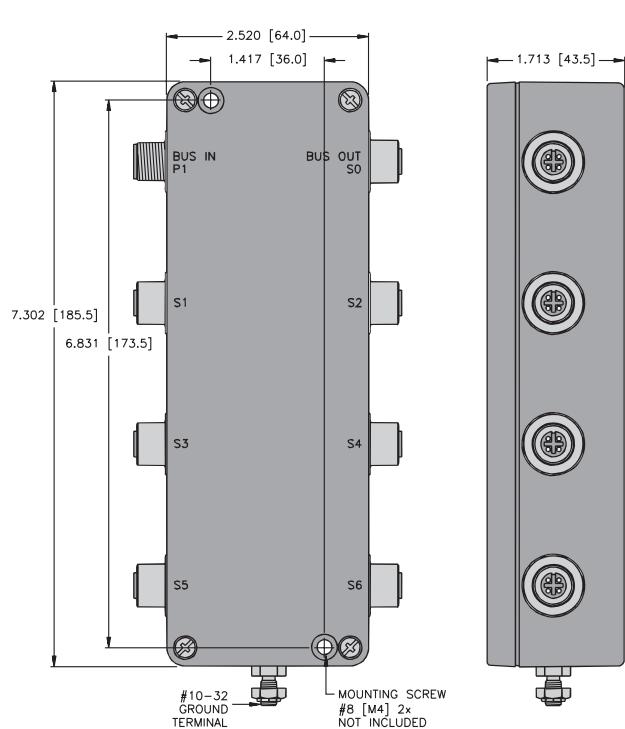

## Pinouts

eurofast	
Male	Female
1 2 3 4	4 3 2 1

## PROFIBUS®-PA, eurofast® Passive Multiport Junctions (Bricks)

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagrams
JBBS-48-E814	No short-circuit protection	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (M12x1) <b>eurofast</b></li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field devices CL I, Div 2; Groups A-D see TURCK drawing N1-2.400 T6, Ta = 70°C (SC Only)</li> </ul>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-40° to +167°F)

## Dimensions

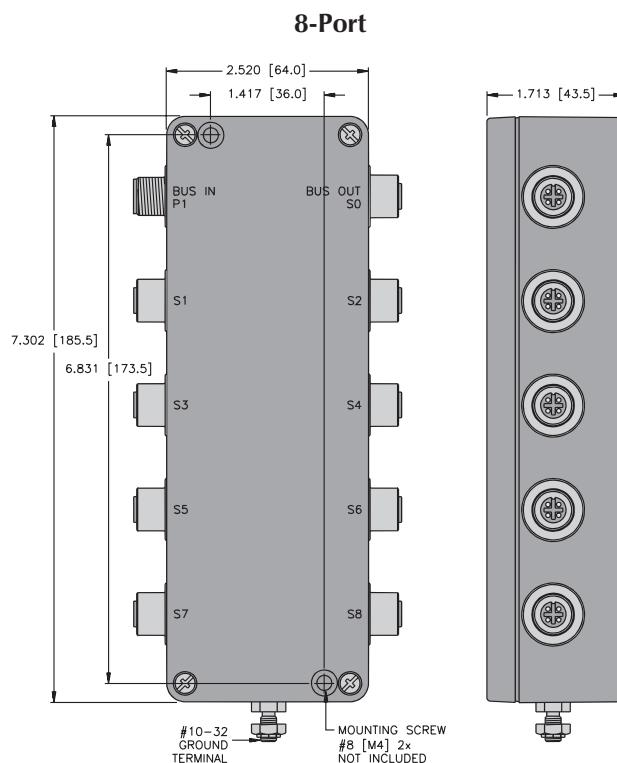

## Pinouts

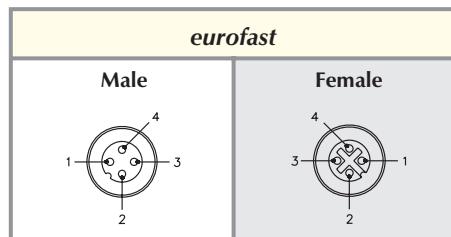


PROFIBUS®-PA, *minifast*® Conduit Adapters

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 48-M123	Nylon Housing 300 V, 9 A -40° to +75°C	Attaches to standard conduit body* for transition to 4-wire (7/8-16UN) <i>minifast</i> connector  *Crouse-Hinds 3/4" Form 8, or Mark 9 or equivalent.	<b>Male</b> 
	BCA 48-M223		Attaches to standard conduit body* for transition to 4-wire (7/8-16UN) <i>minifast</i> connector  *Crouse-Hinds 3/4" Form 8, or Mark 9 or equivalent.	

1-port Wiring Diagram



2-port Wiring Diagram

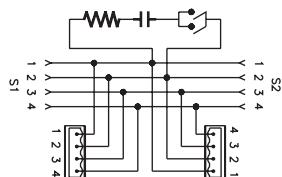


## PROFIBUS®-PA, eurofast® Conduit Adapters

- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 48-E123	Nylon Housing 250 V, 4 A -40° to +75°C	Attaches to standard conduit body* for transition to 4-wire (M12x1) <b>eurofast</b> connector  *Crouse-Hinds 3/4" Form 8, or Mark 9 or equivalent.	<b>Female</b> 
	BCA 48-E223		Attaches to standard conduit body* for transition to 4-wire (M12x1) <b>eurofast</b> connector  *Crouse-Hinds 3/4" Form 8, or Mark 9 or equivalent.	

1-port Wiring Diagram



2-port Wiring Diagram

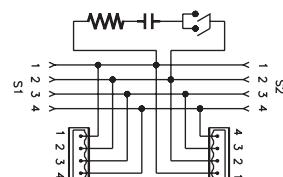

## PROFIBUS®-PA, Tees

- Creates a Drop or Branch from the Main Bus Line
- *minifast*® Connectors on Bus or Drop Lines



Housing	Part Number	Specs	Application	Wiring Diagrams
	RSV 2RKV 48		<b>minifast Tee</b> <ul style="list-style-type: none"> <li>• Data, ground, shield</li> <li>• Stainless steel coupling nuts</li> </ul>	
	RSV FKV RKV 48	PUR (Polyurethane) 250 V, 4 A -40° to +75°C	<b>minifast to eurofast® Drop</b> <ul style="list-style-type: none"> <li>• Data, ground, shield</li> <li>• Stainless steel coupling nuts</li> </ul>	
	RS CS 2RKCS 48		<b>eurofast Tee</b> <ul style="list-style-type: none"> <li>• Stainless steel coupling nuts</li> </ul>	

## Pinouts

<i>minifast</i>		<i>eurofast</i>	
Male	Female	Male	Female


## PROFIBUS®-PA, Gender Changers and Elbow Connectors

- Allows Quick and Easy Changes from Male to Female **minifast®** Connectors



Housing	Part Number	Specs	Application
	RSV RSV 48		Male <b>minifast</b> Gender Changer <ul style="list-style-type: none"> <li>• Changes female cordset to male receptacle</li> </ul>
	RKV RKV 48	TPU (Polyurethane) 250 V, 4 A -40° to +75°C	Female <b>minifast</b> Gender Changer <ul style="list-style-type: none"> <li>• Changes female cordset to male receptacle</li> </ul>
	WSV RKV 48		<b>minifast</b> Elbow <ul style="list-style-type: none"> <li>• Right angle male to female connector</li> </ul>



### Pinouts

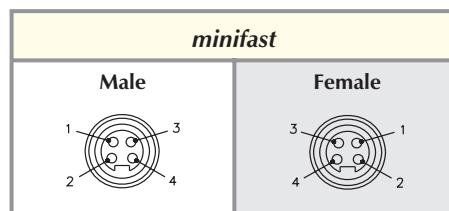


## PROFIBUS®-PA, Surge Suppressor

- Protects Data Communication Lines (V+ and V-)
- Absorbs the Front End of the Transient, Responding in Less Than a Nanosecond
- Diverts the Surge Energy to Ground
- Automatically Resets and waits for Next Surge



Housing	Part Number	Specs	Application	Pinouts
See Drawing 1	RSV RKV 48 SS	<p><b>Electrical</b></p> <ul style="list-style-type: none"> <li>• Maximum operating voltage: 27 Volts</li> <li>• Maximum operating current: 200 mA</li> <li>• Clamping Action Turn-on: 28.5 Volts</li> <li>• Maximum clamping at 2 kA: (8 x 20 Sec): 44 Volts</li> <li>• Maximum surge voltage: 20 kV</li> <li>• Maximum surge current: 2.5 kA</li> <li>• Current leakage/line at operating voltage: 5 A</li> <li>• Capacitance /line at operating voltage: 500 pF</li> <li>• Response time: Less than 1 nanosecond</li> </ul> <p><b>Mechanical</b></p> <ul style="list-style-type: none"> <li>• Ground Stud: 10-32 stainless steel</li> <li>• Operating temperature: -40° to +85°C</li> </ul>	Male and female <i>minifast</i> ®, 4-pin	 <b>Male</b>  <b>Female</b>

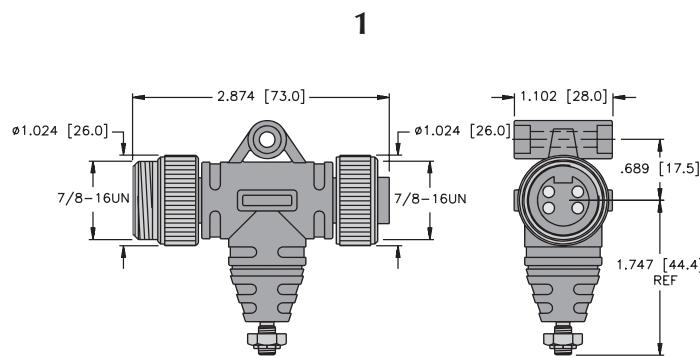


## PROFIBUS®-PA, Field Wireable Tee

- A Hybrid Connection System Offering Reliable Connections on the Short Drops and Ease of Installation on the Long Trunk Runs
- Features Standard *minifast*® Connector for the Drop Connection and Terminal Connectors on the Trunk Connections




Housing Style	Part Number	Specs	Application	Pinout
See Drawing 1	SPTT1-A48	Anodized Aluminum 250 V, 4 A -40° to +75°C NEMA 1, 3, 4, 6P and IEC IP 68	(7/8-16UN) <i>minifast</i> connector for drop connection, and field wireable terminals on the trunk connections.	Female 
See Drawing 2	SPTTM13-A48			

1

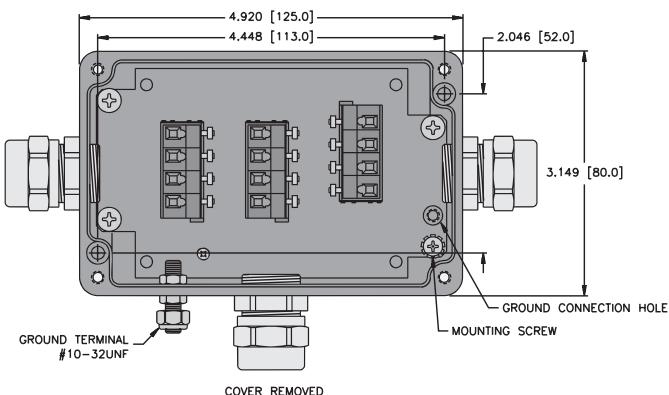

2

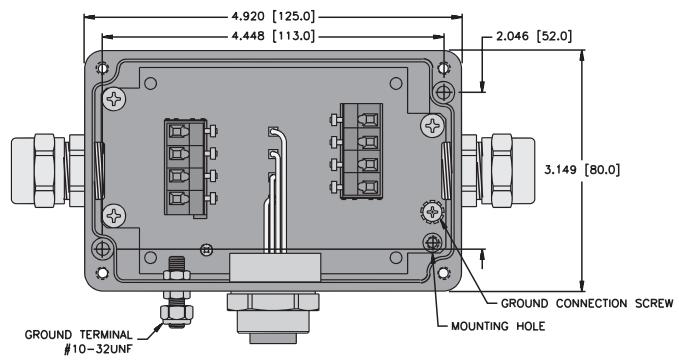

PROFIBUS®-PA, (7/8-16UN) *minifast*® Male Receptacles

- Provides Quick Connection to Field Devices
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
13 	RSFV 48-*M/14.5		1/2-14NPT full length threads	
15 	RSFV 48-*M/14.75		3/4-14NPT full length threads	
14 	RSFV 48-*M/M20	Nickel Plated CuZn or Stainless Steel 600 V, 9 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. N/C
16 	RSFV 48-*M		1/2-14NPSM threads	
17 	RSFV 48-*M/NPT		1/2-14NPT modified length threads	


See page H99 for dimensional drawings.

Standard cable length is 0.3 Meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; indicates 316 stainless steel housing.

For locknuts to be included, add "W/LN" to the end of the part number.




## PROFIBUS®-PA, (7/8-16UN) *minifast*® Female Receptacles

- Provides Quick Connection to Field Devices
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
18 	RKFV 48-*M/14.5		1/2-14NPT full length threads	
20 	RKFV 48-*M/14.75		3/4-14NPT full length threads	
19 	RKFV 48-*M/M20	Nickel Plated CuZn or Stainless Steel 600 V, 9 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. GY
21 	RKFV 48-*M		1/2-14NPSM threads	
22 	RKFV 48-*M/NPT		1/2-14NPT modified length threads	



See page H100 for dimensional drawings.

Standard cable length is 0.3 Meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; indicates 316 stainless steel housing.


For locknuts to be included, add "W/LN" to the end of the part number.

## PROFIBUS®-PA, (M12x1) eurofast® Male Receptacles

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinout
23 	FSV 48-*M/14.5		1/2-14NPT full length threads	
25 	FSV 48-*M/14.75		3/4-14NPT full length threads	
24 	FSV 48-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. N/C
26 	FSV 48-*M		PG 9 threads	
27 	FSV 48-*M/NPT		1/2-14NPT modified length threads	



See page H101 for dimensional drawings.

Standard cable length is 0.3 Meters. Consult factory for other lengths.

Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.


Standard housing material is nickel plated brass. "RKF .."; indicates 316 stainless steel housing.

## PROFIBUS®-PA, (M12x1) eurofast® Female Receptacles

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14 NPT, 1/2-14 NPSM, 3/4-14 NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
28	FKV 48-*M/14.5		1/2-14NPT full length threads	
30	FKV 48-*M/14.75		3/4-14NPT full length threads	
29	FKV 48-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. BN 2. N/C 3. BU 4. GY
31	FKV 48-*M		PG 9 threads	
32	FKV 48-*M/NPT		1/2-14NPT modified length threads	








See page H102 for dimensional drawings.

Standard cable length is 0.3 Meters. Consult factory for other lengths.


Receptacles require a 13/16" (21 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; indicates 316 stainless steel housing.

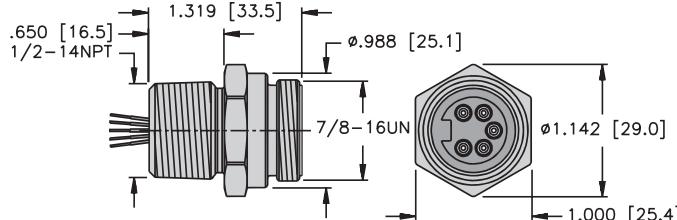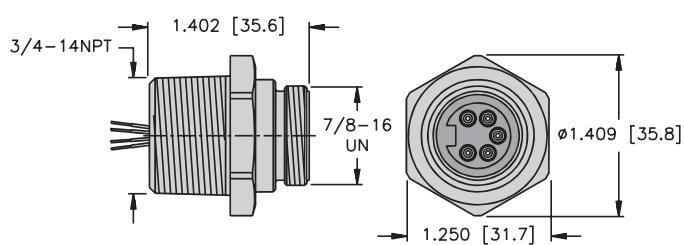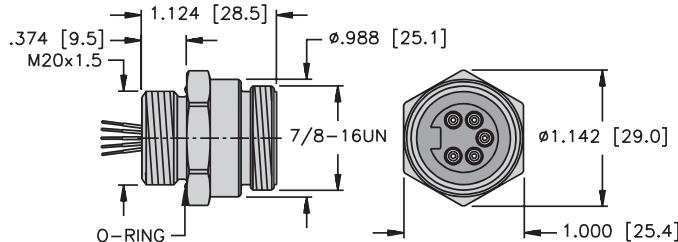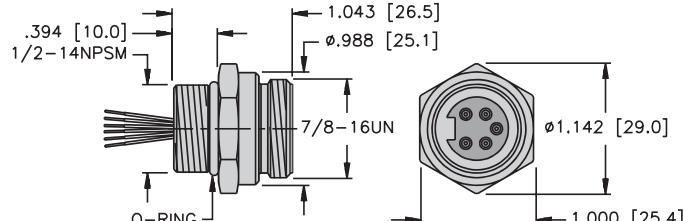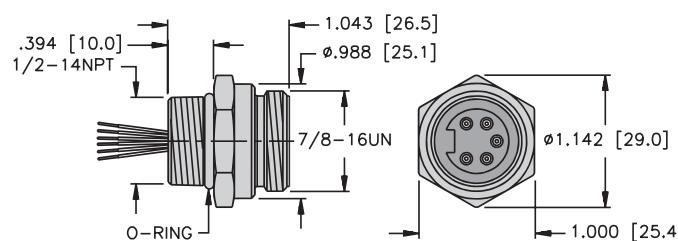**minifast® Male Receptacles****13****RSFV .. 14.5****Page H95****15****Page H95****14****RSFV .. M20****Page H95****16****Page H95****17****RSFV .. NPT****Page H95**

**minifast® Female Receptacles**


**18**

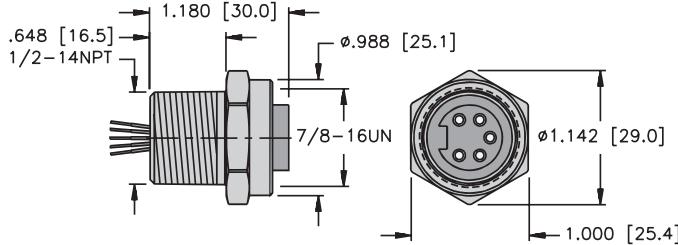

RKFV .. 14.5

Page H96


**20**

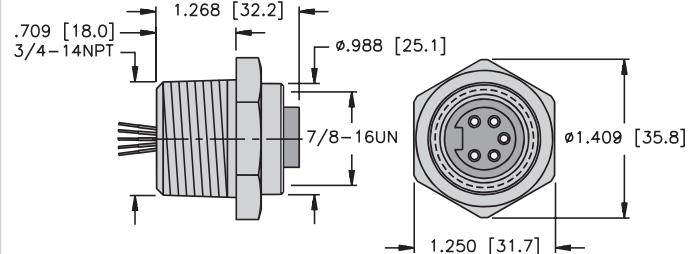

RKFV .. 14.75

Page H96


**19**

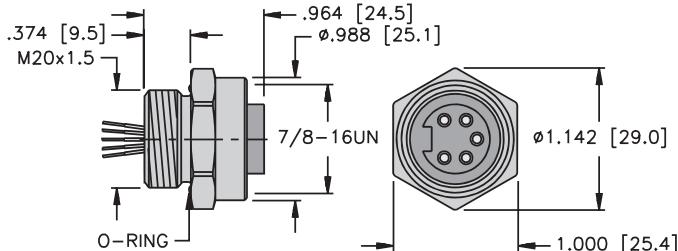

RKFV .. M20

Page H96


**21**

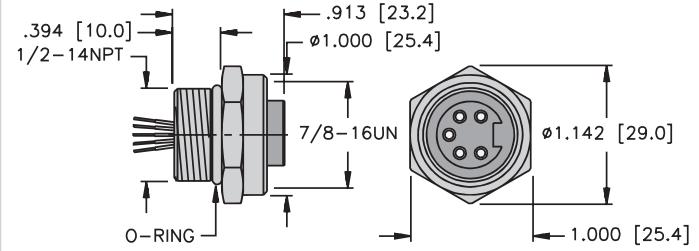

RKFV ..


Page H96

**22**

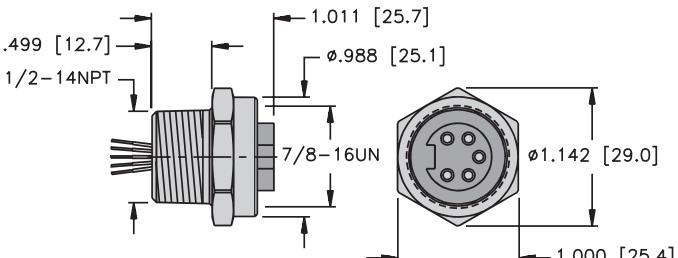


RKFV .. NPT

Page H96

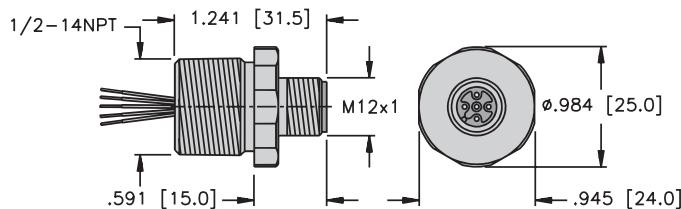**eurofast® Male Receptacles****23**


FSV .. 14.5

Page H97

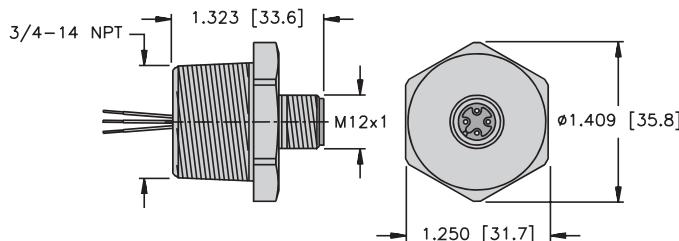**25**


FSV .. 14.75

Page H97

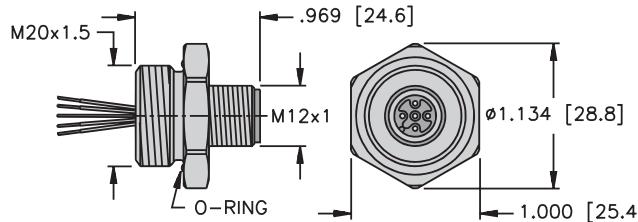**24**


FSV .. M20

Page H97

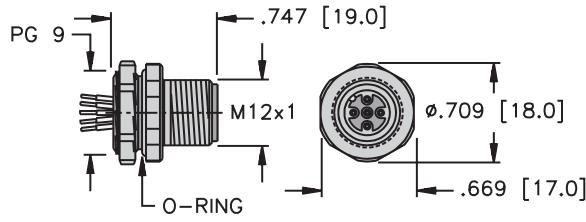**26**

FSV ..

Page H97

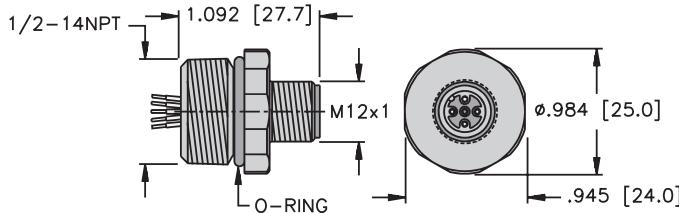
**27**

FSV .. NPT

Page H97

**eurofast® Female Receptacles**


**28**

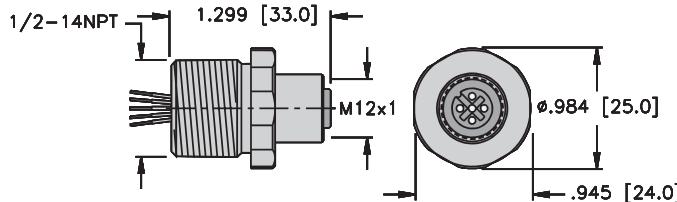

**FKV .. 14.5**

**Page H98**


**30**

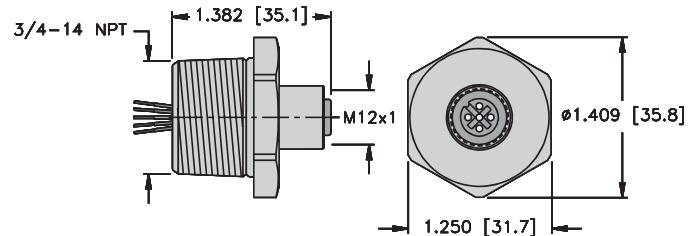

**FKV .. 14.75**

**Page H98**


**29**

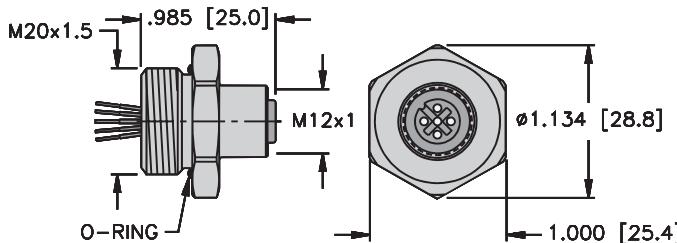

**FKV .. M20**

**Page H98**


**31**

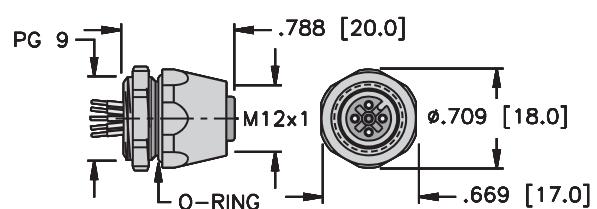

**FKV ..**

**Page H98**

**32**

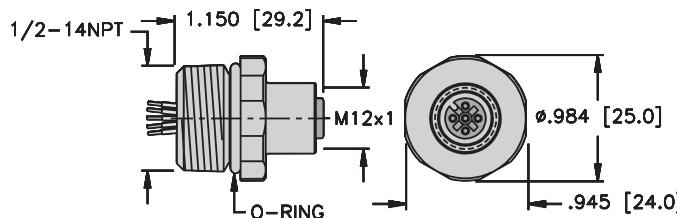

**FKV .. NPT**

**Page H98**

PROFIBUS®-PA, *minifast*® Field Wireable Connectors

- Screw Terminals Accept up to 16 AWG Conductors



Housing	Part Number	Specs	Application	Pinout
	BS 4148-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter 85°C 250 V, 9 A	Mates with all 4-pin <b>minifast</b> cordsets and receptacles	<b>Female</b> 
	BS 4148-0/13.5	Glass filled nylon PG 13.5 cable gland accepts 10-12 mm cable diameter 85°C 250 V, 9 A		
	B 4148-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter 85°C 250 V, 9 A	Mates with all 4-pin <b>minifast</b> cordsets and receptacles	<b>Male</b> 
	B 4148-0/13.5	Glass filled nylon PG 13.5 cable gland accepts 10-12 mm cable diameter 85°C 250 V, 9 A		

For stainless steel coupling nuts change part number BS ... to BSV ...

## PROFIBUS®-PA, eurofast® Field Wireable Connectors

- Screw Terminals Accept up to 18 AWG Conductors





Housing	Part Number	Specs	Application	Pinouts
	BS 8141-0/PG9	PBT, Black PG 7 cable gland, accepts 4-8 mm cable diameter 85°C 125 V, 4 A		<b>Male</b> 
	BS 8241-0/PG9	PBT, Black PG 7 cable gland, accepts 4-8 mm cable diameter 85°C 125 V, 4 A	Mates with standard key 4-pin eurofast cordsets and receptacles	
	B 8141-0/PG9	PBT, Black PG 7 cable gland, accepts 4-6 mm cable diameter 85°C 250 V, 4 A		<b>Female</b> 
	B 8241-0/PG9	PBT, Black PG 7 cable gland, accepts 4-6 mm cable diameter 85°C 250 V, 4 A		


## PROFIBUS®-PA, Gender Changers and Elbow Connectors

- Allows Quick and Easy Changes from Male to Female and *minifast*® to *eurofast*® Connectors

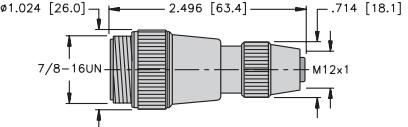

Housing	Part Number	Specs	Application	Wiring Diagram
	RSM 48-FK 4.5	Nickel plated brass CuZn or Stainless Steel 250 V, 4 A -40° to +80°C	Female <i>eurofast</i> , male <i>minifast</i> , 4-pin	

## Pinouts

<i>minifast</i>	<i>eurofast</i>
Male	Female
	

# Process Automation



Notes:

## DeviceNet™ Selection Guide



AIM	Page
Discrete Input	J11-J13, J29, J37
Discrete Output	J27, J39
Discrete Input & Output	J15-J25, J31-J35, J41-J43
Analog	J45 - J47
Master	J49
Repeater	J51
Spanner	J53

FDN20	Page
Discrete Input & Ouput	J59 - J67

OEM	Page
Discrete Input & Ouput	J69 - J71



Operator Station	Page
Discrete Input & Ouput	J73

Gateways	Page
BL67	J76
BL20	J78
AS-I	J81



Cables	Flat Cable Connectors	Terminating Resistors	Feed Through Connectors
J84 - J93	J94	J95	J96



Junctions	Adapters	Tees	Gender Changers
J97 - J119	J121 - J123	J124 - J127	J128 - J129



Receptacles	Field Wireable Connectors	Power Taps	Daisy Chain Cordsets
J130 - J142	J143 - J144	J145	J147

## DeviceNet™ System Description


DeviceNet is a low-cost communications protocol that eliminates hard wiring and connects industrial devices such as limit switches, photoelectric sensors, valve manifolds, motor starters, process sensors, bar code readers, variable frequency drives, panel displays and operator interfaces to a network. DeviceNet's direct connection provides improved communication between devices, as well as important device-level diagnostics not easily accessible or available through hard-wired I/O interfaces.

DeviceNet is based on the Controller Area Network (CAN) broadcast-oriented communication architecture. CAN uses a bus arbitration method, CSMA/BA, that assures the highest priority message always gets use of the bus in the event of a data collision. The DeviceNet protocol further defines message priorities such that I/O messages are given top priority and configuration messages have lower priority.

A DeviceNet network supports up to 64 nodes and virtually an unlimited amount of I/O. The bus uses a trunkline/dropline topology, where bus power and communication are supplied on a single cable. Bus power is 24 VDC and supplies current to operate the nodes and (typically) power input devices. Some **TURCK** stations require an additional 24 VDC auxiliary power to supply current for outputs.

DeviceNet allows peer-to-peer data exchange (where a DeviceNet node can initiate communication with other nodes or peers), and a master/slave configuration in which the master node initiates all communication and all other nodes, or slaves, respond to the master node's requests.

## Typical System Configuration

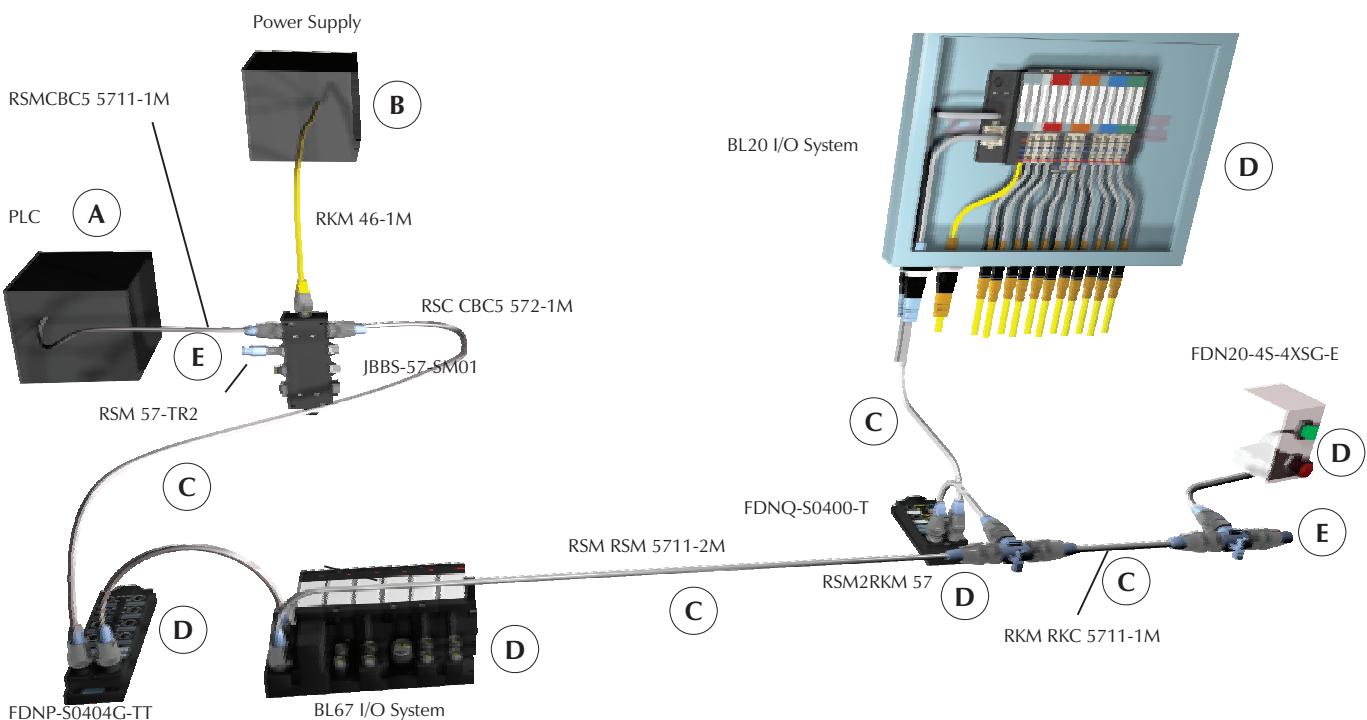

## Basic Part List

A typical DeviceNet system consists of the following parts:

- A - Controller
- B - Power Supply
- C - DeviceNet Cable
- D - DeviceNet I/O Modules (or Slaves)
- E - Terminating Resistors

DeviceNet stations require a network master (also called a scanner) to interface the stations to the host controller. **TURCK** DeviceNet stations are designed to be fully compatible with DeviceNet equipment from other manufacturers.

## Cordsets

**TURCK** offers a complete line of molded DeviceNet cordsets to facilitate network installation, resulting in a faster start-up and fewer wiring errors. The bus and drop cables are specially designed foil-shielded, high-flex cables with very low inductance and capacitance to minimize propagation delay time. DeviceNet cables consist of a shielded and twisted data pair, as well as a shielded and twisted power pair for the 24 VDC bus power, with an additional outer shield. The 24 VDC power pair provides bus power to the station's communication electronics and (typically) to input circuits.

The data lines for CAN-High and CAN-Low differential signals conform to the CAN standard, and support network data exchange at the maximum transmission speed of 500 kbps.

In most cases, bus cable connections are made using 5-pin **minifast**® (7/8-16 UN) or **eurofast**® (M12) connectors. A variety of stations are also available that support terminal-block type connections. Stations with output circuits for DC actuators normally require 24 VDC auxiliary power fed through a separate connection from the communication bus.

**TURCK** cordsets for the DeviceNet system are available in standard lengths. Contact your local sales representative to order custom lengths.

## Diagnostics

**TURCK** stations provide increased diagnostics when used with standard proximity or photoelectric sensors and discrete actuators. **TURCK** stations also serve as a buffer between I/O devices and the DeviceNet bus by detecting short-circuits without disrupting DeviceNet communication.

For deluxe style stations, each I/O point on the station provides state and status data. State data represents the real world value of the I/O device; for example, when the sensor is on or the actuator is off. Status data indicates short-circuits in the I/O device or in the wiring between the device and the station. Some models also use status data to indicate open circuits.

State and status data are transferred to the DeviceNet scanner where it is available for fault handling in the control program. Additionally, each input and output has a multicolored LED to indicate its state and status and pinpoint I/O problems quickly; for example the module status LED indicates the internal health of the station, and the network status LED indicates the station's communication on the DeviceNet network.

## Addressing

The valid range of DeviceNet node addresses is 0 to 63. The station's default node address is 63. Each node's address must be initially set, usually via rotary dials or switches on the node. The address can also be set with a DeviceNet configuration tool.

Changes to the address settings take effect when the station power is cycled. Care must be taken to prevent the same address from being assigned to more than one node in a system. If the same address is set on multiple nodes, one node will take control of the address and the others will go into "Critical Link Failure" state, indicated by the network status LED (solid red).



## Communication Rate/Cycle Time

DeviceNet™ specifications define three transmission speeds: 125, 250 and 500 kbps. All nodes on a network must communicate at the same rate.

Several factors must be considered when calculating the complete cycle time of a DeviceNet system, including:

- Number of nodes being scanned
- Amount of data produced and consumed by the nodes
- Type of I/O messaging (change of state, strobe, poll)
- Network communication rate
- Device time-out and explicit messaging traffic
- Cycle time of the control program

## Electronic Data Sheets (EDS) Files

Electronic Data Sheets, or EDS files, are files that contain detailed information about a DeviceNet device, including I/O data size and the device's configurable parameters. The information provided by EDS files guide a user through the steps necessary to configure a device. EDS files are available on the **TURCK** web site ([www.turck.com](http://www.turck.com)).

## Maximum Ratings

The DeviceNet bus uses trunk and drop topology. The trunk is the main communication cable, and requires a 121 ohm resistor at both ends of the trunk. The length of the trunk depends on the communication rate and the cable type. Drops are branches off the trunk, and may be from zero to 6 m (20 ft) in length. The cumulative drop lengths are dependent on the communication rate. The following table shows the maximum ratings for a trunk using thick, mid and thin cable. Thick and thin DeviceNet communication cable types are defined by the DeviceNet specification; mid cable is a hybrid of the two that is offered by **TURCK**.

Communication Rate	Thick Trunk Length (maximum)	Mid Trunk Length (maximum)	Thin Trunk Length (maximum)	Drop Length (maximum per drop)	Drop Length (cumulative)	Nodes (maximum)
125 kbps	500 m (1640 ft.)	300 m (984 ft.)	100 m (328 ft.)	6 m (20 ft.)	156 m (512 ft.)	64
250 kbps	250 m (820 ft.)	250 m (820 ft.)	100 m (328 ft.)	6 m (20 ft.)	78 m (256 ft.)	64
500 kbps	100 m (328 ft.)	100 m (328 ft.)	100 m (328 ft.)	6 m (20 ft.)	39 m (128 ft.)	64

## DeviceNet™ AIM™ Stations

TURCK's Advanced I/O Module (AIM) DeviceNet stations are extremely rugged stations designed for machine mounting. These stations allow easy connection of standard I/O devices (such as sensors, limit switches, valves and pilot lights) to a DeviceNet network, typically without a protective enclosure. This is made possible by epoxy-filled station housings, all-metal connectors and visible rotary address switches, among other things.

## Specifications


### Mechanical

TURCK DeviceNet AIM stations are designed for machine mounting with no separate enclosure or housing necessary. Quick-disconnect capability, combined with an epoxy-filled housing, creates an extremely durable station that can be mounted in most industrial environments. Detailed environmental specifications are as follows:

- Housing material: Glass filled nylon
- Connector material: Nickel-plated brass
- Protection level: NEMA 1,3,4,12,13; IEC IP 67
- Operating temperature: SE stations -40 to +70°C (-40 to +158°F); LX stations -25 to +70°C (-13 to +158°F)
- Vibration: 50 g @ 10-500 Hz

Other housing and connector materials available upon request.

The stations components are identified in the following figure. The figure shows a station with **minifast®** (7/8-16 UN) network connectors, but other connector options (such as M12 **eurofast®**) are available for some stations. Stations with all I/O powered from the DeviceNet power supply do not have the auxiliary power connectors at the top of the housing.

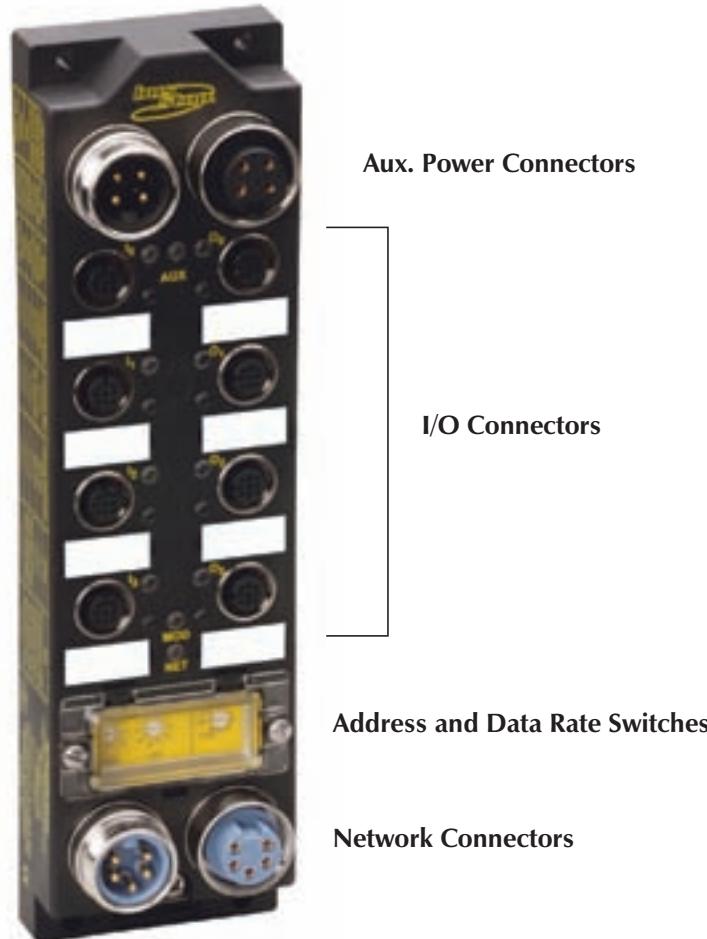

## Connectors

DeviceNet™ AIM™ stations generally provide connections for the bus and I/O, in addition to auxiliary power for stations with outputs.

### Bus Connectors

**minifast**® (7/8-16UN) is the standard bus connector for DeviceNet AIM stations. Some stations are available with **eurofast**® (M12) or M23 bus connectors.

DeviceNet **minifast** Pinouts

Male	Female
5-Pin	5-Pin


DeviceNet **eurofast** Pinouts

Male	Female
5-Pin	5-Pin


### eurofast I/O Connectors

Different I/O connector pinouts are used for different station types. Stations are available with one or two inputs per connector, one or two outputs per connector, or one input and one output per connector. The pin assignments for these styles are provided below.


### Screw Terminal I/O Connection

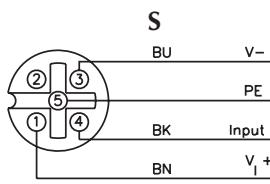


Mating cordset:  
RK 4.4T-\*RS 4.4T

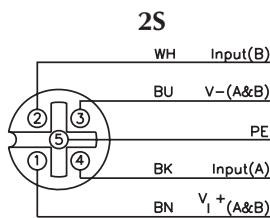


Mating cordset:  
RK 4.4T-\*RS 4.4T  
Splitter:  
VBRS-4.4-2RK 4T-\*/\*




Mating cordset:  
RK 4.4T-\*RS 4.4T  
Splitter:  
VB2-RS 4.4T-1/2RK 4.4T-\*/\*S651

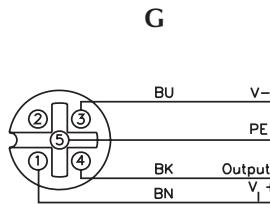

Mating cordset:  
RK 4.4T-\*RS 4.4T

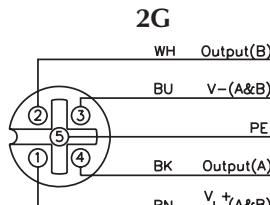


Mating cordset:  
RK 4.4T-\*RS 4.4T  
Splitter:  
VBRS-4.4-2RK 4T-\*/\*

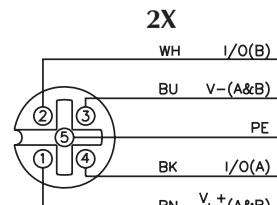

Mating cordset:  
RK 4.4T-\*RS 4.4T  
Splitter:  
VBRS-4.4-2RK 4T-\*/\*

AIM™ stations with part numbers ending in "ST" support screw terminal I/O and bus connections. The screw terminals for these stations are located on the back of the station. The back of the station is also fitted with a foam gasket to allow the station to be mounted to the outside of a cabinet or field I/O box (i.e. motor control center).

## Auxiliary Power Connectors

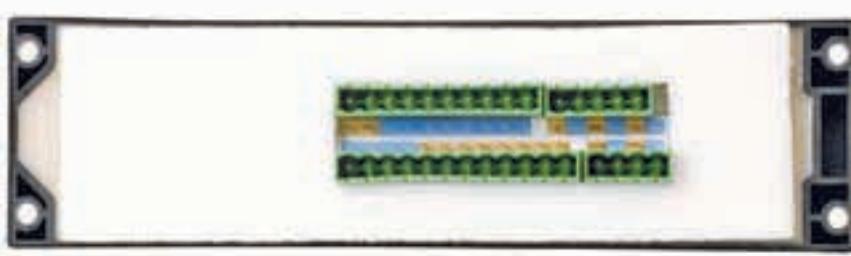

Stations where I/O draws a significant amount of current (2 Amp outputs, for example) receives this power from a second, or auxiliary, power supply. Some stations receive input power from the network and output power from the auxiliary supply. Generally, the connection is a male/female pair to allow cabling one power supply to multiple stations without the use of a tee (daisy chain configuration). Auxiliary power is typically supplied by a 4-pin **minifast**® (7/8-16 UN) connector, though other auxiliary power connections are used on some stations. For further details see the individual station entries in this catalog.

**Aux. Power Pinout**

Male	Female
	
<b>4-Pin</b>	<b>4-Pin</b>

1 =  $V_{AUX}^+$   
 2 = Pass Through  
 3 = Pass Through  
 4 =  $V_{AUX}^-$

## Power

Some AIM stations (typically those with only inputs) are completely powered from the DeviceNet power supply. When designing a network, take care to include the current draw for the station, as well as all input devices connected to the station in your power supply sizing calculations. For example, if the internal current consumption of the station is <50 mA and the total short-circuit limit for all inputs combined is <700 mA, then the maximum current draw for the station is  $50\text{ mA} + 700\text{ mA} = 750\text{ mA}$ .

Stations with output points normally use a separate auxiliary power supply to provide current for the outputs. Several AIM stations can be powered by one auxiliary supply, or a single supply for each station can be used.

Common power ratings for AIM stations include:


- Bus (DeviceNet) Voltage: 11-26 VDC
- Aux Power Voltage: 24 VDC (nominal, supported stations)
- Input Voltage: 13-26 VDC (From DeviceNet supply)
- Input Signal Current (each input): OFF <2 mA; ON 3.0-3.4 mA (@ nominal 24 VDC)
- Input Delay: 2.5 ms

## Addressing

DeviceNet™ stations must have a network address for communication. The address for AIM stations may be set via the visible rotary switches under the clear plastic cover on the front of the station.

The pair of switches represents the address as a decimal number; the left switch being the 10's multiplier and the right switch the 1's multiplier. To program the station, rotate the switches with a small slotted screwdriver until the arrows on the switch point to the appropriate numbers for the chosen address.

Some stations (LX style with extended diagnostics) have a third switch. This switch is used to set the communication baud rate for the station. When set to the AUTO position, the station automatically senses the baud rate of the network. SE style stations only use the autobaud setting.

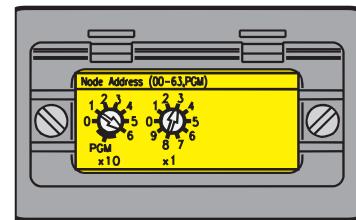

$$\text{Address} = 6 \times 10 + 3 \times 1 = 63$$

## Parameters

Many DeviceNet configuration tools support the use of EDS driver files to configure nodes and set various parameters. Some of the user settable parameters available for AIM stations are:

Parameter Name	Description	Valid Values	Default
Baud Rate	Defines the baud rate for the station to use if Autobaud is disabled	125kB; 250kB; 500kB	125kB
Autobaud	If enabled the station automatically senses the baud rate	Enable; Disable	Enable
Connection Mode	Set to UCMM to use unconnected messaging	Predefined M/S Connection; UCMM	Predefined M/S Connection
Quick Connect	Set to enable fast startup connection to DeviceNet (QuickConnect)	Enable; Disable	Disable

Consult the documentation for the DeviceNet configuration tool you are using for details on how to access device parameters via EDS files.

## Diagnostics

AIM™ stations provide two LEDs for diagnosing communication problems.

### Module Status

- Green: Working properly
- Flashing green: Detecting baud rate
- Flashing red: Input short-circuit

### Network Status

- Green: Connection established
- Flashing green: Waiting for connection
- Flashing red: Connection timed out
- Red: Cannot connect

There is an additional LED for each I/O point on the station. This LED indicates:

- Off: Point is off
- Green: Point is on
- Amber: Point is in open circuit state (advanced diagnostic stations only)
- Red: Point is in short-circuit state (advanced diagnostic stations only)

For SE style (group diagnostic) stations there is also a single bit communicated to the controller for diagnostic purposes. This bit is on if any input on the station is in the short-circuit condition, and off if all inputs are operating normally.

LX style (extended diagnostic) stations indicate the diagnostic status of each I/O point on the station, with an extra bit to indicate if the point is short or open circuited. These diagnostic bits can be disabled via the EDS parameter settings.

### Connecting Devices to an AIM Station

AIM stations typically provide a **eurofast®** (M12) connection for each I/O point. Standard **TURCK** I/O cordsets can be used to connect physical devices in the field to the AIM station. Some AIM stations, specifically those with I/O counts greater than eight total points, connect two signals to each connector. If the signals being connected are on the same physical device (for example a sensor with two outputs), a simple four or five-wire cordset can be used for connection (Figure 1) on the next page.

**I/O Data Map 1**

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>In</b>	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0
	2	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0
	3	OS-7	OS-6	OS-5	OS-4	OS-3	OS-2	OS-1	OS-0
	4	-	APS	-	-	-	-	-	-
<b>Out</b>	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

Extended  
Diagnostic


I	= Input
O	= Output
ISS	= Input Short Circuit Status
IOS	= Input Open Circuit Status
OS	= Output Status
APS	= Auxiliary Power Status

If the signals are on two separate devices, a splitter can be used to separate the AIM™ I/O connector into two individual **eurofast®** connectors. The recommended splitter is wired such that the second signal pin on the AIM station (pin 2) is wired to the default signal pin (pin 4) on the second splitter arm - requiring no special wiring by the user. The splitter is simply plugged into the AIM I/O connector and each arm is plugged into the appropriate I/O devices, as shown (Figure 2).



**Figure 1**

AIM stations provide a wide range of connection options depending on the I/O count and type being used. The user should be aware of the I/O pinout being used.

**Figure 2**

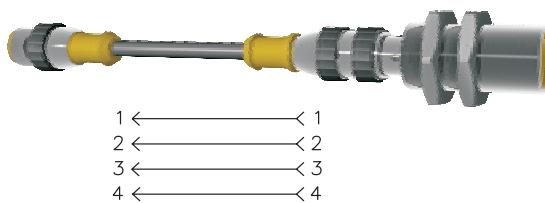

For one input per connector use standard cordsets, for example RK 4.4T-1-RS 4.4T

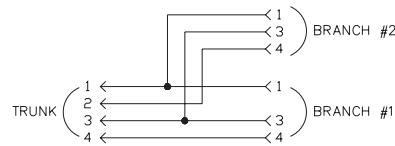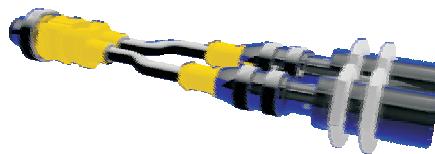

For two inputs per connector use a splitter, for example VBR5 4.4-2RK 4T-1/1

# Process Automation



## Part Number Key

F DN P - L 04 04 G - T T - V

F = AIM™ Designator  
Top-entry, plastic

DN = DeviceNet

P = 8 I/O Ports/Aux power/220 mm long

L = 8 I/O Ports/197 mm long

Q = 4 I/O Ports/148 mm long

L = NPN/PNP, Individual Open and Short-circuit Detection

P = PNP, Individual Open and Short-circuit Detection

S = PNP, Group Input Short-circuit Detection, Earth Ground Pin 5

C = Combined (ie: CPG = Combined PNP and 500 mA Outputs)

X = Universal PNP Input or 500 mA Output

N = NPN, Group Input Short-circuit Detection, Earth Ground Pin 5

Connector Material  
Blank = Nickel Plated Brass  
V = Stainless Steel

Aux Power Connector  
T = Through **minifast**®  
Both male and female

DeviceNet Connector Configuration  
T = Through **minifast**, both male and female  
E = **eurofast**® Drop, single male  
M = **minifast** drop, male only

G = 510 mA Outputs

H = 1.4 or 2.0 Amp Outputs

Number of Outputs

Number of Inputs

## Deluxe Input Stations



**FDNL-L0800-T**

**FDNL-L0800-T-V**

**FDNL-L1600-T**

**FDNL-L0800-C**

**FDNL-L1600-C**



- Rugged, Fully Potted Stations
- IP 67 Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current:  $\leq 100$  mA (8-in) or 140 mA (16-in) plus sum of input currents (from DeviceNet)
- Sensor Current:  $< 80$  mA per input (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit each per I/O point

### Diagnostics (Physical)

- Individual LED to indicate open/short-circuit for each channel
- LEDs to indicate status of DeviceNet communication

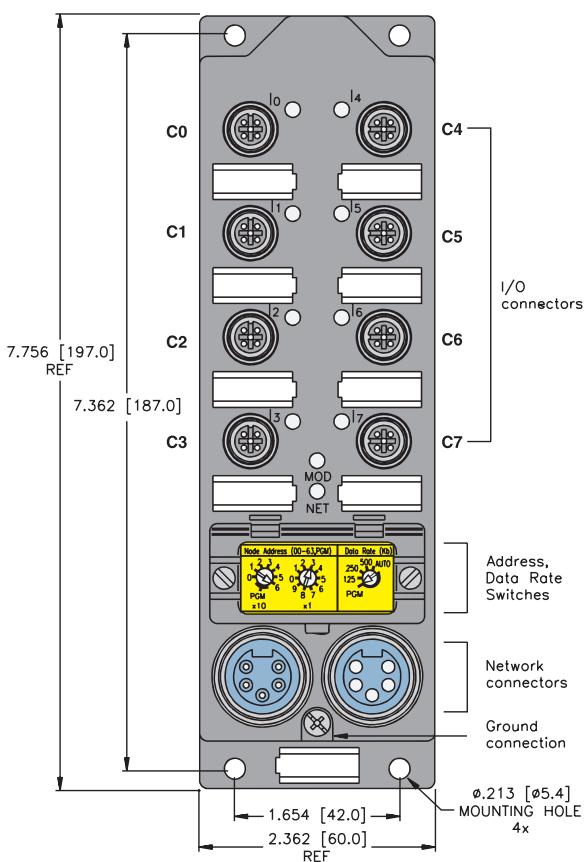

1 = Shield  
 2 = V+  
 3 = V-  
 4 = CAN\_H  
 5 = CAN\_L

DeviceNet minifast® Pinouts

Male	Female
5-Pin	5-Pin

FDNL-...-T

1 = Shield  
 2 = V+  
 3 = V-  
 4 = CAN\_H  
 5 = CAN\_L



DeviceNet eurofast® Pinouts

Male	Female
5-Pin	5-Pin

FDNL-...-C

Part Number	Inputs								Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map	
FDNL-L0800-T	8	0-7	L	1	NPN/PNP		X	X	1	
FDNL-L0800-T-V	8	0-7	L	1	NPN/PNP		X	X	1	
FDNL-L1600-T	16	0-7	2L	2	NPN/PNP		X	X	2	
FDNL-L0800-C	8	0-7	L	1	NPN/PNP		X	X	1	
FDNL-L1600-C	16	0-7	2L	2	NPN/PNP		X	X	2	

## Input Connectors

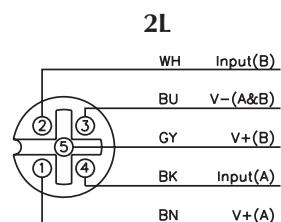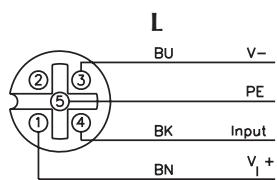

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Mating cordset:

Sensor with dual outputs:

RK 4.4T-\* - RS 4.4T

### Two sensors:

RK 4.5T-\* - RS 4.5T

### Splitter:

VBRS 4.5-2RK 4T-/\* / S818

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0	
2	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0	

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	
2	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0	
3	ISS-15	ISS-14	ISS-13	ISS-12	ISS-11	ISS-10	ISS-9	ISS-8	
4	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0	
5	IOS-15	IOS-14	IOS-13	IOS-12	IOS-11	IOS-10	IOS-9	IOS-8	

## Standard Input Stations



**FDNL-S0800-T**

**FDNL-S1600-T**

**FDNL-S1600-T-V**

**FDNL-N0800-T**

**FDNL-N1600-T**

**FDNL-S1600-E**



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Rotary Address Switches
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <50 mA plus input currents (from DeviceNet)
- Sensor Current: <700 mA sum of all inputs (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for all inputs

### Diagnostics (Physical)

- One LED indicates a fault for the whole station
- LEDs to indicate status of DeviceNet communication

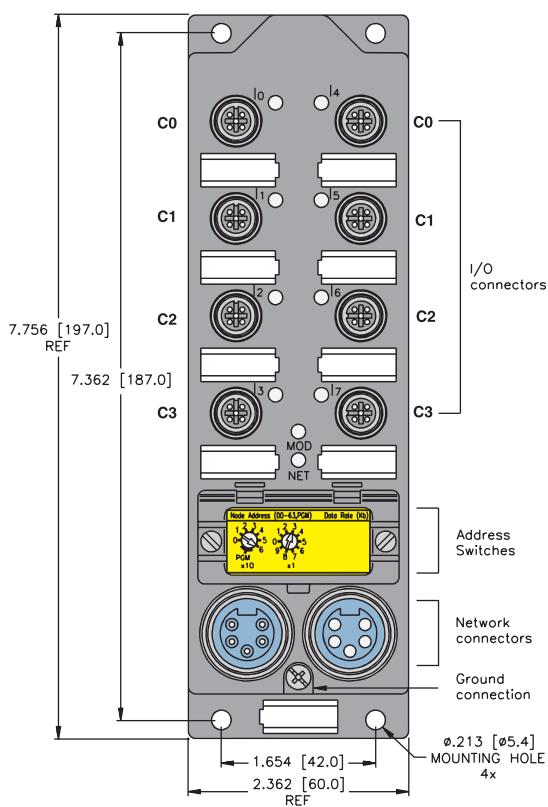

1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet minifast Pinout

Male	Female
5-Pin	5-Pin

FDNL...T

1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet eurofast® Pinouts

Male
5-Pin



FDNL...E

# Process Automation





Part Number	Inputs								Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNL-S0800-T	8	0-7	S	1	PNP	X			1
FDNL-S1600-T	16	0-7	2S	2	PNP	X			2
FDNL-S1600-T-V	16	0-7	2S	2	PNP	X			2
FDNL-N0800-T	8	0-7	N	1	NPN	X			1
FDNL-N1600-T	16	0-7	2N	2	NPN	X			2
FDNL-S1600-E	16	0-7	2S	2	PNP	X			2

## Input Connectors

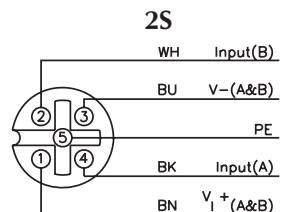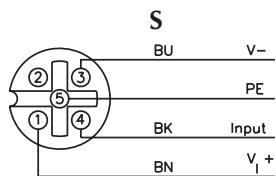

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-\*/\*

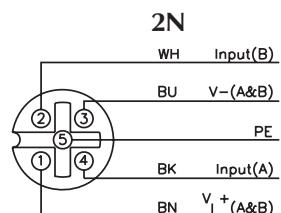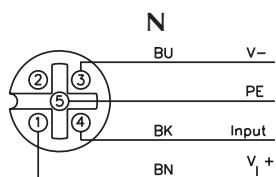

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	IGS	-	-	-	-	-	-	-	

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	
2	IGS	-	-	-	-	-	-	-	

**Deluxe Input/Output Station**

- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection
- Input and Output on Same Connector
- Automatic Baud Rate Sensing

**FDNL-CPG88-T****Electrical**

- Operating Current: <100 mA plus sum of I/O currents (from DeviceNet)
- Sensor Current: <120 mA per input (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

**Power Distribution**

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

**Mechanical**

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

**Material**


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

**Diagnostics (Logical)**

- Open/short-circuit status mapped to DeviceNet I/O table, one bit each per I/O point

**Diagnostics (Physical)**


- Individual LED to indicate open/short-circuit for each channel
- LEDs to indicate status of DeviceNet communication

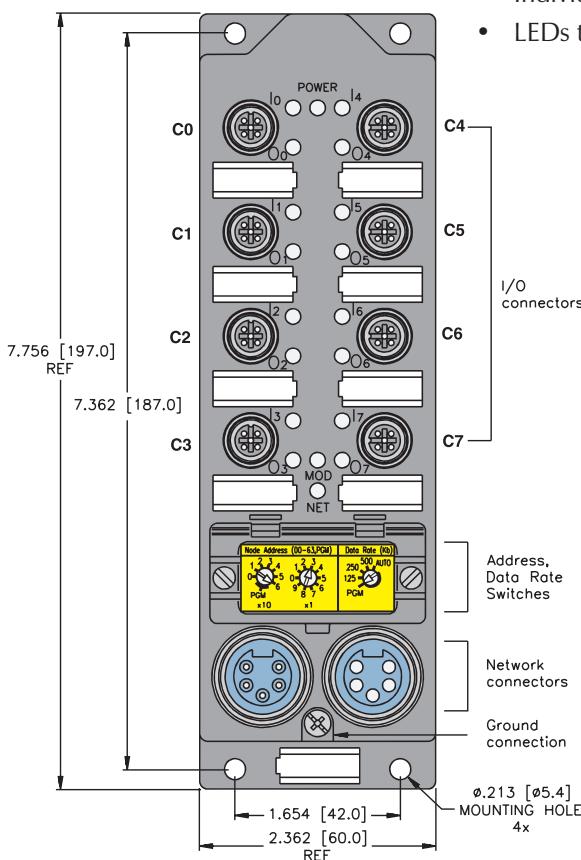**DeviceNet minifast Pinout**

Male	Female
1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L	2 3 4 5 1

Part Number	Inputs								Outputs								Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map		
FDNL-CPG88-T	8	0-7	C	1	PNP		X	X	8	0-7	C	1	0.5 A	X	X	1		

## Input/Output Connectors

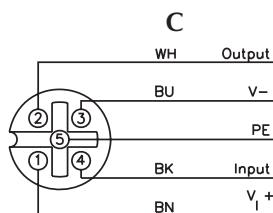

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VB2-RS 4.4T-1/2RK 4.4T-\*/\*/S651

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
In	1	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0
In	2	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0
In	3	OS-7	OS-6	OS-5	OS-4	OS-3	OS-2	OS-1	OS-0
In	4	-	APS	-	-	-	-	-	-
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Standard Input/Output Station



FDNL-CSG88-T

FDNL-CSG88-T-V



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Input and Output on Same Connector
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <100 mA plus sum of I/O currents (from DeviceNet)
- Sensor Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for all inputs, one bit for all outputs

### Diagnostics (Physical)

- One LED indicates I/O fault for entire station
- LEDs to indicate status of DeviceNet communication

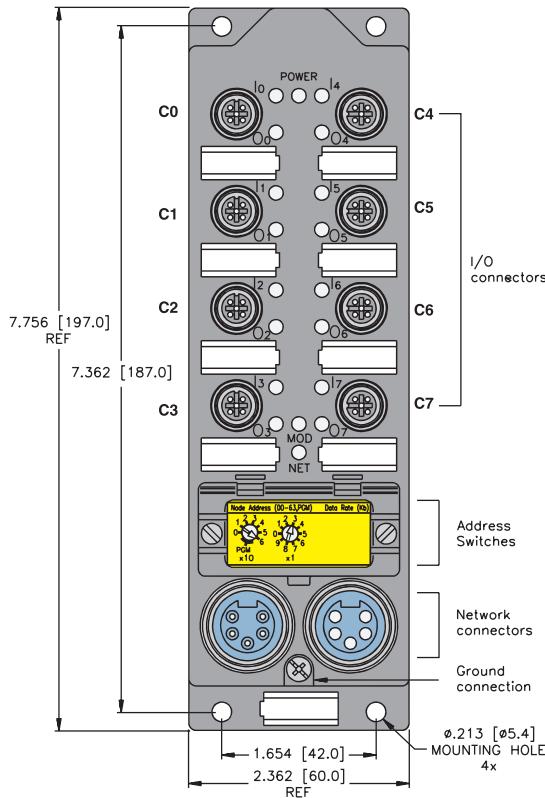

DeviceNet minifast Pinout


Male	Female
1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L	2 3 4 5 1

# Process Automation



Part Number	Inputs								Outputs								Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map		
FDNL-CSG88-T	8	0-7	C	1	PNP	X			8	0-7	C	1	0.5 A				1	
FDNL-CSG88-T-V	8	0-7	C	1	PNP	X			8	0-7	C	1	0.5 A				1	

## Input/Output Connectors

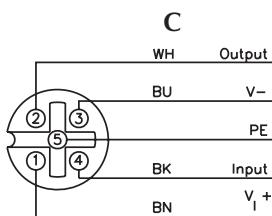

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VB2-RS 4.4T-1/2RK 4.4T-\*/S651

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	IGS	OGS	-	-	-	-	-	-
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

**Input/Output Station****FDNL-SN0808N-C**

- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection
- DeviceNet Powered I/O
- Sinking Outputs

**Electrical**

- Operating Current: <75 mA (from DeviceNet)
- Sensor Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

**Power Distribution**

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

**Mechanical**


- Operating Temperature: -40 to +70 °C (-40 to +158 °F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

**Material**

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

**Diagnostics (Physical)**

- One LED indicates a fault for the entire station
- LEDs to indicate status of DeviceNet communication

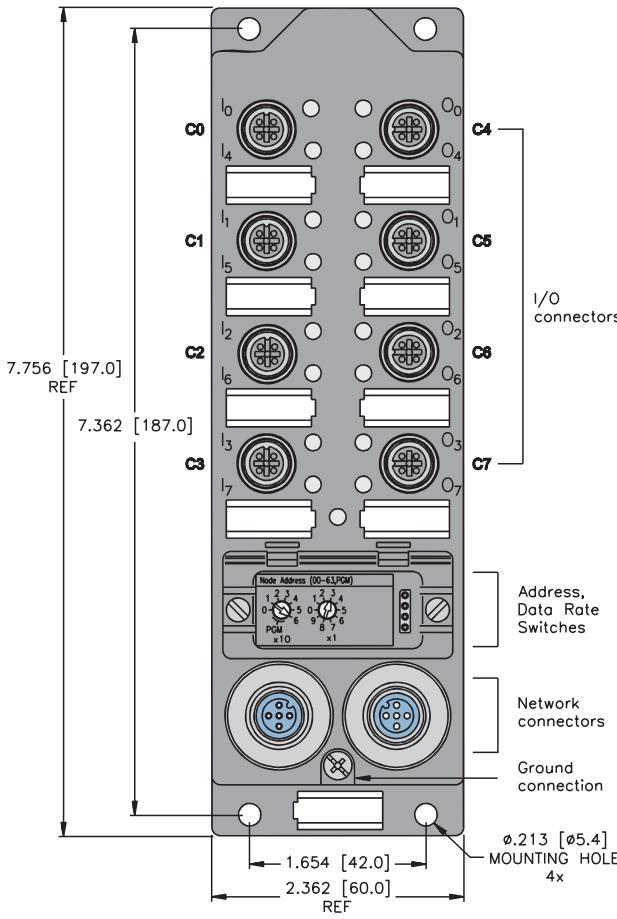**DeviceNet eurofast Pinout**

Male	Female
1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L	1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L
5-Pin	5-Pin


# Process Automation




Part Number	Inputs					Outputs					Data					
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNL-SN0808N-C	8	0-3	2SN	2	PNP/NPN				8	4-7	2NO	2	0.5 A			1

## Input/Output Connectors

**2SN**

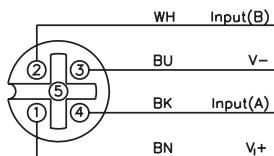

**2NO**

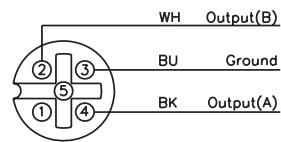

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	IGS	-	-	-	-	-	-	-
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Input/Output Station



**FDNL-S1204H-0142**

**FDNL-S1204H-0153**



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection
- DeviceNet Powered I/O
- Sinking Outputs

### Electrical

- Operating Current: <75 mA (from DeviceNet)
- Sensor Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

### Mechanical


- Operating Temperature: -40 to +70 °C (-40 to +158 °F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material



- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Physical)

- One LED indicates a fault for the entire station
- LEDs to indicate status of DeviceNet communication

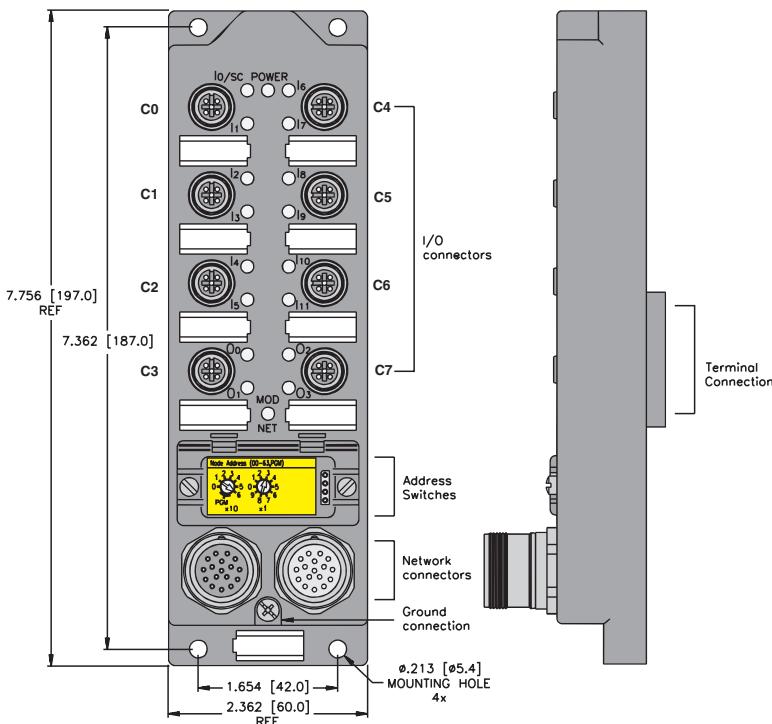

DeviceNet *multifast* Pinout

Male	Female
 17-Pin	 17-Pin
1 = 0 V, us1 2 = 0 V, US2 3 = +24, US2 4 = +24, US1 5 = PE 6 = * 7 = Us COM 8 = * 9 = KSR2	10 = KSR1 11 = * 12 = Us CAN high 13 = Devnet high 14 = Devnet low 15 = RBST 16 = UL 17 = Us CAN low


- |  |   |
|--|---|
| 1 = 0 V, us1<br>2 = 0 V, US2<br>3 = +24, US2<br>4 = +24, US1<br>5 = PE<br>6 = *<br>7 = Us COM<br>8 = *<br>9 = KSR2 | 10 = KSR1<br>11 = *<br>12 = Us CAN high<br>13 = Devnet high<br>14 = Devnet low<br>15 = RBST<br>16 = UL<br>17 = Us CAN low |
|--|---|

\* Rear removable terminal present on FDNL-S1204H-0142 only.

Part Number	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNL-S1204H-0142	12	0-2 4-6	2S	2	PNP	X			4	3+7	2H	2	2.0 A			1
FDNL-S1204H-0153	12	0-2 4-6	2S	2	PNP	X			4	3+7	2H	2	2.0 A			1

## Input/Output Connectors

2S

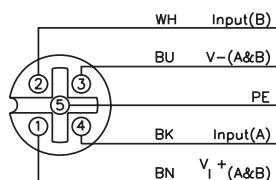


Mating cordset:

RK 4.4T-\*RS 4.4T

Splitter: VBRS 4.4-2RK 4T-\*/\*

2H

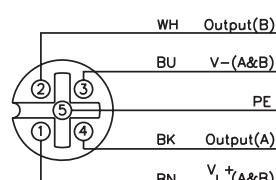


Mating cordset:

RK 4.4T-\*RS 4.4T

Splitter: VBRS 4.4-2RK 4T-\*/\*

SIGNAL	PIN
*	6
PE	5
+24V, US1	4
+24V, US2	3
0 V, US1	1
0 V, US2	2
Us CAN high	12
Us CAN low	17
KSR2	9
KSR1	10
*	8
Us COM	7
*	11
Devnet high	13
Devnet low	14
RBST	15
UL	16

LEAD	SIGNAL
1	+24V, US2
2	OV, US1, US2
3	OV, US1, US2
4	Us CAN high
5	Us CAN low
6	KSR2
7	KSR1
8	-
9	-
10	-
11	-
12	-
13	-

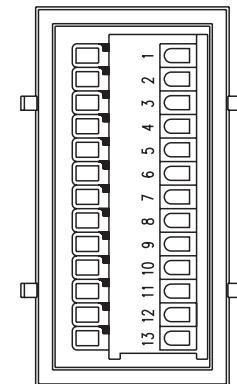

## Terminal Connection

### I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	IGS	-	-	-	I-11	I-10	I-9	I-8
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

## Deluxe Input/Output Stations




**FDNP-L0404G-TT**

**FDNP-L0808G-TT**

**FDNP-L0808H-TT\***

**FDNP-P0808H-TT\***

\* Not FM

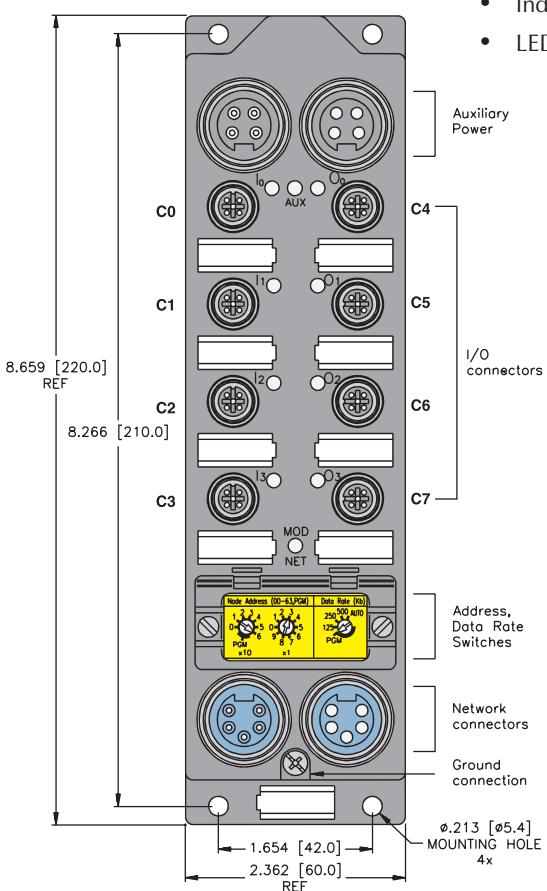

- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Auxiliary Powered Outputs
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <100 mA (all except ...L0404G... is <140 mA) plus sensor currents (from DeviceNet power)
- Sensor Current: <80 mA per input (from DeviceNet)
- Output Current: See table on facing page

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit each per I/O point

### Diagnostics (Physical)

- Individual LED to indicate open/short-circuit for each channel
- LEDs to indicate status of DeviceNet communication

- Aux. Power Pinout
- | Male            | Female |
|-----------------|--------|
| 1 = $V_{aux}$ + | 3      |
| 2 = Pass thru   | 4      |
| 3 = Pass thru   | 1      |
| 4 = $V_{aux}$ - | 2      |
- 4-Pin

Male	Female
1 = $V_{aux}$ +	3
2 = Pass thru	4
3 = Pass thru	1
4 = $V_{aux}$ -	2

4-Pin

- DeviceNet minifast Pinout
- | Male       | Female |
|------------|--------|
| 1 = Shield | 2      |
| 2 = $V_+$  | 3      |
| 3 = $V_-$  | 4      |
| 4 = CAN_H  | 5      |
| 5 = CAN_L  |        |
- 5-Pin

Male	Female
1 = Shield	2
2 = $V_+$	3
3 = $V_-$	4
4 = CAN_H	5
5 = CAN_L	

5-Pin


# Process Automation




Part Number	Inputs							Outputs							Data		
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map	
FDNP-L0404G-TT	4	0-3	L	1	PNP/NPN		X	X	4	4-7	G	1	0.5 A	X	X	1	
FDNP-L0808G-TT	8	0-3	2L	2	PNP/NPN		X	X	8	4-7	2G	2	0.5 A	X	X	2	
FDNP-L0808H-TT	8	0-3	2L	2	PNP/NPN		X	X	8	4-7	2H	2	2 A	X	X	2	
FDNP-P0808H-TT	8	0-3	2P	2	PNP		X	X	8	4-7	2H	2	2 A	X	X	2	

## Input/Output Connectors


**L**

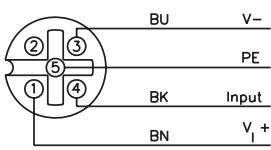

**2L**

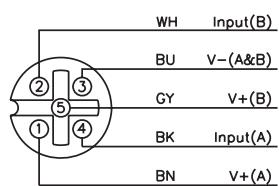

**2P**

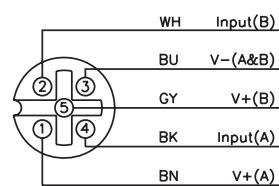

**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Mating cordset:**

**Sensor with dual outputs:**

RK 4.4T-\*RS 4.4T

**Two sensors:**

RK 4.5T-\*RS 4.5T

**Splitter:**

VBRS 4.5-2RK 4T-\*/\*S818

**Mating cordset:**

**Sensor with dual outputs:**

RK 4.4T-\*RS 4.4T


**Two sensors:**

RK 4.5T-\*RS 4.5T


**Splitter:**

VBRS 4.5-2RK 4T-\*/\*S818


**G**

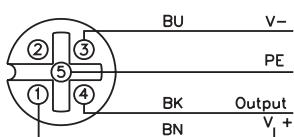

**2G**

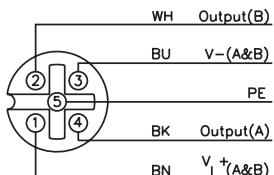

**2H**

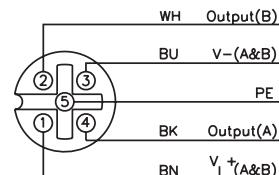

**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>In</b>	0	-	-	-	-	I-3	I-2	I-1	I-0
	1	IOS-3	IOS-2	IOS-1	IOS-0	ISS-3	ISS-2	ISS-1	ISS-0
	2	0OS-3	0OS-2	0OS-1	0OS-0	OSS-3	OSS-2	OSS-1	OSS-0
	3	-	APS	-	-	-	-	-	-
<b>Out</b>	0	-	-	-	-	0-3	0-2	0-1	0-0

## I/O Data Map 2

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>In</b>	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0
	2	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0
	3	OS-7	OS-6	OS-5	OS-4	OS-3	OS-2	OS-1	OS-0
<b>Out</b>	4	-	APS	-	-	-	-	-	-
	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Deluxe Input/Output Station



FDNP-CPG88-TT



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Auxiliary Powered I/O
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <30 mA (from DeviceNet)
- Sensor Current: <120 mA per input (from Auxiliary power)
- Output Current: <0.5 A per output (from Auxiliary power)

### Power Distribution

- Inputs: Auxiliary power supply
- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit each per I/O point

### Diagnostics (Physical)

- Individual LED to indicate open/short-circuit for each channel
- LEDs to indicate status of DeviceNet communication

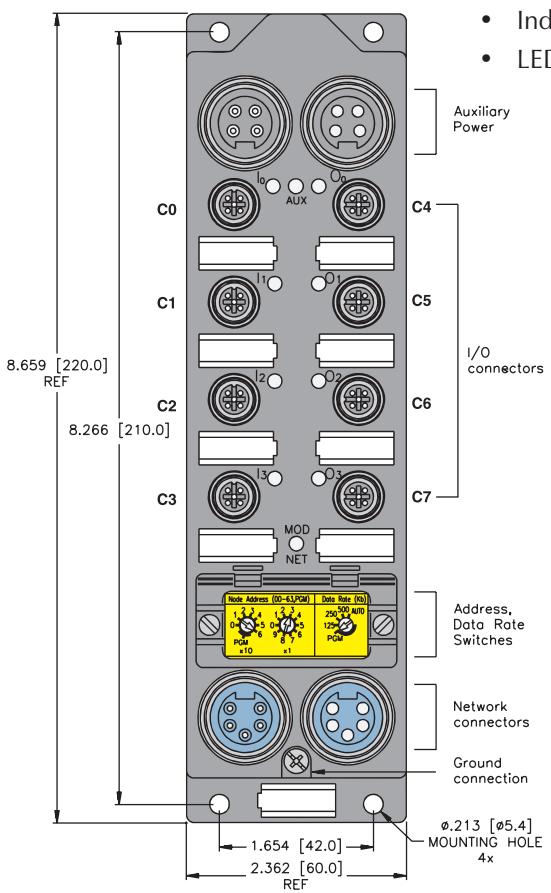

Aux. Power Pinout  
1 =  $V_{aux+}$   
2 = Pass thru  
3 = Pass thru  
4 =  $V_{aux-}$


Aux. Power Pinout	
Male	Female
1	3
2	4
3	1
4	2
4-Pin	

DeviceNet minifast Pinout  
1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet minifast Pinout	
Male	Female
3	2
4	1
5	4
5-Pin	

Part Number	Inputs								Outputs						Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNP-CPG88-TT	8	0-7	C	1	PNP		X	X	8	0-7	C	1	0.5 A	X	X	1

## Input/Output Connectors

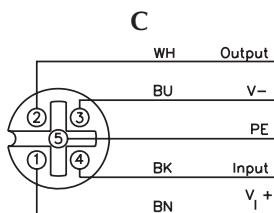

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VB2-RS 4.4T-1/2RK 4.4T-/\*/S651

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
In	1	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0
In	2	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0
In	3	OS-7	OS-6	OS-5	OS-4	OS-3	OS-2	OS-1	OS-0
In	4	-	APS	-	-	-	-	-	-
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Standard Output Stations



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Auxiliary Powered Outputs
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <140 mA (FDNP...G-TT), <50 mA (FDNP...H-TT), <75 mA (FDNP...0200) (from DeviceNet)
- Output Current: see table on facing page (from aux. power)

### Power Distribution

- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)


- short-circuit status mapped to DeviceNet I/O table, one bit per each I/O point (except FDNP...0200 has no diagnostic data)

### Diagnostics (Physical)

- Individual LED to indicate open/short-circuit for each channel (except FDNP...0200 has one LED indicating a short for all I/O points)

**FDNP-S0008G-TT**  
**FDNP-S0008G-TT-V**  
**FDNP-S0008H-TT\***  
**FDNP-S0016N-TT-0200\***

\*Not FM

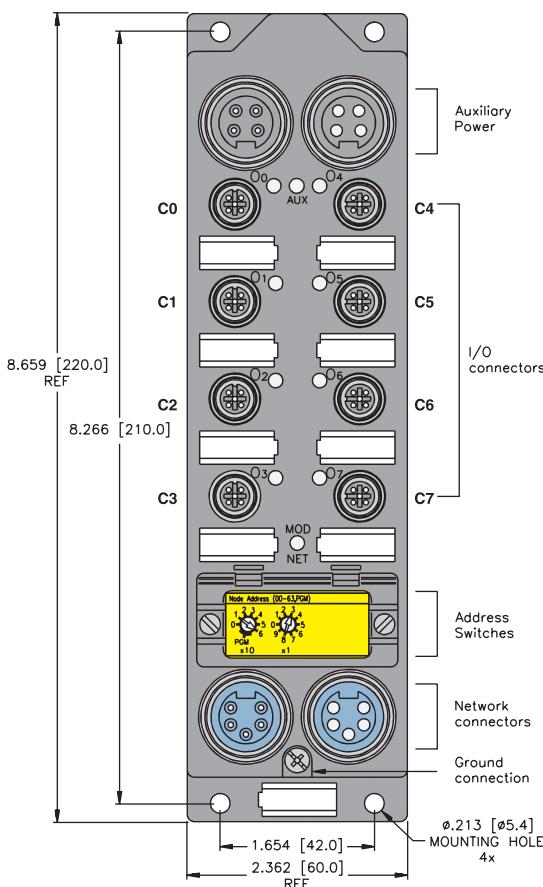

### Aux. Power Pinout

- 1 =  $V_{AUX}^+$   
 2 = Pass thru  
 3 = Pass thru  
 4 =  $V_{AUX}^-$

Male	Female
4-Pin	4-Pin

### FDNP...TT

- 1 =  $V_{AUX}^+$   
 2 =  $V_{IN}^+$   
 3 =  $V_{IN}^-$   
 4 =  $V_{AUX}^-$

Male	Female
4-Pin	4-Pin

### FDNP...0200

- 1 = Shield  
 2 =  $V^+$   
 3 =  $V^-$   
 4 = CAN\_H  
 5 = CAN\_L


Male	Female
5-Pin	5-Pin

### DeviceNet minifast Pinout


Part Number	Outputs							Data
	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNP-S0008G-TT	8	0-7	G	1	0.5 A	X		1
FDNP-S0008G-TT-V	8	0-7	G	1	0.5 A	X		1
FDNP-S0008H-TT	8	0-7	H	1	1.4 A	X		1
FDNP-S0016N-TT-0200	16	0-7	2GN	2	0.5 A			2

## Output Connectors


**G**

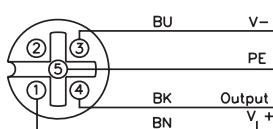

**H**

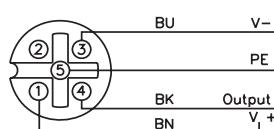

**2GN**

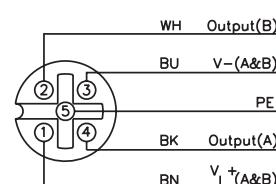

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Out	0	0S-7	0S-6	0S-5	0S-4	0S-3	0S-2	0S-1	0S-0
In	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
In	1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8

## Standard Input Station



**FDNP-N1600-TT-0197**



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Auxiliary Powered Inputs
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <20 mA (from DeviceNet)
- Sensor Current: <700 mA total of all inputs (from  $V_{IN}$  power)

### Power Distribution

- Inputs: Auxiliary ( $V_{IN}$ ) power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- No diagnostic data

### Diagnostics (Physical)

- One LED indicates a fault for the entire station
- LEDs to indicate status of DeviceNet communication

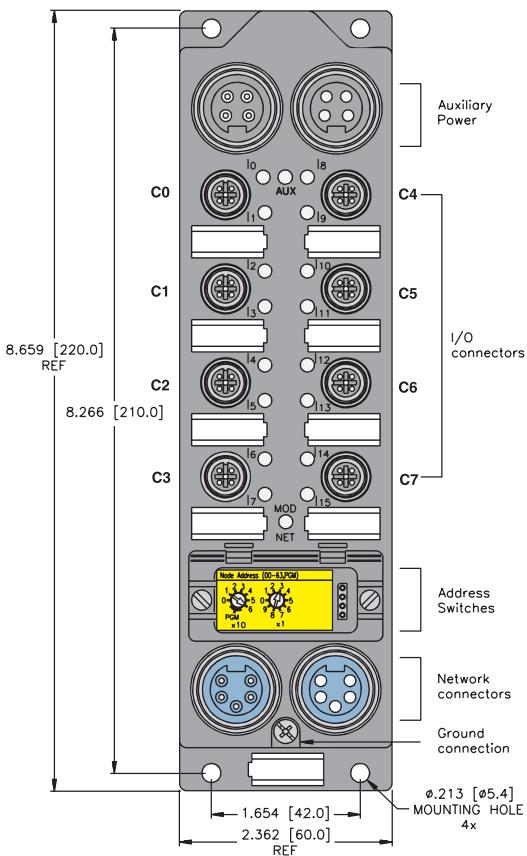

Aux. Power Pinout  
 1 =  $V_{AUX}^+$   
 2 =  $V_{IN}^+$   
 3 =  $V_{IN}^-$   
 4 =  $V_{AUX}^-$

Aux. Power Pinout	
Male	Female
4-Pin	4-Pin

DeviceNet minifast Pinout  
 1 = Shield  
 2 = V+  
 3 = V-  
 4 = CAN\_H  
 5 = CAN\_L

DeviceNet minifast Pinout	
Male	Female
5-Pin	5-Pin


# Process Automation



	Inputs								Data
Part Number	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNP-N1600-TT-0197	16	0-7	2S	2	NPN				1

## Input Connectors

2S

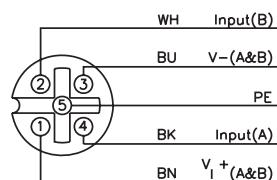

### Mating cordset:

RK 4.4T-\* - RS 4.4T

### Splitter:

VBRS 4.4-2RK 4T-/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	

## Standard Input/Output Stations



**FDNP-S0404G-TT**


**FDNP-S0808G-TT**

**FDNP-CSG88-TT**

**FDNP-XSG16-TT**

**FDNP-S1204H-TT-0149\***

\* Not FM Approved

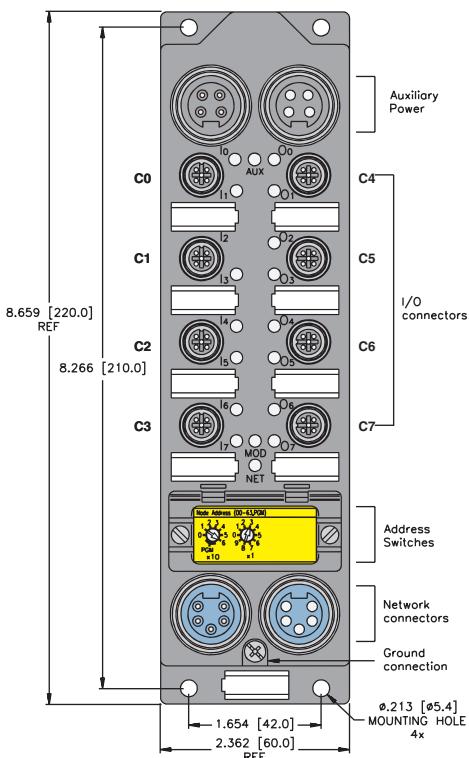

- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection
- Auxiliary Powered
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA plus applicable input currents (from DeviceNet)
- Sensor Current: <700 mA total (from DeviceNet except FDNP-CSG... and FDNP-XSG...) per input
- Output Current: See table on facing page

### Power Distribution

- Inputs: DeviceNet power supply (except FDNP-CSG... and FDNP-XSG... from Auxiliary supply)
- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates fault for entire station (FDNP-CSG88-TT maps one bit for all inputs and one bit for each output point)

### Diagnostics (Physical)

- One LED indicates fault for entire station
- LEDs to indicate status of DeviceNet communication

**Aux. Power Pinout**

Male	Female
1 = $V_{AUX}^+$ 2 = Pass thru 3 = Pass thru 4 = $V_{AUX}^-$	1 3 2 4

4-Pin      4-Pin

**DeviceNet minifast Pinout**

Male	Female
1 = Shield 2 = $V^+$ 3 = $V^-$ 4 = CAN_H 5 = CAN_L	2 3 4 5 1

5-Pin      5-Pin


# Process Automation




Part Number	Inputs					Outputs					Data					
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNP-S0404G-TT	4	0-3	S	1	PNP	X			4	4-7	G	1	0.5 A			1
FDNP-S0808G-TT	8	0-3	2S	2	PNP	X			8	4-7	2G	2	0.5 A			2
FDNP-CSG88-TT	8	0-7	C	1	PNP	X			8	0-7	C	1	0.5 A	X		5
FDNP-XSG16-TT	16	0-7	2X	2	PNP	X			16	0-7	2X	2	0.5 A			4
FDNP-S1204H-TT-0149	12	0-2, 4-6	2S	2	PNP	X			4	3, 7	2H	2	1.4 A			3

## Input/Output Connectors


**S**

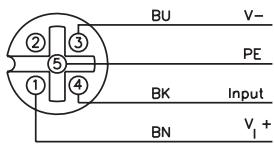

**2S**

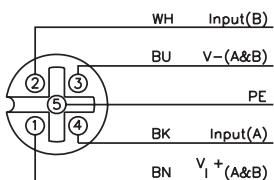

**C**

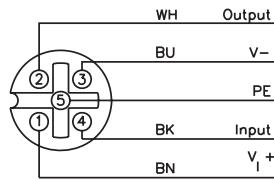

### Mating cordset:

RK 4.4T-\*RS 4.4T

### Mating cordset:

RK 4.4T-\*RS 4.4T

**Splitter:** VBRS 4.4-2RK 4T-\*/\*

### Mating cordset:


RK 4.4T-\*RS 4.4T

### Mating cordset:


RK 4.4T-\*RS 4.4T

**Splitter:** VB2-RS 4.4T-1/2RK 4.4T-\*/\*S651


### 2X

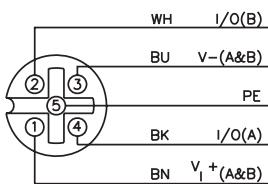


### G

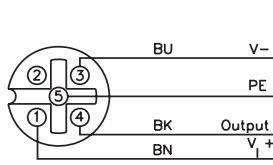

### 2G

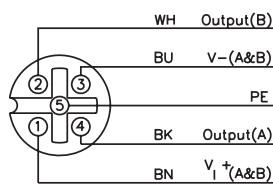

### 2H

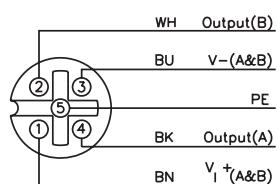

### Mating cordset:

RK 4.4T-\*RS 4.4T

**Splitter:** VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	IGS	OGS	-	-	I-3	I-2	I-1	I-0
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## I/O Data Map 3

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

## I/O Data Map 4

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## I/O Data Map 5

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

## Deluxe Input/Output Station



FDNP-P1204G-TT



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Auxiliary Powered Outputs
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <100 mA plus sum of input currents (from DeviceNet)
- Sensor Current: <80 mA per input (from DeviceNet)
- Output Current: <0.5 A per output (from Auxiliary power)

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit for each I/O point

### Diagnostics (Physical)

- Individual LED to indicate open/short-circuit for each channel
- LEDs to indicate status of DeviceNet communication

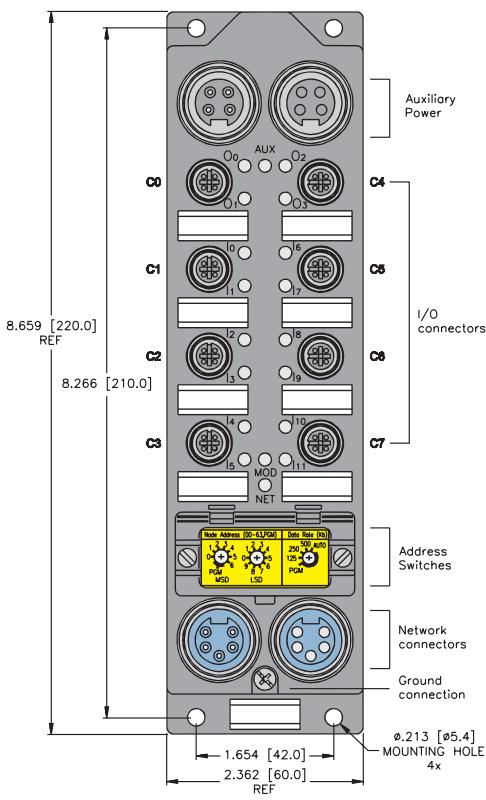

1 =  $V_{AUX}^+$   
2 = pass thru  
3 = pass thru  
4 =  $V_{AUX}^-$

Aux. Power Pinout	
Male	Female
1	3
2	4
3	1
4	2

4-Pin      4-Pin



1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet minifast Pinout	
Male	Female
3	2
4	3
5	4
1	5

5-Pin      5-Pin

Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNP-P1204G-TT	12	0-2, 4-6	2P	2	PNP		X	X	4	3, 7	2G	2	0.5 A	X	X	1

## Input/Output Connectors

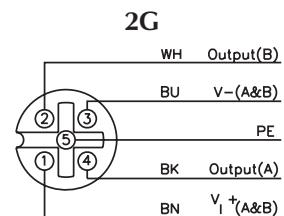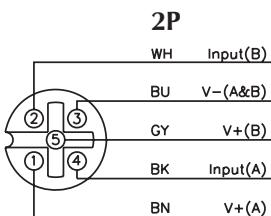

**Mating cordset:**

**Sensor with dual outputs:**

RK 4.4T-\* - RS 4.4T

**Two sensors:**

RK 4.5T-\* - RS 4.5T

**Splitter:**

VBRS 4.5-2RK 4T-\*/\*S818

**Mating cordset:**

RK 4.4T-\* - RS 4.4T


**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>In</b>	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	-	APS	-	-	I-11	I-10	I-9	I-8
	2	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0
	3	OSS-3	OSS-2	OSS-1	OSS-0	ISS-11	ISS-10	ISS-9	ISS-8
	4	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0
	5	OOS-3	OOS-2	OOS-1	OOS-0	IOS-11	IOS-10	IOS-9	IOS-8
<b>Out</b>	0	-	-	-	-	0-3	0-2	0-1	0-0

## Standard Input/Output Stations

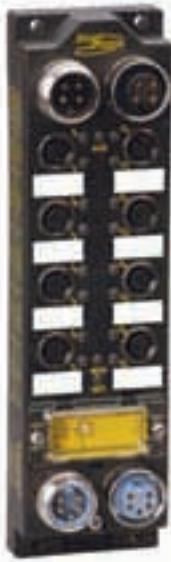

**FDNP-S0808G-ST**

**FDNP-XSG16-ST**



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection
- Screw Terminal Connections
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA from DeviceNet (for ...S0808G... add input currents)
- Sensor Current: <700 mA total of all inputs (...S0808G... From DeviceNet, ...XSG16... from aux. Power)
- Output Current: <500 mA per output (from aux. power)

### Power Distribution

- Inputs: ...S0808G... from DeviceNet power supply, ...XSG16... From Auxiliary power supply
- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)



### Diagnostics (Logical)


- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for the entire station

### Diagnostics (Physical)

- One LED indicates an I/O fault for the entire station
- LEDs to indicate status of DeviceNet communication

#### Aux. Power Pinout



Male	Female
 4-Pin	 4-Pin

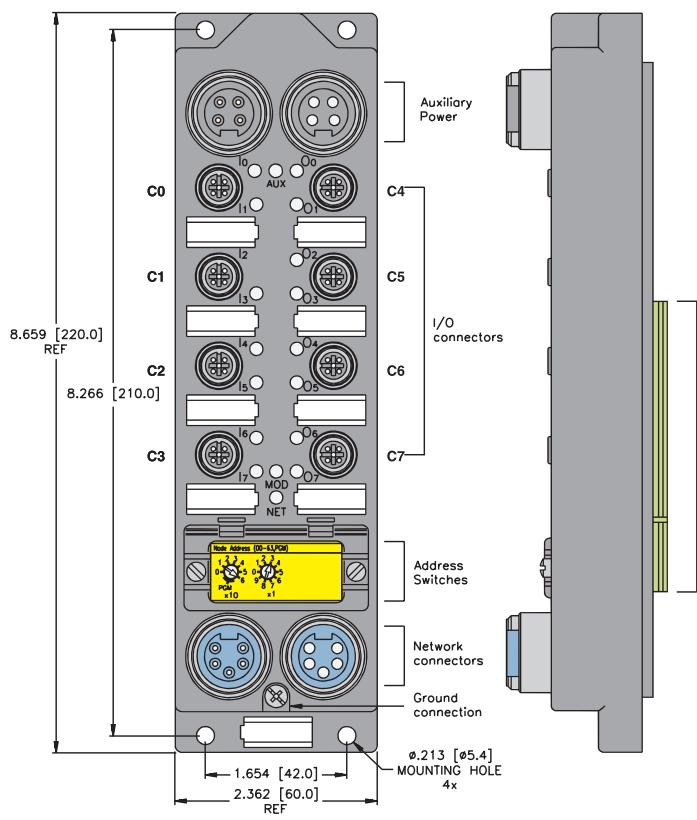

1 =  $V_{AUX}^+$   
 2 = pass thru  
 3 = pass thru  
 4 =  $V_{AUX}^-$

Screw Terminal Connection


#### DeviceNet minifast Pinout

Male	Female
 5-Pin	 5-Pin


Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNP-S0808G-ST	8	0-3	2S, ST1	2	PNP	X			8	4-7	2G, ST1	2	0.5 A			1
FDNP-XSG16-ST	16	0-7	2X, ST2	2	PNP	X			16	0-7	2X, ST2	2	0.5 A			2

## Input/Output Connectors


2S

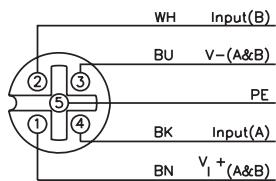

2X

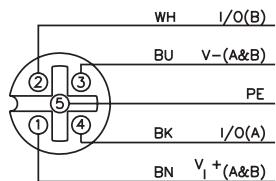

2G

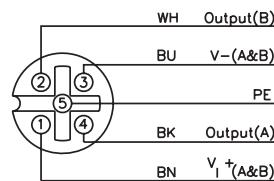

**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*


**Mating cordset:**

RK 4.4T-\*RS 4.4T

**Splitter:**


VBRS 4.4-2RK 4T-\*/\*

ST1

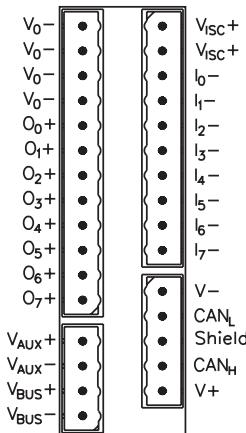

NOTE:  $V_{ISC}$  is from DeviceNet power supply.  
 $V_0$  is from Auxiliary power supply.

ST2

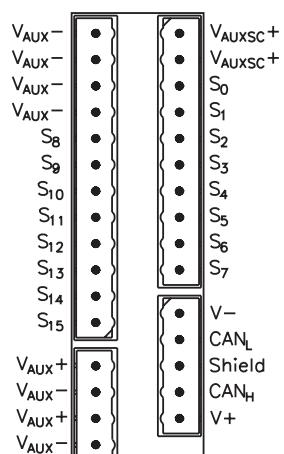

### I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0

### I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
Out	0	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8

## Standard Input Stations



**FDNQ-S0200-T\***

**FDNQ-S0400-T**

**FDNQ-S0800-T**

**FDNQ-S0400-C**

\* Not FM Approved



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Compact Housing
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA plus total of input currents (from DeviceNet)
- Sensor Current: <700 mA sum of all inputs (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates fault for entire station


### Diagnostics (Physical)

- One LED indicates fault for entire station
- LEDs to indicate status of DeviceNet communication

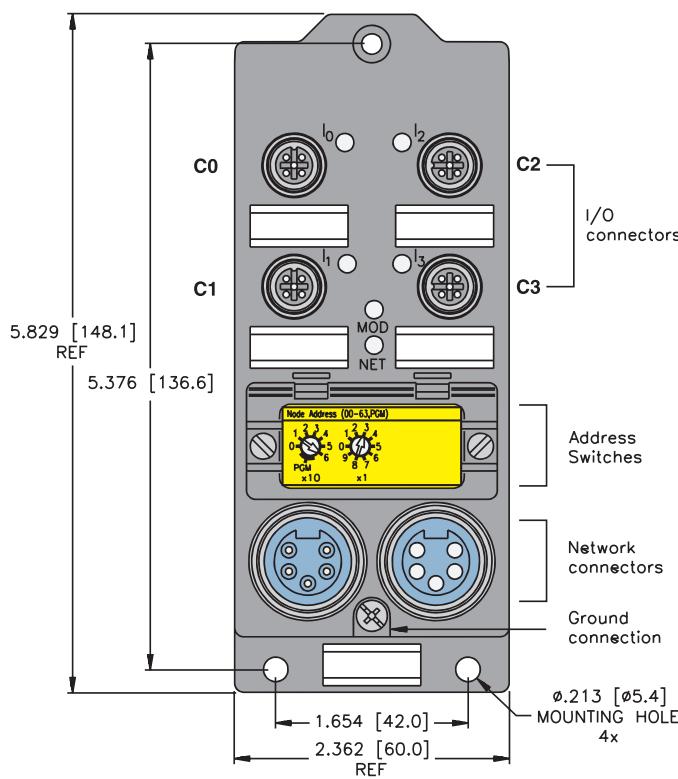

1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L



DeviceNet minifast Pinout

Male	Female
	
5-Pin	5-Pin

FDNQ...T

1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet eurofast Pinout

Male	Female
	
5-Pin	5-Pin



FDNQ...C

# Process Automation



Part Number	Inputs							Data	
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNQ-S0200-T	2	0,2	S	1	PNP	X			3
FDNQ-S0400-T	4	0-3	S	1	PNP	X			1
FDNQ-S0800-T	8	0-3	2S	2	PNP	X			2
FDNQ-S0400-C	4	0-3	S	1	PNP	X			1

## Input Connectors

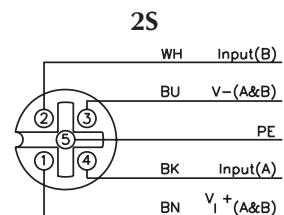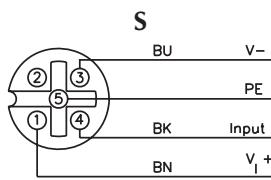

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	IGS	-	-	-	I-3	I-2	I-1	I-0

## I/O Data Map 3

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	IGS	-	-	-	-	-	I-1	I-0

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
In	1	IGS	-	-	-	-	-	-	-

## Standard Output Station



**FDNQ-S0002G-T**



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Compact Housing
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA plus total of all output currents (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

### Power Distribution

- Outputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit each per I/O point



### Diagnostics (Physical)

- Individual LED to indicate open/short-circuit for each channel
- LEDs to indicate status of DeviceNet communication

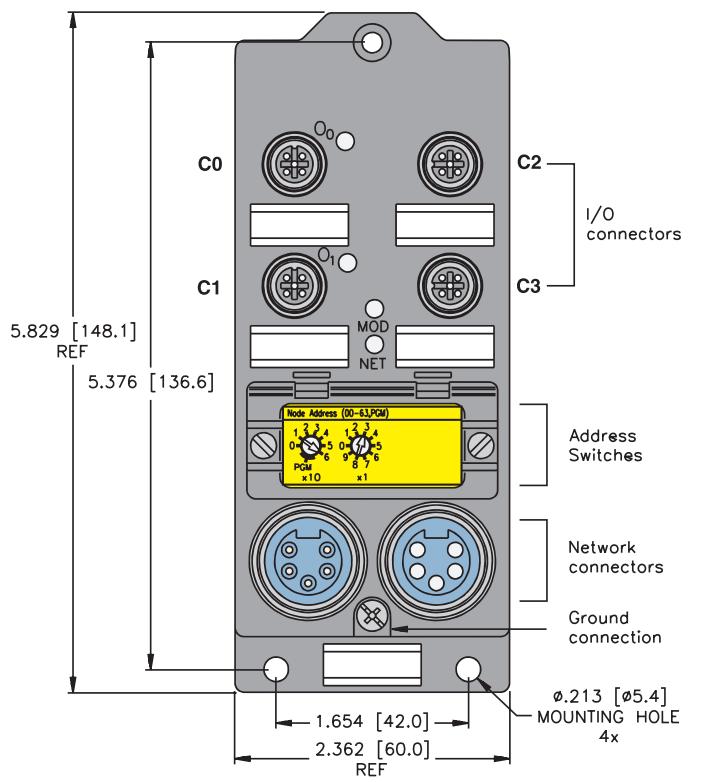


1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet minifast Pinout

Male	Female
	
5-Pin	5-Pin

Part Number	Outputs								Data
	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map	
FDNQ-S0002G-T	2	0, 2	G	1	0.5 A	X			1

### Output Connectors

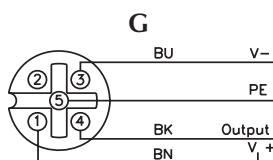

**Mating cordset:**  
RK 4.4T-\* - RS 4.4T

### I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	-	-	-	-	-	-	-	OS-1	OS-0
Out	0	-	-	-	-	-	-	0-1	0-0

## Standard Input/Output Stations



**FDNQ-S0201G-T\***

**FDNQ-CSG44-T**

**FDNQ-S0404G-T**

**FDNQ-XSG08-T**

**FDNQ-CSG44-E**

\* Not CSA Approved



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- DeviceNet Powered I/O
- Compact Housing

### Electrical

- Operating Current: <75 mA plus total of all I/O current (from DeviceNet)
- Sensor Current: <700 mA total of all inputs (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -40 to +70 °C (-40 to +158 °F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates fault for entire station (...S0201G-T has one dedicated bit to indicate a fault for the output point as well)

### Diagnostics (Physical)

- One LED indicates fault for entire station
- LEDs to indicate status of DeviceNet communication

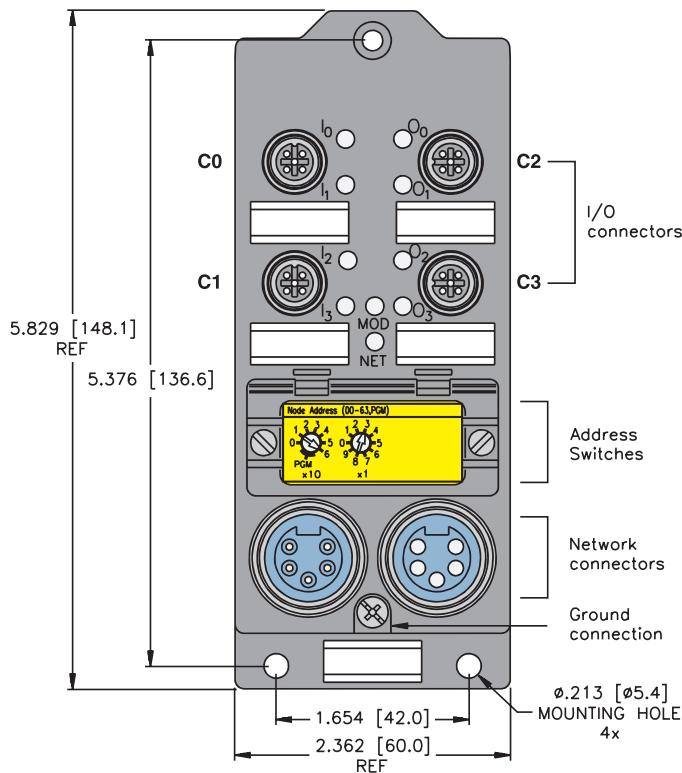

1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet minifast Pinout

Male	Female

5-Pin

1 = Shield  
2 = V+  
3 = V-  
4 = CAN\_H  
5 = CAN\_L

DeviceNet Pinout

eurofast Male

5-Pin




FDNQ...-E

# Process Automation



Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNQ-S0201G-T	2	0	2S	2	PNP	X			1	1	G	1	0.5 A	X		1
FDNQ-CSG44-T	4	0-3	C	1	PNP	X			4	0-3	C	1	0.5 A			2
FDNQ-S0404G-T	4	0-1	2S	2	PNP	X			4	2-3	2G	2	0.5 A			2
FDNQ-XSG08-T	8	0-3	2X	2	PNP	X			8	0-3	2X	2	0.5 A			3
FDNQ-CSG44-E	4	0-3	C	1	PNP	X			4	0-3	C	1	0.5 A			2




## Input/Output Connectors

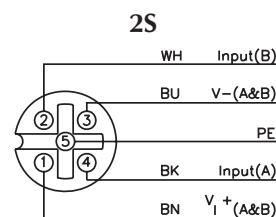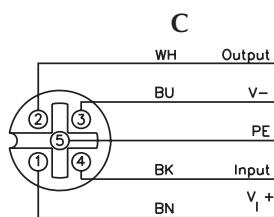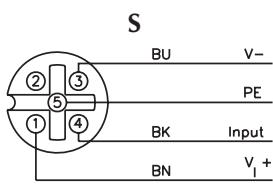

**Mating cordset:**  
RK 4.4T-\*RS 4.4T

**Mating cordset:**  
RK 4.4T-\*RS 4.4T  
**Splitter:**  
VB2-RS 4.4T-1/2RK 4.4T-/\*/S651

**Mating cordset:**  
RK 4.4T-\*RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-/\*

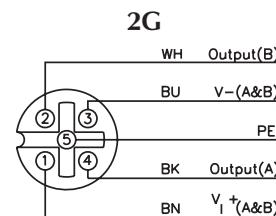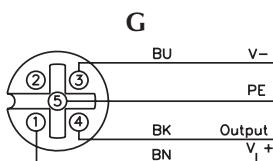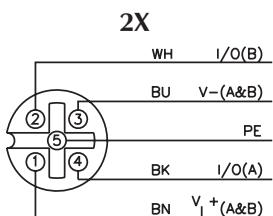

**Mating cordset:**  
RK 4.4T-\*RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-/\*

**Mating cordset:**  
RK 4.4T-\*RS 4.4T

**Mating cordset:**  
RK 4.4T-\*RS 4.4T  
**Splitter:**  
VBRS 4.4-2RK 4T-/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	IGS	-	-	-	-	OS-0	I-1	I-0
Out	0	-	-	-	-	-	-	0-0	

## I/O Data Map 3

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	IGS	OGS	-	-	I-3	I-2	I-1	I-0
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

## I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	IGS	OGS	-	-	I-3	I-2	I-1	I-0
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

## Standard Input/Output Station



FDNQ-S0404G-MM



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection
- Auxiliary Powered Outputs
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA plus total of input currents (from DeviceNet)
- Sensor Current: <700 mA total of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from Auxiliary power)

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: Auxiliary power supply

### Mechanical

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates fault for entire station

### Diagnostics (Physical)

- One LED indicates a fault for the entire station
- LEDs to indicate status of DeviceNet communication

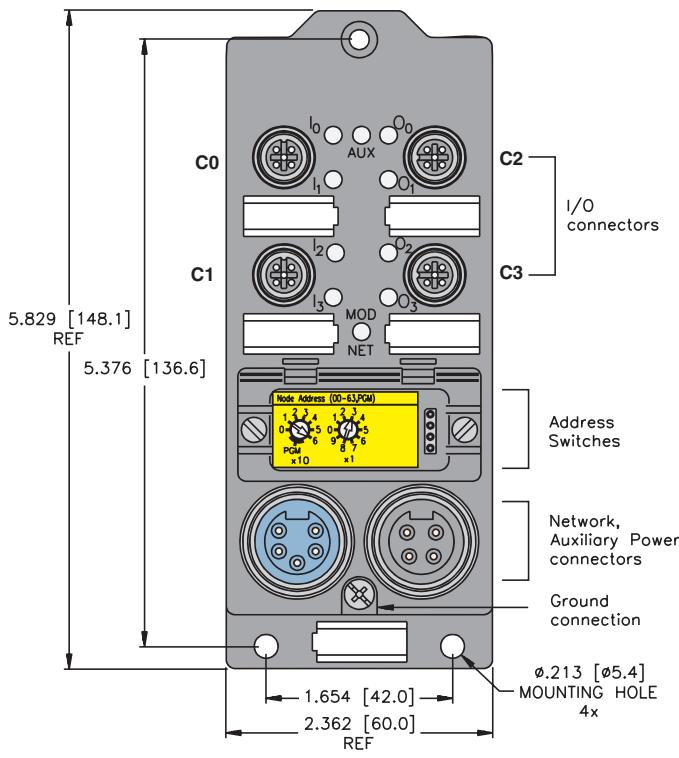

### Aux. Power Pinout

#### minifast Male

- |   |               |
|---|---------------|
| 1 | = $V_{AUX}^+$ |
| 2 | = NC          |
| 3 | = NC          |
| 4 | = $V_{AUX}^-$ |

#### 4-Pin



### DeviceNet Pinout

#### minifast Male

- |   |          |
|---|----------|
| 1 | = Shield |
| 2 | = V+     |
| 3 | = V-     |
| 4 | = CAN_H  |
| 5 | = CAN_L  |


#### 5-Pin




Part Number	Inputs						Outputs						Data			
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	Output Count	Connectors	Pinout	Outputs per Connector	Current	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNQ-S0404G-MM	4	0-1	2S	2	PNP	X			4	2-3	2G	2	0.5 A	X		1

## Input/Output Connectors

2S

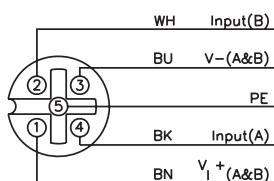

2G

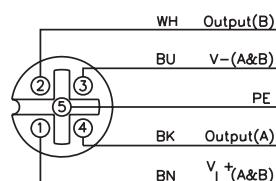

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

**Mating cordset:**

RK 4.4T-\* - RS 4.4T

**Splitter:**

VBRS 4.4-2RK 4T-\*/\*

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Out	0	IGS	OGS	-	-	I-3	I-2	I-1	I-0
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

## Analog Input Station



**FDNQ-4AI-I-T**



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Compact Housing
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <100 mA plus sum of input currents (from DeviceNet)
- Sensor Current: 0-20 mA or 4-20 mA analog signal (16-bit signed integer). The 0-20 mA or 4-20 mA range can be adjusted via rotary switch on front of station.

### Power Distribution

- Inputs: DeviceNet power supply

### Mechanical


- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Physical)

- LEDs to indicate status of DeviceNet communication

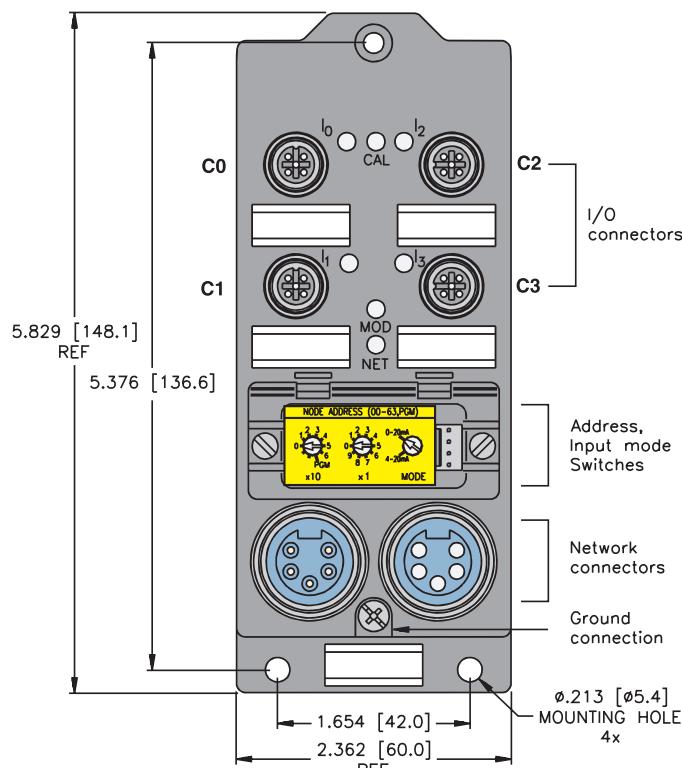


**DeviceNet minifast Pinout**

Male	Female
1 = Shield	
2 = V+	
3 = V-	
4 = CAN_H	
5 = CAN_L	
<b>5-Pin</b>	
<b>5-Pin</b>	

Part Number	Inputs								Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNQ-4AI-I-T	4	0-3	AI-I	1	0-20 mA or 4-20 mA				1

## Input Connectors

AI-I

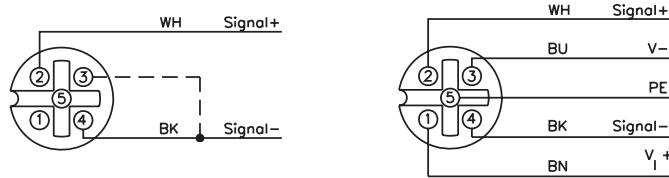

Loop Powered (Isolated)

DeviceNet Powered Transducer

**Mating cordset:**

**Isolated Loop:**

RK 4.5T-\*M-RS 4.5T/S653

**Loop Powered:**  
RK 4.5T-\*M-RS 4.5T/LPS/S653  
Note: The "LPS" in the part number indicates that the cord jumpers pin 3 to pin 4 on the male side to the signal- to the station common. Pin 3 is not connected at the female end.

**Applications:**

TURCK Sensors:

LU; RK 4.4T-\*RS 4.4T/S1118

LI; RK 4.4T-\*RS 4.4T/S1120

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0								Channel 0, LSB
	1								Channel 0, MSB
	2								Channel 1, LSB
	3								Channel 1, MSB
	4								Channel 2, LSB
	5								Channel 2, MSB
	6								Channel 3, LSB
	7								Channel 3, MSB

## Analog Input Station



FDNQ-4AI-V/I-T



- Rugged, Fully Potted Stations
- IP 67, IP 68, IP 69K Protection

- Compact Housing
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <100 mA plus sum of input currents (from DeviceNet)
- Sensor Current: 0-20 mA or 4-20 mA analog signal (16-bit signed integer)
- Sensor Voltage: 0 to 10 V or -10 to +10 V Analog signal (16 bit signed integer)

The voltage/current ranges can be adjusted via rotary switch on front of station.

### Power Distribution

- Inputs: DeviceNet power supply

### Mechanical


- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 / IEC IP 67, IP 68, IP 69K
- Vibration: 50 g @ 10-500 Hz

### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Physical)

- LEDs to indicate status of DeviceNet communication

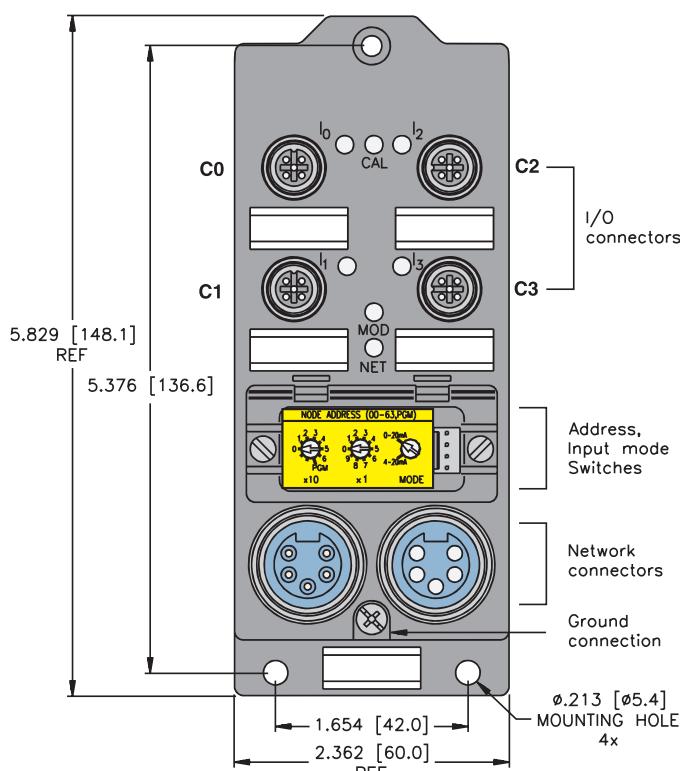

DeviceNet minifast Pinout

Male	Female
1 = Shield	
2 = V+	
3 = V-	
4 = CAN_H	
5 = CAN_L	
<b>5-Pin</b>	


# Process Automation



Part Number	Inputs								Data
	Input Count	Connectors	Pinout	Inputs per Connector	Sensor Style	Group Diagnostics	Individual Diagnostics	Wire-Break Detection	I/O Map
FDNQ-4AI-V/I-T	4	0-3	AI-I	1	0-20 mA, 4-20 mA 0-10 V -10 to +10 V				1

## Input Connectors

AI-I

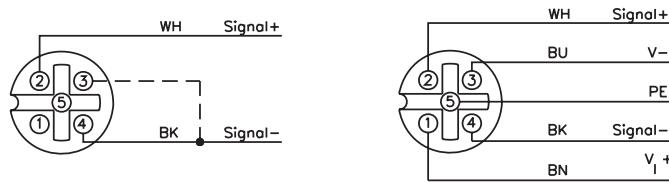

Loop Powered (Isolated)

DeviceNet Powered Transducer

### Mating cordset:

### Isolated Loop:

RK 4.5T-\*M-RS 4.5T/S653

### Loop Powered:

RK 4.5T-\*M-RS 4.5T/LPS/S653

Note: The "LPS" in the part number indicates that the cord jumpers pin 3 to pin 4 on the male side to the signal- to the station common. Pin 3 is not connected at the female end.

### Applications:


TURCK Sensors:

LU; RK 4.4T-\*RS 4.4T/S1118

LI; RK 4.4T-\*RS 4.4T/S1120

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0								Channel 0, LSB
	1								Channel 0, MSB
	2								Channel 1, LSB
	3								Channel 1, MSB
	4								Channel 2, LSB
	5								Channel 2, MSB
	6								Channel 3, LSB
	7								Channel 3, MSB

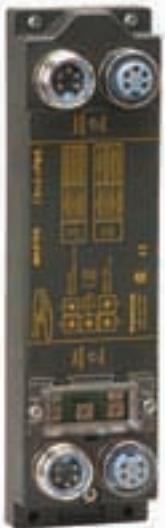**DeviceNet Master**
**FDN-MSTR-1220**  


- Used to Manage a Sub-Network
- Manages 8-nodes on Sub-Network

**Electrical**

- Bus Power: 11-30 VDC
- Current Consumption: 125 mA (Slave), 30 mA (Master)

**LED Indication**

- Slave Network Status:
  - Flashing Green: Ready for connection
  - Green: Established connection
  - Flashing Red: Connection time out
- Master Network Status:
  - Flashing Green: Ready for connection
  - Green: Connected to all stations
  - Flashing Red: Time out with one or more stations
  - Red: Connection not possible

**Adjustments**


- Slave Side (Network address): 0-63 via rotary switches
- Master Side (Node count): 0-8 via rotary switches
- Master Baud Rate (5,6,7): 5=125 K, 6=250 K, 7=500 K

**Connections**

- Bus Line: 5-pin **minifast®** connectors

**Housing**

- Material: Glass filled nylon with nickel plated brass connectors
- Enclosure: NEMA 1,3,4,12,12 and IEC IP 67, 68 and 69K
- Operating Temperature: -25° to 70° C (-13° to 158° F)

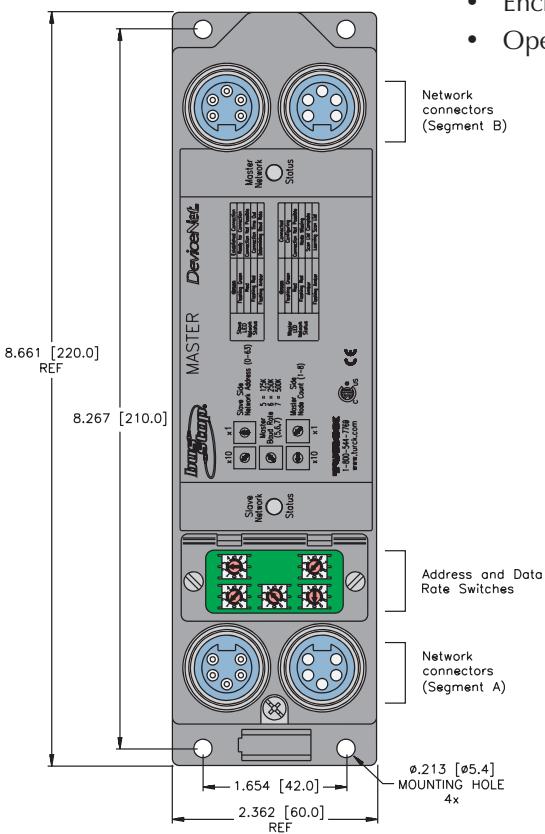

Note: each segment has one male and one female connector

**DeviceNet minifast Pinout**


Male	Female
1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L	2 3 4 5 1

# Process Automation



The FDN-MSTR is a DeviceNet™ master used to manage a subnet off of the main DeviceNet network.

## Main DeviceNet Network

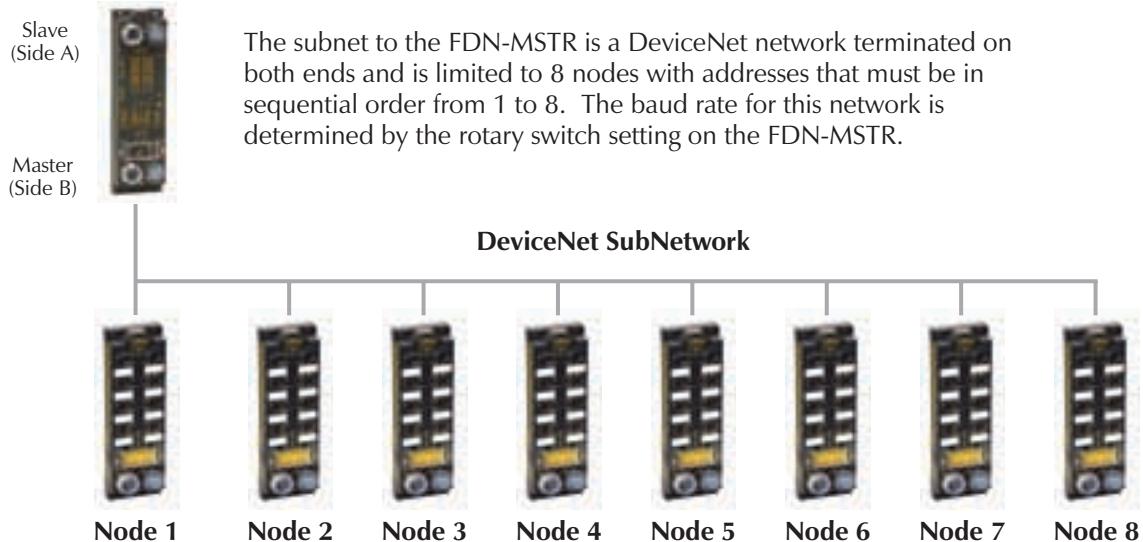

The subnet to the FDN-MSTR is a DeviceNet network terminated on both ends and is limited to 8 nodes with addresses that must be in sequential order from 1 to 8. The baud rate for this network is determined by the rotary switch setting on the FDN-MSTR.

The slaves on the subnet are independent of the main DeviceNet network. Hence a node 4 on the main network will conflict with a node 4 on the sub network.

## I/O Data Map 1

The Input data size is 64 bytes (where the first two bytes are reserved for status information from the FDN-MSTR).

In	Byte	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	IC	-
	1	ESN 8	ESN 7	ESN 6	ESN 5	ESN 4	ESN 3	ESN 2	ESN 1	RSN 8	RSN 7	RSN 6	RSN 5	RSN 4	RSN 3	RSN 2	RSN 1
2 Node Address 1 Input Data																	
3 Node Address 2 Input Data																	
... ..																	
N Node Address X Input Data																	

The Output data is 64 bytes.

Out	Byte	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0																
	0	Node Address 1 Output Data																															
	1	Node Address 2 Output Data																															
2 Node Address 3 Output Data																																	
... ..																																	
N Node Address X Output Data																																	

IC = Invalid configuration of node missing: 0 means OK, 1 means error.

ESNX = Error on sub node X: 0 means OK, 1 means error communicating with node.

RSNX = Registered sub node X: 0 means no node is present, 1 means that node is present.

The data table for the Input and Output show the last Byte as "N". This "N" is variable depending on the total amount of data generated by all the nodes on the deviceNet™ sub network. However the maximum for both the Input and the Ouptut are 64 bytes.

**DeviceNet Repeater****REP-DN****REP-DN-DROP**

- Extend Network Length
- Extend Drop Lengths
- Isolate Power Segments
- Isolate Communication Segments

**Electrical**

- Operating Current: 125 mA from segment A, 30 mA from segment B

**Power Distribution**

- REP-DN: DeviceNet power supply for each segment (must be powered by separate supplies)
- REP-DN-Drop: Does not require a separate power supply and does not isolate power between segments

**Mechanical**


- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 and IEC IP 67
- Vibration: 50 g @ 10-500 Hz

**Material**

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

**Diagnostics (Physical)**

- One LED for each segment to indicate communication status

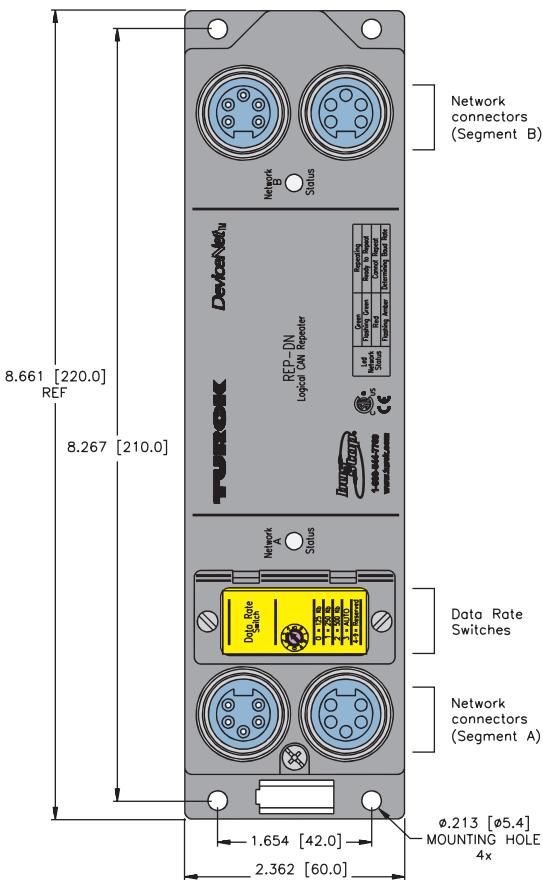

Note: each segment has one male and one female connector

**DeviceNet minifast Pinout**

Male	Female
 5-Pin	 5-Pin

- 1 = Shield
- 2 = V+
- 3 = V-
- 4 = CAN\_H
- 5 = CAN\_L

# Process Automation



## DeviceNet™ Repeater

The **REP-DN** is a potted, fully connectorized rugged repeater that can be mounted directly on the machine. It is designed for use on any Controller Area Network (CAN), including DeviceNet. Network segments connected by a repeater are considered separate physical networks (trunk and drop lengths for each segment are determined as if the other segments are not there), but one logical network (addresses cannot be duplicated - the scanner and configuration tools work as a single network).

A repeater does not consume an address and is invisible to all the other devices on the network. A repeater does not have an EDS file. The **REP-DN** repeater can be used to extend either the trunk or drop lines, and to isolate power supplies on networks with multiple supplies. There is no limit to the number of repeaters that can be used on one network.


A repeater's baudrate is set via a rotary switch. The baudrate on each side of the repeater must be the same, as different rates would cause the "slow" side to be overloaded with messages from the "fast" side. When a message is repeated, a 2 ms delay is introduced. This is typically insignificant compared to the overall scan time of the network. If more than four repeaters are used in series, the interscan delay may need to be increased.

## Repeater Configurations

### Extended Trunk Line


Repeaters are connected in series to extend the trunk line. The total delay is 2 ms multiplied by the number of repeaters.

\* REP-DN-DROP does not require a separate power supply on segment B. If a separate power supply is desired, it must be attached using a "Power T" (RSM RKM 57 WSM 40 PST recommended).

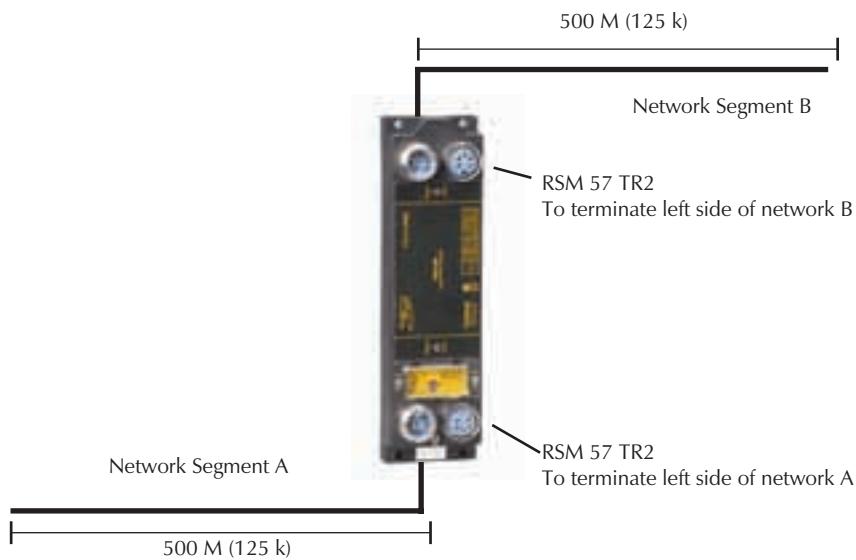

### Extended Drop Line


Repeaters are connected in parallel to extend the drop length. The overall network delay is 2 ms, because there is only one repeater between the scanner on the trunk and any other device.

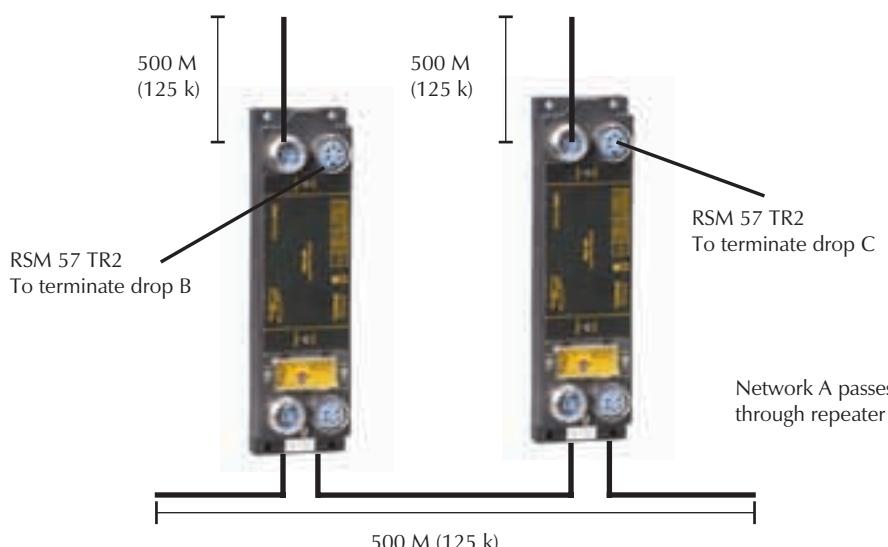

## Do Not Create a Ring

While a repeater can be used to create very large and complex networks, some configurations are not permitted. If a ring is created (both sides of a repeater are connected to the same network), the repeater will continuously repeat to itself, causing the network to overload.

## DeviceNet Spanner

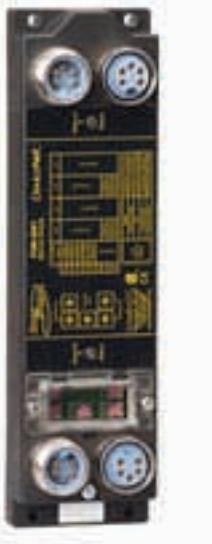

- Rugged, Fully Potted Stations
- IP 67 Protection
- Communicate Between PLCs
- Connect Two DeviceNet Networks

### Electrical

- Operating Current: 125 mA from segment A, 30 mA from segment B

### Power Distribution

- Station: DeviceNet power supply for each segment (must be powered by separate supplies)

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: NEMA 1,3,4,12,13 and IEC IP 67
- Vibration: 50 g @ 10-500 Hz


### Material

- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Nylon 6 (other materials available on request)

### Diagnostics (Physical)



- One LED for each segment to indicate communication status

**FDN-DN1**

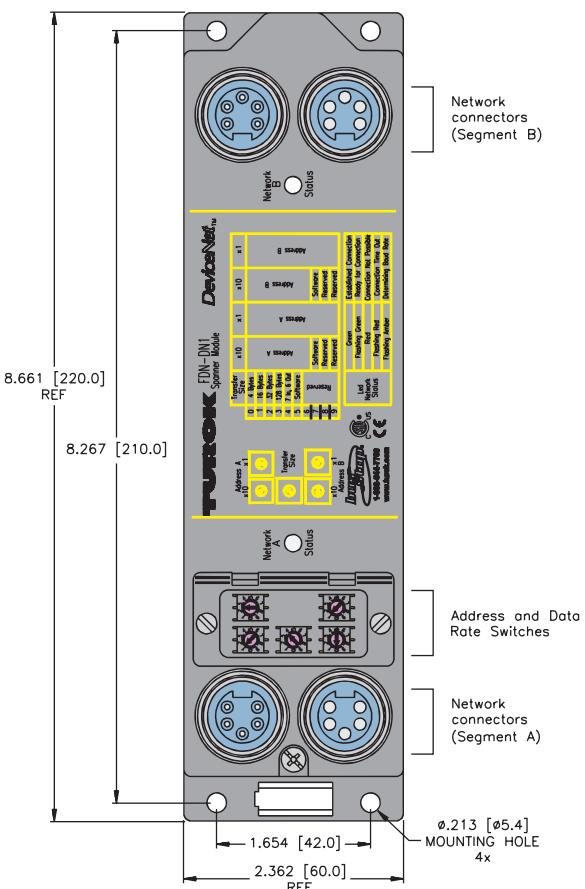

Note: Each segment has one male and one female connector.

### DeviceNet minifast Pinouts

Male	Female
1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L	 
5-Pin	5-Pin

## DeviceNet™ Spanner

The FDN-DN1 "Spanner" module provides a means to route data between two PLC's using DeviceNet. The spanner eliminates the need for a high level control network pyramid, by connecting the DeviceNet networks directly. This simple approach is extremely powerful and economical. It is simple because the spanner appears to each PLC as a standard rack of I/O; any DeviceNet scanner can send I/O data to the spanner without additional software or complex configuration procedures. It is powerful because it can transfer up to 128 bytes of data in one message. It is economical because it replaces the high level control network, eliminating two control cards, wiring, conduit and programming.

### Theory of operation

The spanner transfers data between PLC A and PLC B by appearing as I/O to each PLC. The spanner immediately copies the output data from PLC A to the input data for PLC B. Similarly, PLC B's output data is copied to PLC A's input data. The size of data transferred is set by the transfer size switch. If the transfer size switch is set at 4,16, 32 or 128 bytes, then the size of the data transferred is the same in both directions. If the transfer size switch is set to software, then the transfer size is set via software and it can be any size (0,1,2,3...128 bytes). When in software mode, the data size mapped to the PLC must be equal in opposite directions on either side of the spanner. For example, if side A produces 2 input bytes and consumes 12 output bytes, then side B must be set to produce 12 input bytes and consume 2 output bytes.

### Electrically

The spanner optically isolates network A from network B; the networks do not interact electrically in any way. The spanner is powered internally by network A; a power reset on the A side will reset the entire station.

### Addressing

Because the spanner is essentially two DeviceNet devices, one on network A and one on network B, it has two sets of address switches. The address switches for network A are completely independent of network B.


### Baudrate

The spanner automatically detects the Baudrate at startup. Network A and B may be at different baudrates.

### Spanner Topology

The spanner is typically used to correct and coordinate multiple work cells.

Conveyor  
PLC

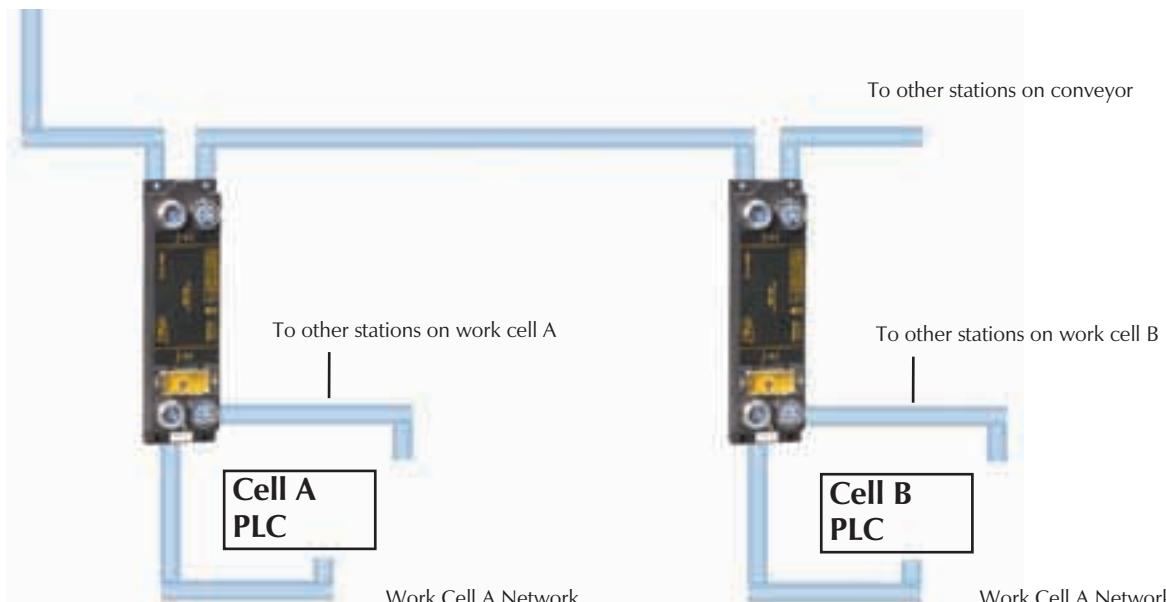

## DeviceNet FDN20 Stations


TURCK's FDN20 DeviceNet stations are low-cost screw-terminal connection stations designed for mounting in an enclosure. These stations allow you to easily connect standard I/O devices such as push buttons, pilot lights, motor starters and drives to a DeviceNet network. The FDN20 station is designed to easily upgrade existing equipment to a DeviceNet network.

### Specifications

TURCK FDN20 stations are designed to be mounted in standard equipment enclosures (operator stations, motor control centers, etc.). Most FDN20 stations use only screw terminal connections for all I/O and network wiring. FDN20-4S-4XSG-E has a DeviceNet **eurofast®** (M12) connector on the back of the housing that enables mounting the station to an enclosure wall with the (DeviceNet) connection on the outside of the box; greatly simplifying network wiring. Detailed environmental specifications are as follows:

- Housing material: Glass filled nylon
- Protection level: IP 20
- Operating temperature: -40 to +70°C (-40 to +158°F)


The station's components are identified in the figure below.

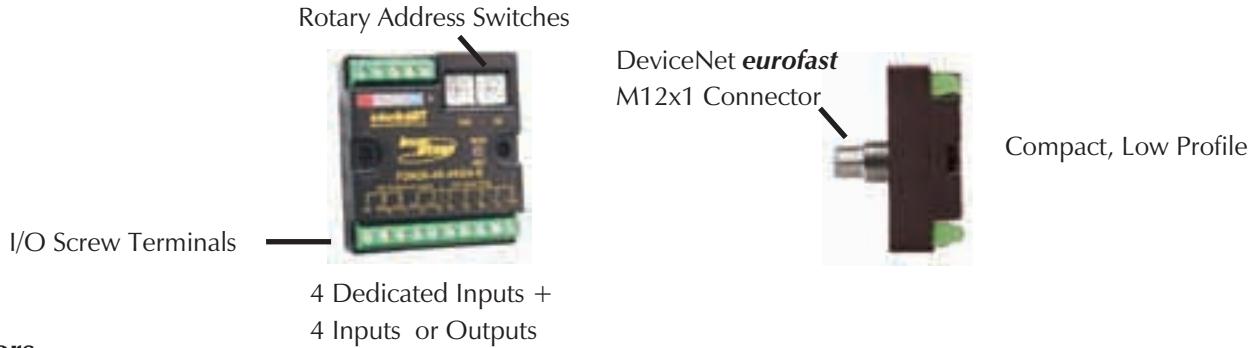

### Connectors

#### Bus connectors:

FDN20 screw terminal and **eurofast** bus connectors pinouts:

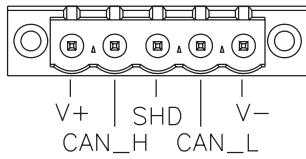


- 1 = Shield
- 2 = V+
- 3 = V-
- 4 = CAN\_H
- 5 = CAN\_L

#### I/O connectors:

Each FDN20 version uses a different screw terminal connector. Detailed pinout information is given in the product information on the following pages.

**DeviceNet Pinout**



# Process Automation





## Power

The short FDN20 stations provide all the power to the I/O devices from the DeviceNet™ power supply. In this case there is no auxiliary power connection.

The remaining long FDN20 stations (FDN20-16XSG, for example) provide an auxiliary power connection. I/O devices can be powered from the DeviceNet or auxiliary power supply, depending on how the user chooses to wire the station. The different wiring options are illustrated in the following diagram.

\*WARNING NOTE: (V+) and (V-) PROVIDE POWER FROM DeviceNet . \*WARNING NOTE: (V+) and (V-) PROVIDE POWER FROM DeviceNet.  
DO NOT CONNECT TO SUPPLY OR GROUND. DO NOT CONNECT TO SUPPLY OR GROUND.

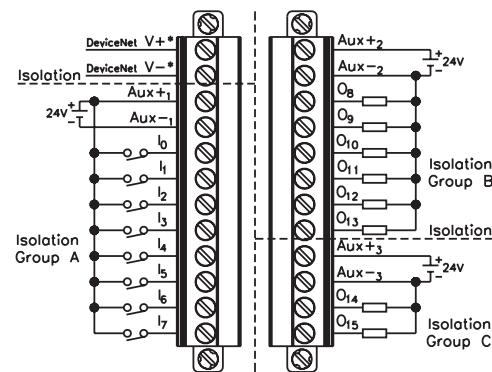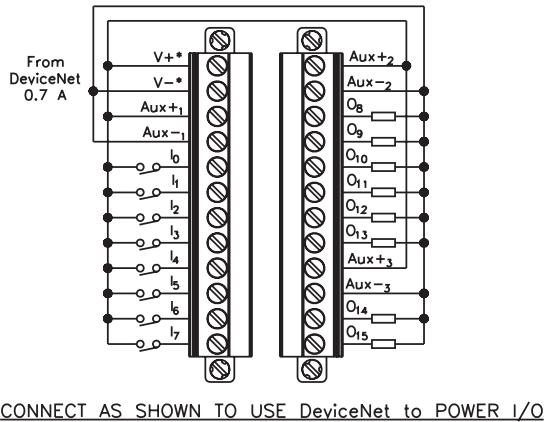


Power ratings for FDN20 stations:

- Bus (DeviceNet) Voltage: 11-26 VDC
- Aux Power Voltage: 24 VDC (nominal)
- Internal Current Consumption: <75 mA (@ nominal 24 VDC) plus sum of I/O currents if auxiliary power is not used
- Input Voltage: 13-26 VDC (From DeviceNet supply)
- Input Short-Circuit Current: <700 mA (total for entire station)
- Input Signal Current (each input): OFF <2 mA; ON 3.0-3.4 mA (@ nominal 24 VDC)
- Input Delay: 2.5 ms
- Output Current: 0.5 A max per output

## Addressing

DeviceNet stations must have a network address for communication. The address for FDN20 stations may be set via the visible rotary switches on the front of the station.

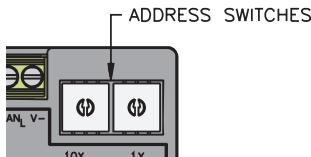

$$\text{Address} = 6 \times 10 + 3 \times 1 = 63$$

The pair of switches represents the address as a decimal number; the left switch being the 10's multiplier and the right switch the 1's multiplier. To program the stations, rotate the switches with a small slotted screwdriver until the arrows are pointing at the appropriate numbers for the chosen address.

## Diagnostics

FDN20 stations provide a single Network Status LED for diagnosing communication problems.

- Green: Connection established
- Flashing green: Waiting for connection
- Flashing red: Connection timed out
- Red: Cannot connect
- Flashing Amber: Finding baud rate (autobaud setting)

The long housing stations (i.e. FDN20-16XSG) have an additional LED for each I/O point on the station indicating:

- Off: Point is off
- Green: Point is on

Additionally, most FDN20 stations provide diagnostic bits in the I/O table for diagnostics. One bit indicates a short-circuit fault for outputs or inputs. See product pages in this catalog for detailed I/O information.

**Notes:**

## Enclosure Mounted Input/Output Stations



**FDN20-4S-4XSG**

**FDN20-4S-4XSG-E\***

**FDN20-4S-4XSG-DIN\***

\* Not UL



- In-Cabinet I/O
- IP 20 Protection

- Ideal for Retrofits
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA (from DeviceNet) plus I/O currents (from bus power)
- Input Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: IEC IP 20

### Material


- Connectors: Nickel-plated brass (**eurofast** option only)
- Housing: Nylon

### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for all inputs and one bit indicates a fault for all outputs


### Diagnostics (Physical)

- LED to indicate status of DeviceNet communication

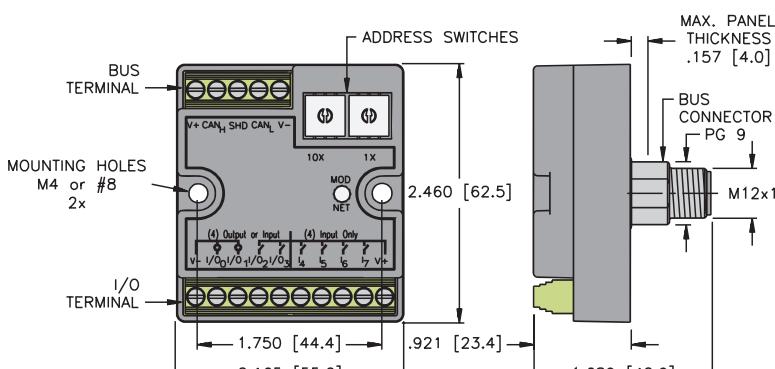


FDN20-4S-4XSG-E shown

### DeviceNet Pinout

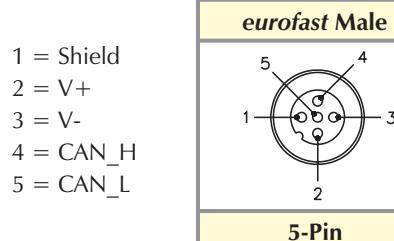

FDN20-4S-4XSG-E only

### DeviceNet Connector

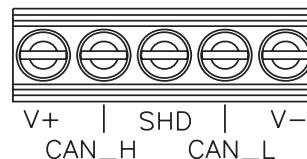

Note: A DIN rail mounting bracket (FDN20-BKT-DIN) may be purchased separately for use with the FDN20-4S-4XSG.


# Process Automation



Part Number	Inputs						Outputs				Data	
	Input Count	Pinout	Sensor Style	Group	Individual	Wire-Break Detection	Output Count	Pinout	Current	Individual	Wire-Break Detection	Data Map
FDN20-4S-4XSG	8	FS	PNP	X			4	FS	0.5 A			1
FDN20-4S-4XSG-E	8	FS	PNP	X			4	FS	0.5 A			1
FDN20-4S-4XSG-DIN	8	FS	PNP	X			4	FS	0.5 A			1

## Input/Output Connectors

FS

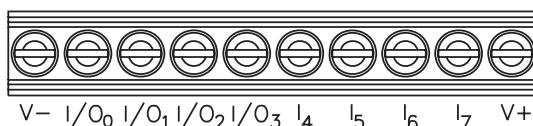

\*Note: I/O<sub>0</sub> to I/O<sub>3</sub> can be used as inputs or outputs

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

### Enclosure Mounted Input/Output Station



**FDN20-4S-4XSG-0189**

**FDN20-S0404G-0220\***

\* Not CE



- In-Cabinet I/O
- IP 20 Protection
- Ideal for Retrofits
- Automatic Baud Rate Sensing

#### Electrical

- Operating Current: <75 mA plus I/O currents (from bus power)
- Input Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

#### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

#### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: IEC IP 20

#### Material


- Housing: Nylon

#### Diagnostics (Logical)


- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for all inputs and one bit indicates a fault for all outputs

#### Diagnostics (Physical)

- LED to indicate status of DeviceNet communication

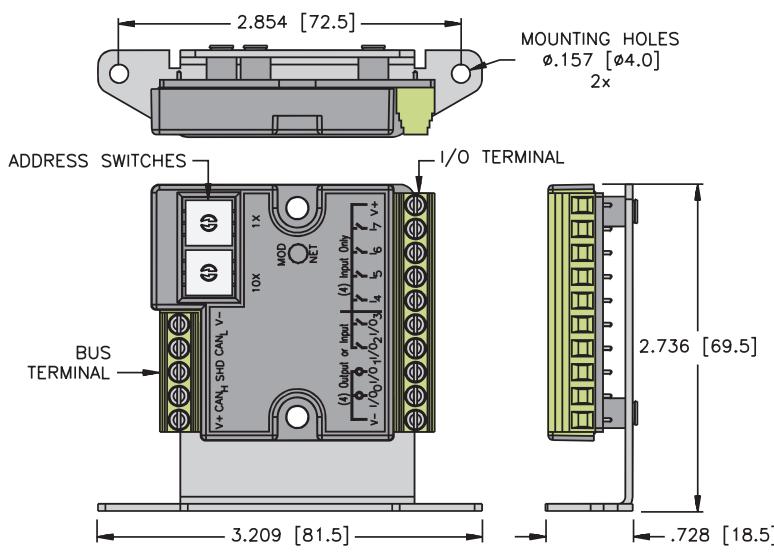

**DeviceNet Connector**

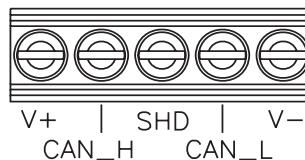


# Process Automation



Part Number	Inputs						Outputs				Data	
	Input Count	Pinout	Sensor Style	Group	Individual	Wire-Break Detection	Output Count	Pinout	Current	Individual	Wire-Break Detection	Data Map
FDN20-4S-4XSG-0189	8	FS	PNP	X			4	FS	0.5A			1
FDN20-S0404G-0220	4	FS-2	PNP	X			4	FS-2	0.5 A			2


## Input/Output Connectors

FS

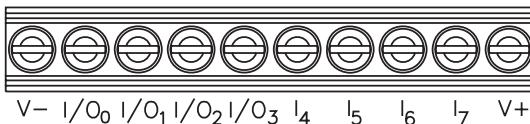

V- I/O<sub>0</sub> I/O<sub>1</sub> I/O<sub>2</sub> I/O<sub>3</sub> I<sub>4</sub> I<sub>5</sub> I<sub>6</sub> I<sub>7</sub> V+

FS-2

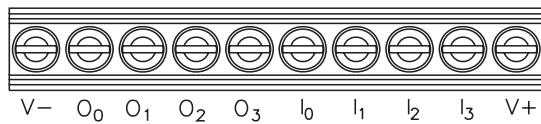

V- O<sub>0</sub> O<sub>1</sub> O<sub>2</sub> O<sub>3</sub> I<sub>0</sub> I<sub>1</sub> I<sub>2</sub> I<sub>3</sub> V+

\*Note: I/O<sub>0</sub> to I/O<sub>3</sub> can be used as inputs or outputs

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0	
1	IGS	OGS	-	-	-	-	-	-	
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	IGS	OGS	-	-	I-3	I-2	I-1	I-0	
Out	0	-	-	-	-	0-3	0-2	0-1	0-0

### Enclosure Mounted Input/Output Stations



**FDN20-16XSG**

**FDN20-16S**

- In-Cabinet I/O
- IP 20 Protection
- Ideal for Retrofits
- Automatic Baud Rate Sensing

#### Electrical

- Operating Current: <75 mA plus applicable I/O currents (from bus power)
- Input Current: <700 mA sum of all inputs
- Output Current: <500 mA per output

#### Power Distribution

- Inputs: Optionally DeviceNet or Auxiliary power supply as shown in wiring diagram
- Outputs: Optionally DeviceNet or Auxiliary power supply as shown in wiring diagram

#### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: IEC IP 20

#### Material


- Housing: Nylon

#### Diagnostics (Logical)

- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for all inputs, on bit indicates a fault for all outputs

#### Diagnostics (Physical)


- LED to indicate status of DeviceNet communication

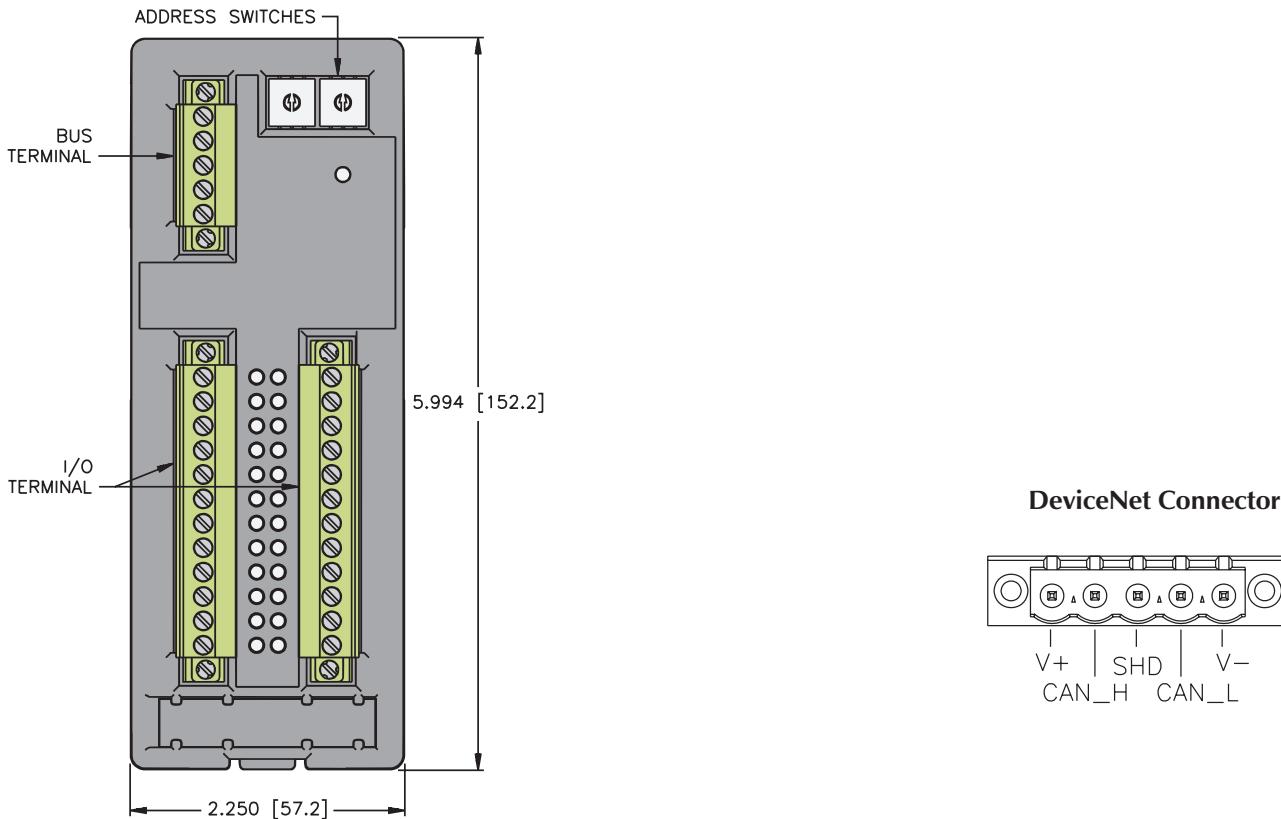


Part Number	Inputs				Outputs				Data			
	Input Count	Pinout	Sensor Style	Group	Individual	Wire-Break Detection	Output Count	Pinout	Current	Individual	Wire-Break Detection	Data Map
FDN20-16XSG	16	FLX	PNP	X			16	FLX	0.5 A			1
FDN20-16S	16	FL	PNP	X			0					2

## Input/Output Connectors

FL

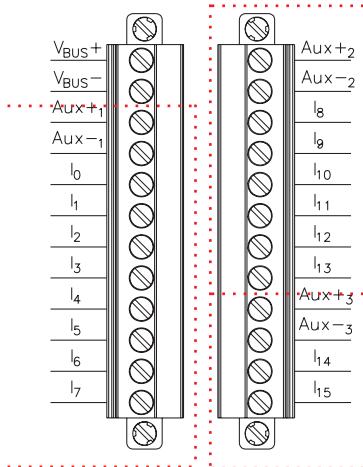

FLX

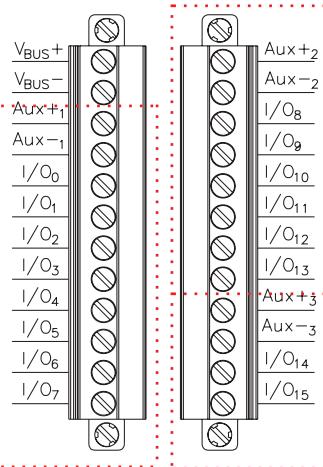

..... Indicates I/O groups which can be powered from separate Aux. Power supplies if desired.

I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	
2	IGS	OGS	-	-	-	-	-	-	-
Out	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
	1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8

I/O Data Map 2

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8	
2	IGS	OGS	-	-	-	-	-	-	-

## Enclosure Mounted Input/Output Stations



**FDN20-16SN-16XSG**

**FDN20-32SN**



- In-Cabinet I/O
- IP 20 Protection

- Ideal for Retrofits
- Automatic Baud Rate Sensing

### Electrical

- Operating Current: <75 mA plus applicable I/O currents (from bus power)
- Input Current: <700 mA sum of all inputs
- Output Current: 1.8 A per output

### Power Distribution

- Inputs: Optionally DeviceNet or Auxiliary power supply as shown in wiring diagram
- Outputs: Optionally DeviceNet or Auxiliary power supply as shown in wiring diagram

### Mechanical

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: IEC IP 20

### Material


- Housing: Nylon

### Diagnostics (Logical)


- Open/short-circuit status mapped to DeviceNet I/O table, one bit indicates a fault for all inputs, on bit indicates a fault for all outputs

### Diagnostics (Physical)

- LED to indicate status of DeviceNet communication

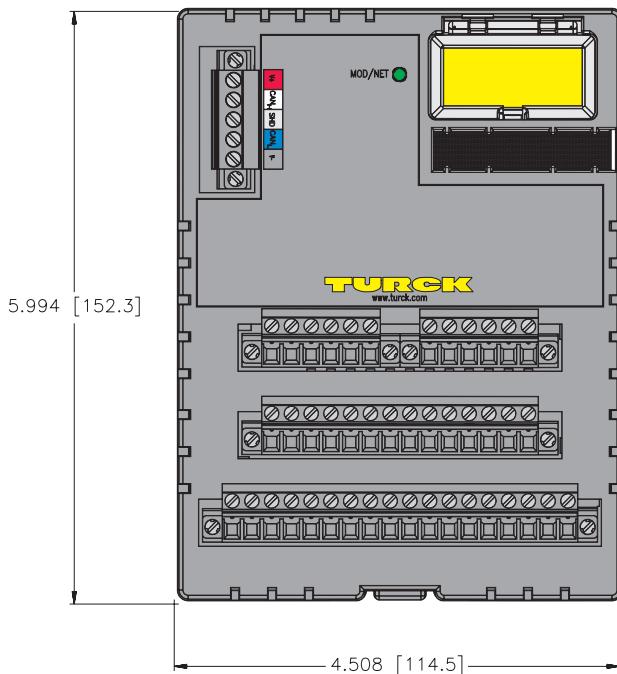

DeviceNet Connector

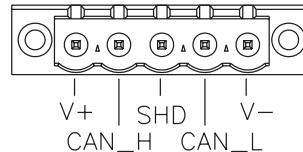

# Process Automation



Part Number	Inputs						Outputs				Data	
	Input Count	Pinout	Sensor Style	Group	Individual	Wire-Break Detection	Output Count	Pinout	Current	Individual	Wire-Break Detection	Data Map
FDN20-16SN-16XSG	32*	1	NPN/PNP	X			16*	2	1.8 A			1
FDN20-32SN	32	1	NPN/PNP	X								2

\* 16 dedicated inputs and 16 points which can be used as inputs or outputs.

I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
	2	I-23	I-22	I-21	I-20	I-19	I-18	I-17	I-16
	3	I-31	I-30	I-29	I-28	I-27	I-26	I-25	I-24
Out	4	IGS	OGS	-	-	-	-	-	-
	0	0-7	0-6	0-5	0-4	0-3	0-2	0-1	0-0
	1	0-15	0-14	0-13	0-12	0-11	0-10	0-9	0-8

I/O Data Map 2

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	I-15	I-14	I-13	I-12	I-11	I-10	I-9	I-8
	2	I-23	I-22	I-21	I-20	I-19	I-18	I-17	I-16
	3	I-31	I-30	I-29	I-28	I-27	I-26	I-25	I-24
	4	IGS	OGS	-	-	-	-	-	-

## Enclosure Mounted Input/Output Stations



**FDN20-4DR**



- In-Cabinet I/O
- IP 20 Protection
- Ideal for Retrofits
- Automatic Baud Rate Sensing

### Electrical

- Bus Power: 11-26 VDC
- Internal Current Consumption:  $\leq 75$  mA plus sum of sensor and output currents (from bus power)

### Input Circuits: (4) Negative Switched Dry contacts

- Input Voltage (V+): 0-26 VDC
- Input Signal Current (Input): OFF > 3 V, < 0.5 mA  
ON 0-1 V, 2-3 mA
- Input Delay: 1 ms

### Output Circuits: (12) Solid State Relays

- Output Voltage: 0-26 VDC
- Output Load Current: 120 mA (max.)

### Output Circuits (Analog): (4) 0-10 V

- Output Voltage 0-10 V
- Representation 16-bit signed integer
- Analog Supply Voltage 10-24 V

### Network Status LED

- Status: Green: Established connection  
Flashing Green: Ready for connection  
Red: Connection not possible  
Flashing Amber: autobaud/125k/250k/500k

### Adjustments


- Slave Side (Network address): 0-63 via rotary switches
- Master Side (Node count): 0-8 via rotary switches
- Master Baud Rate (5,6,7): 5=125 K, 6=250 K, 7=500 K

### I/O Status LED


- OFF = off
- Green = On

### Housing

- Material: Nylon
- Operating Temperature: -40° to 70° C (-40° to 158° F)

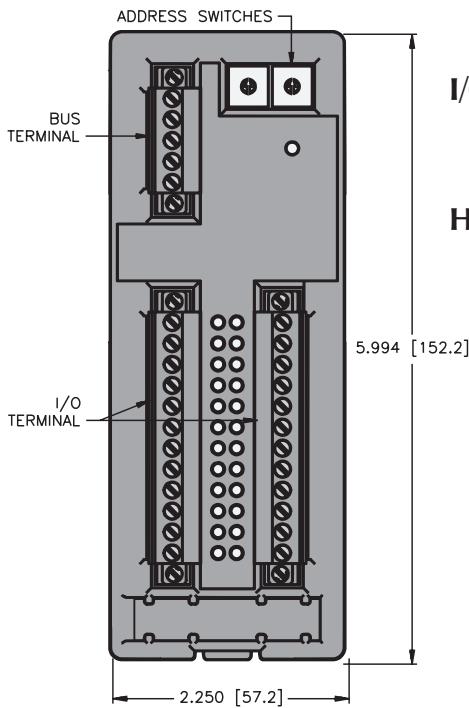

DeviceNet Connector

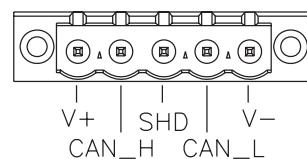

# Process Automation



Inputs								Outputs				Data	
Part Number	Input Count	Pinout	Sensor Style	Group	Individual	Wire-Break Detection	Discrete Relay Output Count	Pinout	Analog Outputs	Individual	Wire-Break Detection	Data Map	
FDN20-4DR	4	1	Sinking Dry Contacts	X			12	1	4			1	

## Input/Output Connectors

I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
In	0	-	-	-	-	-	-	I-1	I-0
	1	-	-	-	-	-	-	I-3	I-2
	0	-	-	0-5	0-4	0-3	0-2	0-1	0-0
	1	-	-	0-11	0-10	0-9	0-8	0-7	0-6
	2	A0 Low Byte							
	3	A0 High Byte							
Out	4	A1 Low Byte							
	5	A1 High Byte							
	6	A2 Low Byte							
	7	A2 High Byte							
	8	A3 Low Byte							
	9	A3 High Byte							

**OEM Stations**

- PC-Board Slaves
- Small Footprint

- Ideal for Retrofits
- Bus Powered I/O

**Electrical**

- Operating Current: <50 mA plus sum of I/O currents (from DeviceNet)
- Input Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

**Power Distribution**

- Inputs: DeviceNet power supply
- Outputs: DeviceNet power supply

**Mechanical**


- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: Open Frame

**Diagnostics (Logical)**

- One bit in I/O table indicates input fault for entire station, one bit per output for fault indication

**FDN-PCB-22****FDN-PCB-22-OEM\***

\* Not CE

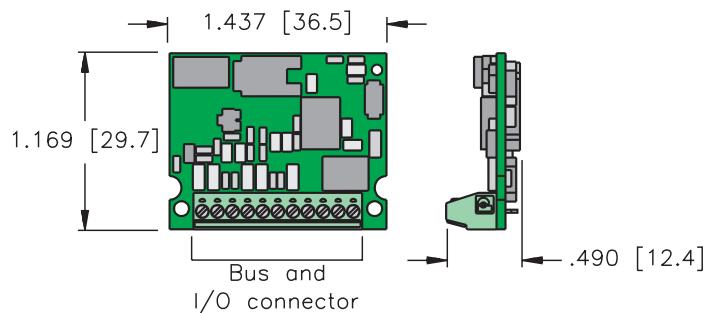**CE**


# Process Automation



Part Number	Connector	Inputs				Outputs				Data			
		Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Output Count	Pinout	Current	Individual Diagnostics	OCD	Map
FDN-PCB-22	Screw Terminal	2	DN-O1	PNP	X			2	DN-O1	0.5A	X		1
FDN-PCB-22-OEM	None	2	DN-O1	PNP	X			2	DN-O1	0.5A	X		1

## Input/Output Connectors

DN-O1

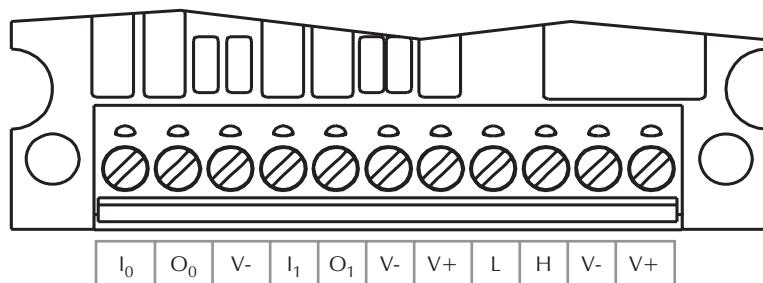

Note: L refers to CAN\_L and H refers to CAN\_H

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	IGS	-	-	-	0S-1	0S-0	I-1	I-0
Out	0	-	-	-	-	-	-	0-1	0-0

**OEM Station**

- PC-Board Slaves
- Small Footprint

- Ideal for Retrofits
- Included Mounting Bracket

**Electrical**

- Operating Current: <50 mA plus sum of I/O currents (from DeviceNet)
- Input Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

**Power Distribution**


- Inputs: DeviceNet power supply
- Outputs: Auxiliary power supply

**Mechanical**

- Operating Temperature: -40 to +70°C (-40 to +158°F)
- Protection: Open Frame

**FDN-PCB-22-1003-BKT****Diagnostics (Logical)**


- One bit in I/O table indicates input fault for entire station, one bit per output for fault indication

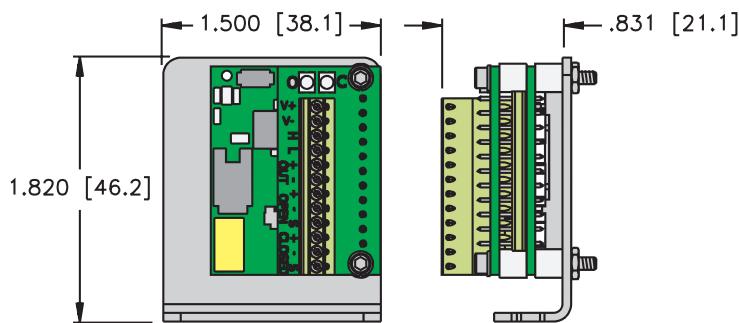

Part Number	Inputs						Outputs				Data	
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Output Count	Pinout	Current	Individual Diagnostics	OCD	Map
FDN-PCB-22-1003-BKT	2	DN-O3	PNP	X			1	DN-O3	0.5 A	X		1

## Input/Output Connectors

DN-O3

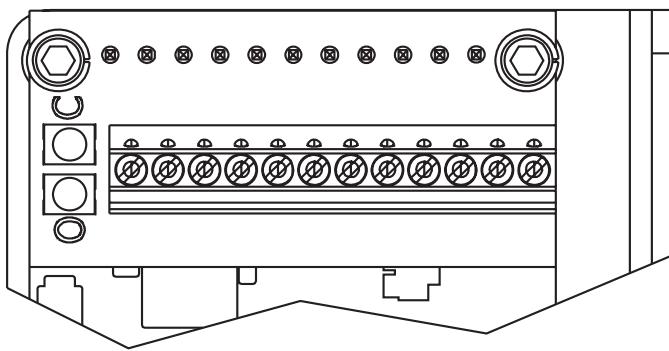

V+	V-	H	L	+      -	+      -	S	+      -	S
				Out	Open Input	Closed Input		

Note: L refers to CAN\_L and H refers to CAN\_H

## I/O Data Map 1

In	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	IGS	-	-	-	OS-1	-	I-1	I-0
Out	0	-	-	-	-	-	-	0-1	-

## Operator Station



### ODNA-4S-4XSG-E

- Ideal for Operator Interfaces
- IP 67 Protection

- Bus Powered I/O
- Automatic Baud Rate Sensing

#### Electrical

- Operating Current: <50 mA plus sum of all I/O currents (from DeviceNet)
- Input Current: <700 mA sum of all inputs (from DeviceNet)
- Output Current: <500 mA per output (from DeviceNet)

#### Power Distribution

- Inputs: DeviceNet power supply
- Outputs: Auxiliary power supply

#### Mechanical

- Operating Temperature: -25 to +70°C (-13 to +158°F)
- Protection: NEMA 4 / IEC IP 67

#### Material


- Connectors: Nickel-plated brass (stainless steel available on request)
- Housing: Fiberglass

#### Diagnostics (Logical)


- One bit in I/O table indicates an I/O fault for inputs, one bit for outputs

#### Diagnostics (Physical)

- LED to indicate status of DeviceNet communication

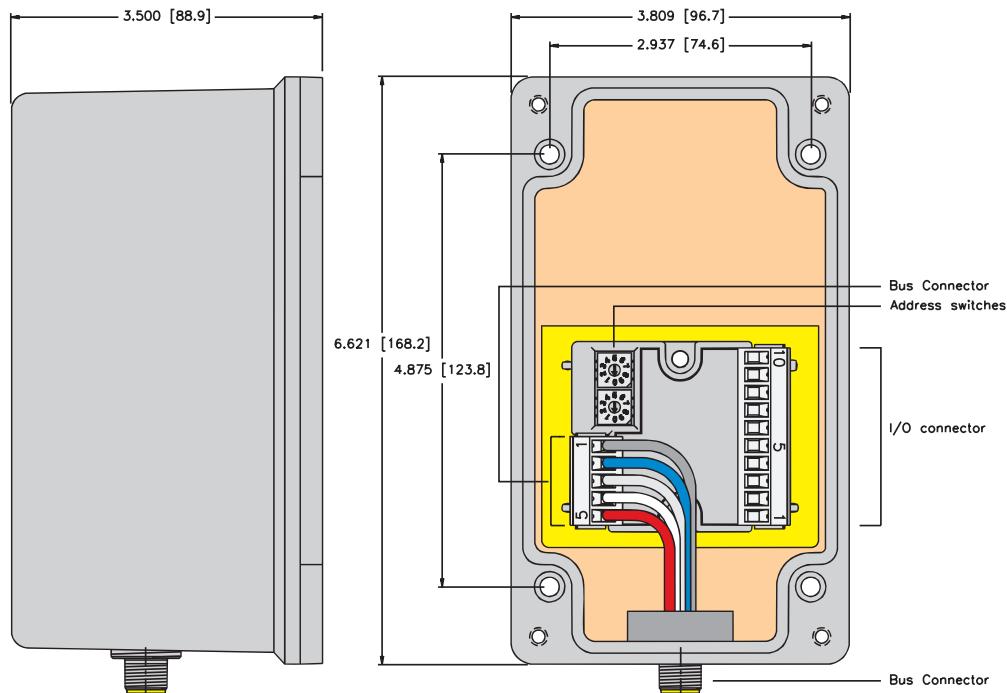

**DeviceNet eurofast® Pinouts**

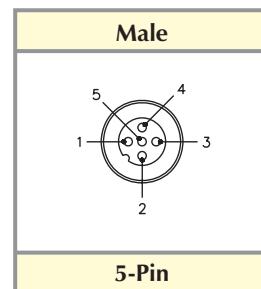


# Process Automation



Part Number	Inputs						Outputs				Data	
	Input Count	Pinout	Style	Group Diagnostics	Individual Diagnostics	OCD	Output Count	Pinout	Current	Individual Diagnostics	OCD	Map
ODNA-4S-4XSG-E	8	FS	PNP	X			4	FS	0.5A	X		1

## Input/Output Connectors

FS

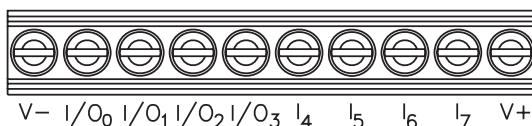

## I/O Data Map 1

	Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>In</b>	0	I-7	I-6	I-5	I-4	I-3	I-2	I-1	I-0
	1	IGS	OGS	-	-	-	-	-	-
<b>Out</b>	0	-	-	-	-	0-3	0-2	0-1	0-0

## Covers for ODNA-4S-4XSG-E


Part Number	Cutouts
OCA-B	Blank
OCA-1-30	1 x 30 mm
OCA-2-30	2 x 30 mm
OCA-1-22	1 x 22 mm
OCA-2-22	2 x 22 mm
OCA-3-22	3 x 22 mm

## DeviceNet™ BL67 Stations

TURCK's BL67 is a modular, user configurable network I/O system designed to allow installation of nodes containing different types and sizes of I/O depending on the users needs for a particular area. Featuring IP 67 protection and metal threaded connectors, the BL67 can often be mounted in the physical process environment or directly on a machine without the need to plan or purchase a separate enclosure for the I/O. This saves planning and installation time, as well as the cost of the enclosure itself.

The BL67 system supports several different network protocols, including DeviceNet. A BL67 station consists of a gateway module that interfaces to the DeviceNet system, and several I/O modules that interface with the physical I/O in the field. Different connector options are available to allow a greater level of customization to the user.

For more details on the BL67 system please see the section G of this catalog.

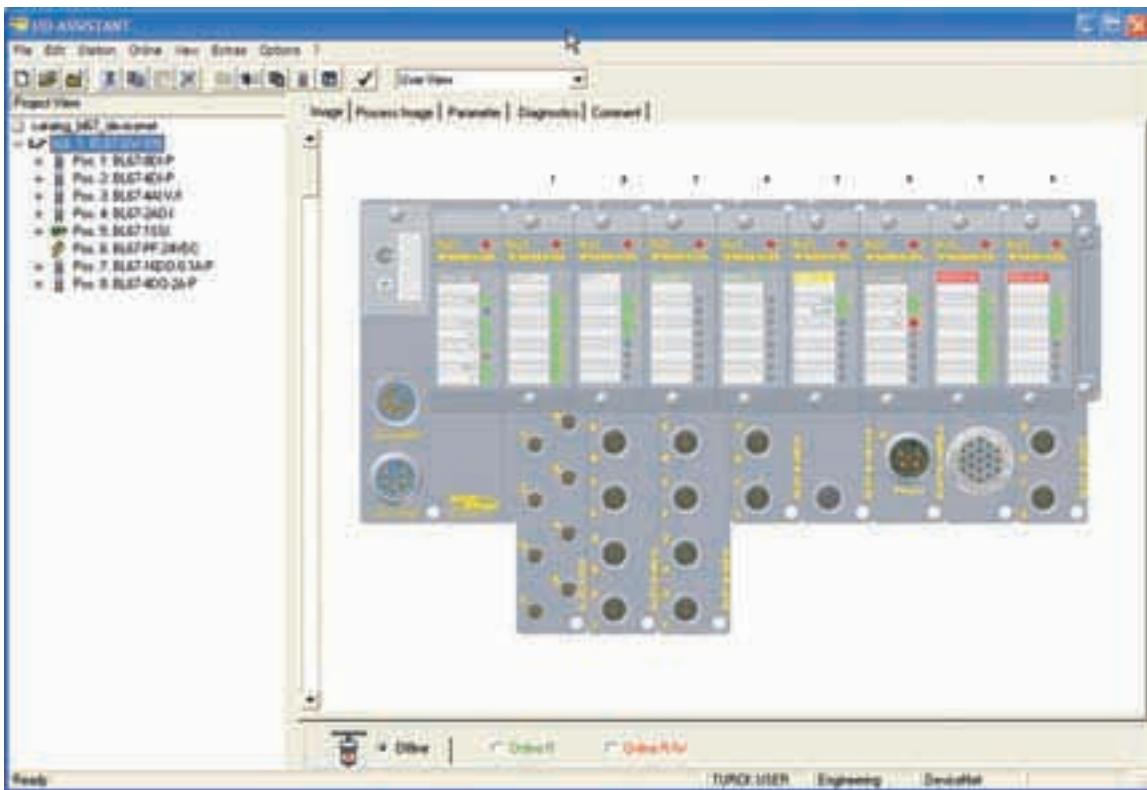

TURCK's I/O Assistant software package is used to configure the BL67 system.

## BL67 Gateway



## BL67-GW-DN



- Modular I/O
- Fieldbus Independent Configuration
- IP 67 Protection
- Various I/O Styles

### Electrical

- Operating Current: <600 mA from  $V_{MB}$
- Supply Current: <8 A to I/O (from DeviceNet)
- Backplane Current: <1.5 A (from DeviceNet)

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 67
- Vibration: 5 g @ 10-500 Hz

### Material


- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)

- Diagnostic information available through the DeviceNet I/O map

### Diagnostics (Physical)

- LEDs to indicate status of DeviceNet and Module Bus communication

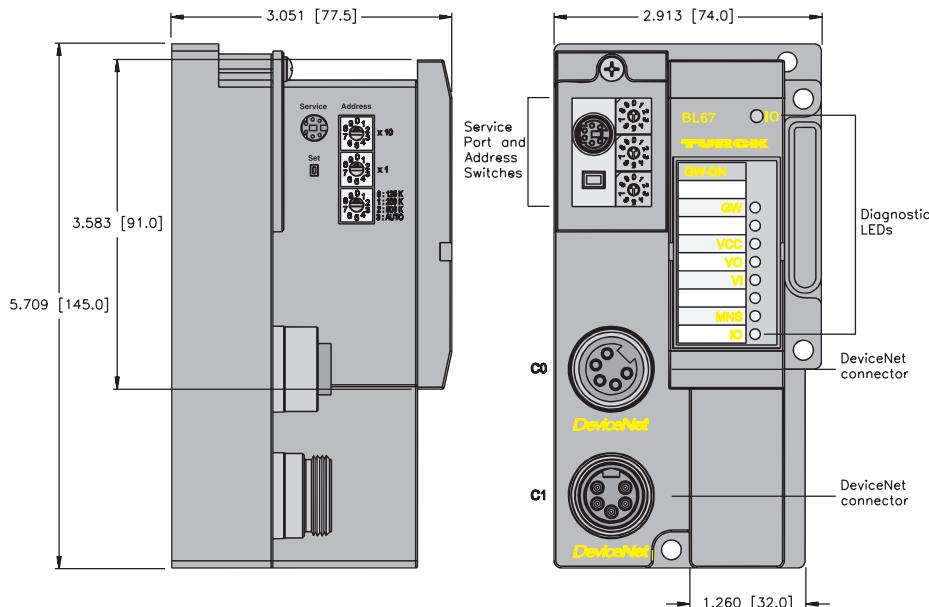

DeviceNet minifast® Pinouts

Male	Female
 1 = Shield 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L	 2 = V+ 3 = V- 4 = CAN_H 5 = CAN_L
5-Pin	5-Pin


Note: Power feeding modules may be used for I/O current supply to prevent overloading the DeviceNet power supply.

## DeviceNet™ BL20 Stations

TURCK's BL20 is a modular, user configurable network I/O system designed to allow installation of nodes containing different types and sizes of I/O depending on the users needs for a particular area. Featuring IP 20 protection and terminal point connections, the BL20 is intended to be mounted in the control cabinet or in a field enclosure.

The BL20 system supports several different network protocols, including DeviceNet. A BL20 station consists of a gateway module that interfaces to the DeviceNet system, and several I/O modules that interface with the physical I/O in the field. The terminal bases are available with tension clamp or screw terminal connector types.

For more details on the BL20 system please see section H of this catalog.

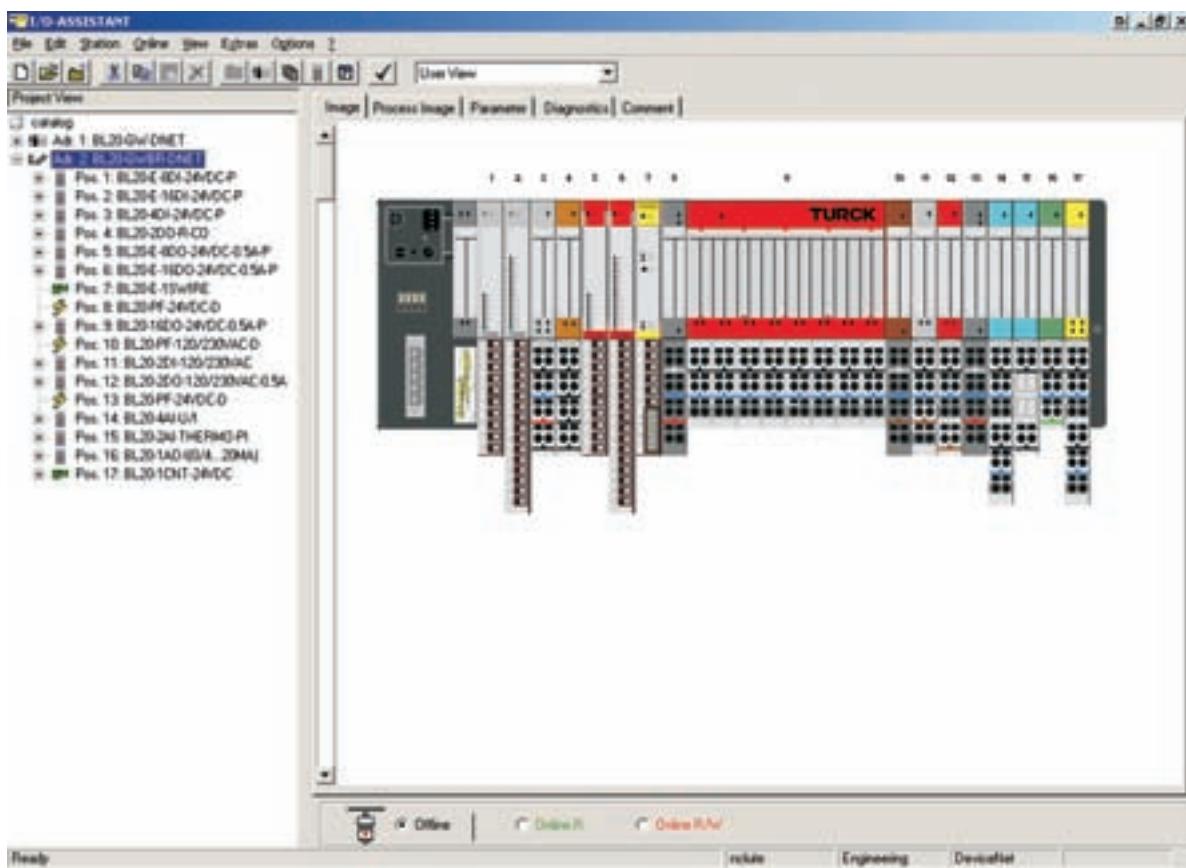

TURCK's I/O Assistant software package is used to configure the BL20 system.

## BL20 Gateway



## BL20-GWBR-DNET



- Modular I/O
- Fieldbus Independent Configuration
- IP 20 Protection
- Various I/O Styles

### Electrical

- Operating Current: <250 mA from BR power supply
- Supply Current: <10 A to I/O (from  $U_L$ )  
<1.5 A to backplane (from  $U_{SYS}$ )

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: 1 g @ 5...100 Hz

### Material


- Housing: PC-V0 (Lexan)

### Diagnostics (Logical)

- Diagnostic information available through the DeviceNet I/O map

### Diagnostics (Physical)


- LEDs to indicate status of DeviceNet and Module Bus communication

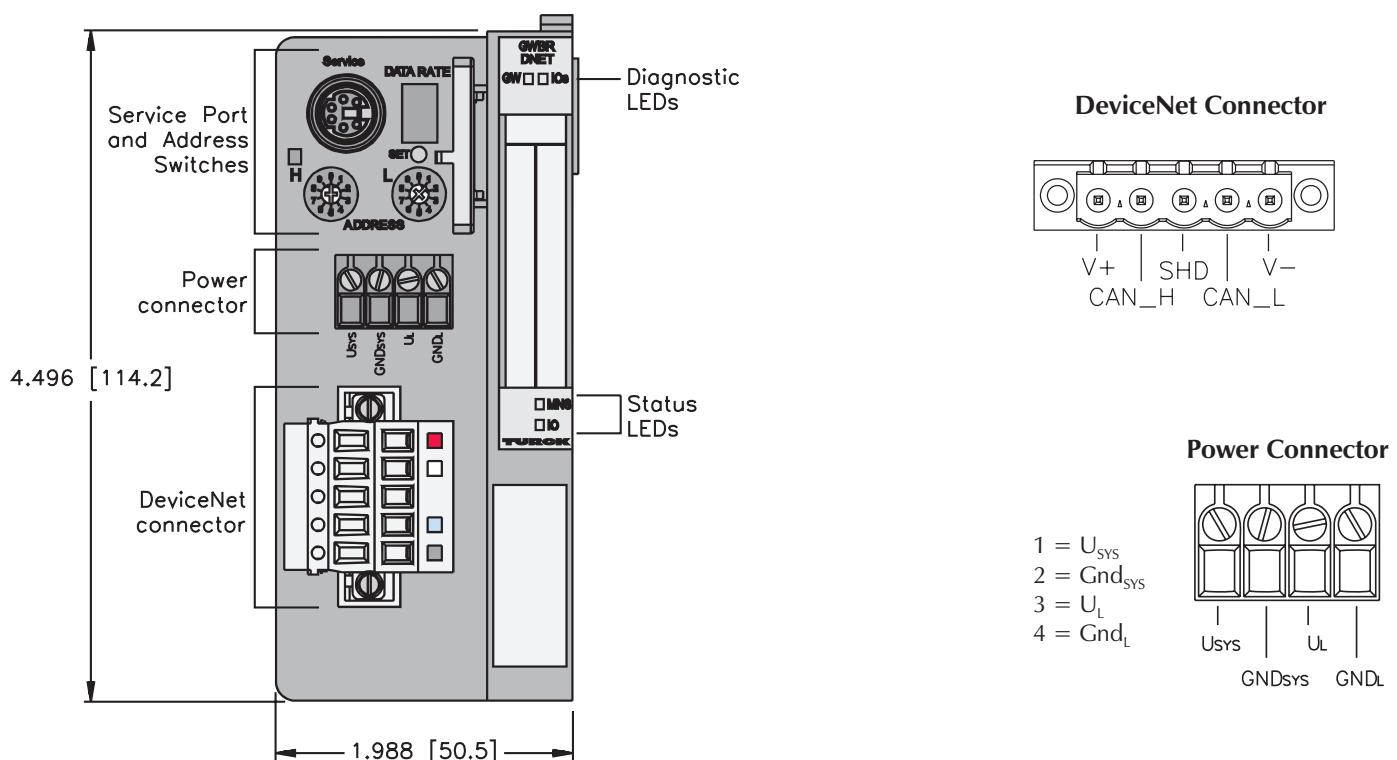

## DeviceNet to AS-interface® Gateways

AS-I systems can be easily connected to a higher-level network, such as DeviceNet, through a gateway master. The gateway acts as a master to the AS-I system(s) and a slave to the DeviceNet system, mapping all of the AS-I data for DeviceNet in a single block.

For AS-I specifications and ratings details, see section E of this catalog.

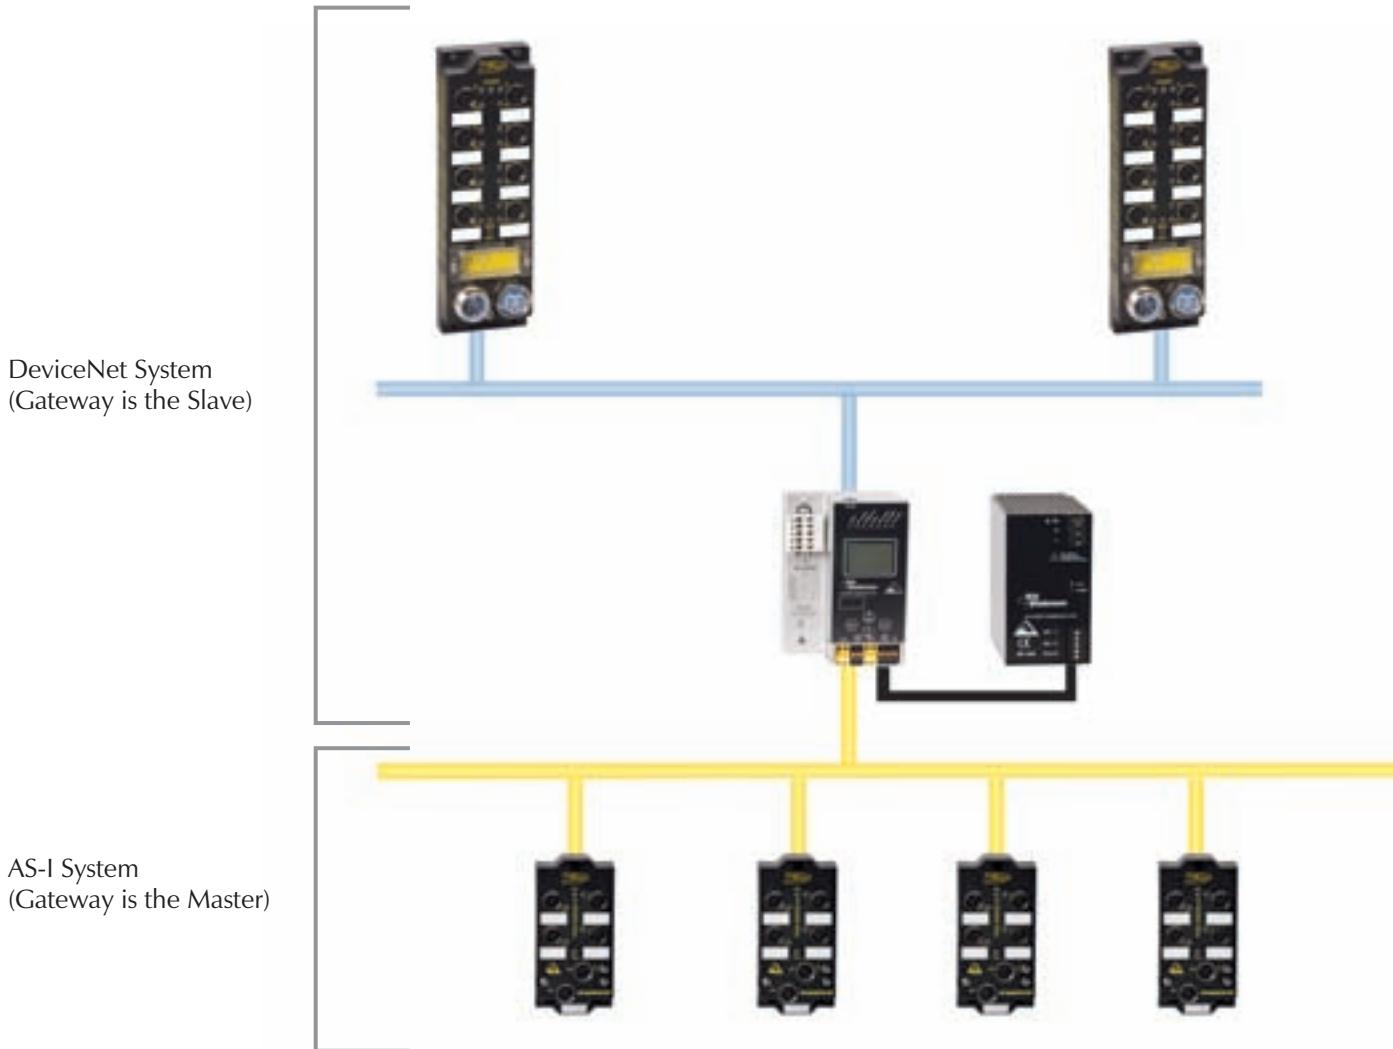



## Addressing

DeviceNet™ stations must have a network address for communication. The address for AS-i/DeviceNet gateway stations may be set via the display screen and push buttons. Please consult the manual for a particular gateway for instruction on the procedure.

## Diagnostics

AS-i/DeviceNet gateways contain LEDs for diagnosing I/O and communication problems for both the DeviceNet and AS-I interfaces. For a detailed description of the LED states, please see the Bihl+Wiedemann AS-i/DeviceNet Gateway User Manual available to download from [www.bihl-wiedemann.com](http://www.bihl-wiedemann.com).

## Power

Most AS-i/DeviceNet gateways draw power from the AS-I power supply. The option to use a separate, non-AS-I power supply is also available. Refer to the AS-I masters section of this catalog for more details on the power supply configurations.

### AS-I Gateways in Stainless Steel

- AS-I v3.0 Supported
- Graphical Display
- Integrated Ground-Fault Detection
- Integrated AS-I Diagnostics



**ASI-DNG-SS BW1818\***

**ASI-DNG-SS BW1819\***

**ASI-DNG-SS BW1820\***

**ASI-DNG-SS-C1D2 BW1824**

**ASI-DNG-SS-C1D2 BW1825**

**ASI-DNG-SS-C1D2 BW1826**

\* Not ETL Listed



### Electrical

- Operating Current: 200 mA from  $V_{AS-I}$  (Power Supply A)
- 200 mA from  $V_{AS-i1}$ , 70mA from  $V_{AS-i2}$  (Power Supply A2)
- 250 mA from  $V_{AUX}$  (Power Supply E)

### Power Distribution

- From AS-I supply for each network (Power Supply A, A2)
- From external supply (Power Supply E)

### Mechanical

- Operating Temperature: 0 to +55°C (+32 to +131°F)
- Protection: IP 20
- Vibration: According to EN 61131-2

### Material


- Housing: Stainless Steel

### Diagnostics (Logical)

- AS-I diagnostic data is available via Network interface

### Diagnostics (Physical)

- LEDs to indicate status of network and AS-I communication and power supply

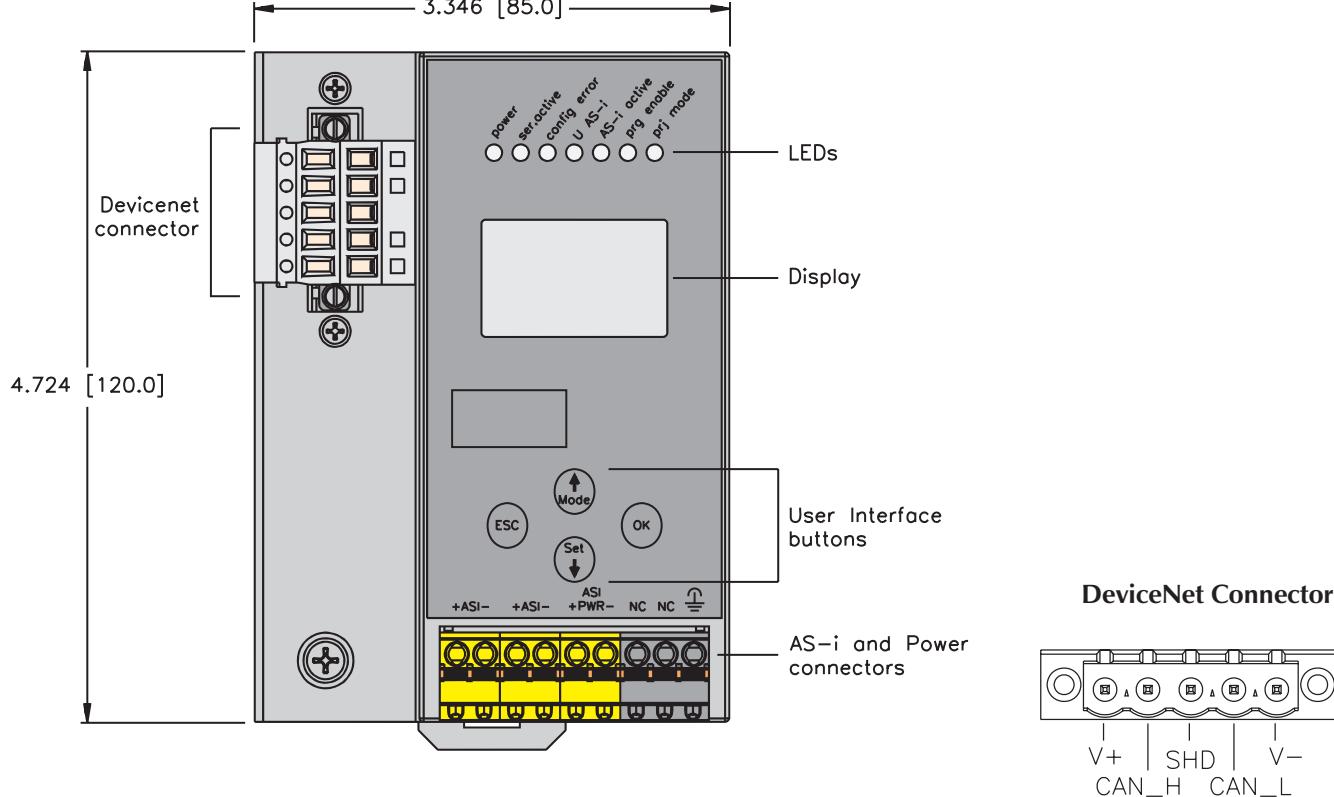

# Process Automation




Part Number	Higher Level Network	Power Style	AS-I Version	Connection Diagram	# of AS-I Masters
ASI-DNG-SS BW1818	DeviceNet	A	3.0	A	1
ASI-DNG-SS BW1819	DeviceNet	A2	3.0	A2	2
ASI-DNG-SS BW1820	DeviceNet	E	3.0	E	2
ASI-DNG-SS-C1D2 BW1824*	DeviceNet	A	3.0	A	1
ASI-DNG-SS-C1D2 BW1825*	DeviceNet	A2	3.0	A2	2
ASI-DNG-SS-C1D2 BW1826*	DeviceNet	E	3.0	E	2


\* Approved for use in Class 1, Division 2 areas.

## Input/Output Connectors


**A**

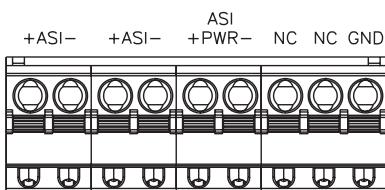

**A2**

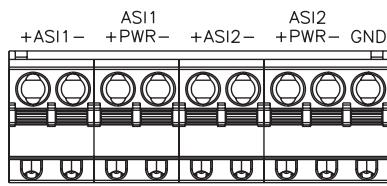

**E**

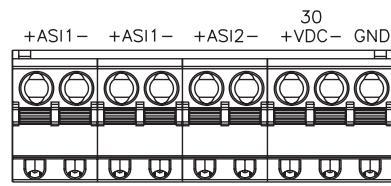

A - Single AS-I network is powered by one AS-I power supply


A2 - Dual AS-I networks are each powered by their own AS-I power supply

E - Dual AS-I networks are both powered by a single 30 VDC supply, decoupled through the gateway

**Notes:**

## DeviceNet™, Thin Cable Specifications

- Cable that Meets the Requirements of ODVA Thin or Type 1 Cable**
- Commonly Used as Drop Cable to a Maximum Length of 6 Meters (20 Feet) or Trunk Cable in Networks Up to a Maximum Length of 100 Meters (328 Feet)**

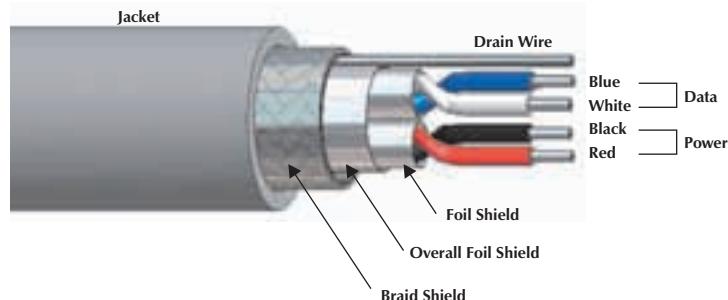

Data Rate	Maximum Trunk Length	Drop Length	
		Maximum	Cumulative
125 Kbaud	100 meters (328 feet)	6 meters (20 feet)	156 meters (512 feet)
250 Kbaud	100 meters (328 feet)		78 meters (feet)
500 Kbaud	100 meters (328 feet)		39 meters (feet)

Type	Approvals	Power Pair		Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	DCR (/1000 feet) Insulation			
<b>572</b> AWM 2464 75°C 300 Volts	<b>NEC PLTC</b> <b>CEC AWM-I/II A/B FT4</b>	2/22 AWG BK/RD	18.1 Ohms PVC	2/22 AWG BU/WH	18.1 Ohms PE	PVC Light Grey 7.2 mm (.285 in)	Foil 22 AWG	RB50603-*M 44 lbs.
<b>577</b> AWM 2464 75°C 300 Volts	<b>NEC PLTC</b> <b>CEC AWM-I/II A/B FT4</b>	2/22 AWG BK/RD	16.9 Ohms PVC	2/22 AWG BU/WH	16.9 Ohms PE	PVC Light Grey 8.4 mm (.330 in)	Foil/Braid 22 AWG	RB50629-*M 65 lbs. <b>flexlife-10®</b>
<b>578</b> AWM 2464 75°C 300 Volts	<b>NEC PLTC/CL2</b> <b>CEC CMG</b>	2/22 AWG BK/RD	18.1 Ohms PVC	2/22 AWG BU/WH	18.1 Ohms PE	PVC Light Grey 7.8 mm (.310 in)	Foil/Braid 22 AWG	RB50651-*M 51 lbs.
<b>5715</b> AWM 2095 80°C 300 Volts	<b>NEC AWM</b> <b>CEC AWM-I/II A/B FT1</b>	2/22 AWG BK/RD	16.5 Ohms PVC	2/22 AWG BU/WH	16.5 Ohms PE	PVC Light Grey 6.0 mm (.235 in)	Foil (Data Only) 22 AWG	RB50764-*M 26 lbs.
<b>5725</b> AWM 21080 75°C 300 Volts	<b>NEC AWM</b>	2/22 AWG BK/RD	16.5 Ohms PE	2/24 AWG BU/WH	27.7 Ohms PE	PUR Violet 7.1 mm (.280 in)	Foil/Braid 22 AWG	RB50994-*M 50 lbs. <b>Halogen-Free</b> <sup>++</sup>
<b>5732</b> AWM 20626 80°C 600 Volts	<b>NEC AWM</b> <b>CEC AWM-I/II A/B FT4</b>	2/22 AWG BK/RD	16.5 Ohms PVC	2/22 AWG BU/WH	16.5 Ohms PE	TPE Charcoal Grey 9.3 mm (.365 in)	Foil/Braid 22 AWG	RB51296-*M 68 lbs. <b>flexlife®</b> <b>weldlife™</b>

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.

<sup>++</sup> Zero Halogen: to DIN VDE 0472 part 815 + IEC 60754-1

## DeviceNet™, Mid Cable Specifications

- **Cable That Meets the Requirements of ODVA Mid or Type III Cable**
- **Provides More Flexibility When Used as a Trunk Cable Up to a Maximum Length of 300 Meters (984 Feet)**

Figure A


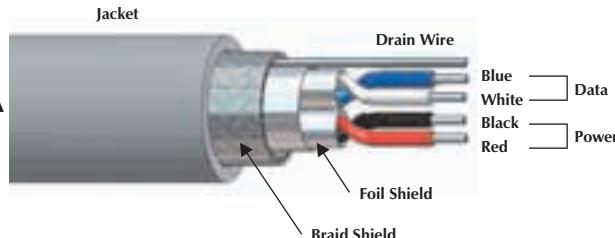


Figure B

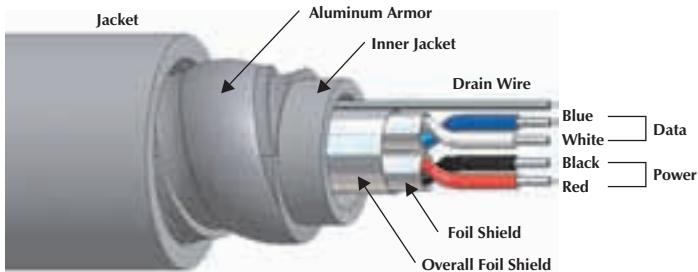

Data Rate	Maximum Trunk Length
125 Kbaud	300 meters (984 feet)
250 Kbaud	250 meters (820 feet)
500 Kbaud	100 meters (328 feet)


Type	Approvals	Power Pair		Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M	Figure
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	DCR (/1000 feet) Insulation				
<b>5711</b> AWM 2464 80°C 300 Volts	NEC PLTC CEC AWM-I/II A/B FT4	2/16 AWG BK/RD	4.1 Ohms PVC	2/20 AWG BU/WH	11.2 Ohms PE	PVC Light Grey 8.4 mm (.330 in)	Foil 20 AWG	RB50721-*M 65 lbs.	A
<b>5722</b> AWM 2464 75°C 300 Volts	NEC PLTC CEC AWM-I/II A/B FT4	2/17 AWG BK/RD	5.2 Ohms SR-PVC	2/20 AWG BU/WH	10.4 Ohms PE	PVC Light Grey 8.9 mm (.350 in)	Foil 20 AWG	RB50876-*M 71 lbs. <i>flexlife-10</i> ®	A
<b>5723</b> AWM 20233 80°C 300 Volts	NEC AWM CEC AWM-I/II A/B FT1	2/17 AWG BK/RD	5.2 Ohms PVC	2/20 AWG BU/WH	10.4 Ohms PE	PUR Light Grey 8.4 mm (.330 in)	Foil 20 AWG	RB50877-*M 60 lbs. <i>flexlife-10</i> ®	A
<b>5721A</b> 75°C 300 Volts	NEC PLTC/CM CEC CMG HL ABCD	2/18 AWG BK/RD	6.7 Ohms PVC	2/20 AWG BU/WH	10.4 Ohms PE	PVC Light Grey 14.9 mm (.585 in) Aluminum Armor	Foil/Armor 20 AWG	RB50859-*M 101 lbs. <i>armorfast</i> ®	B
<b>5731</b> AWM 20626 80°C 300 Volts	NEC AWM CEC AWM-I/II A/B FT1	2/16 AWG BK/RD	4.1 Ohms PVC	2/20 AWG BU/WH	10.4 Ohms PE	TPE Charcoal Grey 10 mm (.394 in)	Foil/Spiral None	RB51235-*M 95 lbs. <i>flexlife</i> <i>weldlife</i> ™	A

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.

## DeviceNet™, Thick Cable Specifications

- Cable That Meets the Requirements of ODVA Thick or Type II Cable**
- It Provides the Most Power to a Network When Used as a Trunk Cable Up to a Maximum Standard Cable Length of 500 Meters (1640 Feet)**

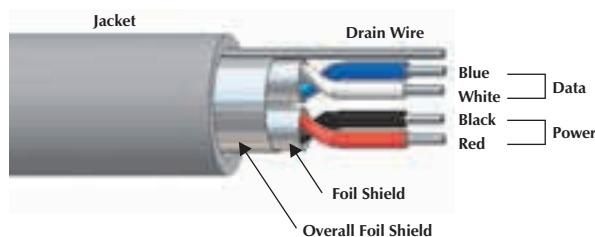

Data Rate	Maximum Trunk Length	Maximum Trunk Length (5720)
125 Kbaud	500 meters (1640 feet)	420 meters (1378 feet)
250 Kbaud	250 meters (820 feet)	200 meters (656 feet)
500 Kbaud	100 meters (328 feet)	100 meters (328 feet)

Type	Approvals	Power Pair		Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	DCR (/1000 feet) Insulation			
<b>575</b> AWM 20233 80°C 300 Volts	<b>NEC AWM</b> <b>CEC AWM-I/II A/B FT1</b>	2/15 AWG BK/RD	3.3 Ohms PVC	2/18 AWG BU/WH	6.5 Ohms PE	PUR Light Grey 10.4 mm (.409 in)	Foil/Braid 18 AWG	RB50633-*M 94 lbs.
<b>579</b> AWM 2570 75°C 300 Volts	<b>NEC PLTC/CL2</b> <b>CEC CMG</b>	2/15 AWG BK/RD	3.2 Ohms PVC	2/18 AWG BU/WH	6.5 Ohms PE	PVC Light Grey 11.3 mm (.445 in)	Foil/Braid 18 AWG	RB50652-*M 122 lbs.
<b>5720</b> 75°C 600 Volts	<b>NEC TC</b>	2/16 AWG BK/RD	4.9 Ohms PVC	2/18 AWG BU/WH	6.9 Ohms PE	PVC Light Grey 13 mm (.515 in)	Foil/Braid 16 AWG	RB50793-*M 168 lbs.
<b>5726</b> AWM 21080 70°C 300 Volts	<b>NEC AWM</b>	2/15 AWG BK/RD	3.2 Ohms PE	2/18 AWG BU/WH	6.9 Ohms PE	PUR Violet 11.2 mm (.449 in)	Foil/Braid 18 AWG	RB51038-*M 150 lbs. <b>Halogen-Free</b> ††
<b>5727</b> 75°C 300 Volts	<b>NEC PLTC</b> <b>CEC AWM-I/II A/B FT4</b>	2/15 AWG BK/RD	3.44 Ohms PVC	2/18 AWG BU/WH	7.06 Ohms PE	PVC Light Grey 13.7 mm (.540 in)	Foil/Spiral None	RB51106-*M 157 lbs <b>flexlife-10</b> ®
<b>5730</b> AWM 20626 80°C 300 Volts	<b>NEC AWM</b> <b>CEC AWM-I/II A/B FT1</b>	2/15 AWG BK/RD	3.44 Ohms PVC	2/18 AWG BU/WH	7.06 Ohms PE	TPE Grey 10.4 mm (.413 in)	Foil/Braid 18 AWG	RB51231-*M 110 lbs. <b>flexlife</b> <b>weldlife</b> ™

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters.

†† Zero Halogen: to DIN VDE 0472 part 815 + IEC 60754-1

## DeviceNet™, Cable/Cordset Selection Matrix

		minifast®				eurofast® (Thin/Mid Only)
		Pin (Male)	Socket (Female)	Pin (Male)		
		1 RSM	2 WSM	3 RKM	4 WKM	5 RSC
Bare		RSM 57x-*M	WSM 57x-*M	RKM 57x-*M	WKM 57x-*M	RSC 57x-*M
minifast	1 RSM	RSM RSM 57x-*M	WSM WSM 57x-*M	RSM RKM 57x-*M	RSM WKM 57x-*M	RSM RSC 57x-*M
	2 WSM		WSM WSM 57x-*M	WSM RKM 57x-*M	WSM WKM 57x-*M	WSM RSC 57x-*M
Socket (Female)	3 RKM			RKM RKM 57x-*M	RKM WKM 57x-*M	RKM RSC 57x-*M
	4 WKM				WKM WKM 57x-*M	WKM RSC 57x-*M
eurofast (Thin/Mid Only)	5 RSC					RSC RSC 57x-*M
	6 WSC					
Socket (Female)	7 RKC					
	8 WKC					

See pages J91 - J92 for dimensional drawings.





\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 Meters. Consult factory for other lengths.

For stainless steel coupling nuts change part number RSM ... to RSV, WSM ... to WSV.

minifast		Pinouts	eurofast	
Male	Female	Pinouts	Male	Female
		1. Bare (Shield Drain Wire) 2. Red (+ Voltage) 3. Black (- Voltage) 4. White (CAN_H) 5. Blue (CAN_L)		

## DeviceNet™, Cable/Cordset Selection Matrix

eurofast® (Thin/Mid Only)			minifast® Bulkhead		eurofast Bulkhead (Thin Only)	
Pin (Male)	Socket (Female)		Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)
6 WSC	7 RKC	8 WKC	9 RSFP	10 RKFP	11 FSFD	12 FKFD
WSC 57x-*M	RKC 57x-*M	WKC 57x-*M	RSFP 57x-*M	RKFP 57x-*M	FSFD 57x-*M	FKFD 57x-*M
RSM WSC 57x-*M	RSM RKC 57x-*M	RSM WKC 57x-*M	RSM RSFP 57x-*M	RSM RKFP 57x-*M	RSM FSFD 57x-*M	RSM FKFD 57x-*M
WSM WSC 57x-*M	WSM RKC 57x-*M	WSM WKC 57x-*M	WSM RSFP 57x-*M	WSM RKFP 57x-*M	WSM FSFD 57x-*M	WSM FKFD 57x-*M
RKM WSC 57x-*M	RKM RKC 57x-*M	RKM WKC 57x-*M	RKM RSFP 57x-*M	RKM RKFP 57x-*M	RKM FSFD 57x-*M	RKM FKFD 57x-*M
WKM WSC 57x-*M	WKM RKC 57x-*M	WKM WKC 57x-*M	WKM RSFP 57x-*M	WKM RKFP 57x-*M	WKM FSFD 57x-*M	WKM FKFD 57x-*M
RSC WSC 57x-*M	RSC RKC 57x-*M	RSC WKC 57x-*M	RSC RSFP 57x-*M	RSC RKFP 57x-*M	RSC FSFD 57x-*M	RSC FKFD 57x-*M
WSC WSC 57x-*M	WSC RKC 57x-*M	WSC WKC 57x-*M	WSC RSFP 57x-*M	WSC RKFP 57x-*M	WSC FSFD 57x-*M	WSC FKFD 57x-*M
	RKC RKC 57x-*M	RKC WKC 57x-*M	RKC RSFP 57x-*M	RKC RKFP 57x-*M	RKC FSFD 57x-*M	RKC FKFD 57x-*M
		WKC WKC 57x-*M	WKC RSFP 57x-*M	WKC RKFP 57x-*M	WKC FSFD 57x-*M	WKC FKFD 57x-*M

## DeviceNet™, Open Connector Cordset Selection Matrix

		minifast®				eurofast®	
		Pin (Male)	Socket (Female)	Pin (Male)			
		1 RSM	2 WSM	3 RKM	4 WKM	5 RSC	
13	CBC5	CBC5 57x-*M	RSM CBC5 57x-*M	WSM CBC5 57x-*M	RKM CBC5 57x-*M	WKM CBC5 57x-*M	RSC CBC5 57x-*M
14	BK52C	BK52C 57x-*M	RSM BK52C 57x-*M	WSM BK52C 57x-*M	RKM BK52C 57x-*M	WKM BK52C 57x-*M	RSC BK52C 57x-*M
Thin, Mid and Thick Cable						Thin Cable Only	

See pages J90 - J92 for dimensional drawings.





\* Indicates length in meters.

x Indicates cable type.

Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 Meters. Consult factory for other lengths.

For stainless steel coupling nut: Change part number (RSM ... to RSV, RSC ... to RSCV).

minifast		Pinouts	eurofast	
Male	Female	Pinouts	Male	Female
		1. Bare (Shield Drain Wire) 2. Red (+ Voltage) 3. Black (- Voltage) 4. White (CAN_H) 5. Blue (CAN_L)		

## DeviceNet™, Open Connector Cordset Selection Matrix

eurofast®			minifast® Bulkhead		eurofast Bulkhead	
Pin (Male)	Socket (Female)		Pin (Male)	Socket (Female)	Pin (Male)	Socket (Female)
6	7	8	9	10	11	12
WSC	RKC	WKC	RSFP	RKFP	FSFD	FKFD
WSC CBC5 57x-*M	RKC CBC5 57x-*M	WKC CBC5 57x-*M	RSFP CBC5 57x-*M	RKFP CBC5 57x-*M	FSFD CBC5 57x-*M	FKFD CBC5 57x-*M
WSC BK52C 57x-*M	RKC BK52C 57x-*M	WKC BK52C 57x-*M	RSFP BK52C 57x-*M	RKFP BK52C 57x-*M	FSFD BK52C 57x-*M	FKFD BK52C 57x-*M
Thin and Mid Cable Only			Thin, Mid and Thick Cable		Thin Cable Only	

See pages J91 - J92 for dimensional drawings.

\* Indicates length in meters.

x Indicates cable type.


Refer to the Cordset Builder at [www.turck.com](http://www.turck.com) for assistance with cordset/cable combinations.

Standard cable lengths are 0.3, 0.5, 1.0, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 6.0, 8.0, 10, 15....50 Meters. Consult factory for other lengths.

## Specifications

<b>Housing:</b>	PA (Nylon)
<b>Protection:</b>	NEMA 1, and IEC IP 20
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	12 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)


13

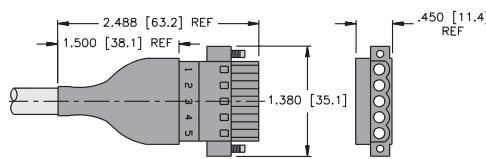

CBC5 ..

Page J89

14

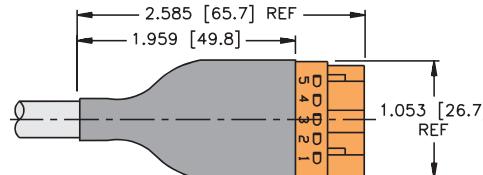

BK52C ..

Page J89


CBC5	Pinouts	BK52C
5 4 3 2 1	1 = Black (- Voltage) 2 = Blue (CAN_L) 3 = Bare (Shield Drain) 4 = White (CAN_H) 5 = Red (+ Voltage)	5 4 3 2 1

**DeviceNet™, *minifast®* Cordset and Receptacle Connector Dimensions**


**Specifications**

<b>Overmold:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	PUR (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

**1**

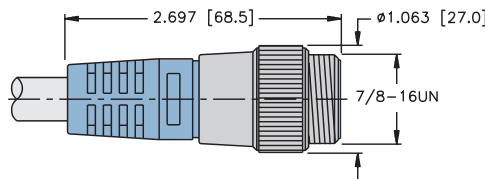


**3**

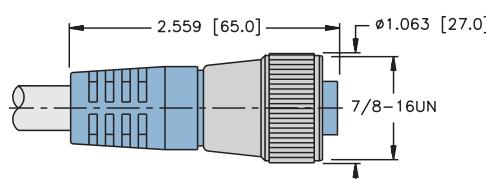

RSM ..

Pages J87 - J90


**2**

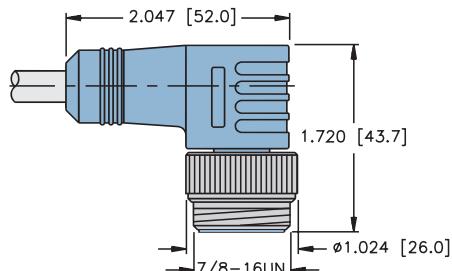

RKM ..

Pages J87 - J90

**4**

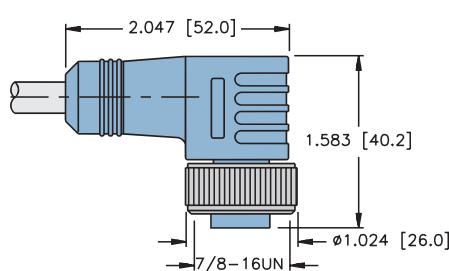


WSM ..

Pages J87 - J90


WKM ..

Pages J87 - J90

**9**

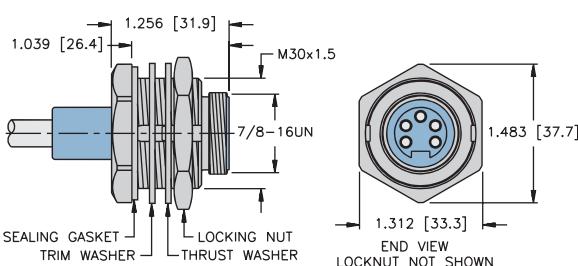

**10**

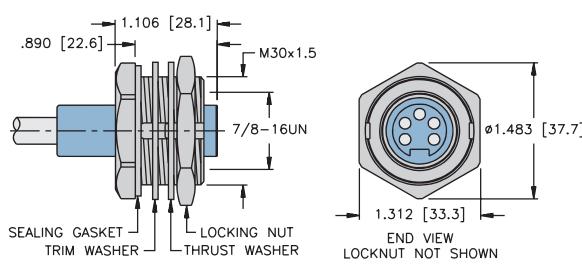

RSFP ..

Pages J87 - J90

RKFP ..


Pages J87 - J90

## DeviceNet™, eurofast® Cordset and Receptacle Connector Dimensions

### Specifications

<b>Overmold:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	PUR (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)


5

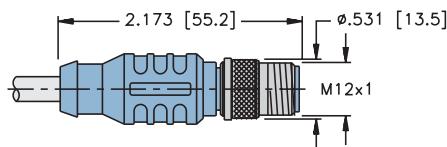

RSC ..

Pages J87 - J90


7

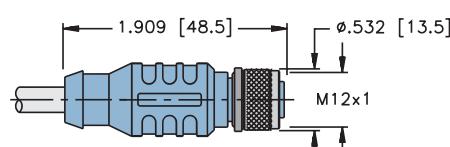

RKC ..

Pages J87 - J90


6

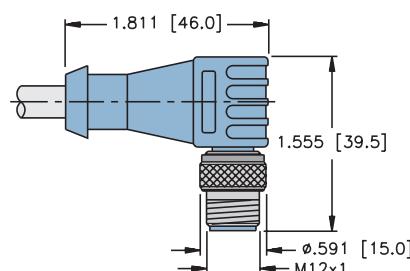

WSC ..

Pages J87 - J90


8

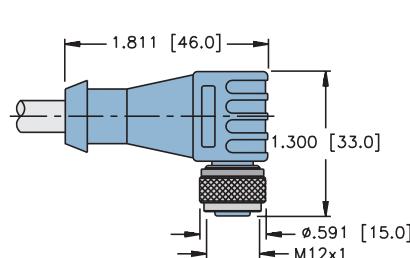

WKC ..

Pages J87 - J90


11

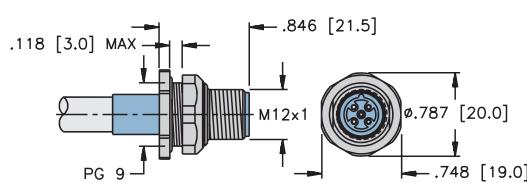

FSFD ..

Pages J87 - J90

12

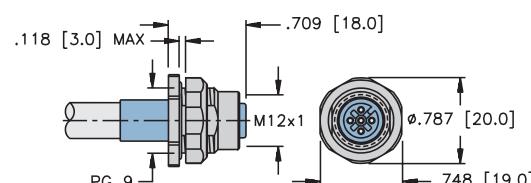


FKFD ..

Pages J87 - J90

## DeviceNet™, Flat Cable Specifications

- **Cable that Meets the Requirements of ODVA Thick or Type II Cable**
- **Uses Insulation Displacement Connectors as Device Taps**

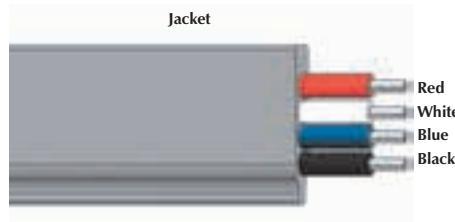

Data Rate	Maximum Trunk Length
125 Kbaud	420 meters (1378 feet)
250 Kbaud	200 meters (656 feet)
500 Kbaud	100 meters (328 feet)


Type	Approvals	Power Pair		Data Pair		Outer Jacket	Shields	Bulk Cable Part Number / Weight/300 M
		AWG Color Code	DCR (/1000 feet) Insulation	AWG Color Code	DCR (/1000 feet) Insulation			
<b>5713</b> 75°C 300 Volts	NEC CL2 CEC AWM-I/II A/B FT4	2/16 AWG BK/RD	4.1 PE	2/16 AWG BU/WH	4.1 PE	PVC Light Grey Flat Profile <sup>††</sup>	None	RB50787-*M 116 lbs.

\* Indicates length in meters.

Standard cable lengths are 30, 75, 150, 225 and 300 meters. Consult factory for other lengths.

†† Flat cable profile is 19.3 mm (0.760 in) x 5.3 mm (0.210 in).

**Flat Cable Profile**

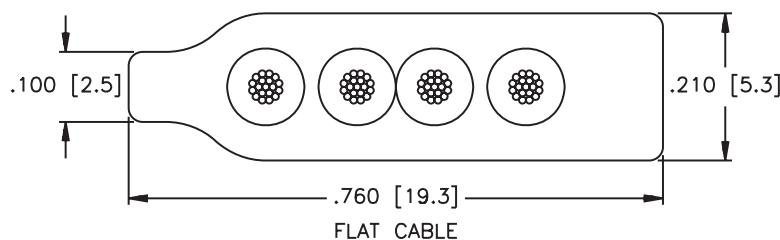

## DeviceNet™, Flat Cable Connectors

- Provides a **minifast®** or **eurofast®** Drop Connector from Flat Cable



Housing	Part Number	Application	Pinouts
	RKF 57-IDC	(7/8-16UN) <b>minifast</b> Flat Cable Connector • Flat cable connector to female (7/8-16UN) <b>minifast</b> drop	<b>Female</b> 
	RKF 40-IDC	(7/8-16UN) <b>minifast</b> Auxiliary Power Connector	<b>Female</b> 
	FK 57-IDC	(M12x1) <b>eurofast</b> Flat Cable Connector • Flat cable connector to female (M12x1) <b>eurofast</b> drop	<b>Female</b> 
	FK 57-IDC ET RKF 57-IDC ET RKF 40-IDC ET	Includes connector, end termination, and splice kit	











## Specifications

<b>Housing:</b>	POM (Nylon)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	Nylon
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A ( <b>eurofast</b> ), 9 A ( <b>minifast</b> )
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## DeviceNet™, Terminating Resistors

- **Terminating Resistors Stabilize and Minimize Reflections on the Bus Line**
- **A Terminating Resistor is Required at the Beginning and End of the Main Bus Line**

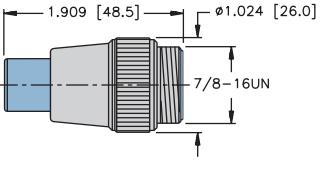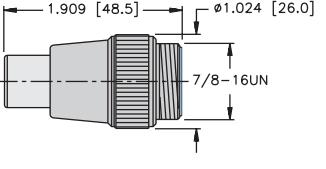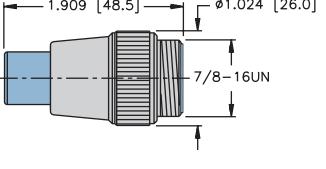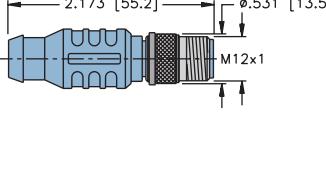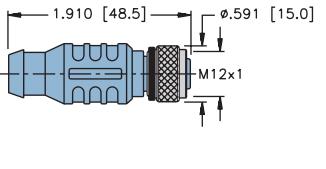

Housing	Part Number	Specs	Application	Pinouts
	RSM 57-TR2	Nickel Plated Brass or Stainless Steel 300 V, 9 A -40° to +75°C IP 67	<b>minifast®</b> Terminating Resistor <ul style="list-style-type: none"> <li>Male <b>minifast</b> connector</li> <li>120 Ohms, 1/4 W internal resistance</li> </ul>	<b>Male</b> 
	RSM 57-TR2/VM	Nickel Plated Brass or Stainless Steel 300 V, 9 A -40° to +75°C IP 67	<b>minifast</b> Terminating Resistor with Voltage Monitoring <ul style="list-style-type: none"> <li>Male <b>minifast</b> connector</li> <li>Led indication: Red - reverse polarity Green - okay</li> <li>120 Ohms, 1/4 W internal resistance</li> </ul>	<b>Male</b> 
	RKM 57-TR2	Nickel Plated Brass or Stainless Steel 250 V, 4 A -40° to +75°C IP 67	<b>minifast</b> Terminating Resistor <ul style="list-style-type: none"> <li>Female <b>minifast</b> connector</li> <li>120 Ohms, 1/4 W internal resistance</li> </ul>	<b>Female</b> 
	RSE 57-TR2	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C IP 67	<b>eurofast®</b> Terminating Resistor <ul style="list-style-type: none"> <li>Male <b>eurofast</b> connector</li> <li>120 Ohms, 1/4 W internal resistance</li> </ul>	<b>Male</b> 
	RKE 57-TR2	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C IP 67	<b>eurofast</b> Terminating Resistor <ul style="list-style-type: none"> <li>Female <b>eurofast</b> connector</li> <li>120 Ohms, 1/4 W internal resistance</li> </ul>	<b>Female</b> 

## DeviceNet™, Receptacles


- Receptacles Provide Transition from Male to Female Connectors
- Available for Bulkhead and Feed Through Applications




Housing	Part Number	Specs	Application	Pinouts
	RSF RKF 57/22	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +75°C IP 67	<b>minifast® Bulkhead Receptacle</b> <ul style="list-style-type: none"> <li>• Straight male/female feed through</li> </ul>	
	FKM FS 57/M12	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C IP 67	<b>eurofast® Bulkhead Receptacle</b> <ul style="list-style-type: none"> <li>• Straight male/female feed through</li> </ul>	

Standard housing material is nickel plated brass. "RSF RKF..", "RSFV RKFV.." indicates stainless steel housing.

**Panel Cutout**  
**RSF RKF 57/22**

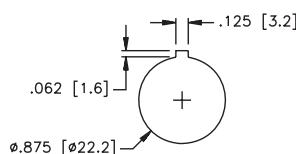





**Panel Cutout**  
**FKM FS 57/M12**



## DeviceNet™, Panel Mount Junction Box

- DIN Rail Junction Box
- Open Style
- Removable Terminals

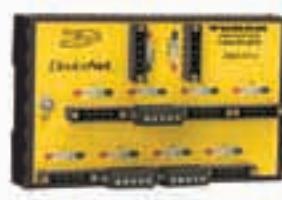


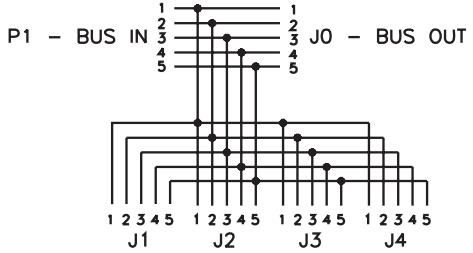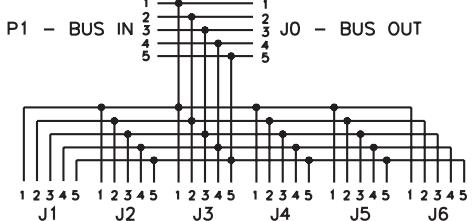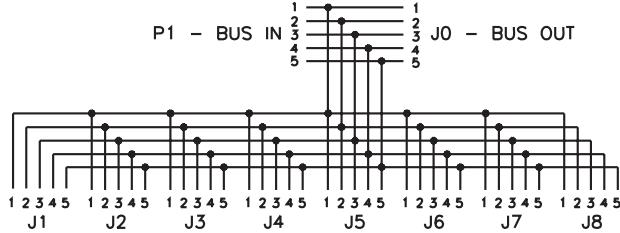Part Number	Application	Wiring Diagrams
JRBS-57-4		<p>P1 – BUS IN      J0 – BUS OUT</p> 
JRBS-57-6	Open style DIN mounted junction box	<p>P1 – BUS IN      J0 – BUS OUT</p> 
JRBS-57-8		<p>P1 – BUS IN      J0 – BUS OUT</p> 


## Specifications

<b>Housing:</b>	Aluminum
<b>Contact Carrier:</b>	PA (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1 and IP 20
<b>Connection Mode:</b>	Snap-on DIN RAIL (DIN 50022)
<b>Ambient Temperature:</b>	-25° to +70°C (-13° to +158°F)


**4-Port**

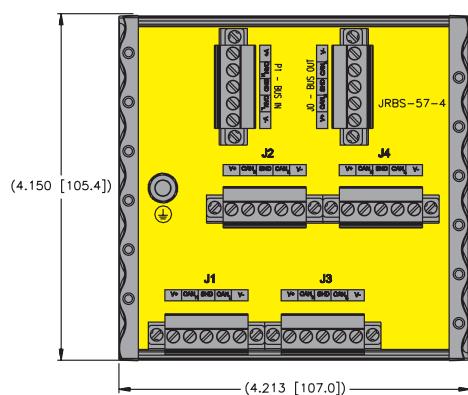

**6-Port**

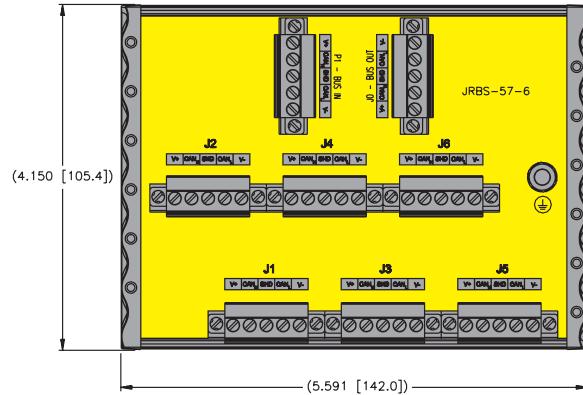


**8-Port**

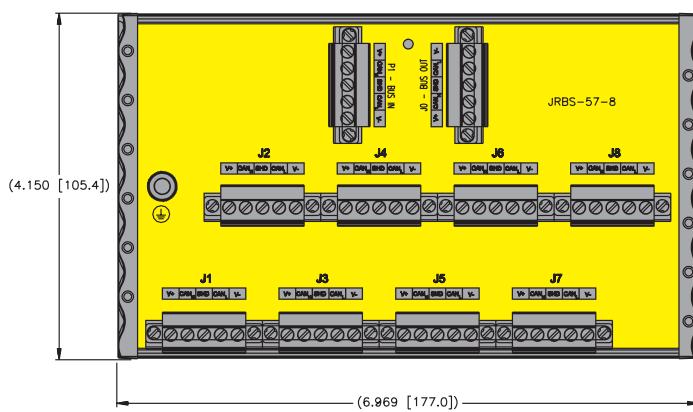

## DeviceNet™, *eurofast*® Junctions

- Multi-port Junction Boxes for Connecting I/O in Concentrated Areas
- Available in Standard and Voltage Monitoring

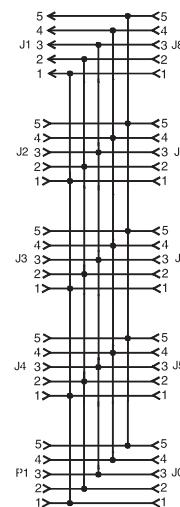


Part Number	Application	Wiring Diagram
JBBS-57-E811	<p>8-port Junction with Voltage Monitoring</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b>®</li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field connectors</li> <li>• Voltage monitoring provides low voltage (12.9 V) and high voltage (25.6) indication LED indication:            (Lo) &lt; 12.9 V Amber            (Ok) 12.9 - 25.6 V Green            (Hi) &gt; 25.6 V Amber         </li> </ul>	
JBBS-57-E812	<p>8-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out connections (7/8-16UN) <b>minifast</b></li> <li>• Eight (M12x1) <b>eurofast</b> connectors for field connectors</li> </ul>	

## Specifications

<b>Housing:</b>	POM (Nylon)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	Nylon
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

**8-port**

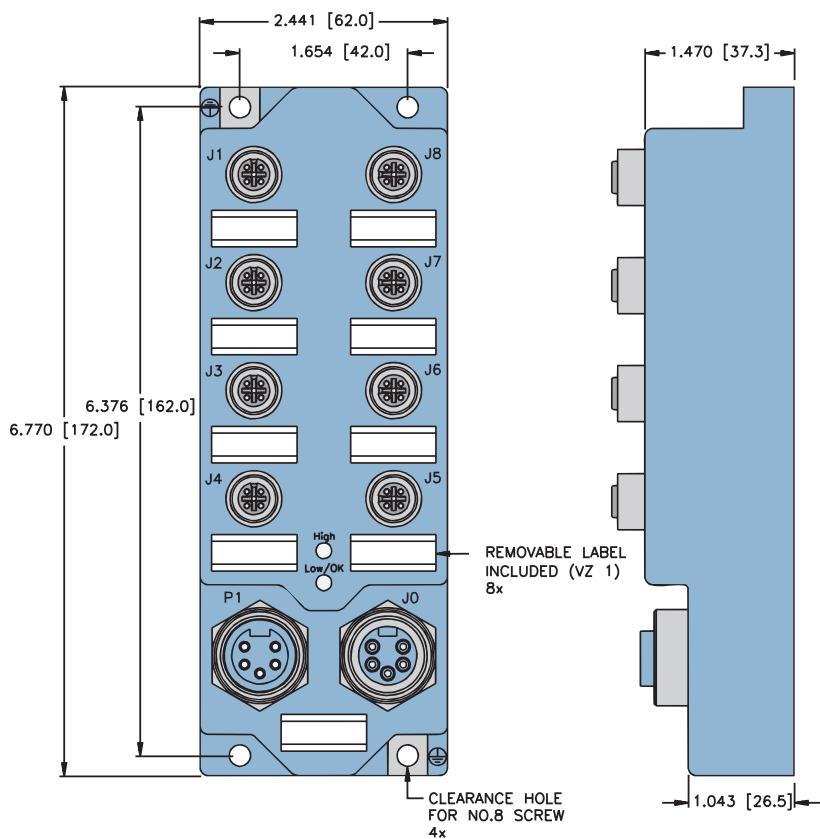



## Pinouts

<i>minifast</i>		<i>eurofast</i>
Male	Female	Female

## DeviceNet™, *minifast*® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications

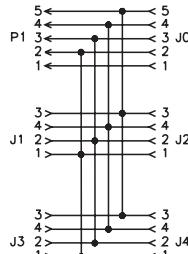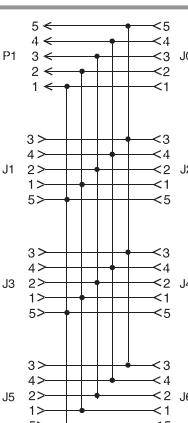


Part Number	Specs	Application	Wiring Diagrams
JBBS-57-M401		4-port Junction <ul style="list-style-type: none"><li>• Bus in/bus out straight (7/8-16UN) <i>minifast</i> through ports</li></ul>	
JBBS-57-M413	Die-cast aluminum enclosure.	<ul style="list-style-type: none"><li>• Four device ports with (7/8-16UN) <i>minifast</i> connectors</li></ul>	
JBBS-57-M601		6-port Junction <ul style="list-style-type: none"><li>• Bus in/bus out straight (7/8-16UN) <i>minifast</i> through ports</li></ul>	
JBBS-57-M613		<ul style="list-style-type: none"><li>• Six device ports with (7/8-16UN) <i>minifast</i> connectors</li></ul>	

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions


**4-Port**

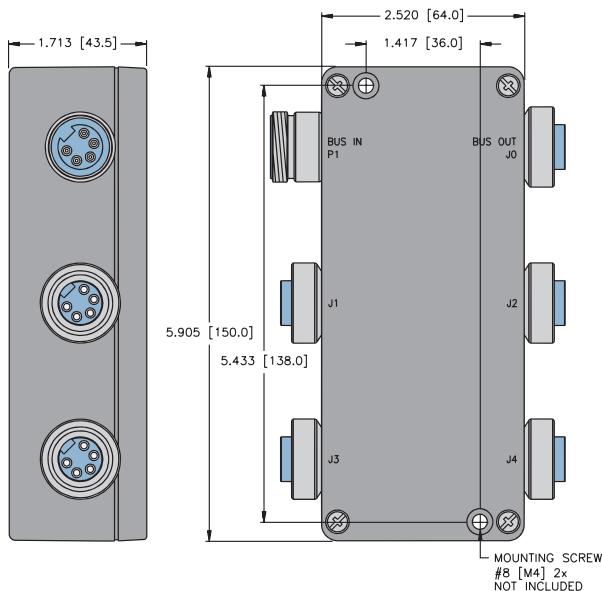

**6-Port**

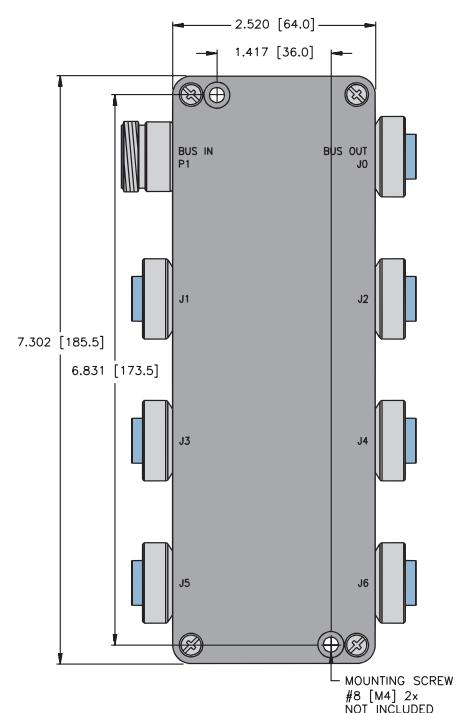


## Pinouts

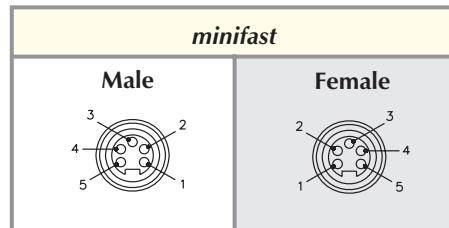

## DeviceNet™, *minifast*® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications

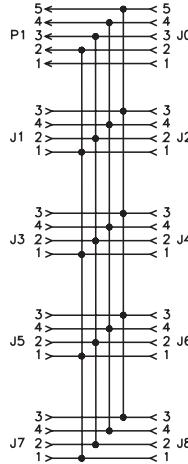


Part Number	Specs	Application	Wiring Diagrams
JBBS-57-M801	Die-cast aluminum enclosure.	8-port Junction <ul style="list-style-type: none"> <li>• Bus in/bus out straight (7/8-16UN) <i>minifast</i> through ports</li> <li>• Eight device ports with (7/8-16UN) <i>minifast</i> connectors</li> </ul>	 <pre> P1 5&lt;--&gt; 4&lt;--&gt; 3&lt;--&gt; 2&lt;--&gt; 1   4           3           2           1   3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J0                                     2           1           J0 J1 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J1                         2           1           J1 J2 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J2                         2           1           J2 J3 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J3                         2           1           J3 J4 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J4                         2           1           J4 J5 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J5                         2           1           J5 J6 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J6                         2           1           J6 J7 3&gt;--&gt; 2&gt;--&gt; 1&gt;--&gt; J7                         2           1           J7   </pre>
JBBS-57-M813			

## Specifications


<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

### 8-Port

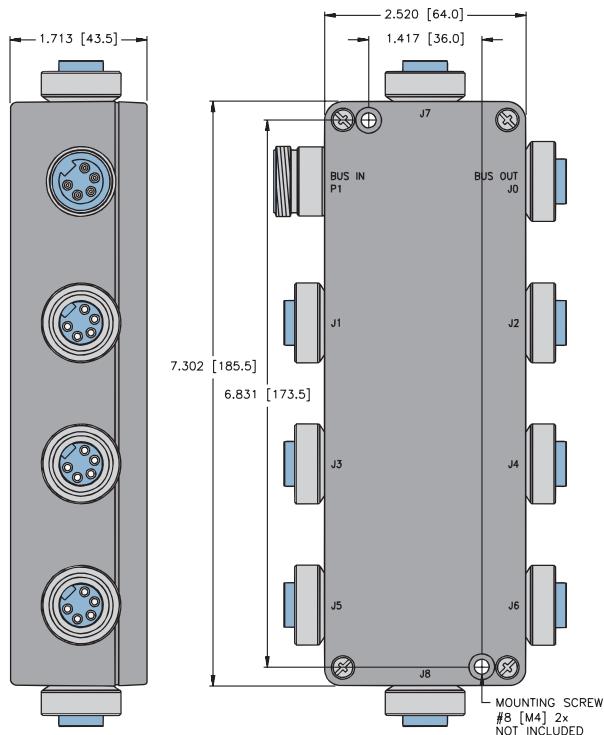


## Pinouts

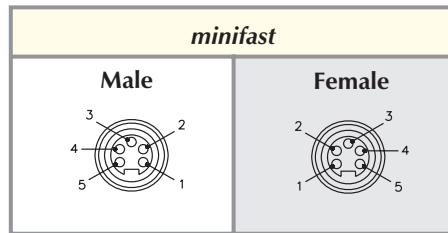

## DeviceNet™, *minifast*® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications

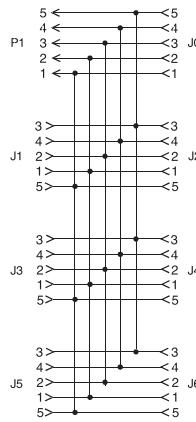


Part Number	Specs	Application	Wiring Diagrams
JBBS-57-M623	Fiberglass enclosure	<p>6-port Junction</p> <ul style="list-style-type: none"> <li>• Bus in/bus out straight (7/8-16UN) <i>minifast</i> through ports</li> <li>• Six device ports with (7/8-16UN) <i>minifast</i> connectors</li> </ul>	

## Specifications


<b>Housing:</b>	Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

**6-Port**

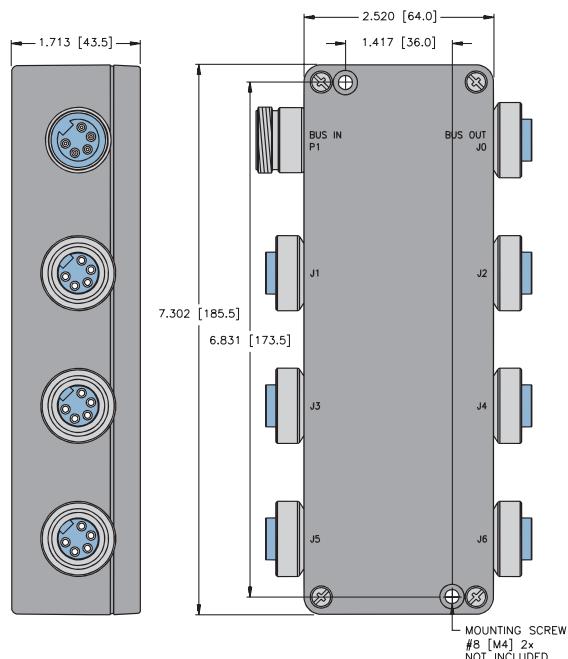


## Pinouts

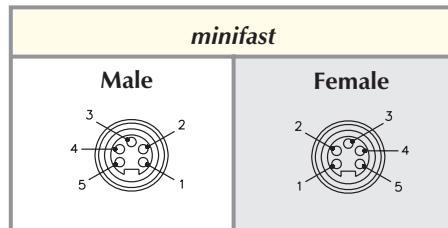

## DeviceNet™, eurofast® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications

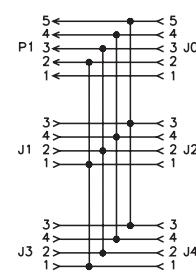


Part Number	Specs	Application	Wiring Diagram
JBBS-57-E401			
JBBS-57-E403	Die-cast aluminum enclosure.	4-port Junction	
JBBS-57-E411		<ul style="list-style-type: none"> <li>• Bus in/bus out straight (7/8-16UN) <b>minifast</b>® through ports</li> <li>• Four device ports with (M12x1) <b>eurofast</b> connectors</li> </ul>	
JBBS-57-E421	Fiberglass		

## Specifications


<b>Housing:</b>	Anodized Aluminum/Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

### 4-Port

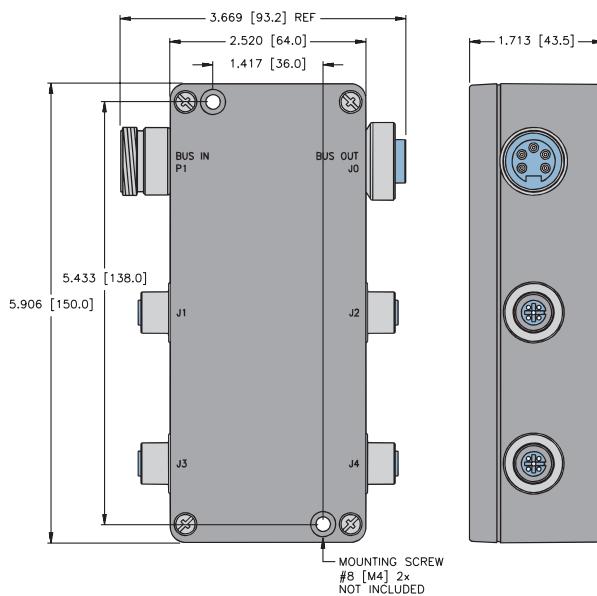



## Pinouts

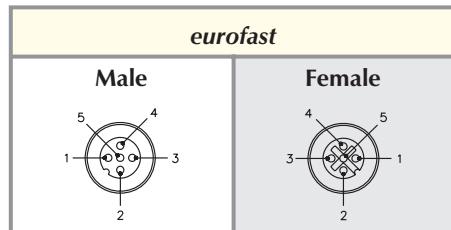

## DeviceNet™, eurofast® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications




Part Number	Specs	Application	Wiring Diagram
JBBS-57-E601	Die-cast aluminum enclosure.		 <pre> P1 5 &lt;--&gt; J0 5 P1 4 &lt;--&gt; J0 4 P1 3 &lt;--&gt; J0 3 P1 2 &lt;--&gt; J0 2 P1 1 &lt;--&gt; J0 1 J1 3 &gt;--&gt; J1 3 J1 4 &gt;--&gt; J1 4 J1 2 &gt;--&gt; J1 2 J1 1 &gt;--&gt; J1 1 J1 5 &gt;--&gt; J1 5 J2 3 &gt;--&gt; J2 3 J2 4 &gt;--&gt; J2 4 J2 2 &gt;--&gt; J2 2 J2 1 &gt;--&gt; J2 1 J2 5 &gt;--&gt; J2 5 J3 3 &gt;--&gt; J3 3 J3 4 &gt;--&gt; J3 4 J3 2 &gt;--&gt; J3 2 J3 1 &gt;--&gt; J3 1 J3 5 &gt;--&gt; J3 5 J4 3 &gt;--&gt; J4 3 J4 4 &gt;--&gt; J4 4 J4 2 &gt;--&gt; J4 2 J4 1 &gt;--&gt; J4 1 J4 5 &gt;--&gt; J4 5 J5 3 &gt;--&gt; J5 3 J5 4 &gt;--&gt; J5 4 J5 2 &gt;--&gt; J5 2 J5 1 &gt;--&gt; J5 1 J5 5 &gt;--&gt; J5 5 </pre>
JBBS-57-E621	Fiberglass	6-port Junction <ul style="list-style-type: none"> <li>• Bus in/bus out straight (7/8-16UN) <b>minifast</b> through ports</li> <li>• Six device ports with (M12x1) <b>eurofast</b> connectors</li> </ul>	 <pre> P1 5 &lt;--&gt; J0 5 P1 4 &lt;--&gt; J0 4 P1 3 &lt;--&gt; J0 3 P1 2 &lt;--&gt; J0 2 P1 1 &lt;--&gt; J0 1 J1 3 &gt;--&gt; J1 3 J1 4 &gt;--&gt; J1 4 J1 2 &gt;--&gt; J1 2 J1 1 &gt;--&gt; J1 1 J1 5 &gt;--&gt; J1 5 J2 3 &gt;--&gt; J2 3 J2 4 &gt;--&gt; J2 4 J2 2 &gt;--&gt; J2 2 J2 1 &gt;--&gt; J2 1 J2 5 &gt;--&gt; J2 5 J3 3 &gt;--&gt; J3 3 J3 4 &gt;--&gt; J3 4 J3 2 &gt;--&gt; J3 2 J3 1 &gt;--&gt; J3 1 J3 5 &gt;--&gt; J3 5 J4 3 &gt;--&gt; J4 3 J4 4 &gt;--&gt; J4 4 J4 2 &gt;--&gt; J4 2 J4 1 &gt;--&gt; J4 1 J4 5 &gt;--&gt; J4 5 J5 3 &gt;--&gt; J5 3 J5 4 &gt;--&gt; J5 4 J5 2 &gt;--&gt; J5 2 J5 1 &gt;--&gt; J5 1 J5 5 &gt;--&gt; J5 5 J6 3 &gt;--&gt; J6 3 J6 4 &gt;--&gt; J6 4 J6 2 &gt;--&gt; J6 2 J6 1 &gt;--&gt; J6 1 J6 5 &gt;--&gt; J6 5 </pre>


## Specifications

<b>Housing:</b>	Anodized Aluminum/Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

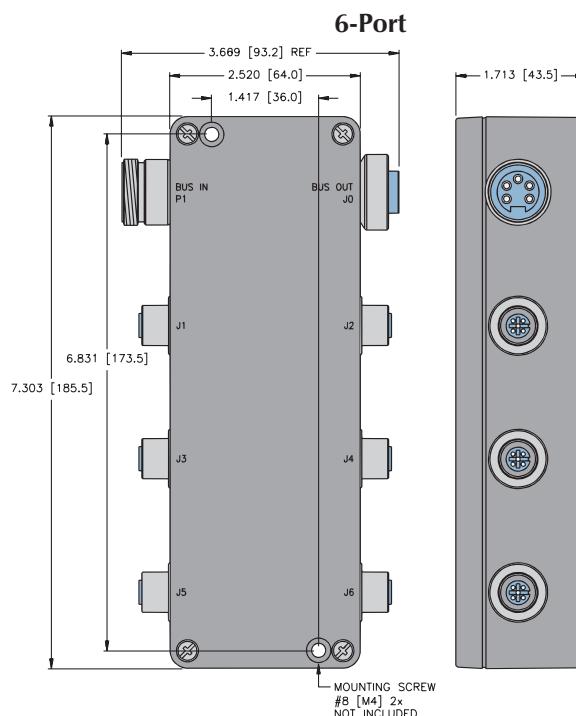


## Pinouts

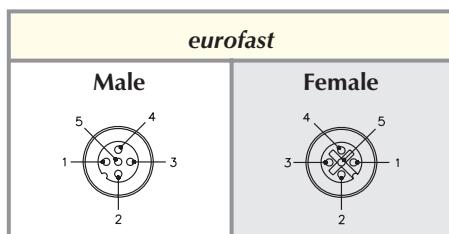

## DeviceNet™, *eurofast*® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications

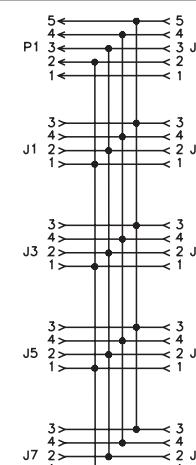


Part Number	Specs	Application	Wiring Diagram
JBBS-57-E801  JBBS-57-E803	Die-cast aluminum enclosure.	8-port Junction <ul style="list-style-type: none"> <li>• Bus in/bus out straight (7/8-16UN) <i>minifast</i> through ports</li> <li>• Eight device ports with (M12x1) <i>eurofast</i> connectors</li> </ul>	 <pre> P1 5&lt;--&gt;5     4&lt;--&gt;4     3&lt;--&gt;3     2&lt;--&gt;2     1&lt;--&gt;1       +-----+                       +-----+ J0 5&lt;--&gt;5     4&lt;--&gt;4     3&lt;--&gt;3     2&lt;--&gt;2     1&lt;--&gt;1       +-----+                       +-----+ J1 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+ J2 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+ J3 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+ J4 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+ J5 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+ J6 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+ J7 3&gt;&lt;3     4&gt;&lt;4     2&gt;&lt;2     1&gt;&lt;1       +-----+                       +-----+     </pre>
JBBS-57-E821	Fiberglass		


## Specifications

<b>Housing:</b>	Anodized Aluminum/Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

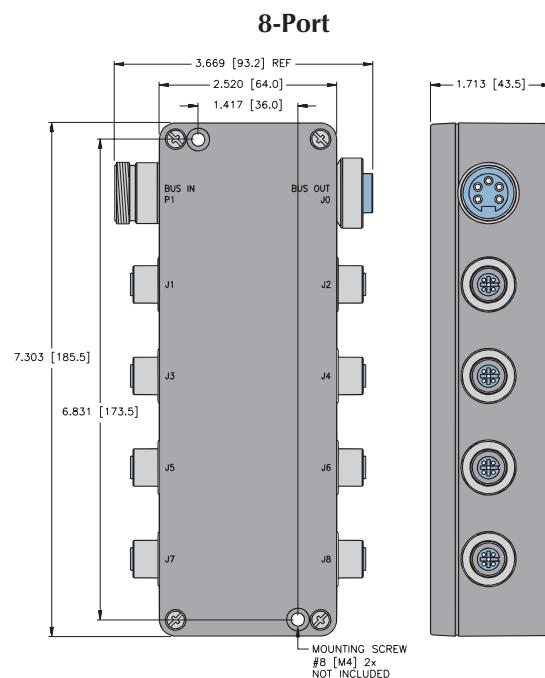


## Pinouts

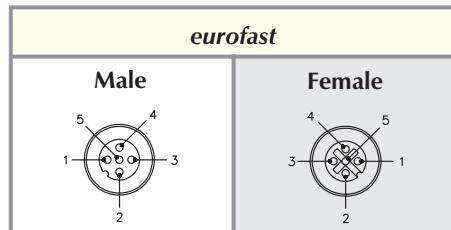

## DeviceNet™, eurofast® Passive Multi-Port Junctions

- Rugged, Fully Encapsulated Enclosure
- For Connecting I/O in Concentrated Areas
- Bus-In / Bus-Out Eliminates Need for Splitter Tee
- Suitable for Outdoor Applications

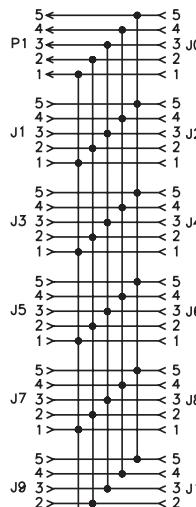


Part Number	Specs	Application	Wiring Diagram
JBBS-57-E1001	Die-cast aluminum enclosure.	10-port Junction <ul style="list-style-type: none"> <li>• Bus in/bus out straight (7/8-16UN) <i>minifast</i>® through ports</li> <li>• Ten device ports with (M12x1) <i>eurofast</i> connectors</li> </ul>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

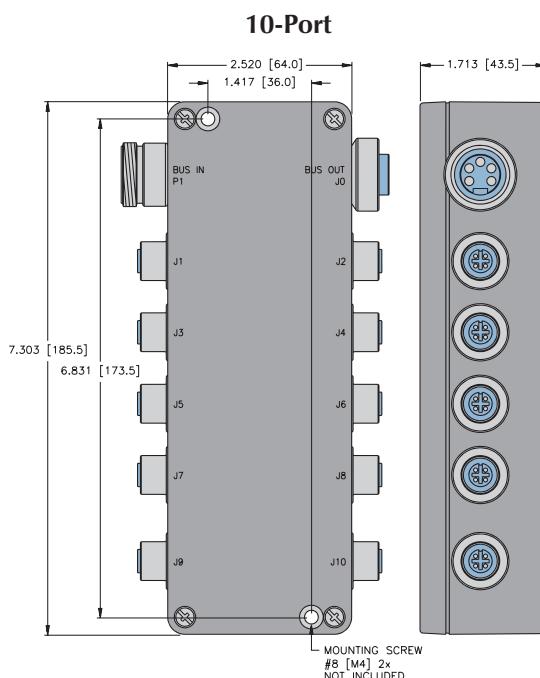


## Pinouts

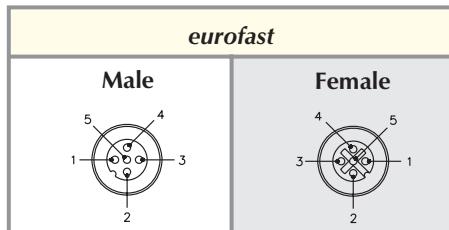

## DeviceNet™, eurofast® Passive Multi-Port Junctions

- Switchable DeviceNet Diagnostic Box
- Used for DeviceNet Troubleshooting

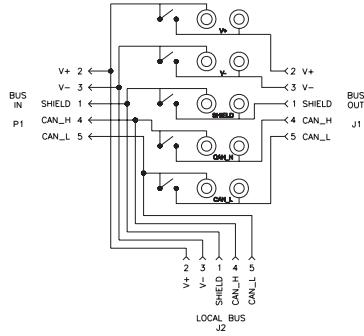


Part Number	Specs	Application	Wiring Diagram
JBBS-57-DGM	Fiberglass	<p>Diagnostic Box</p> <ul style="list-style-type: none"> <li>• Taps into CAN_H, CAN_L, V+, V- and SHIELD</li> <li>• Used to diagnose DeviceNet (should not be installed permanently on network)</li> </ul>	

## Specifications

<b>Housing:</b>	Fiberglass
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	IEC IP20
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

## Dimensions

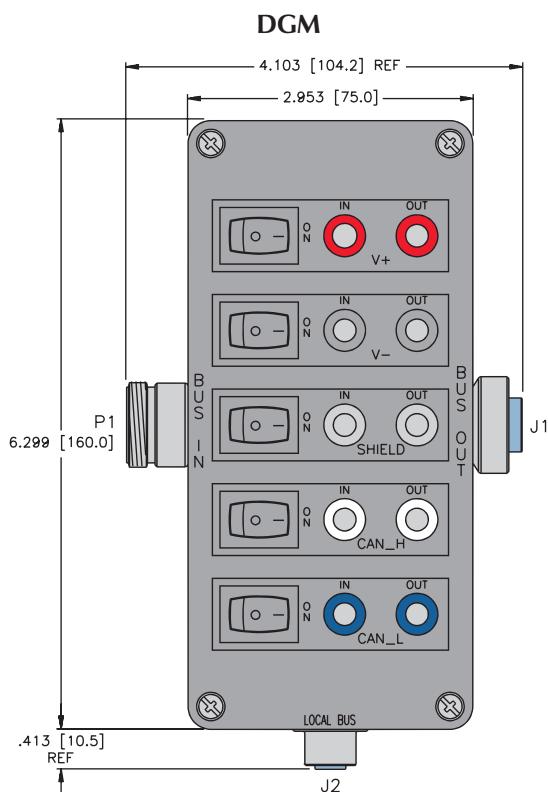

## Pinouts

<b>eurofast Male</b>	<b>minifast Male</b>	<b>minifast Female</b>

## DeviceNet™, eurofast® Passive Multi-Port Junctions

- System Module Junction Box




Part Number	Specs	Application	Wiring Diagram
JBBS-57-SM01	Die-cast aluminum enclosure.	<p>System module with two circuit groups</p> <ul style="list-style-type: none"> <li>• DeviceNet circuit</li> <li>• Supplies DC power</li> <li>• Two drops</li> <li>• Auxiliary power</li> <li>• Supplies DC power</li> <li>• Category 2 E-stop</li> <li>• General purpose</li> <li>• M(machine)-stop</li> </ul>	

## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	TPU (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67, IP 68, IP 69K
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)







## Dimensions

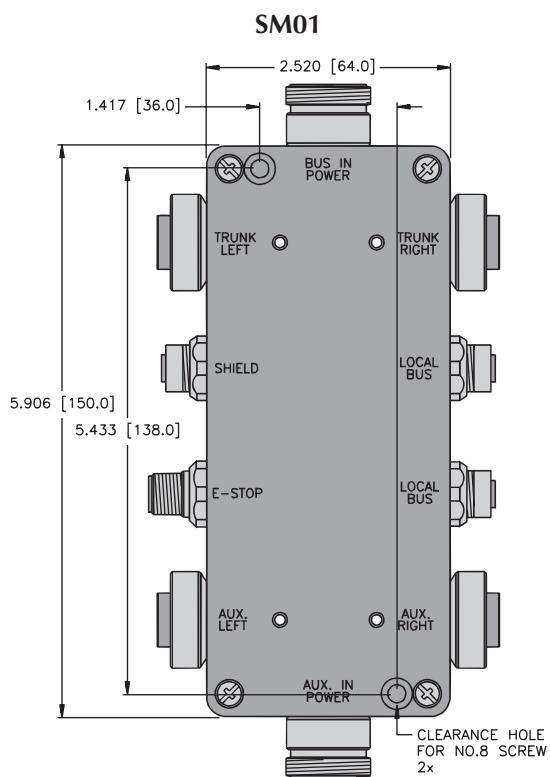

## DeviceNet™, eurofast® Drop Junctions

- Creates a Drop or Branch from the Main Bus Line
- Cable Drop Lengths Available Up to a Maximum of 6 Meters

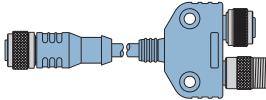

Housing	Part Number	Application	Wiring Diagrams
	VB2-FKM/FKM/FSM 57	<p>VB2 Junction</p> <ul style="list-style-type: none"> <li>• Ready for <b>eurofast</b> drop and trunk cordsets</li> <li>• Maximum six meter drop</li> </ul>	 <pre> graph TD     1 --&gt; FKM1     2 --&gt; FKM2     3 --&gt; FKM3     4 --&gt; FKM4     5 --&gt; FKM5     FKM1 --&gt; 1     FKM2 --&gt; 2     FKM3 --&gt; 3     FKM4 --&gt; 4     FKM5 --&gt; 5   </pre>
	VB2-RKC 57x-*M-FKM FSM	<p>VB2 Junction with Trunk Line</p> <ul style="list-style-type: none"> <li>• Ready for <b>eurofast</b> trunk line</li> <li>• Maximum six meter drop</li> </ul>	 <pre> graph TD     1 --&gt; RKC1     2 --&gt; RKC2     3 --&gt; RKC3     4 --&gt; RKC4     5 --&gt; RKC5     RKC1 --&gt; 1     RKC2 --&gt; 2     RKC3 --&gt; 3     RKC4 --&gt; 4     RKC5 --&gt; 5   </pre>
	VB2-FKM/RKC RSC 57x-*M/*M	<p>VB2 Junction with Trunk Line</p> <ul style="list-style-type: none"> <li>• Ready for <b>eurofast</b> drop cordsets</li> <li>• Maximum six meter branch</li> </ul>	 <pre> graph TD     1 --&gt; RSC1     2 --&gt; RSC2     3 --&gt; RSC3     4 --&gt; RSC4     5 --&gt; RSC5     RSC1 --&gt; 1     RSC2 --&gt; 2     RSC3 --&gt; 3     RSC4 --&gt; 4     RSC5 --&gt; 5   </pre>

\* Indicates length in meters.


x Indicates cable type.

## Specifications


<b>Housing:</b>	PUR (Polyurethane)
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	PUR (Polyurethane) or POM (Nylon)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	250 V
<b>Rated Current:</b>	4 A
<b>Ambient Temperature:</b>	-40° to +75°C (-22° to +167°F)

**Mounting:** Mounting hole accepts #8 screw.


**VB2-FKM/FKM/FSM 57**

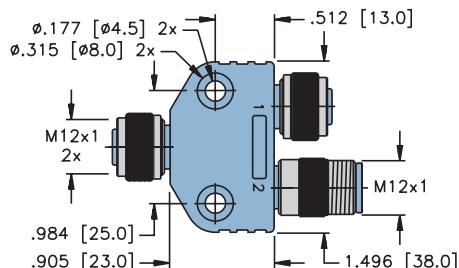

**VB2-RKC 57x-\*M-FKM FSM**

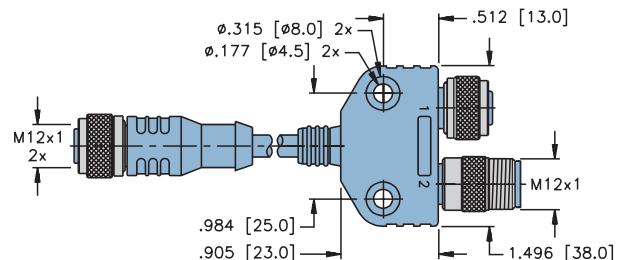

**VB2-FKM/RKC RSC 57x-\*M/\*M**

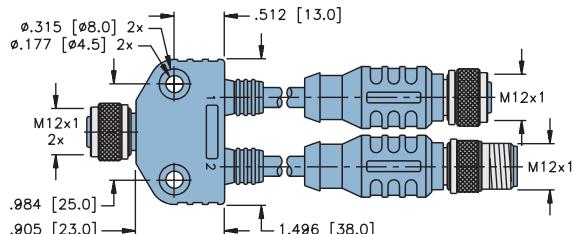




## Pinouts

eurofast®	
Male	Female

## DeviceNet™, *minifast*® Conduit Adapters


- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port

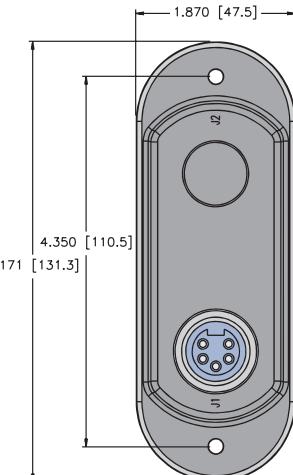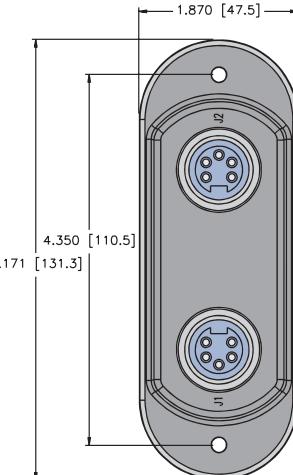


Housing	Part Number	Specs	Application	Pinout
	BCA 57-M123	Nylon Housing Stainless Steel Receptacle Housing 300 V, 9 A -40° to +75°C	Attaches to standard conduit body* for transition to 5-wire (7/8-16UN) <b>minifast</b> connector  *Crouse-Hinds 3/4" Form 8, Mark 9 or equivalent.	<b>Female</b> 
	BCA 57-M223	Nylon Housing Stainless Steel Receptacle Housing 300 V, 9 A -40° to +75°C	Attaches to standard conduit body* for transition to 5-wire (7/8-16UN) <b>minifast</b> connector  *Crouse-Hinds 3/4" Form 8, Mark 9 or equivalent.	

Standard receptacle housing material is stainless steel, for nickel plated brass change part number from ... M223 to ... M224.

**1-port Wiring Diagram**

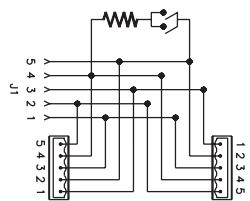

**2-port Wiring Diagram**

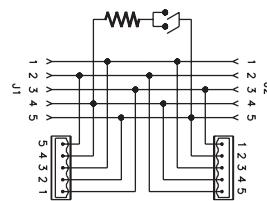

## DeviceNet™, eurofast® Conduit Adapters


- Gasket and Mounting Screws Provided
- Same Housing Style for Single or Double Port




Housing	Part Number	Specs	Application	Pinout
	BCA 57-E123	Nylon Housing Stainless Steel Receptacle Housing 250 V, 4 A -40° to +75°C	Attaches to standard conduit body* for transition to 5-wire (M12x1) eurofast connector  *Crouse-Hinds 3/4" Form 8, Mark 9 or equivalent.	<b>Female</b> 
	BCA 57-E223		Attaches to standard conduit body* for transition to 5-wire (M12x1) eurofast connector  *Crouse-Hinds 3/4" Form 8, Mark 9 or equivalent.	

Standard receptacle housing material is stainless steel, for nickel plated brass change part number from ... M223 to ... M224.

**1-port Wiring Diagram**

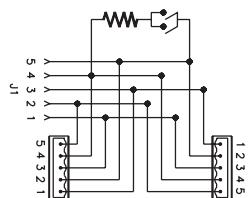





**2-port Wiring Diagram**

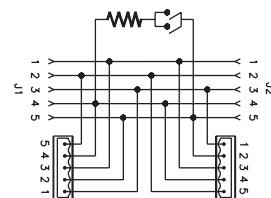


## DeviceNet™, Wall Plate Adapters

- Gasket and Mounting Screws Provided
- For Use with a Single Gang Electrical Box

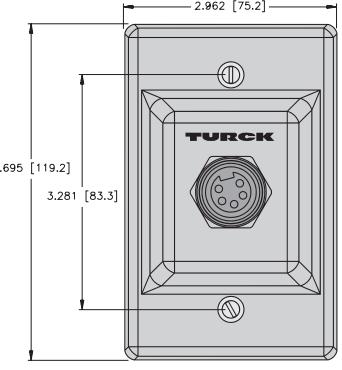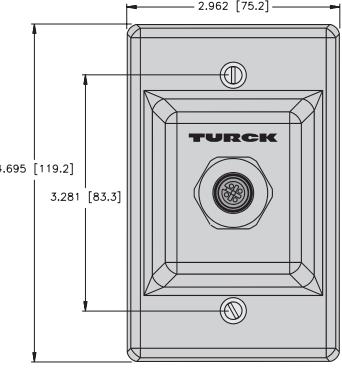







Housing	Part Number	Specs	Application	Pinouts
	BPA-57-M113		Attaches to standard single gang electrical box for transition to 5-wire (7/8-16UN) <b>minifast</b> connector	
	BPA-57-E113	Stainless Steel 250 V, 4.0 A -40 to +70°C (-40 to +158°F)	Attaches to standard single gang electrical box for transition to 5-wire (M12x1) <b>eurofast</b> connector	

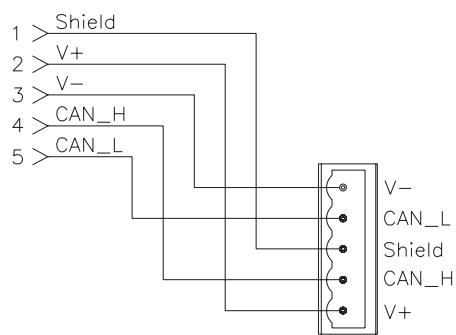



## DeviceNet™, Bus Drop and Diagnostic Tees

- Creates a Drop or Branch from the Main Bus Line
- (7/8-16UN) *minifast*® Connectors on Bus and Drop Lines
- Available in Three Keyway Options

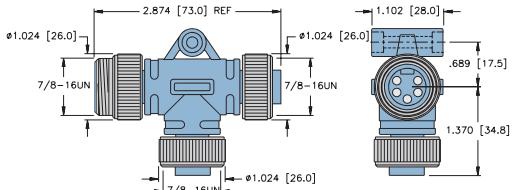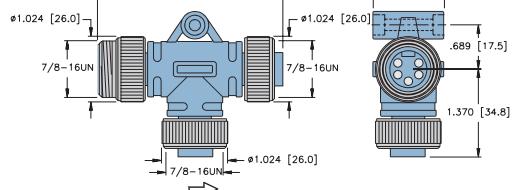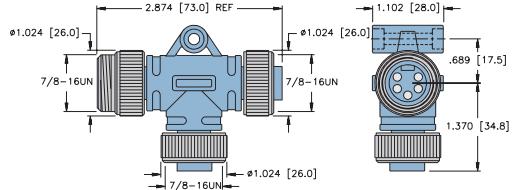

Housing	Part Number	Specs	Application	Wiring Diagrams
	RSM 2RKM 57		<b>minifast</b> Drop Off Bus Line <ul style="list-style-type: none"> <li>Full power and data drop</li> <li>Maximum six meter branch</li> <li>Standard keyway</li> </ul>	
	RSM 2RKM 57-KF	PUR (Polyurethane) 300 V, 9 A -40° to +75°C	<b>minifast</b> Drop Off Bus Line <ul style="list-style-type: none"> <li>Full power and data drop</li> <li>Maximum six meter branch</li> <li>Keyway facing female</li> </ul>	
	RSM 2RKM 57-KM		<b>minifast</b> Drop Off Bus Line <ul style="list-style-type: none"> <li>Full power and data drop</li> <li>Maximum six meter branch</li> <li>Keyway facing male</li> </ul>	





### Pinouts

<i>minifast</i>	
Male	Female
	


## DeviceNet™, Power and Diagnostic Tees

- Provide a Drop to Insert Power or Diagnostic Equipment
- (7/8-16UN) *minifast®* Connectors on Bus and Drop Lines
- Reverse Current Protection on Power Tap

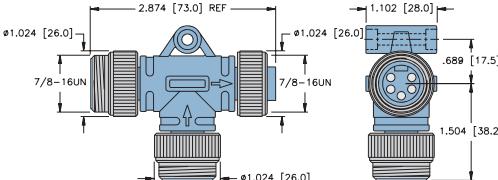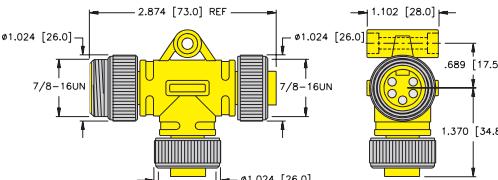

Housing	Part Number	Specs	Application	Wiring Diagrams
	RSM RKM 57 WSM 40 PST	PUR (Polyurethane) 300 V, 9 A -40° to +75°C	<p>Bus Power</p> <ul style="list-style-type: none"> <li>• Tee provides segment power</li> <li>• Includes reverse current protection</li> </ul>	
	RSM 2RKM 57 DGT		<p>Bus Diagnostic Tee</p> <ul style="list-style-type: none"> <li>• Provides easy connection for diagnostic tools</li> <li>• Tap protected with cover when not in use (not shown)</li> </ul>	

### Pinouts

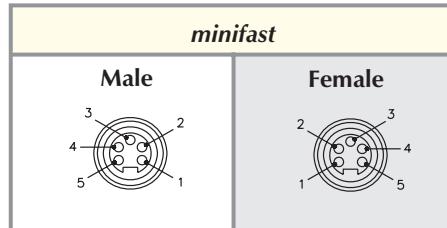

# DeviceNet™, Bus Tees

- Creates a Drop or Branch from the Main Bus Line
  - Cable Drop Can Be Up to a Maximum of 6 Meters
  - **eurofast® Drop Connector or Extension Cordset**



Housing	Part Number	Specs	Application	Wiring Diagrams
	RSM-FKM-RKM 57	PUR (Polyurethane) 250 V, 4 A -40° to +75°C	<b>eurofast</b> Drop <ul style="list-style-type: none"> <li>• <b>minifast®</b> to <b>eurofast</b></li> <li>• Bus power and data drop</li> </ul>	
	RSM RKC 57x-*M RKM 57		<b>eurofast</b> Drop Cordset <ul style="list-style-type: none"> <li>• <b>minifast</b> to <b>eurofast</b> cordset</li> <li>• Bus power and data drop</li> </ul>	



## Pinouts

<i>minifast</i>	<i>eurofast</i>
<b>Male</b>	<b>Female</b>


## DeviceNet™, eurofast® Bus Tees

- Creates a Drop or Branch from the Main Bus Line
- Cable Drop Can Be Up to a Maximum of 6 Meters
- eurofast Drop Connector

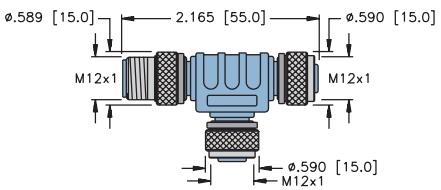

Housing	Part Number	Specs	Application	Wiring Diagram
	RSC 2RKC 57	PUR (Polyurethane) 250 V, 4 A -40° to +75°C	<b>eurofast Tee</b> • eurofast trunk and drop	
	RSC 2RKC 57/KS		<b>eurofast Tee</b> • eurofast trunk and drop • Keyway aligns tee in-line on (M8x1) piconet® boxes	




### Pinouts

eurofast	
Male	Female
	

## DeviceNet™, Gender Changers and Elbow Connectors

- Allows Quick and Easy Changes from Male to Female Connectors
  - Available in Straight and Right Angle Styles with *minifast*® Connectors

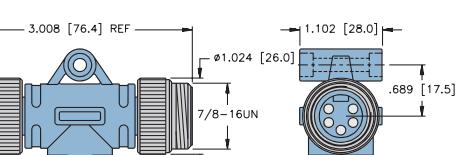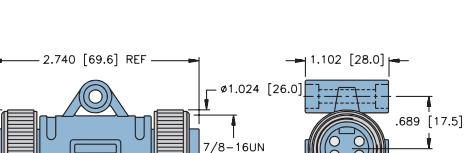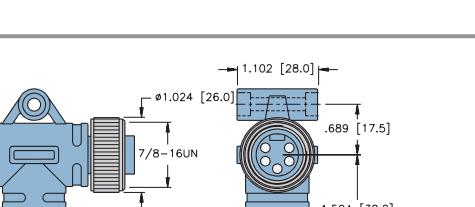

Housing	Part Number	Specs	Application
	RSM RSM 57		Male <b>minifast</b> Gender Changer • Changes female cordset to male cordset
	RKM RKM 57	PUR (Polyurethane) 300 V, 9 A -40° to +75°C	Female <b>minifast</b> Gender Changer • Changes male cordset to female cordset • Changes straight male or female cordset to right angle cordset
	WSM RKM 57		<b>minifast</b> Elbow • Right angle male to female connector


## Pinouts

The diagram illustrates the male and female reproductive structures of the *minifast* species. The male structure on the left shows a circular organ with five numbered parts: 1 at the bottom, 2 at the top, 3 on the left, 4 on the right, and 5 at the base. The female structure on the right is similar but includes internal components labeled 2, 3, 4, and 5, representing the oviducts and associated structures.


## DeviceNet™, Gender Changers and Elbow Connectors

- Allows Quick and Easy Changes from Male to Female and *minifast*® to *eurofast*® Connectors

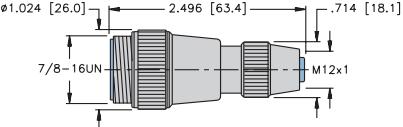

Housing	Part Number	Specs	Application	Wiring Diagram
	RSM 57-FK 4.5	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +75°C	Female <i>eurofast</i> to male <i>minifast</i> adapter	<pre> 1 &gt;-----&gt; 1 2 &gt;-----&gt; 2 3 &gt;-----&gt; 3 4 &gt;-----&gt; 4 5 &gt;-----&gt; 5 </pre>

### Pinouts

<i>minifast</i>	<i>eurofast</i>
Male	Female
	

## DeviceNet™, (7/8-16UN) *minifast*® Male Receptacles

- Provides Quick Connection to Field Devices or Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
23	RSF 57-*M/14.5		1/2-14NPT full length threads	
25	RSF 57-*M/14.75		3/4-14NPT full length threads	
24	RSF 57-*M/M20	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	M20x1.5 threads	Male 1. GY 2. RD 3. BK 4. WH 5. BU
26	RSF 57-*M		1/2-14NPSM threads	
27	RSF 57-*M/NPT		1/2-14NPT modified length threads	

See page J137 for dimensional drawings.

\* Length in meters.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.

For locknuts to be included, add "W/LN" to the end of the part number.

## DeviceNet™, (7/8-16UN) *minifast*® Female Receptacles

- Provides Quick Connection to Field Devices or Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
28 	RKF 57-*M/14.5		1/2-14NPT full length threads	
30 	RKF 57-*M/14.75		3/4-14NPT full length threads	
29 	RKF 57-*M/M20	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	M20x1.5 threads	<b>Female</b> 1. GY 2. RD 3. BK 4. WH 5. BU
31 	RKF 57-*M		1/2-14NPSM threads	
32 	RKF 57-*M/NPT		1/2-14NPT modified length threads	

See page J138 for dimensional drawings.

\* Length in meters.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.


For locknuts to be included, add "W/LN" to the end of the part number.

## DeviceNet™, (M12x1) eurofast® Male Receptacles

- Provides Quick Connection to Field Devices
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinout
33	FS 57-*M/14.5		1/2-14NPT full length threads	
35	FS 57-*M/14.75		3/4-14NPT full length threads	
34	FS 57-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. GY 2. RD 3. BK 4. WH 5. BU
36	FS 57-*M		PG 9 threads	
37	FS 57-*M/NPT		1/2-14NPT modified length threads	



See page J139 for dimensional drawings.

\* Length in meters.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.


Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.

## DeviceNet™, (M12x1) eurofast® Female Receptacles

- Mounted for Quick Connection to Enclosures
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts
38	FK 57-*M/14.5		1/2-14NPT full length threads	
40	FK 57-*M/14.75		3/4-14NPT full length threads	
39	FK 57-*M/M20	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	M20x1.5 threads	1. GY 2. RD 3. BK 4. WH 5. BU
41	FK 57-*M		PG 9 threads	
42	FK 57-*M/NPT		1/2-14NPT modified length threads	



See page J140 for dimensional drawings.

\* Length in meters.

Standard cable length is 0.3 meters. Consult factory for other lengths.

Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is nickel plated brass. "RKF .."; "RKFV .." indicates 316 stainless steel housing.

## DeviceNet™, *minifast*® PCB and Solder Cup Receptacles

- Provides (7/8-16UN) *minifast* Connection to Field Devices




Housing	Part Number	Specs	Application	Pinouts
43	RSF 57 PCB		Male <i>minifast</i> PCB pins	
45	RSF 57	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	Male <i>minifast</i> solder cups	1. BARE 2. RD 3. BK 4. WH 5. BU
44	RKF 57 PCB		Female <i>minifast</i> PCB pins	
46	RKF 57		Female <i>minifast</i> solder cups	<b>Male</b>  <b>Female</b> 


See page J141 for dimensional drawings.

Standard housing material is nickel plated brass "RSFV .."; "RKFV .." indicates 316 stainless steel.

**Panel Cutout**  
RK...FS



**Board Layout** (reference only)  
RK...FS

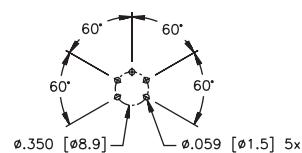

## DeviceNet™, eurofast® PCB and Solder Cup Receptacles

- Provides (M12x1) eurofast Connection to Field Devices




Housing	Part Number	Specs	Application	Pinouts
50 	FS 57 PCB KIT		Male eurofast with mounting kit	
51 	FS 57 PCB	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	Male eurofast	1. BARE 2. RD 3. BK 4. WH 5. BU
54 	FK 57 PCB KIT		Female eurofast with mounting kit	
55 	FK 57 PCB		Female eurofast	

See page J141 - 142 for dimensional drawings.

Standard housing material is nickel plated brass "FSV .."; "FKV .." indicates 316 stainless steel.



### Board Layout (reference only) FK ... FS

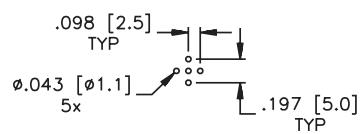

## DeviceNet™, eurofast® PCB Pins and Solder Cup Receptacles

- Provides (M12x1) eurofast Connection to Field Devices




Housing	Part Number	Specs	Application	Pinouts
49	FSFD 57 PCB		Male eurofast PCB pins	
48	FSFDL 57		Male eurofast solder cups	
47	WFS 57 PCB	Nickel Plated CuZn or Stainless Steel 250 V, 4 A -40° to +105°C	Male eurofast right angle PCB pins	1. BARE 2. RD 3. BK 4. WH 5. BU
53	FKFD 57 PCB		Female eurofast PCB pins	
52	FKFDL 57		Female eurofast solder cups	


See pages J141 -J142 for dimensional drawings.

Standard housing material is nickel plated brass "FKFD .."; "FKFDV .." indicates 316 stainless steel.


**Panel Cutout**  
**FKFD ... FSFD**

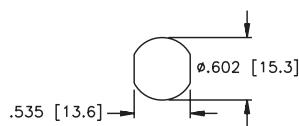


**Board Layout (reference only)**  
**FKFD ... FSFD**

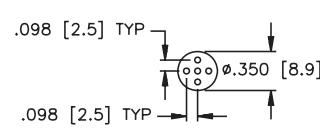


**Panel Cutout**  
**WFS**



**Board Layout (reference only)**  
**WFS**

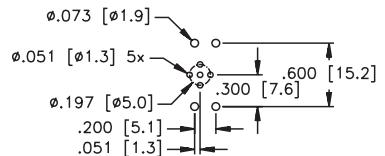


**minifast® Male Receptacles**

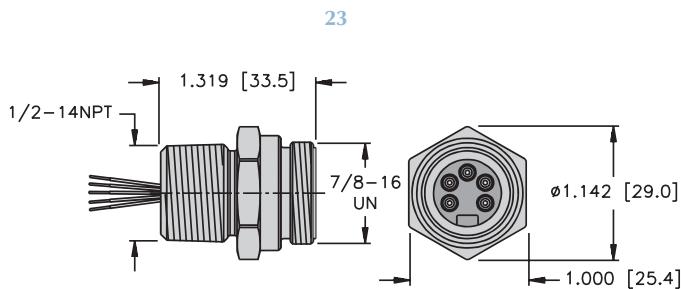


RSF ..14.5

Page J130

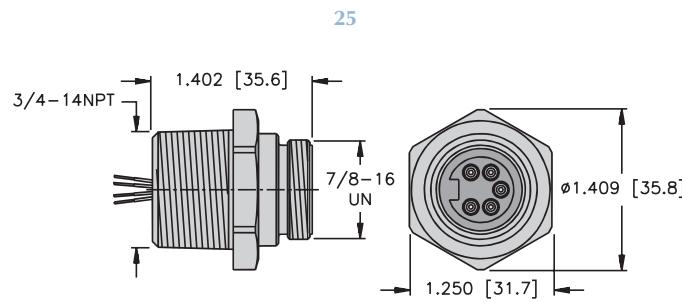


RSF ..14.75

Page J130

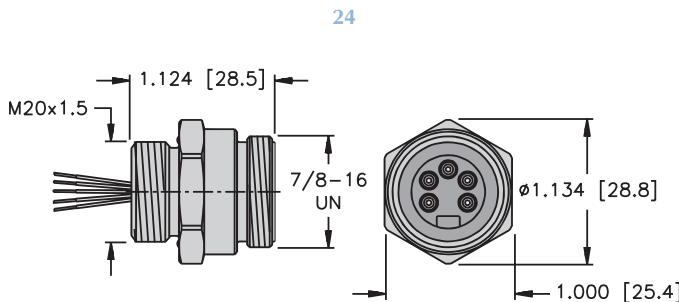


RSF .. M20

Page J130

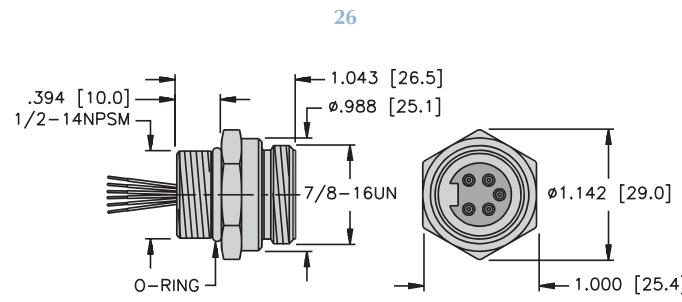

RSF ..

Page J130

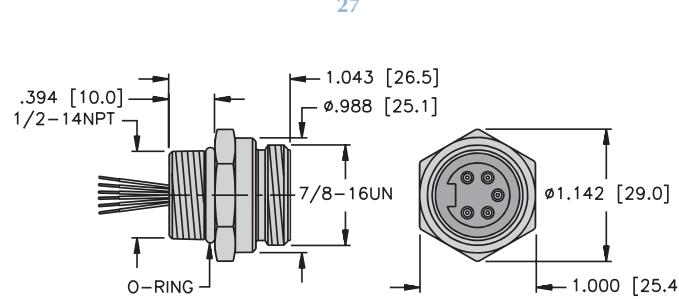


RSF .. NPT

Page J130


**minifast® Female Receptacles**

28

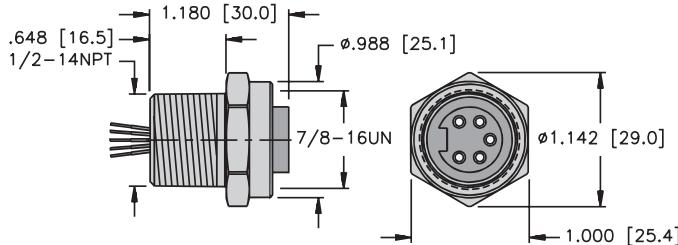


RKF .. 14.5

30

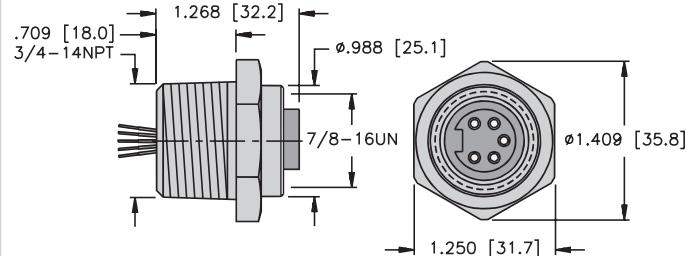

RKF .. 14.75


29

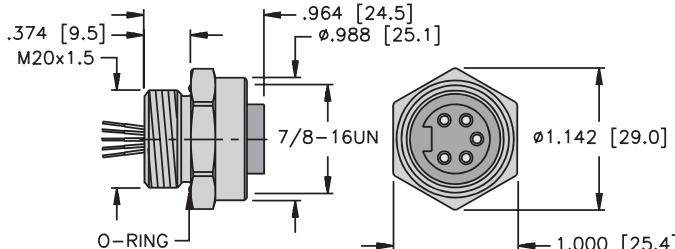

RKF .. M20


Page J131

31

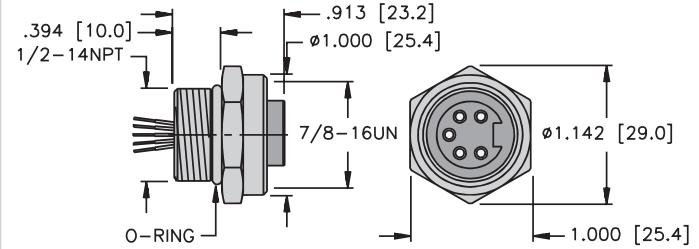

Page J131


32

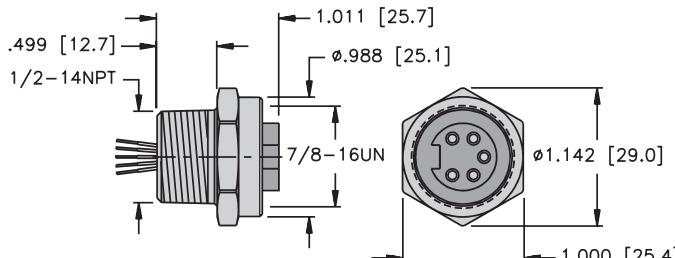

RKF .. NPT


Page J131

**eurofast® Male Receptacles**

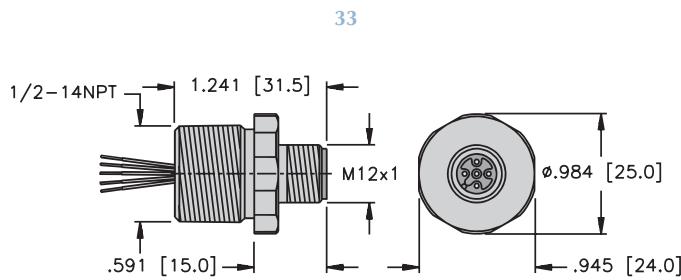


FS .. 14.5

Page J132

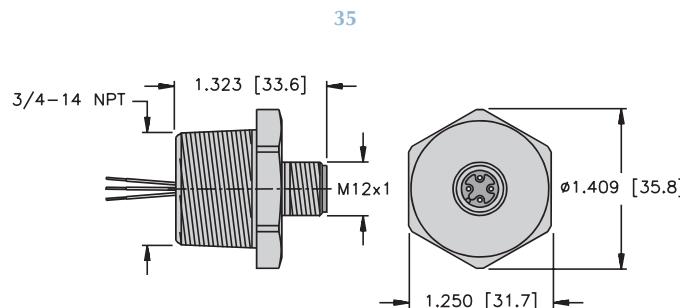


FS .. 14.75

Page J132

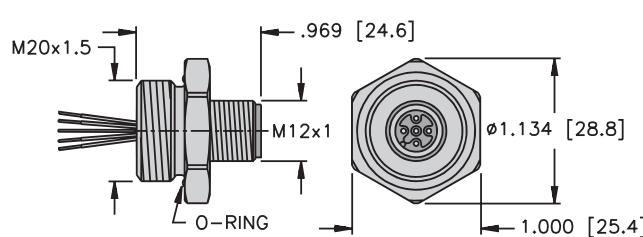


FS .. M20

Page J132

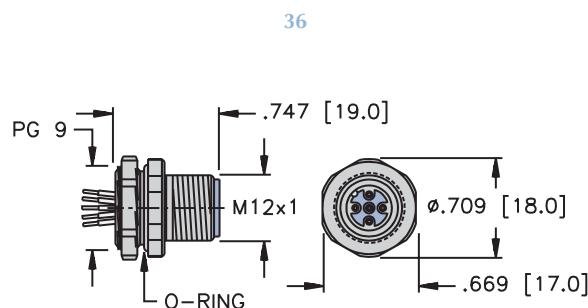

FS ..

Page J132

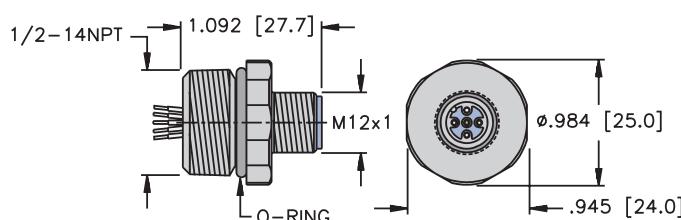


FS .. NPT

Page J132


**eurofast® Female Receptacles**

38

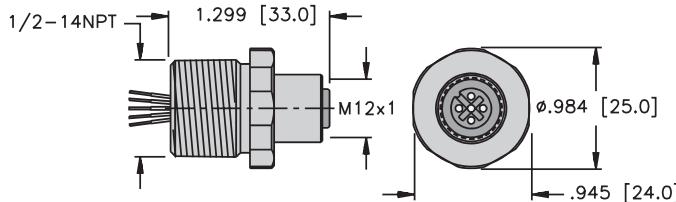


**FK .. 14.5**

40

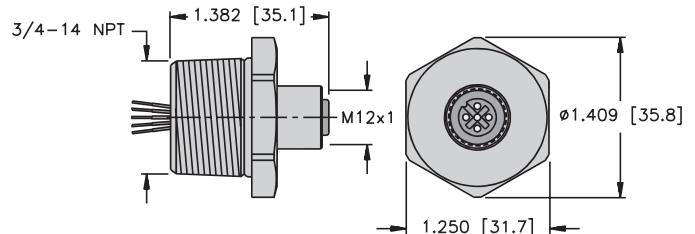

**Page J133**


39

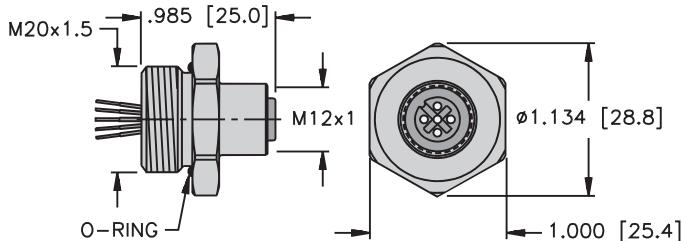

**FK .. M20**


**Page J133**

41

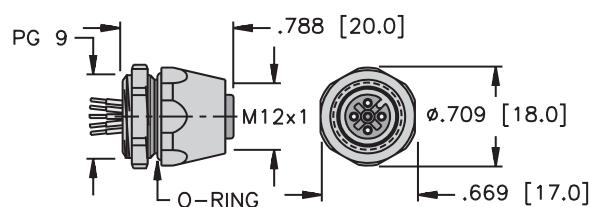


**Page J133**

42

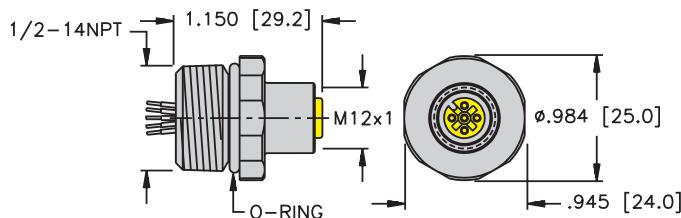


**FK .. NPT**

**Page J133**

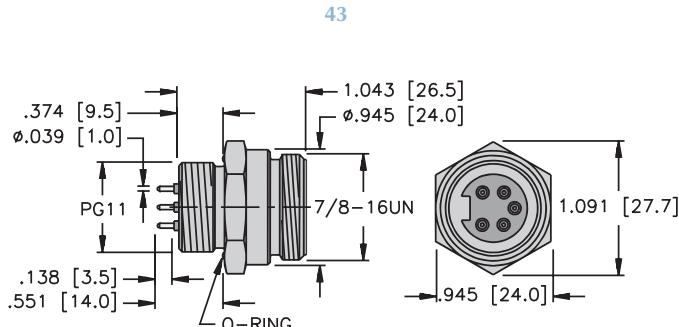**minifast® PCB Mount Male and Female Receptacles**


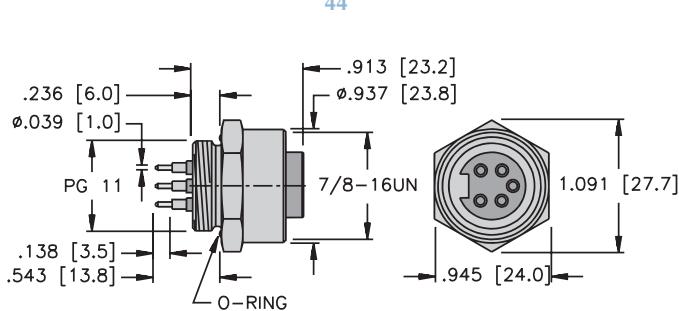
RSF ..PCB

Page J134

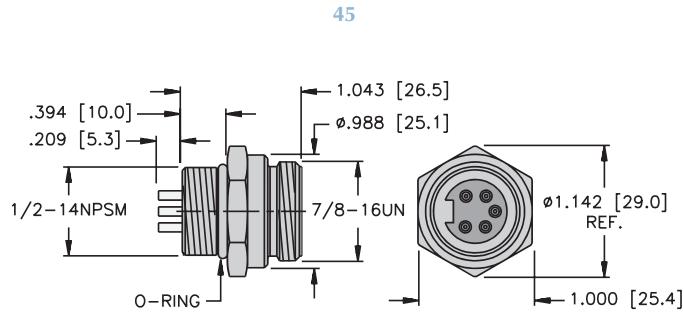


RSF ..

Page J134




RKF ..PCB

Page J134

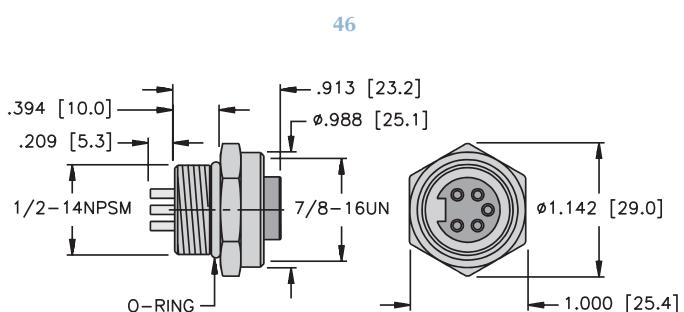

RKF ..

Page J134

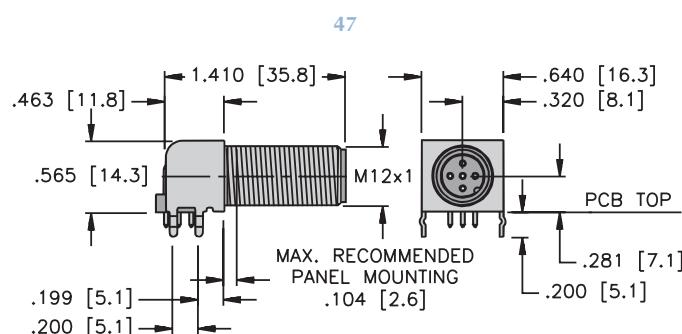
**eurofast® PCB Mount Male and Female Receptacles**


WFS ..PCB

Page J136

**eurofast® PCB Mount Male and Female Receptacles**


48

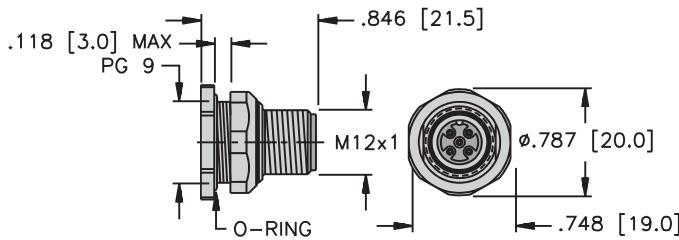

FSFDL ..

Page J136


52

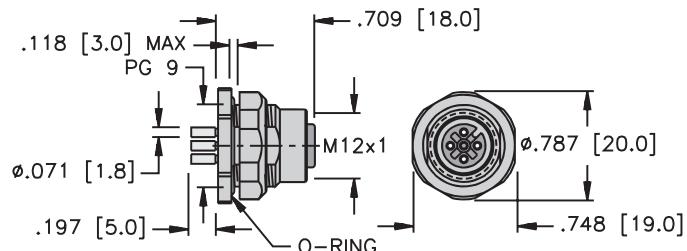

FKFDL ..

Page J136


49

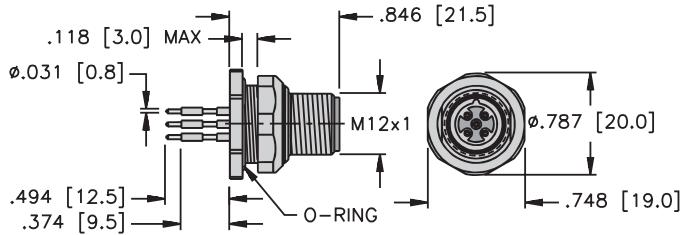

FSFD ..PCB

Page J136


53

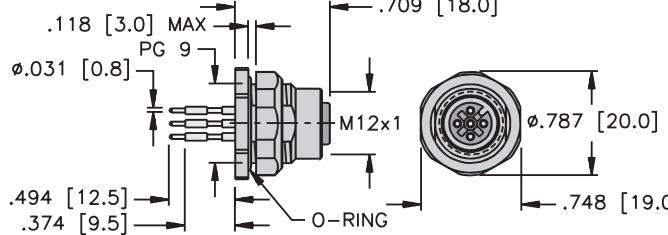

FKFD ..PCB

Page J136


50

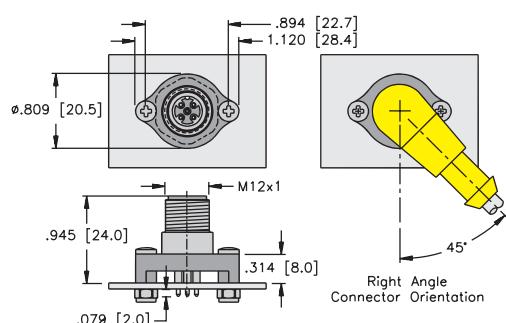

FS ..PCB KIT

Page J135


54

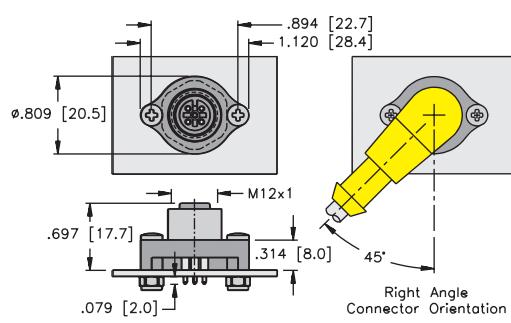

FK ..PCB KIT

Page J135


51

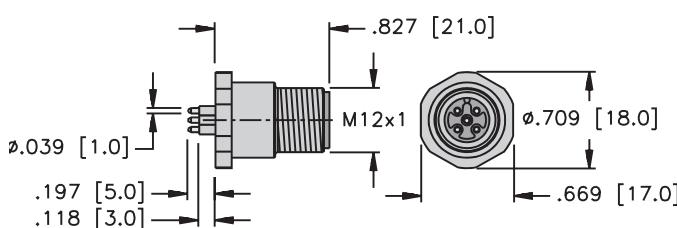

FS ..PCB KIT

Page J135

55

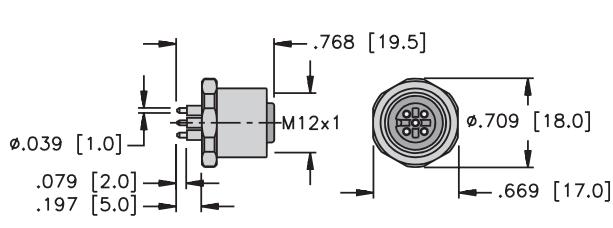





FK ..PCB KIT

Page J135

## DeviceNet™, *minifast*® Field Wireable Connectors

- Allows for Quick Connection when Pre-Molded Cables not Available
- Available for Male and Female Connectors
- Color Coded Wire Connectors for DeviceNet

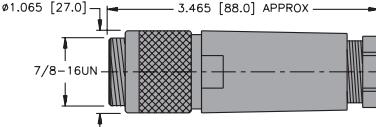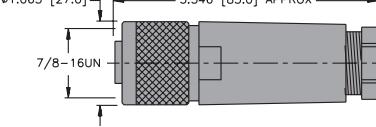

Housing	Part Number	Housing Specs.	Application	Pinouts
	BS 4151-0/9/DNET	Glass filled nylon PG 9 cable gland accepts 6-8 mm cable diameter Screw terminals 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	<b>Male</b> 
	BS 4151-0/13.5/DNET	Glass filled nylon PG 13.5 cable gland accepts 10-12 mm cable diameter Screw terminals 85°C 250 V, 9 A		
	B 4151-0/9/DNET	Glass filled nylon PG 9 cable gland accepts 6-8 mm cable diameter Screw terminals 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	<b>Female</b> 
	B 4151-0/13.5/DNET	Glass filled nylon PG 13.5 cable gland accepts 10-12 mm cable diameter Screw terminals 85°C 250 V, 9 A		

## DeviceNet™, eurofast® Field Wireable Connectors

- Allows for Quick Connection when Pre-Molded Cables not Available
- Available for Male and Female Connectors in Straight or Right-Angle Configurations
- Color Coded Wire Connections for DeviceNet






Housing	Part Number	Housing Specs.	Application	Pinouts
	B 8251-0/PG9/DNET	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals 85°C 125 V, 4 A		<b>Male</b> 
	BS 8251-0/PG9/DNET	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals 85°C 125 V, 4 A	Mates with 5-pin cordsets and receptacles	
	B 8151-0/PG9/DNET	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals 85°C 250 V, 4 A		<b>Female</b> 
	BS 8151-0/PG9/DNET	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals 85°C 250 V, 4 A		

## DeviceNet™, Power Taps

- Allows Connection to Bus Line for Bringing in 12 VDC Power
- Available with *minifast*® Bus Line and Drop Connectors or Terminal Connectors

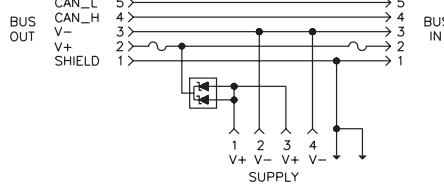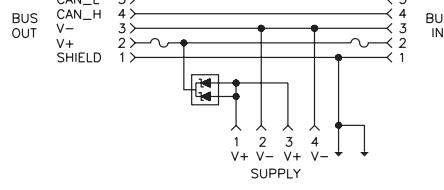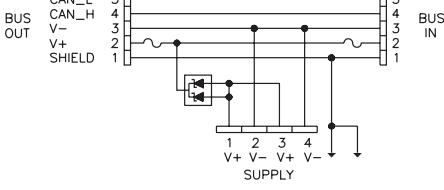


Part Number	Application	Wiring Diagrams
SPTC1	Power Tap with <i>minifast</i> Connectors <ul style="list-style-type: none"> <li>• (7/8-16UN) <i>minifast</i> male to female bus connector</li> <li>• (7/8-16UN) <i>minifast</i> female power connector</li> </ul>	
SPTC2	Power Tap with <i>minifast</i> Connectors <ul style="list-style-type: none"> <li>• (7/8-16UN) <i>minifast</i> female to female bus connector</li> <li>• (7/8-16UN) <i>minifast</i> female power connector</li> </ul>	
SPTT1	Power Tap with Terminal Connectors <ul style="list-style-type: none"> <li>• Terminal strip bus connectors</li> <li>• Terminal strip power connector</li> </ul>	


## Specifications

<b>Housing:</b>	Anodized Aluminum
<b>Coupling Nut:</b>	Nickel Plated CuZn or Stainless Steel
<b>Contact Carrier:</b>	PUR (Polyurethane)
<b>Contacts:</b>	Gold Plated CuZn
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 68
<b>Rated Voltage:</b>	300 V
<b>Rated Current:</b>	9 A
<b>Ambient Temperature:</b>	-30° to +75°C (-22° to +167°F)


**SPTC1**

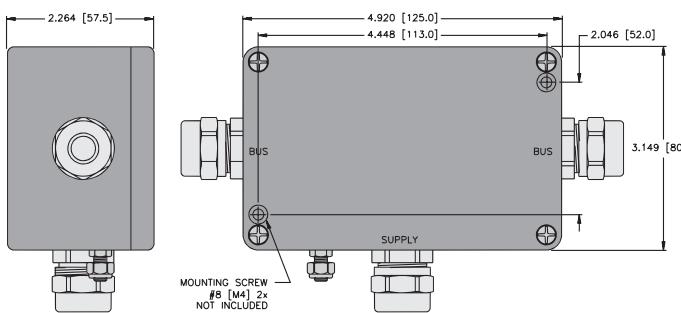

**SPTC2**

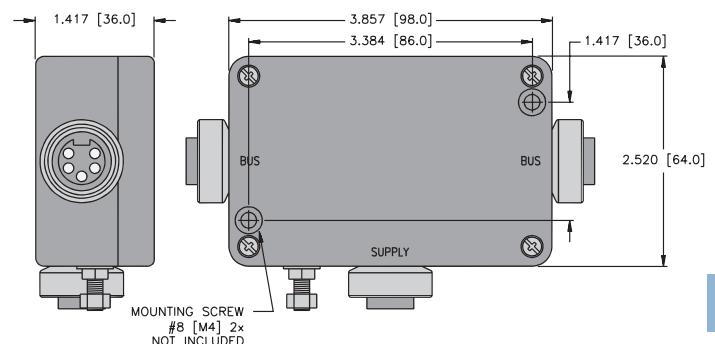

**SPTT1**

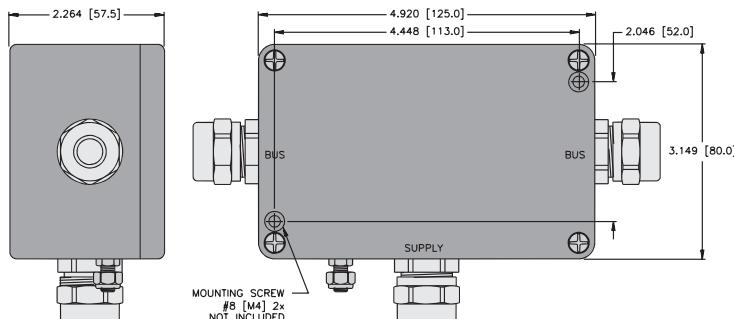

## Pinouts

<i>minifast® - Bus Line</i>		<i>minifast - Auxiliary Power</i>	
<b>Female</b>		<b>Female</b>	
	1. Bare (Shield) 2. Red (+ Voltage) 3. Black (- Voltage) 4. White (CAN_H) 5. Blue (CAN_L)		1. + Voltage 2. - Voltage 3. + Voltage 4. - Voltage


## DeviceNet™, eurofast® Daisy Chain Configurations

- Multi-drop Harnesses Designed for OEM Applications
- Provides Cost Effective Solution vs. Single Tees and Drops



Part Number	Specs	Application
WSC-2VBWK-WKC-5724-DCL	PUR (Polyurethane) 250 V, 4 A -40° to +75°C	(M12x1) <b>eurofast</b> Trunk and Drop Harness <ul style="list-style-type: none"> <li>• Available in custom configurations including length, number of drops and end connector styles</li> </ul>

Consult factory for other designs.

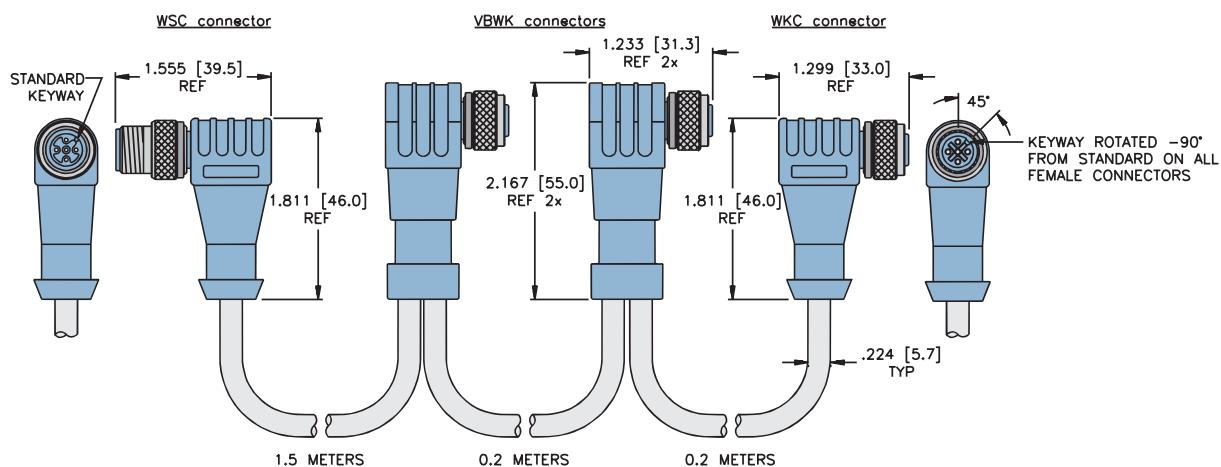

### Pinouts

eurofast	
Male	Female
5 4 3 2 1	4 5 3 2 1


## DeviceNet™, eurofast® Daisy Chain Configurations

- Multi-drop Harnesses Designed for OEM Applications
- Provides Cost Effective Solution vs. Single Tees and Drops



Part Number	Specs	Application
RSC-8VBRK-RKC-5724-DCL	PUR (Polyurethane) 250 V, 4 A -40° to +75°C	(M12x1) <b>eurofast</b> Trunk and Drop Harness <ul style="list-style-type: none"> <li>• Available in custom configurations including length, number of drops and end connector styles</li> </ul>

Consult factory for other designs.

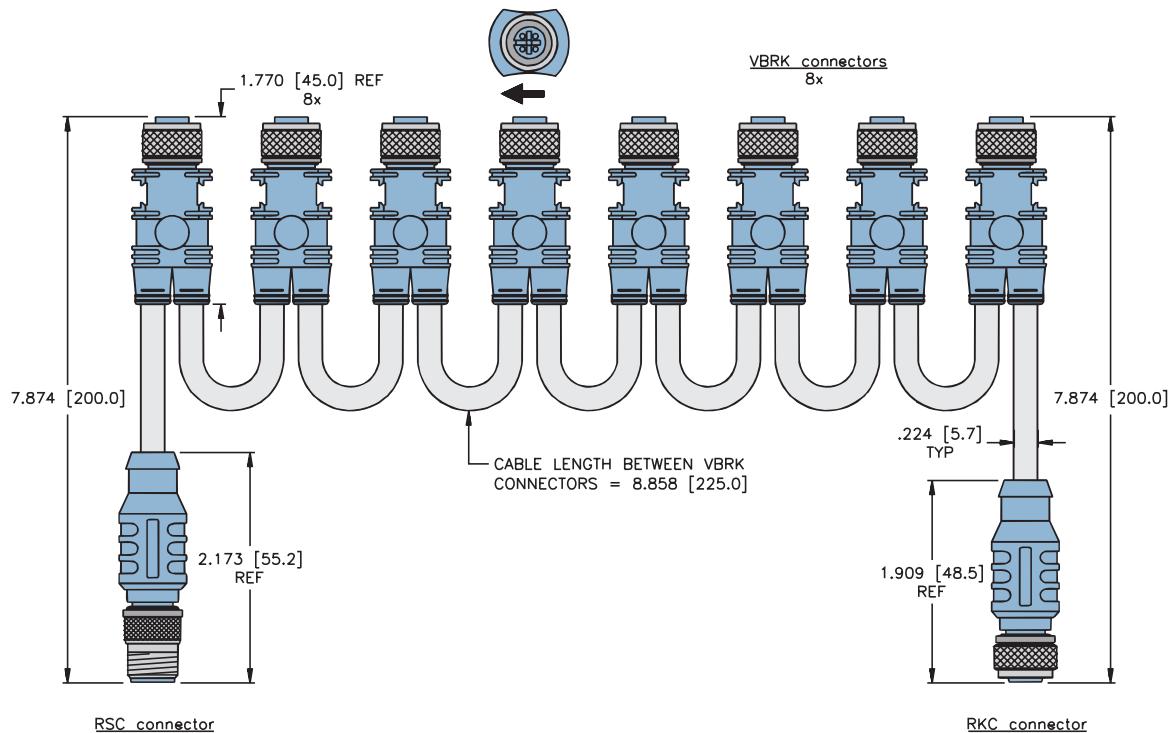

### Pinouts


eurofast	
Male	Female
5 4 3 2 1	4 5 3 2 1

**TURCK**

**Process Wiring Products**

**Notes:**

# **PROCESS WIRING**

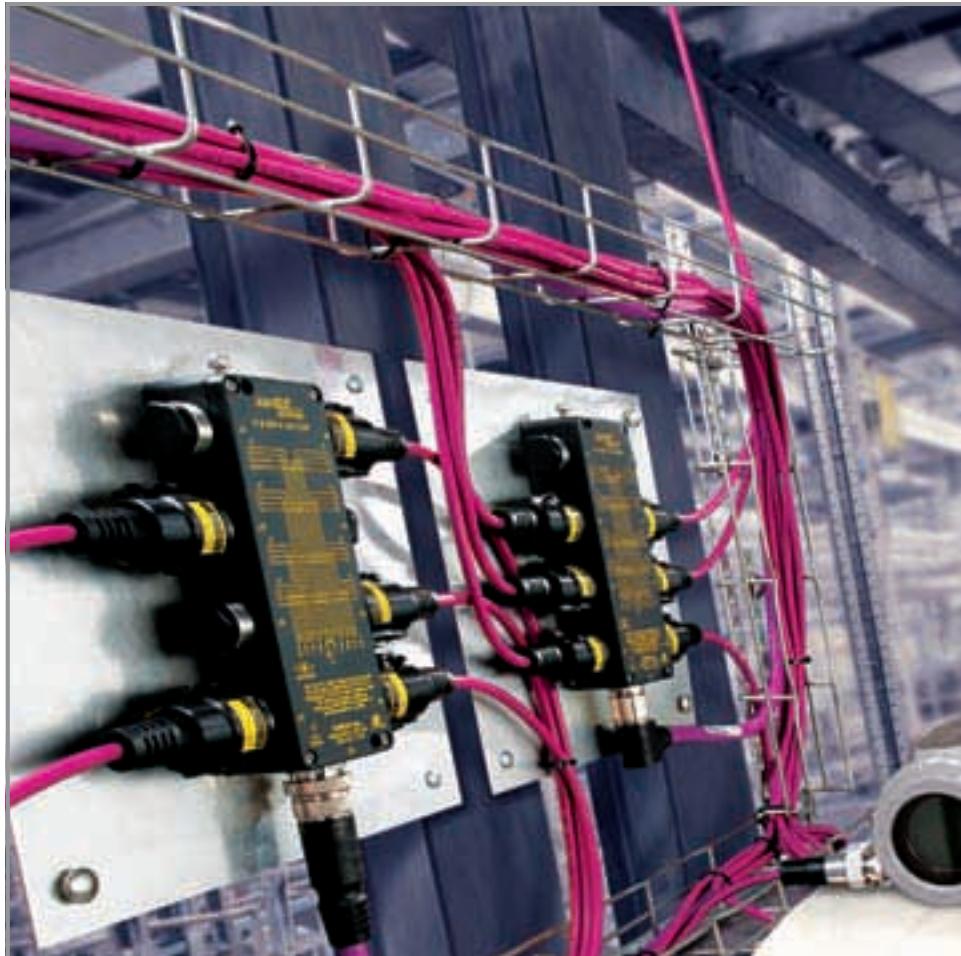

## TURCK Process Wiring Solutions

This catalog contains products from **TURCK's** extensive line of industrial wiring products that are optimized for process applications. The receptacles, drop cords, junction boxes, home-run cables and accessories described within, comprise a process wiring system designed for the demanding conditions of process applications.

- Quick-disconnect design eliminates mis-wiring and speeds installation.
- Instrument receptacles, drop cords, junction boxes and home-run cordsets reduce multiple cable runs.
- Shielded-twisted pair construction serves analog and HART applications.
- Cables with premium PVC insulation provide superior chemical resistance and flexibility.
- Choice of stainless steel or nickel-plated brass hardware.
- Rated and approved for installation in process applications.
- Many products are FM approved for installations in hazardous locations.



## 2-Wire Analog or HART Control Circuits

M12 eurofast®	Page
Part Number Keys	K12
Drop Cordsets	K15
Receptacles with Cable	K20
Receptacles with Leads	K27
Junction Boxes	K33

7/8" minifast®	Page
Part Number Keys	K43
Drop Cordsets	K47
Receptacles with Cable	K55
Receptacles with Leads	K63
Explosionproof Receptacles	K73
"Y" Fitting Receptacles	K77
Junction Boxes	K79

M23 multifast®	Page
Home Run Cordsets	K85
Receptacles with Cable	K93
Receptacles with Leads	K95

## Additional Analog or Discrete Control Circuits

M12 eurofast	Page
Part Number Keys	K98
Drop Cordsets	K101
Receptacles with Cable	K105
Receptacles with Leads	K109
Junction Boxes	K113

7/8", 1", & 1-1/8" minifast	Page
Part Number Keys	K117
Drop Cordsets	K121
Receptacles with Cable	K129
Receptacles with Leads	K144
Explosionproof Receptacles	K161
"Y" Fitting Receptacles	K169
Junction Boxes	K171

M23 multifast	Page
Home Run Cordsets	K173

NAMUR Circuits	K176
----------------	------

extremelife® Cordsets	K194
-----------------------	------

General Accessories	K206
---------------------	------

reelfast® Cable Selection Guide	K236
---------------------------------	------

Reference-Standards	K245
---------------------	------

Installation Instructions	K252
---------------------------	------

## Code Requirements for Flexible Process Wiring Products Ordinary (Nonhazardous) Locations

Figure 1



Type ITC cable, or Instrumentation Tray Cable, provides a cost effective alternative for installation of low power instrumentation and control circuits. The National Electrical Code's (NEC) Article 727 permits the use of ITC- rated cables "in industrial establishments where the conditions of maintenance and supervision ensure that only qualified persons service the installation". It may be used in "instrumentation and control circuits operating at 150 volts or less and 5 amps or less." Permitted uses include installation in cable trays or basket trays (Figure 1), or as Exposed Run wiring in specified circumstances.

One of the permitted uses as of ITC cable is illustrated in Figure 2. NEC, Article 727.4(5) allows ITC cable without metallic sheath or armor between cable tray and equipment in lengths not to exceed 15 m (50 ft.), where the cable is supported and protected against physical damage using mechanical protection, such as struts, angles, or channels.

Figure 2


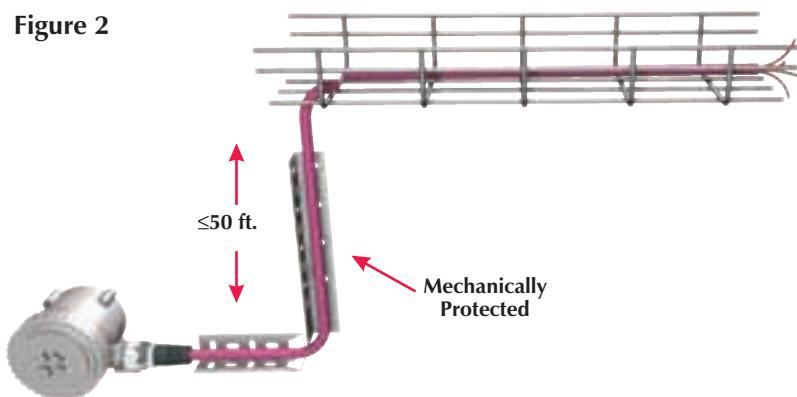


Figure 3

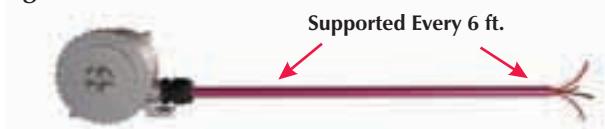

Another permitted use of ITC cable that increases flexibility is illustrated in Figure 3. NEC Article 727.4 (4) allows ITC cable to be used where enclosed in a smooth metallic sheath, continuous corrugated metallic sheath, or interlocking tape armor applied over the nonmetallic sheath in accordance with 727.6. The cable shall be supported and secured at intervals not exceeding 1.8 m (6 ft.)."

When using armored cable, there is no requirement for further mechanical protection or a length limitation. When using ITC cable that complies with the requirements of NEC 727.4(6) no further protection is required.

## Code Requirements for Flexible Process Wiring Products Ordinary (Nonhazardous) Locations


NEC 727.4(6) allows the installation of ITC cable that complies with the crush and impact of Type MC cable between the cable tray and equipment in lengths not to exceed 15 m (50 ft.) without additional protection. Cable meeting this requirement is identified as "Exposed Run" or "ER" (Figure 1).

This concept enables convenient wiring methods, given that drops from a cable tray may be made without additional auxiliary trays or raceways.


Additionally, ITC cable uses 300 volt insulation, resulting in smaller diameter, more flexible cable, with no requirement for special (e.g. Class 2) power supplies. When the ITC cable concept is combined with the **TURCK** process wiring system, the result is an extremely flexible and cost-effective system for process wiring.

The basic building blocks of the system are device receptacles, junction boxes, and molded cordsets.

**Figure 1**

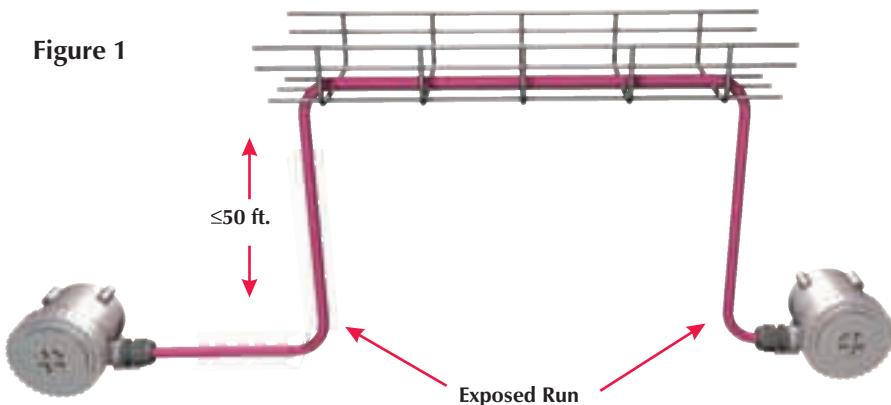

**Figure 2**

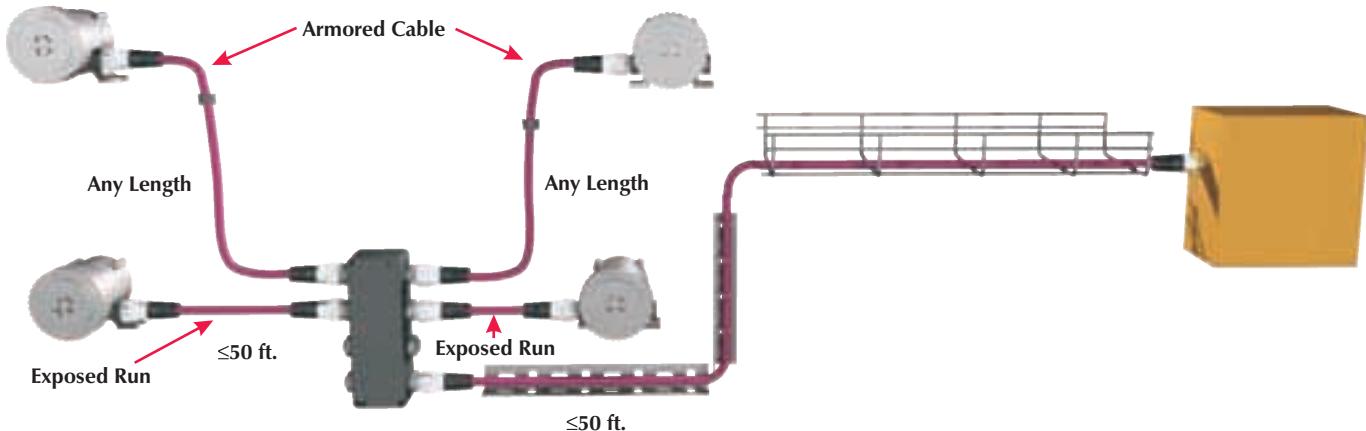

**TURCK**

## Process Wiring Products

The **TURCK** process wiring system provides an integrated, code-compliant wiring method that adds the benefits of quick-disconnects to the ITC cable installation concepts.

---



Receptacles with 1/2-14NPT and 3/4-14NPT threads, as well as M20x1.5, easily extend the benefits of quick-disconnect wiring to most process instruments.

---

Junction boxes can significantly consolidate field wiring. They are available in metal or nylon housings with 4 or 8 ports and home-run quick-disconnects or integral home-run cables.

---



Molded quick-disconnect cordsets, using ITC cable, provide the ratings and performance characteristics required for process applications.


---



## Hazardous Locations

Even more value can be derived from the **TURCK** process wiring system in hazardous locations. The system is now FM approved for use in Class I, Divisions 1 and 2 when installed per **TURCK** drawing QCF-00147 and CSA certified when installed per **TURCK** control drawing Ni-2.404. Contact **TURCK** for a copy of the approval documents or visit [www.turck.com/fmcd](http://www.turck.com/fmcd).


## Intrinsically Safe Circuits

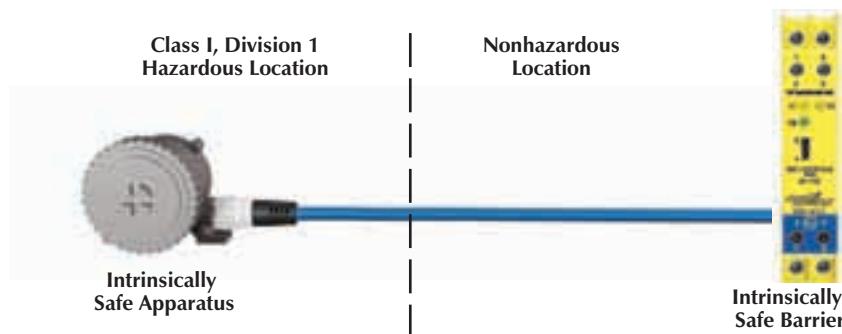

Intrinsically safe circuits may be wired using any of the wiring methods suitable for unclassified locations. The use of connectors is allowed as intrinsically safe circuits are safe against faults, including opening, shorting or grounding.

The same requirements for mechanical protection and length limitations apply as in nonhazardous locations.

## Nonincendive Equipment\*

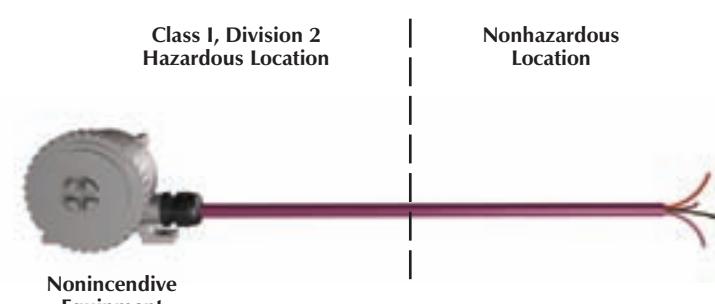

### FM:

ITC cable is a recognized Division 2 wiring method. NEC in Article 501.10 (B)(1)(5) states "Type ITC cable as permitted in 727.4". This is further reinforced by Article 727.4 (3), which states that ITC cable is permitted "in hazardous locations as permitted in 501.10,...".

The same requirements for mechanical protection and length limitations apply as in nonhazardous locations.

### CSA:

Canadian installations require the use of specific cable types for non-intrinsically safe circuits in Class I, Division 2 areas. **TURCK** offers CMX-HL cables for unprotected cable runs and CIC cable (Control and Instrumentation Cable) for cable runs in cable trays.

Quick-disconnects that do not require a tool to disengage are considered "normally arcing". They are not allowed to be used in Division 2 for incendive circuits without additional protection.

**lokfast™** guards enable the use of quick-disconnect technology in Class I, Division 2 hazardous locations.

**lokfast** guards render quick-disconnects not "normally arcing" by:

- Eliminating access to the coupling nut making disconnection impossible.
- Warning the user to disconnect power before removing.
- Requiring a tool for removal.



**lokfast** guards are available for 7/8-16UN **minifast®** and M12 **eurofast®** molded and field-wireable connectors.

Optional M23 **multifast®** home-run connectors with set screw locks also render a connection not "normally arcing".



**lokfast** guards (or integrally locked **multifast** connectors) on all quick disconnects in Division 2 (Figure 1).

The molded construction of the home-run connector and the gas/vapor tight continuous sheath meet the NEC Article 501-15(E)(2) requirements for cable seals in Division 2.

The same requirements for mechanical protection and length limitations apply as in to nonhazardous locations.

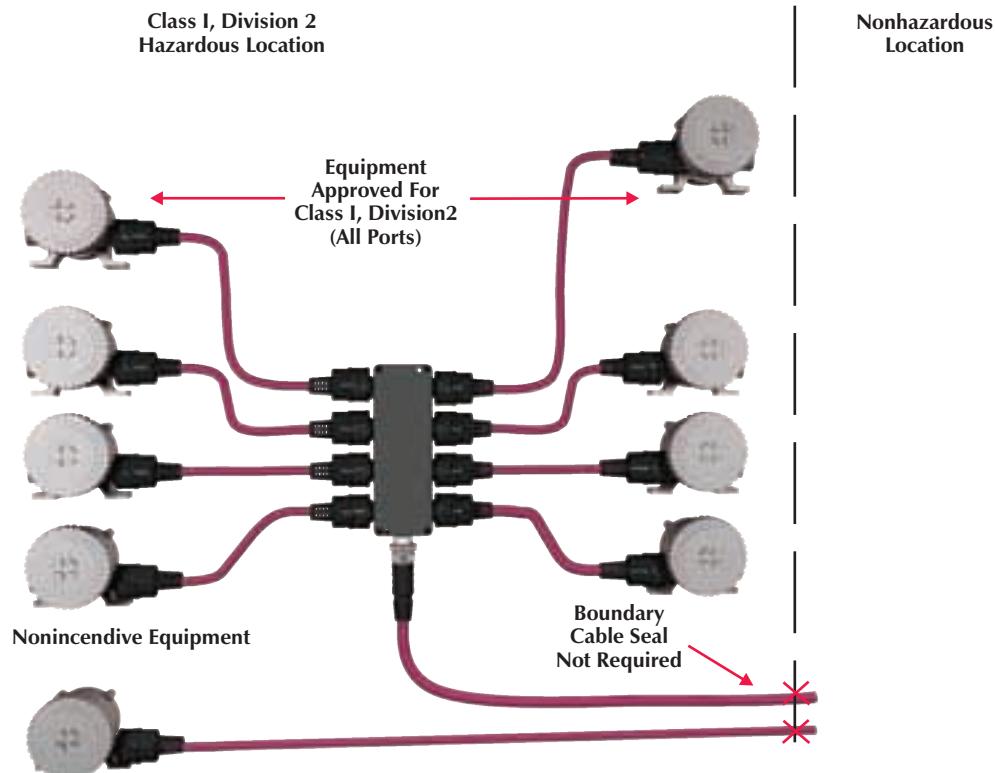


Figure 1


## Intrinsic Safety Summary

Intrinsically safe circuits do not require additional protection for quick-disconnects.


Junction boxes must have FM-approved spacings and entity parameters for intrinsically safe circuits.

Boundary seals are not required for this location, as the molded home-run connector and the gas/vapor tight continuous cable sheath meet the NEC Article 501-15© requirements for cable seals in Class I, Divisions 1 and 2.

Requirements for mechanical protection and length limitations are equivalent to nonhazardous locations.

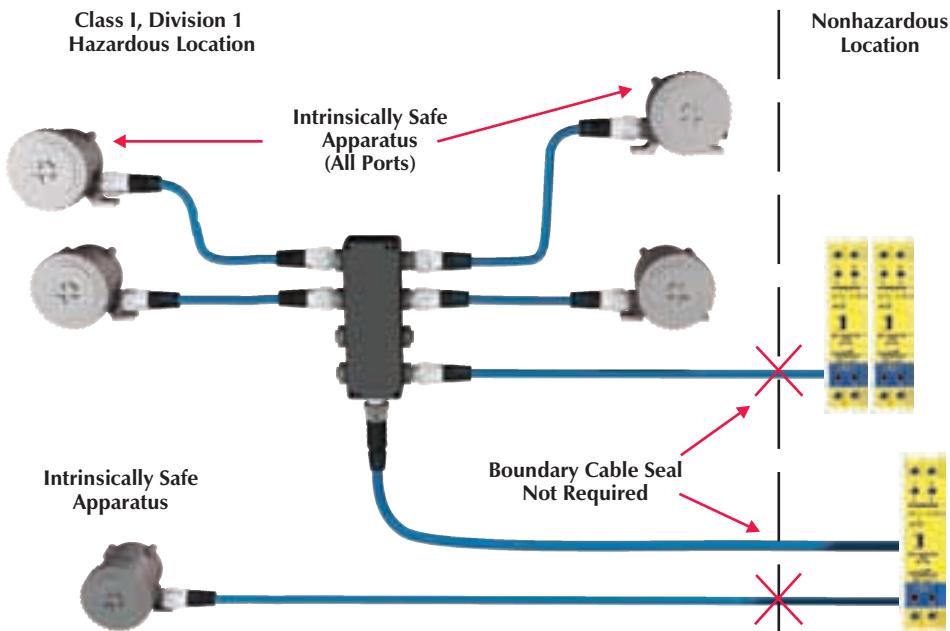

## Explosionproof Equipment

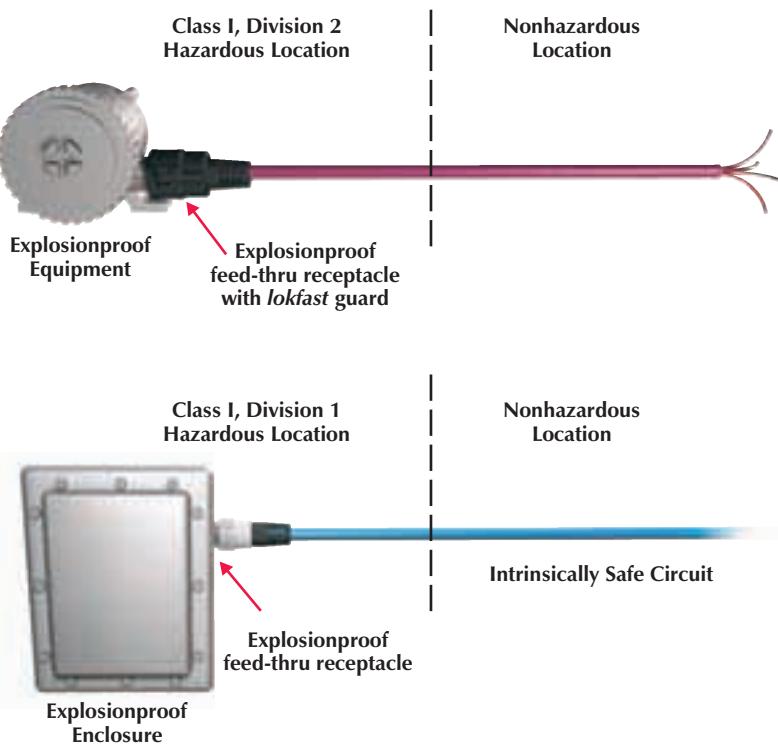

ITC cable, a recognized Division 2 wiring method, may be used to connect Explosionproof equipment installed in Division 2 when used with an explosionproof feed-through receptacle. The extremely robust receptacle maintains the equipment's explosion containment protection scheme. The external wiring, however, is in Division 2, and can therefore be installed using Division 2 wiring methods.

Explosionproof feed-thru receptacles may also be used to feed intrinsically safe circuits into or out of explosionproof enclosures in Class I, Division 1 hazardous locations.

## 2-Wire Analog or HART Control Circuit Selection Guide



M12 eurofast® Thread	Drop Cordsets	Receptacles with Cable	Receptacles with Leads	Junction Boxes
Pages	K15 - K19	K20 - K26	K27 - K32	K33 - K42




7/8" minifast® Thread	Drop Cordsets	Receptacles with Cable	Receptacles with Leads	Explosionproof Receptacles	"Y" Fitting Receptacles	Junction Boxes
Pages	K47 - K54	K55 - K61	K63 - K72	K73 - K76	K77 - K78	K79 - K84



M23 multifast® Thread	Home Run Cordsets	Receptacles with Cable	Receptacles with Leads
Pages	K85 - K92	K93 - K94	K95 - K96


## eurofast® Cordset Part Number Key, 2-Wire Analog or HART Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

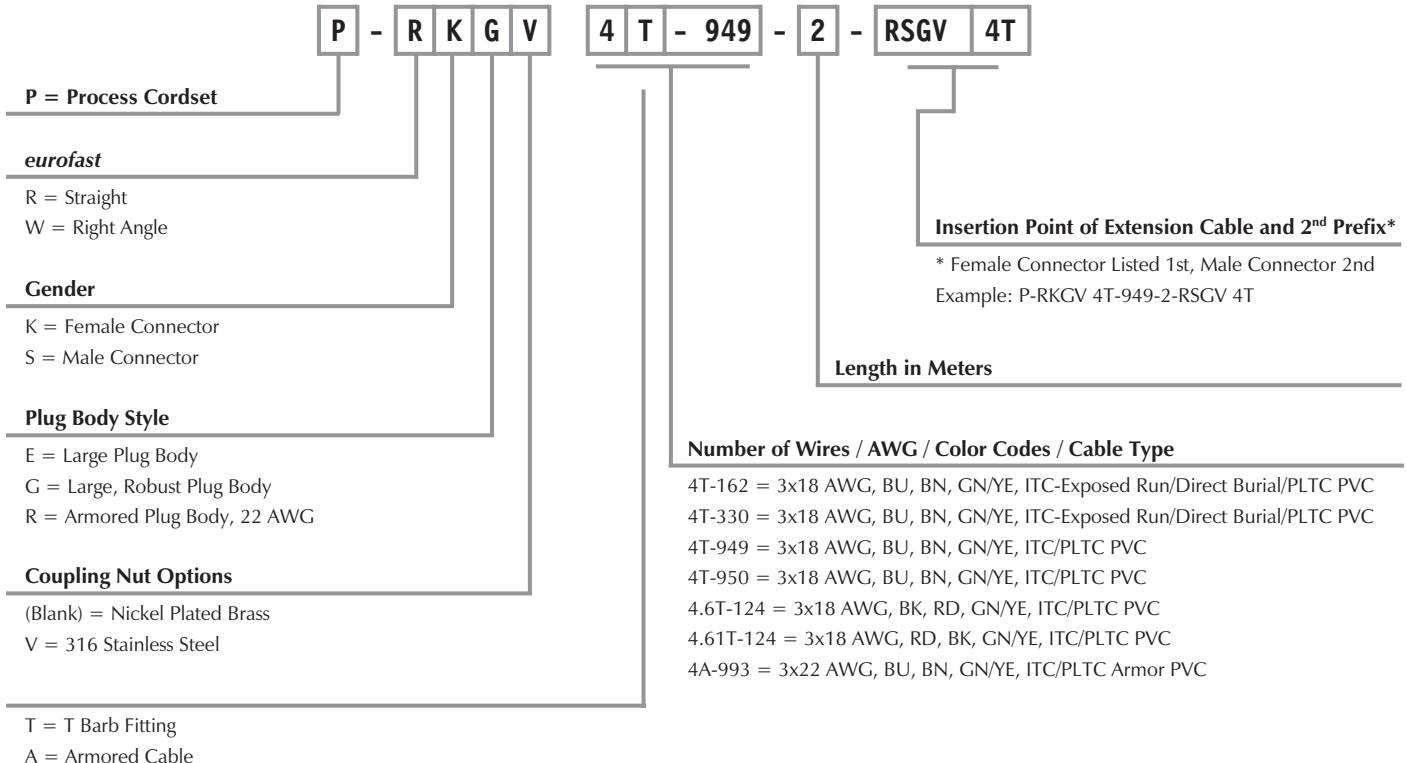

### Single Ended Example:


P - R K G    4 T - 949 - 2

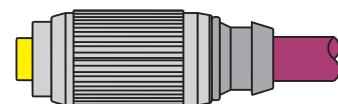


RKG ..

### Extension Example:

P - R K G    4 T - 949 - 2 - R S G    4 T




RKG .. - RSG ..

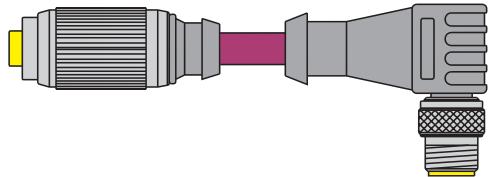**eurofast® Cordset Extension****Other Extension Examples:**


P - RKG    4T - 949 - 2 - WSE    4T

RKG .. - WSE ..

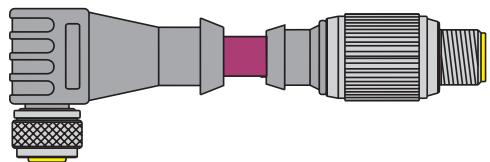

P - WKE    4T - 949 - 2 - RSG    4T

WKE .. - RSG ..

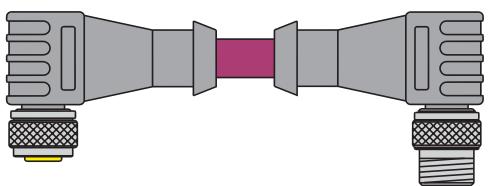

P - WKE    4T - 949 - 2 - WSE    4T

WKE .. - WSE ..


Note: Hybrid connector extensions also available. Consult factory.

# Process Automation




## eurofast® Receptacle with Cable Part Number Key, 2-Wire Analog or HART Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

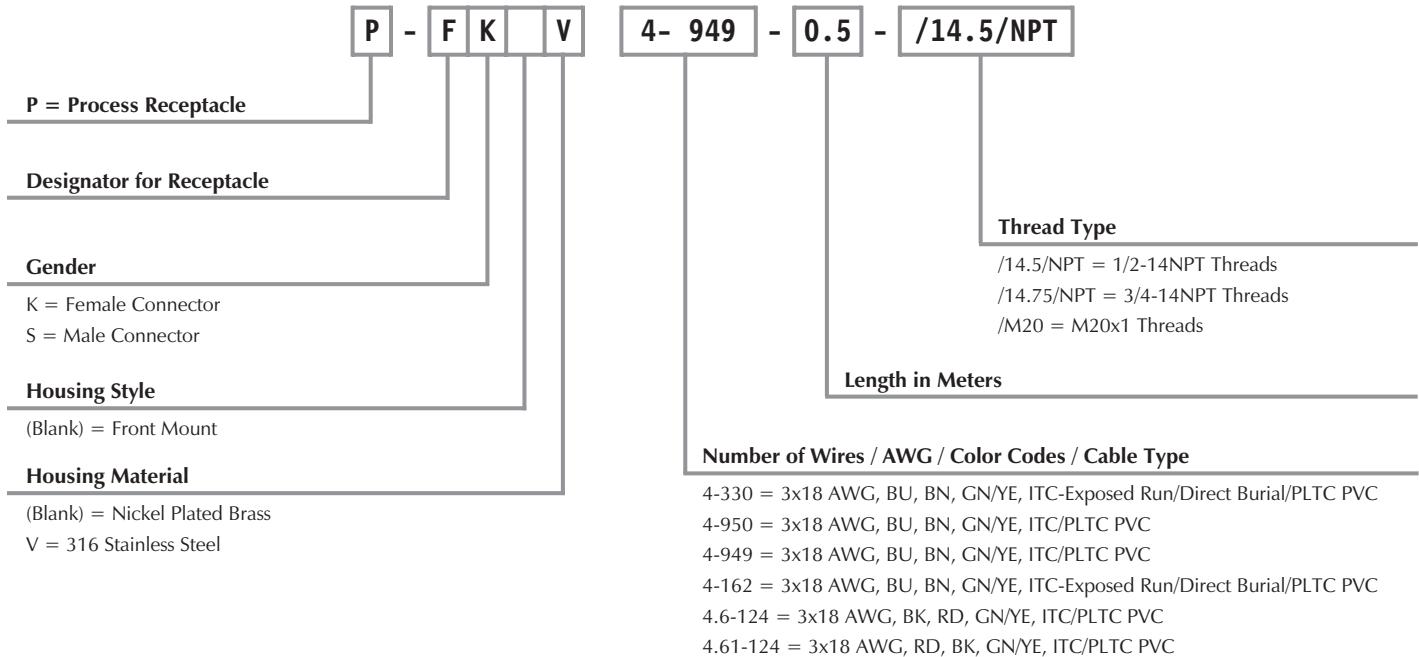

## eurofast Receptacle with Leads Part Number Key, 2-Wire Analog or HART Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

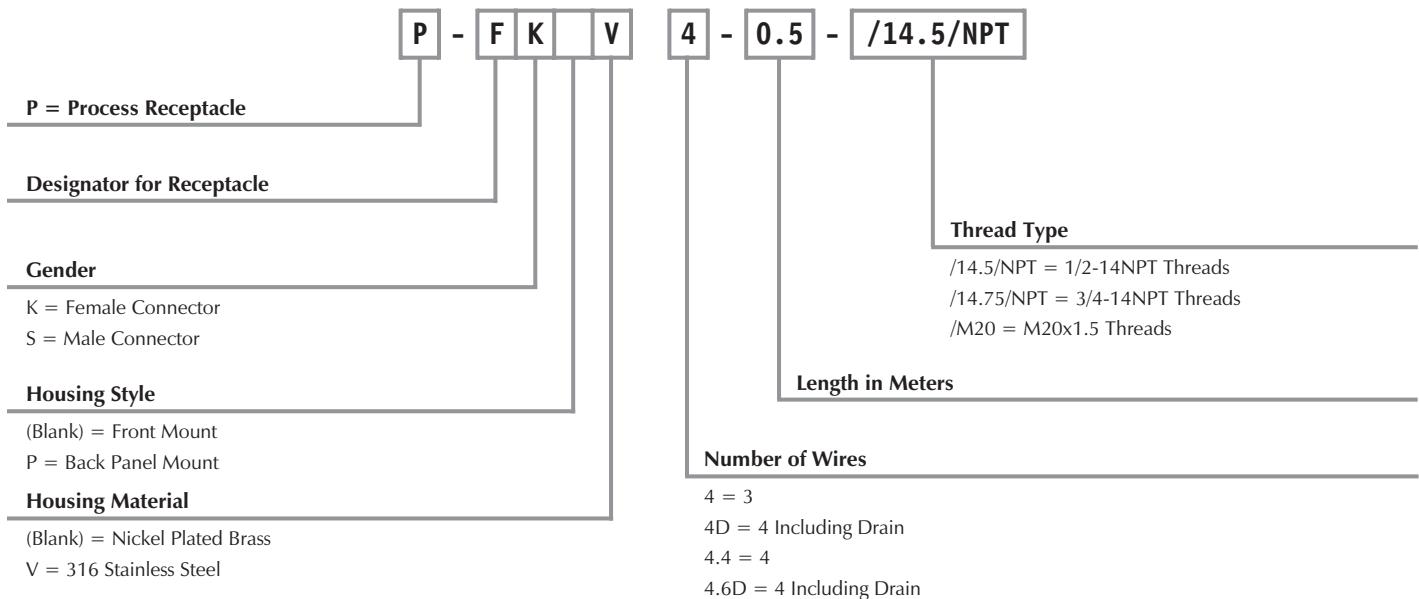

**eurofast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Female Connectors
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



FM tested to the cable sealing requirements of NEC Article 501-5(E)2

Housing Style	Part Number	Cable	Application	Pinout
P-RKG ..	P-RKG 4T-949-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKG 4T-162-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-RKG 4.6T-124-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-RKG 4.61T-124-*	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKG 4T-950-*	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		
	P-RKG 4T-330-*	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-RKG.."; "P-RKGV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast eurofast** guards (Part Number: LOCK-EURO-G) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.



## eurofast® Drop Cordsets, 2-Wire Analog or HART Control Circuits

- Right Angle Female Connectors
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-WKE ..	P-WKE 4T-949-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-WKE 4T-162-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-WKE 4.6T-124-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-WKE 4.61T-124-*	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-WKE 4T-950-*	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		
	P-WKE 4T-330-*	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.		

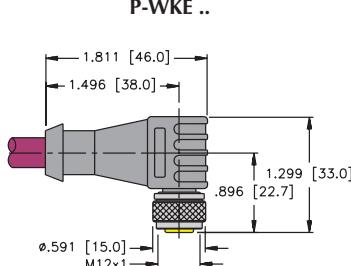

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-WKE.."; "P-WKEV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast**® cable information.

\*\* Use with **lokfast eurofast** guards (Part Number: LOCK-EURO) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**eurofast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Male Connectors
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



FM tested to the cable sealing requirements of NEC Article 501-5(E)2


Housing Style	Part Number	Cable	Application	Pinout
P-RSG ..	P-RSG 4T-949-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M†	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RSG 4T-162-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M†		1. BK 2. RD 3. Drain 4. GN/YE
	P-RSG 4.6T-124-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M†	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. RD 2. BK 3. Drain 4. GN/YE
	P-RSG 4T-950-*	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M†		1. BU 2. BN 3. Drain 4. GN/YE
	P-RSG 4T-330-*	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M†		1. BU 2. BN 3. Drain 4. GN/YE

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-RSG.."; "P-RSGV.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast eurofast** guards (Part Number: LOCK-EURO-G) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.



## eurofast® Drop Cordsets, 2-Wire Analog or HART Control Circuits

- Right Angle Male Connectors
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-WSE ..	P-WSE 4T-949-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-WSE 4T-162-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-WSE 4.6T-124-*	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-WSE 4T-950-*	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-WSE 4T-330-*	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-WSE.."; "P-WSEV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast eurofast** guards (Part Number: LOCK-EURO) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**eurofast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Connectors
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V, 3 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-RKR ..	P-RKR 4A-993-*	ITC/PLTC ARMOR PVC Plum 3x22 AWG, 1 STP with GND Foil/Drain (24) 105°C 11.2 mm OD Cable #RF50993-*M <sup>†</sup>	Analog or HART control circuits in Extreme Conditions or Class I, Division 2 hazardous locations** or unclassified locations	Female  1. BU 2. BN 3. Drain 4. GN/YE
P-RSR ..	P-RSR 4A-993-*			Male  1 2 3 4

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass.


† See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast eurofast** guards (Part Number: LOCK-EURO-R) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.


**eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

**1**

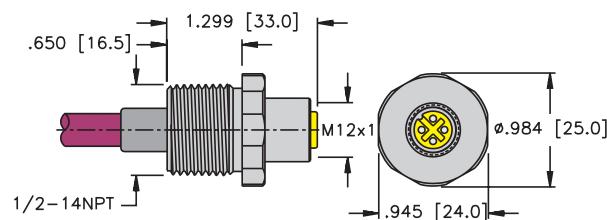

P-FK .. 14.5/NPT


**2**

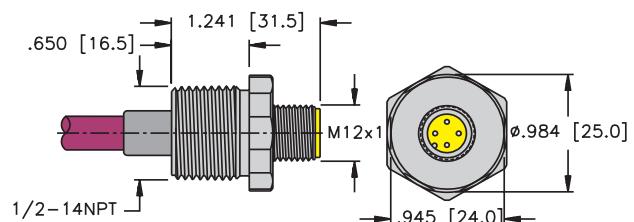

P-FS .. 14.5/NPT

Page K22


**3**

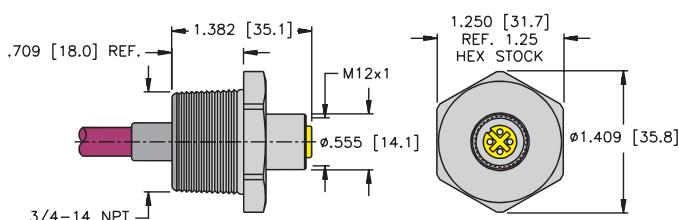

P-FK .. 14.75/NPT

Page K23


**4**

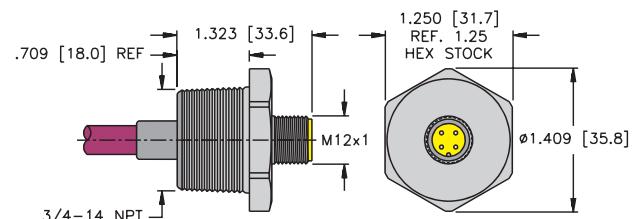

P-FS .. 14.75/NPT

Page K24


**5**

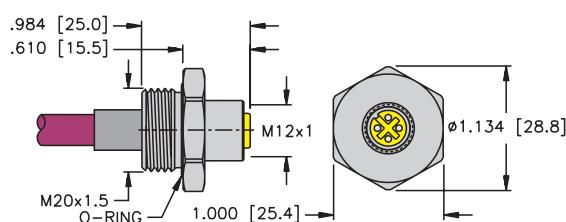

P-FK .. M20

Page K25

**6**

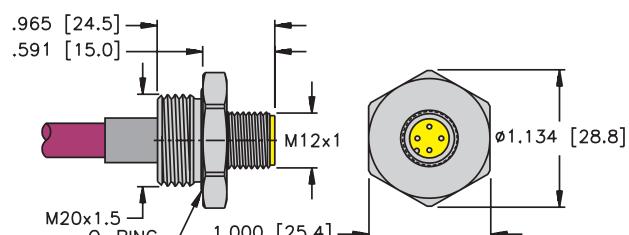

P-FS .. M20


Page K26


Note: Recommended panel cutout size and panel thickness.

**eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
	P-FK 4-949-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Threads.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-162-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-FK 4.6-124-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-FK 4-950-* /14.5/NPT	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i> <i>1/2-14NPT Threads.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-330-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		



See page K20 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-FK.."; "P-FKV.." indicates 316 stainless steel.  
Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)





Housing Style	Part Number	Cable	Application	Pinout
	P-FS 4-949-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-162-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. 1/2-14NPT Threads.	1. BK 2. RD 3. Drain 4. GN/YE
	P-FS 4.6-124-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-FS 4.61-124-* /14.5/NPT	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. 1/2-14NPT Threads.	1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-950-* /14.5/NPT	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		
	P-FS 4-330-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		

See page K20 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-FS.."; "P-FSV.." indicates 316 stainless steel.  
Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast**® cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.



**eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
	P-FK 4-949-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-162-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. 3/4-14NPT Threads.	1. BK 2. RD 3. Drain 4. GN/YE
	P-FK 4.6-124-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-FK 4.61-124-* /14.75/NPT	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		
	P-FK 4-950-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. 3/4-14NPT Threads.	1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-330-* /14.75/NPT			

See page K20 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-FK.."; "P-FKV.." indicates 316 stainless steel.  
Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.


<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
	P-FS 4-949-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Threads.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-162-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-FS 4.6-124-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-FS 4.61-124-* /14.75/NPT	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-950-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE

See page K20 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-FS.."; "P-FSV.." indicates 316 stainless steel.  
Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast**® cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
	P-FK 4-949-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-162-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Threads.</i>	1. BK 2. RD 3. Drain 4. GN/YE
	P-FK 4.6-124-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-FK 4.61-124-* /M20	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. M20 Threads.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-950-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-FK 4-330-* /M20			

**See page K20 for dimensional drawings.**

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-FK.."; "P-FKV.." indicates 316 stainless steel.  
Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(use as ITC limited to 150 V)








Housing Style	Part Number	Cable	Application	Pinout
6	P-FS 4-949-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Threads.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-162-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-FS 4.6-124-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-FS 4.61-124-* /M20	ITC/PLTC PVC Blue 3x18 AWG 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. M20 Threads.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-950-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-FS 4-330-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		

See page K20 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-FS.."; "P-FSV.." indicates 316 stainless steel.  
Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.


<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

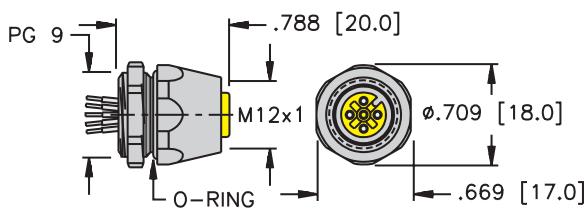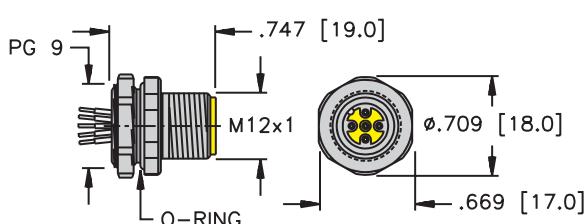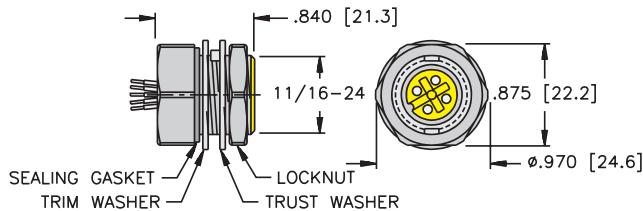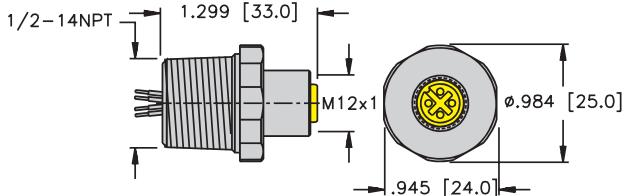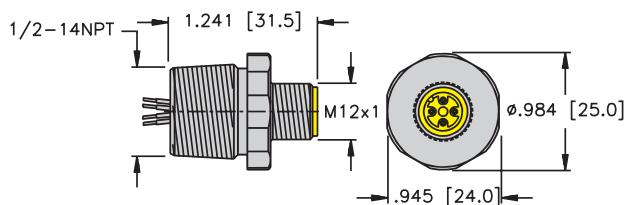**eurofast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits****1****P-FK ..****Page K29****2****Page K30****3****P-FKP ..****Page K29****4****Page K31****5****P-FS .. /14.5/NPT****Page K32**

**eurofast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits**


**6**

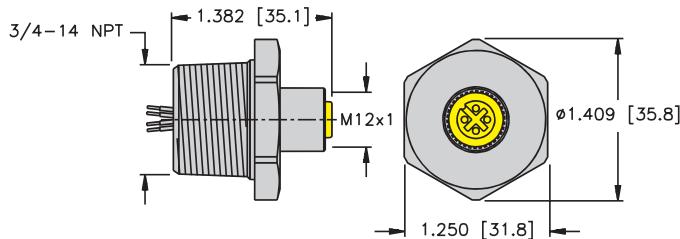

P-FK ../14.75/NPT


Page K31

**7**

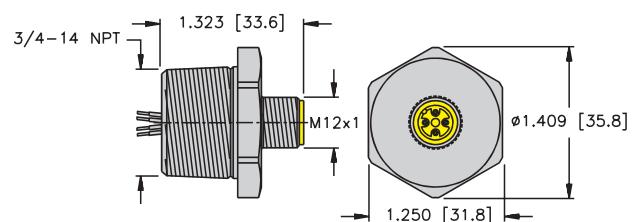

Page K32


**8**

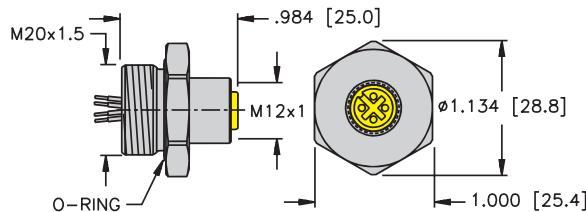

P-FK ../M20

Page K31

**9**

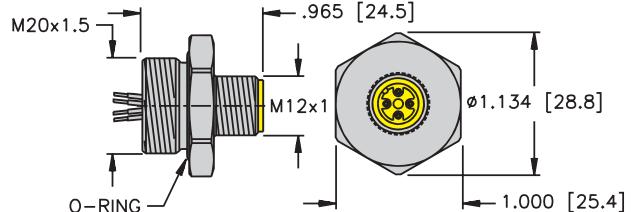

Page K32

**eurofast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
  	P-FK 4-*	UL, CSA 3x18 AWG 105°C 250 V, 4 A	<i>PG 9 Threads, Front Panel Mount</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-FK 4D-*	UL, CSA 4x18 AWG 105°C 250 V, 4 A	<i>PG 9 Threads, Front Panel Mount, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	
	P-FKP 4-*	UL, CSA 3x18 AWG 105°C 250 V, 4 A	<i>Back Panel Mount</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-FKP 4D-*	UL, CSA 4x18 AWG 105°C 250 V, 4 A	<i>Back Panel Mount, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	

See page K27 for dimensional drawings.

\* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.

Housing material listed is nickel plated brass "P-FK(P).."; "P-FK(P)V.." indicates 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
	P-FS 4-*	UL, CSA 3x18 AWG 105°C 250 V, 4 A	<i>PG 9 Threads, Front Panel Mount</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-FS 4D-*	UL, CSA 4x18 AWG 105°C 250 V, 4 A	<i>PG 9 Threads, Front Panel Mount, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	

See page K27 for dimensional drawings.

\* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.

Housing material listed is nickel plated brass "P-FS.."; "P-FSV.." indicates 316 stainless steel.


Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**eurofast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
4	P-FK 4-* /14.5/NPT	UL, CSA 3x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-FK 4D-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	
	P-FK 4.4-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads	1. BU 2. BN 3. WH 4. BK	
	P-FK 4.6D-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads	1. BK 2. RD 3. GY 4. GN/YE	
6	P-FK 4-* /14.75/NPT	UL, CSA 3x18 AWG 105°C 250 V, 4 A	3/4-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-FK 4D-* /14.75/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	
8	P-FK 4-* /M20	UL, CSA 3x18 AWG 105°C 250 V, 4 A	M20 Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-FK 4D-* /M20	UL, CSA 4x18 AWG 105°C 250 V, 4 A	M20 Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	



See pages K27 - K28 for dimensional drawings.

\* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.

Housing material listed is nickel plated brass "P-FK.."; "P-FKV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20, 1-1/16" (27.0 mm) for 3/4-14NPT.


Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
5	P-FS 4-* /14.5/NPT	UL, CSA 3x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-FS 4D-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE
	P-FS 4.4-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-FS 4.6D-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	1/2-14NPT Threads	1. BK 2. RD 3. GY 4. GN/YE
7	P-FS 4-* /14.75/NPT	UL, CSA 3x18 AWG 105°C 250 V, 4 A	3/4-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-FS 4D-* /14.75/NPT	UL, CSA 4x18 AWG 105°C 250 V, 4 A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE
9	P-FS 4-* /M20	UL, CSA 3x18 AWG 105°C 250 V, 4 A	M20 Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-FS 4D-* /M20	UL, CSA 4x18 AWG 105°C 250 V, 4 A	M20 Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE



See pages K27 - K28 for dimensional drawings.

- \* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.
- Housing material listed is nickel plated brass "P-FS.."; "P-FSV.." indicates 316 stainless steel.
- Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20, 1-1/16" (27.0 mm) for 3/4-14NPT.
- Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.


**multibox® eurofast® Nylon Junction Boxes w/Integral Home Run Cable**

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations or Unclassified Locations



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.

"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

**4-port, 1 Analog Signal Per Port, Common Ground and Shield**


Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																						
4-port glass-filled nylon junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 4/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 10.0 mm OD	<table> <thead> <tr> <th>Port, Pin</th><th>Wire Color</th></tr> </thead> <tbody> <tr><td>Port 1, Pin 1</td><td>WH/BK</td></tr> <tr><td>Port 1, Pin 2</td><td>BK/WH</td></tr> <tr><td>Port 2, Pin 1</td><td>WH/GN</td></tr> <tr><td>Port 2, Pin 2</td><td>GN/WH</td></tr> <tr><td>Port 3, Pin 1</td><td>WH/RD</td></tr> <tr><td>Port 3, Pin 2</td><td>RD/WH</td></tr> <tr><td>Port 4, Pin 1</td><td>WH/OG</td></tr> <tr><td>Port 4, Pin 2</td><td>OG/WH</td></tr> <tr><td>Ports 1-4, Pin 3</td><td>Drain</td></tr> <tr><td>Ports 1-4, Pin 4</td><td>GN/YE</td></tr> </tbody> </table>	Port, Pin	Wire Color	Port 1, Pin 1	WH/BK	Port 1, Pin 2	BK/WH	Port 2, Pin 1	WH/GN	Port 2, Pin 2	GN/WH	Port 3, Pin 1	WH/RD	Port 3, Pin 2	RD/WH	Port 4, Pin 1	WH/OG	Port 4, Pin 2	OG/WH	Ports 1-4, Pin 3	Drain	Ports 1-4, Pin 4	GN/YE	P-4MB12-4-960-*	P-4MBV12-4-960-*
Port, Pin	Wire Color																									
Port 1, Pin 1	WH/BK																									
Port 1, Pin 2	BK/WH																									
Port 2, Pin 1	WH/GN																									
Port 2, Pin 2	GN/WH																									
Port 3, Pin 1	WH/RD																									
Port 3, Pin 2	RD/WH																									
Port 4, Pin 1	WH/OG																									
Port 4, Pin 2	OG/WH																									
Ports 1-4, Pin 3	Drain																									
Ports 1-4, Pin 4	GN/YE																									
			P-4MB12-4-415-*/C	P-4MBV12-4-415-*/C																						

**8-port, 1 Analog Signal Per Port, Common Ground and Shield**

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																																						
8-port glass-filled nylon junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 8/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	<table> <thead> <tr> <th>Port, Pin</th><th>Wire Color</th></tr> </thead> <tbody> <tr><td>Port 1, Pin 1</td><td>WH/BK</td></tr> <tr><td>Port 1, Pin 2</td><td>BK/WH</td></tr> <tr><td>Port 2, Pin 1</td><td>WH/GN</td></tr> <tr><td>Port 2, Pin 2</td><td>GN/WH</td></tr> <tr><td>Port 3, Pin 1</td><td>WH/RD</td></tr> <tr><td>Port 3, Pin 2</td><td>RD/WH</td></tr> <tr><td>Port 4, Pin 1</td><td>WH/OG</td></tr> <tr><td>Port 4, Pin 2</td><td>OG/WH</td></tr> <tr><td>Port 5, Pin 1</td><td>WH/BU</td></tr> <tr><td>Port 5, Pin 2</td><td>BU/WH</td></tr> <tr><td>Port 6, Pin 1</td><td>WH/BN</td></tr> <tr><td>Port 6, Pin 2</td><td>BN/WH</td></tr> <tr><td>Port 7, Pin 1</td><td>WH/YE</td></tr> <tr><td>Port 7, Pin 2</td><td>YE/WH</td></tr> <tr><td>Port 8, Pin 1</td><td>WH/VT</td></tr> <tr><td>Port 8, Pin 2</td><td>VT/WH</td></tr> <tr><td>Ports 1-8, Pin 3</td><td>Drain</td></tr> <tr><td>Ports 1-8, Pin 4</td><td>GN/YE</td></tr> </tbody> </table>	Port, Pin	Wire Color	Port 1, Pin 1	WH/BK	Port 1, Pin 2	BK/WH	Port 2, Pin 1	WH/GN	Port 2, Pin 2	GN/WH	Port 3, Pin 1	WH/RD	Port 3, Pin 2	RD/WH	Port 4, Pin 1	WH/OG	Port 4, Pin 2	OG/WH	Port 5, Pin 1	WH/BU	Port 5, Pin 2	BU/WH	Port 6, Pin 1	WH/BN	Port 6, Pin 2	BN/WH	Port 7, Pin 1	WH/YE	Port 7, Pin 2	YE/WH	Port 8, Pin 1	WH/VT	Port 8, Pin 2	VT/WH	Ports 1-8, Pin 3	Drain	Ports 1-8, Pin 4	GN/YE	P-8MB12-4-959-*	P-8MBV12-4-959-*
Port, Pin	Wire Color																																									
Port 1, Pin 1	WH/BK																																									
Port 1, Pin 2	BK/WH																																									
Port 2, Pin 1	WH/GN																																									
Port 2, Pin 2	GN/WH																																									
Port 3, Pin 1	WH/RD																																									
Port 3, Pin 2	RD/WH																																									
Port 4, Pin 1	WH/OG																																									
Port 4, Pin 2	OG/WH																																									
Port 5, Pin 1	WH/BU																																									
Port 5, Pin 2	BU/WH																																									
Port 6, Pin 1	WH/BN																																									
Port 6, Pin 2	BN/WH																																									
Port 7, Pin 1	WH/YE																																									
Port 7, Pin 2	YE/WH																																									
Port 8, Pin 1	WH/VT																																									
Port 8, Pin 2	VT/WH																																									
Ports 1-8, Pin 3	Drain																																									
Ports 1-8, Pin 4	GN/YE																																									
			P-8MB12-4-416-*/C	P-8MBV12-4-416-*/C																																						

\* Length in meters.

<sup>†</sup> Each circuit has dedicated drain wire not connected in the junction box.

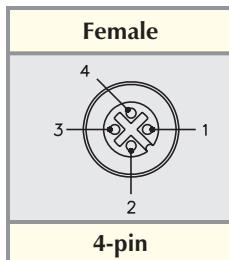
**Pinouts**


## Specifications


<b>Housing:</b>	Glass filled nylon.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), Nylon contact carriers.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 68.
<b>Cable:</b>	Standard Version: Plum PVC jacket, UL ITC/PLTC/AWM, CSA CMX-Outdoor/CMG/AWM FT4, 300 V, 105°C. "/C" Versions: Plum PUR jacket, UL ITC/PLTC, CSA CIC/CMX-Outdoor-CM, 300 V, 105°C, FT1.
<b>Electrical Rating:</b>	Standard Version: 100 V, 4 A per conductor (use as ITC is limited to 3 A for 22 AWG conductors).

## Dimensions


4-Port

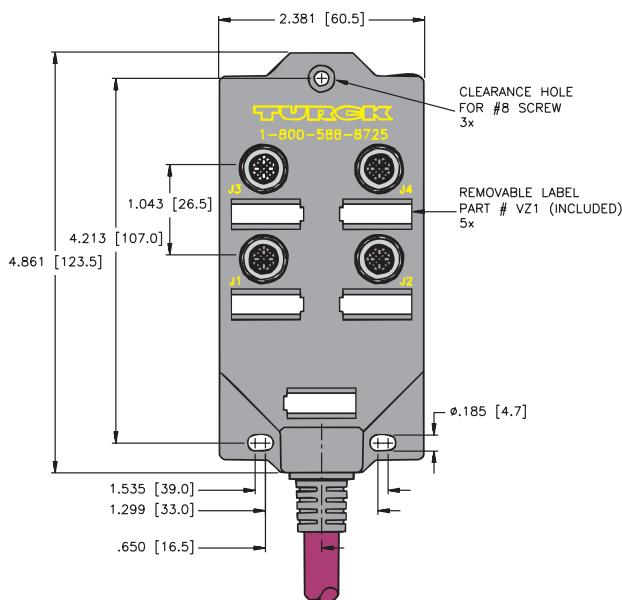


8-Port

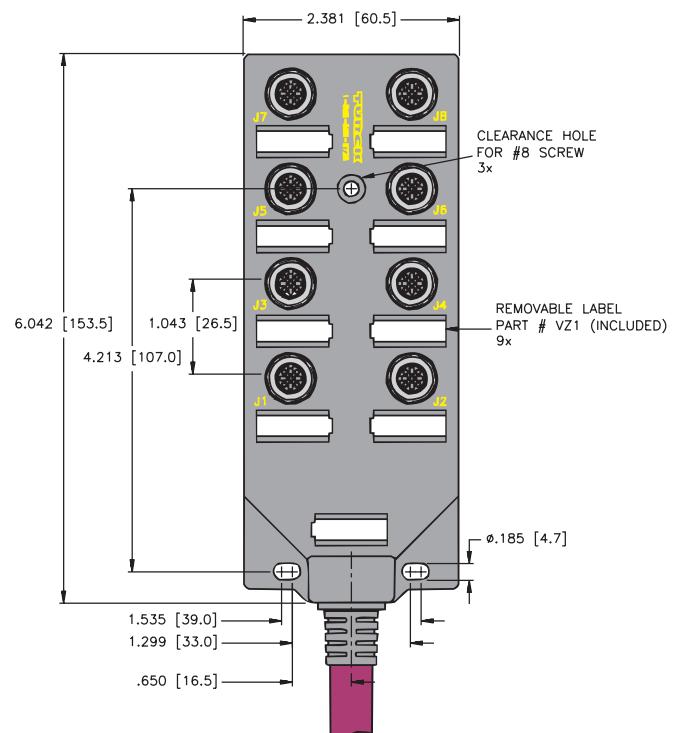

4-Port

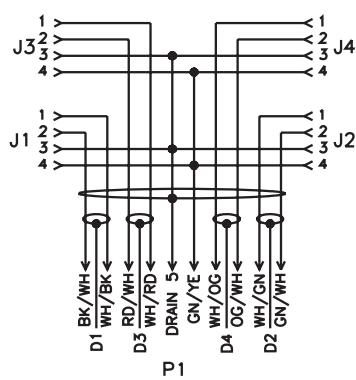

8-Port

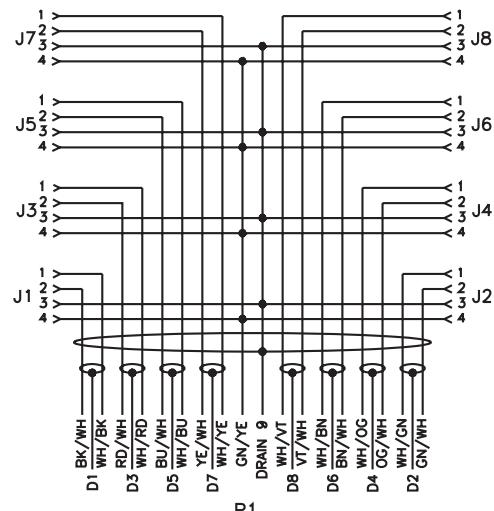

**multibox® eurofast® Nylon Junction Boxes w/Integral Home Run Cable**

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations or Unclassified Locations
- Blue Jacket Color May Be Used as Identification of Intrinsically Safe Circuits



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

**4-port, 1 Analog Signal Per Port, Common Ground and Shield**


Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel
4-port glass-filled nylon junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 4/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 10.0 mm OD	Port, Pin Port 1, Pin 1 Port 1, Pin 2 Port 2, Pin 1 Port 2, Pin 2 Port 3, Pin 1 Port 3, Pin 2 Port 4, Pin 1 Port 4, Pin 2 Ports 1-4, Pin 3 Ports 1-4, Pin 4	Wire Color WH/BK BK/WH WH/GN GN/WH WH/RD RD/WH WH/OG OG/WH Drain GN/YE	P-4MB12-4-978-*  P-4MB12-4-978-*/C
				P-4MBV12-4-978-* P-4MBV12-4-978-*/C

**8-port, 1 Analog Signal Per Port, Common Ground and Shield**

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel
8-port glass-filled nylon junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 8/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	Port, Pin Port 1, Pin 1 Port 1, Pin 2 Port 2, Pin 1 Port 2, Pin 2 Port 3, Pin 1 Port 3, Pin 2 Port 4, Pin 1 Port 4, Pin 2 Port 5, Pin 1 Port 5, Pin 2 Port 6, Pin 1 Port 6, Pin 2 Port 7, Pin 1 Port 7, Pin 2 Port 8, Pin 1 Port 8, Pin 2 Ports 1-8, Pin 3 Ports 1-8, Pin 4	Wire Color WH/BK BK/WH WH/GN GN/WH WH/RD RD/WH WH/OG OG/WH WH/BU BU/WH WH/BN BN/WH WH/YE YE/WH WH/VT VT/WH Drain GN/YE	P-8MB12-4-977-*  P-8MB12-4-977-*/C
				P-8MBV12-4-977-* P-8MBV12-4-977-*/C

\* Length in meters.

† Each circuit has dedicated drain wire not connected in the junction box.

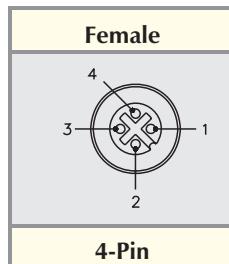
**Pinouts**

## Specifications


<b>Housing:</b>	Glass filled nylon.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), Nylon contact carriers.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 68.
<b>Cable:</b>	Blue PVC jacket, UL UTC/PLTC/AWM, CSA CMX-Outdoor/CMG/AWM FT4, 300 V, 105°C.
<b>Electrical Rating:</b>	Standard Version: 100 V, 4 A per conductor (use as ITC is limited to 3 A for 22 AWG conductors). "/C" Versions: 30 V, 600 mA

## Dimensions


**4-Port**

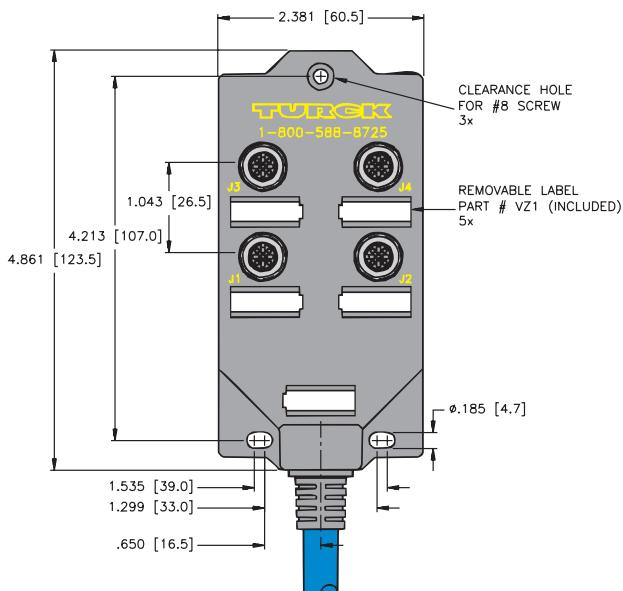


**8-Port**

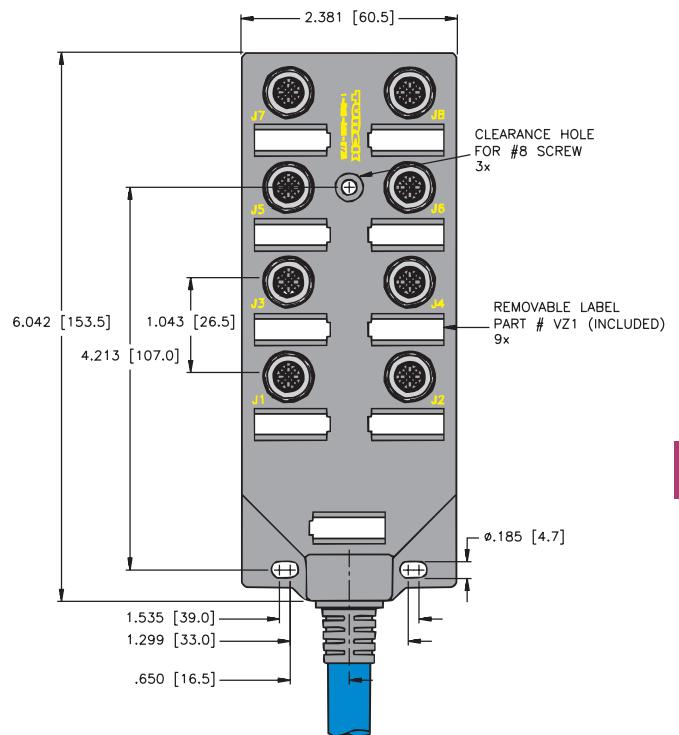

**4-Port**

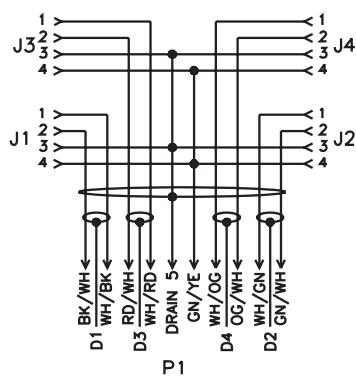

**8-Port**

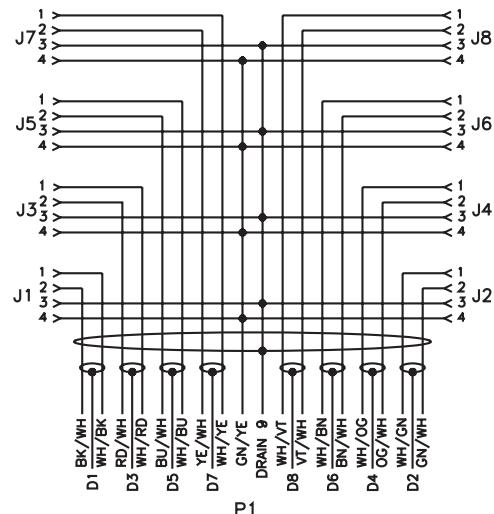



### multibox® eurofast® Metal Junction Boxes w/Integral Home Run Cable

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations\*\* or Unclassified Locations.



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.

"C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

#### 4-port, 1 Analog Signal Per Port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																						
4-port cast aluminum junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 4/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 10.0 mm OD	<table border="0"> <tr> <td>Port, Pin</td> <td>Wire Color</td> </tr> <tr> <td>Port 1, Pin 1</td> <td>WH/BK</td> </tr> <tr> <td>Port 1, Pin 2</td> <td>BK/WH</td> </tr> <tr> <td>Port 2, Pin 1</td> <td>WH/GN</td> </tr> <tr> <td>Port 2, Pin 2</td> <td>GN/WH</td> </tr> <tr> <td>Port 3, Pin 1</td> <td>WH/RD</td> </tr> <tr> <td>Port 3, Pin 2</td> <td>RD/WH</td> </tr> <tr> <td>Port 4, Pin 1</td> <td>WH/OG</td> </tr> <tr> <td>Port 4, Pin 2</td> <td>OG/WH</td> </tr> <tr> <td>Ports 1-4, Pin 3</td> <td>Drain</td> </tr> <tr> <td>Ports 1-4, Pin 4</td> <td>GN/YE</td> </tr> </table>	Port, Pin	Wire Color	Port 1, Pin 1	WH/BK	Port 1, Pin 2	BK/WH	Port 2, Pin 1	WH/GN	Port 2, Pin 2	GN/WH	Port 3, Pin 1	WH/RD	Port 3, Pin 2	RD/WH	Port 4, Pin 1	WH/OG	Port 4, Pin 2	OG/WH	Ports 1-4, Pin 3	Drain	Ports 1-4, Pin 4	GN/YE	P-VBM 40-960-*	P-VBMV 40-960-*
Port, Pin	Wire Color																									
Port 1, Pin 1	WH/BK																									
Port 1, Pin 2	BK/WH																									
Port 2, Pin 1	WH/GN																									
Port 2, Pin 2	GN/WH																									
Port 3, Pin 1	WH/RD																									
Port 3, Pin 2	RD/WH																									
Port 4, Pin 1	WH/OG																									
Port 4, Pin 2	OG/WH																									
Ports 1-4, Pin 3	Drain																									
Ports 1-4, Pin 4	GN/YE																									
			P-VBM 40-415-*/C	P-VBMV 40-415-*/C																						


#### 8-port, 1 Analog Signal Per Port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																																												
8-port cast aluminum junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 8/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	<table border="0"> <tr> <td>Port, Pin</td> <td>Wire Color</td> <td>Port, Pin</td> <td>Wire Color</td> </tr> <tr> <td>Port 1, Pin 1</td> <td>WH/BK</td> <td>Port 6, Pin 1</td> <td>WH/BN</td> </tr> <tr> <td>Port 1, Pin 2</td> <td>BK/WH</td> <td>Port 6, Pin 2</td> <td>BN/WH</td> </tr> <tr> <td>Port 2, Pin 1</td> <td>WH/GN</td> <td>Port 7, Pin 1</td> <td>WH/YE</td> </tr> <tr> <td>Port 2, Pin 2</td> <td>GN/WH</td> <td>Port 7, Pin 2</td> <td>YE/WH</td> </tr> <tr> <td>Port 3, Pin 1</td> <td>WH/RD</td> <td>Port 8, Pin 1</td> <td>WH/VT</td> </tr> <tr> <td>Port 3, Pin 2</td> <td>RD/WH</td> <td>Port 8, Pin 2</td> <td>VT/WH</td> </tr> <tr> <td>Port 4, Pin 1</td> <td>WH/OG</td> <td>Ports 1-8, Pin 3</td> <td>Drain</td> </tr> <tr> <td>Port 4, Pin 2</td> <td>OG/WH</td> <td>Ports 1-8, Pin 4</td> <td>GN/YE</td> </tr> <tr> <td>Port 5, Pin 1</td> <td>WH/BU</td> <td></td> <td></td> </tr> <tr> <td>Port 5, Pin 2</td> <td>BU/WH</td> <td></td> <td></td> </tr> </table>	Port, Pin	Wire Color	Port, Pin	Wire Color	Port 1, Pin 1	WH/BK	Port 6, Pin 1	WH/BN	Port 1, Pin 2	BK/WH	Port 6, Pin 2	BN/WH	Port 2, Pin 1	WH/GN	Port 7, Pin 1	WH/YE	Port 2, Pin 2	GN/WH	Port 7, Pin 2	YE/WH	Port 3, Pin 1	WH/RD	Port 8, Pin 1	WH/VT	Port 3, Pin 2	RD/WH	Port 8, Pin 2	VT/WH	Port 4, Pin 1	WH/OG	Ports 1-8, Pin 3	Drain	Port 4, Pin 2	OG/WH	Ports 1-8, Pin 4	GN/YE	Port 5, Pin 1	WH/BU			Port 5, Pin 2	BU/WH			P-VBM 80-959-*	P-VBMV 80-959-*
Port, Pin	Wire Color	Port, Pin	Wire Color																																													
Port 1, Pin 1	WH/BK	Port 6, Pin 1	WH/BN																																													
Port 1, Pin 2	BK/WH	Port 6, Pin 2	BN/WH																																													
Port 2, Pin 1	WH/GN	Port 7, Pin 1	WH/YE																																													
Port 2, Pin 2	GN/WH	Port 7, Pin 2	YE/WH																																													
Port 3, Pin 1	WH/RD	Port 8, Pin 1	WH/VT																																													
Port 3, Pin 2	RD/WH	Port 8, Pin 2	VT/WH																																													
Port 4, Pin 1	WH/OG	Ports 1-8, Pin 3	Drain																																													
Port 4, Pin 2	OG/WH	Ports 1-8, Pin 4	GN/YE																																													
Port 5, Pin 1	WH/BU																																															
Port 5, Pin 2	BU/WH																																															
			P-VBM 80-416-*/C	P-VBMV 80-416-*/C																																												

\* Length in meters.

\*\* Use with **lokfast** LOCK-EURO-G or LOCK-EURO-FW for port connectors in Class I, Division 2 applications.

<sup>†</sup> Each circuit has an additional dedicated drain wire not connected in the junction box.

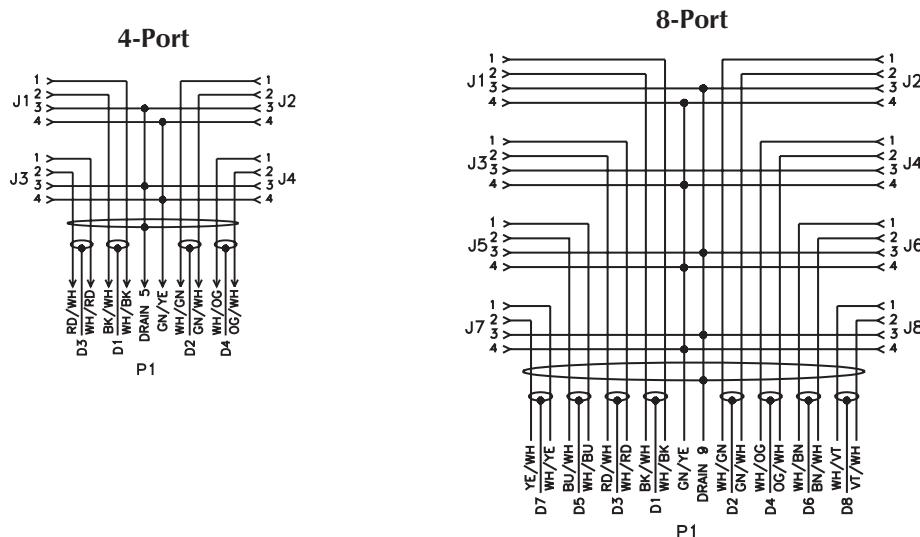


## Specifications


<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 68.
<b>Cable:</b>	Standard Version: Plum PVC jacket, UL ITC/PLTC/AWM, CSA CMX-Outdoor/CMG/AWM FT4, 300 V, 105°C. "/C" Versions: Plum PUR jacket, UL ITC/PLTC, CSA CIC/CMX-Outdoor-CM, 300 V, 105°C, FT1.
<b>Electrical Rating:</b>	Standard Version: 250 V, 4 A per conductor (use as ITC is limited to 150 V, 3 A for 22 AWG conductors). "/C" Versions: 30 V, 600 mA

## Dimensions

### 4-Port

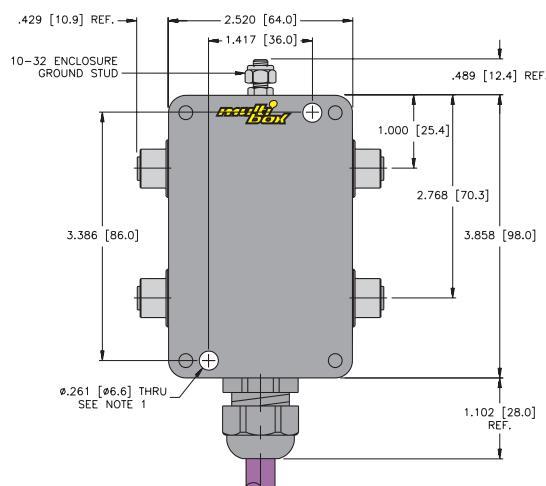


### 8-Port

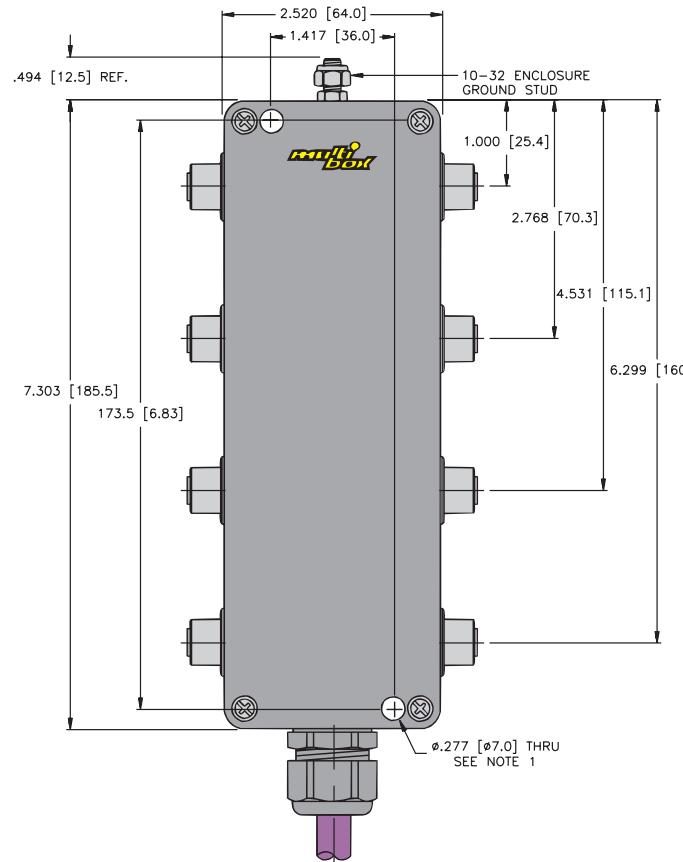

### Notes:

1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

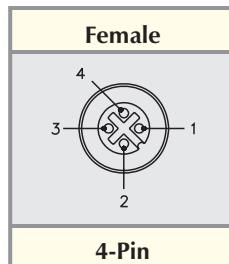



### multibox® eurofast® Nylon Junction Boxes

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations or Unclassified Locations.



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

#### 4-port, 1 Analog Signal Per Port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																												
4-port glass-filled nylon junction box, <b>eurofast</b> port connectors, <b>multifast</b> ® home-run connector	12-pin <b>multifast</b> connector	<table border="1"> <thead> <tr> <th>Port, Pin</th> <th>Home-Run</th> <th>Port, Pin</th> <th>Home-Run</th> </tr> </thead> <tbody> <tr> <td>Port 1, Pin 1</td> <td>1</td> <td>Port 4, Pin 1</td> <td>7</td> </tr> <tr> <td>Port 1, Pin 2</td> <td>2</td> <td>Port 4, Pin 2</td> <td>8</td> </tr> <tr> <td>Port 2, Pin 1</td> <td>3</td> <td>NC</td> <td>9</td> </tr> <tr> <td>Port 2, Pin 2</td> <td>4</td> <td>NC</td> <td>10</td> </tr> <tr> <td>Port 3, Pin 1</td> <td>5</td> <td>Ports 1-4, Pin 3</td> <td>11</td> </tr> <tr> <td>Port 3, Pin 2</td> <td>6</td> <td>Ports 1-4, Pin 4</td> <td>12</td> </tr> </tbody> </table>	Port, Pin	Home-Run	Port, Pin	Home-Run	Port 1, Pin 1	1	Port 4, Pin 1	7	Port 1, Pin 2	2	Port 4, Pin 2	8	Port 2, Pin 1	3	NC	9	Port 2, Pin 2	4	NC	10	Port 3, Pin 1	5	Ports 1-4, Pin 3	11	Port 3, Pin 2	6	Ports 1-4, Pin 4	12	P-4MB12-4-CS12	P-4MBV12-4-CSV12
Port, Pin	Home-Run	Port, Pin	Home-Run																													
Port 1, Pin 1	1	Port 4, Pin 1	7																													
Port 1, Pin 2	2	Port 4, Pin 2	8																													
Port 2, Pin 1	3	NC	9																													
Port 2, Pin 2	4	NC	10																													
Port 3, Pin 1	5	Ports 1-4, Pin 3	11																													
Port 3, Pin 2	6	Ports 1-4, Pin 4	12																													
			P-4MB12-4-CS12/C	P-4MBV12-4-CSV12/C																												

See pages K85 - K92 for mating home-run cordsets.


#### 8-port, 1 Analog Signal Per Port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																																												
8-port glass-filled nylon junction box, <b>eurofast</b> port connectors, <b>multifast</b> home-run connector	19-pin <b>multifast</b> connector	<table border="1"> <thead> <tr> <th>Port, Pin</th> <th>Home-Run</th> <th>Port, Pin</th> <th>Home-Run</th> </tr> </thead> <tbody> <tr> <td>Port 1, Pin 1</td> <td>1</td> <td>Port 5, Pin 1</td> <td>10</td> </tr> <tr> <td>Port 1, Pin 2</td> <td>2</td> <td>Port 5, Pin 2</td> <td>11</td> </tr> <tr> <td>Port 2, Pin 1</td> <td>3</td> <td>Ports 1-8, Pin 4</td> <td>12</td> </tr> <tr> <td>Port 2, Pin 2</td> <td>4</td> <td>Port 6, Pin 1</td> <td>13</td> </tr> <tr> <td>Port 3, Pin 1</td> <td>5</td> <td>Port 6, Pin 2</td> <td>14</td> </tr> <tr> <td>Ports 1-8, Pin 3</td> <td>6</td> <td>Port 7, Pin 1</td> <td>15</td> </tr> <tr> <td>Port 3, Pin 2</td> <td>7</td> <td>Port 7, Pin 2</td> <td>16</td> </tr> <tr> <td>Port 4, Pin 1</td> <td>8</td> <td>Port 8, Pin 1</td> <td>17</td> </tr> <tr> <td>Port 4, Pin 2</td> <td>9</td> <td>Port 8, Pin 2</td> <td>18</td> </tr> <tr> <td></td> <td></td> <td>NC</td> <td>19</td> </tr> </tbody> </table>	Port, Pin	Home-Run	Port, Pin	Home-Run	Port 1, Pin 1	1	Port 5, Pin 1	10	Port 1, Pin 2	2	Port 5, Pin 2	11	Port 2, Pin 1	3	Ports 1-8, Pin 4	12	Port 2, Pin 2	4	Port 6, Pin 1	13	Port 3, Pin 1	5	Port 6, Pin 2	14	Ports 1-8, Pin 3	6	Port 7, Pin 1	15	Port 3, Pin 2	7	Port 7, Pin 2	16	Port 4, Pin 1	8	Port 8, Pin 1	17	Port 4, Pin 2	9	Port 8, Pin 2	18			NC	19	P-8MB12-4-CS19	P-8MBV12-4-CSV19
Port, Pin	Home-Run	Port, Pin	Home-Run																																													
Port 1, Pin 1	1	Port 5, Pin 1	10																																													
Port 1, Pin 2	2	Port 5, Pin 2	11																																													
Port 2, Pin 1	3	Ports 1-8, Pin 4	12																																													
Port 2, Pin 2	4	Port 6, Pin 1	13																																													
Port 3, Pin 1	5	Port 6, Pin 2	14																																													
Ports 1-8, Pin 3	6	Port 7, Pin 1	15																																													
Port 3, Pin 2	7	Port 7, Pin 2	16																																													
Port 4, Pin 1	8	Port 8, Pin 1	17																																													
Port 4, Pin 2	9	Port 8, Pin 2	18																																													
		NC	19																																													
			P-8MB12-4-CS19/C	P-8MBV12-4-CSV19/C																																												


See pages K85 - K92 for mating home-run cordsets.

#### Wiring Diagrams

##### 4-Port

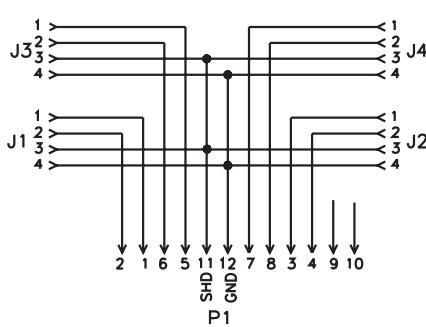

##### 8-Port

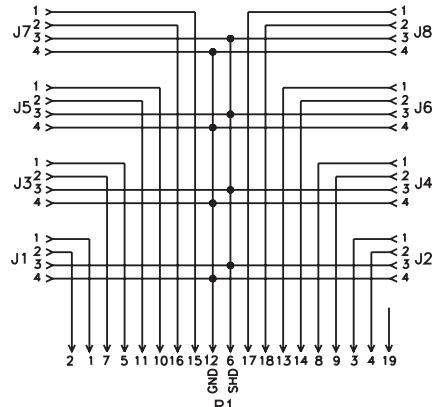


## Specifications


<b>Housing:</b>	Glass filled nylon.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table). Nylon contact carriers.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 100 V, 4 A per conductor. "/C" Versions: 30 V, 600 mA

## Dimensions

4-Port

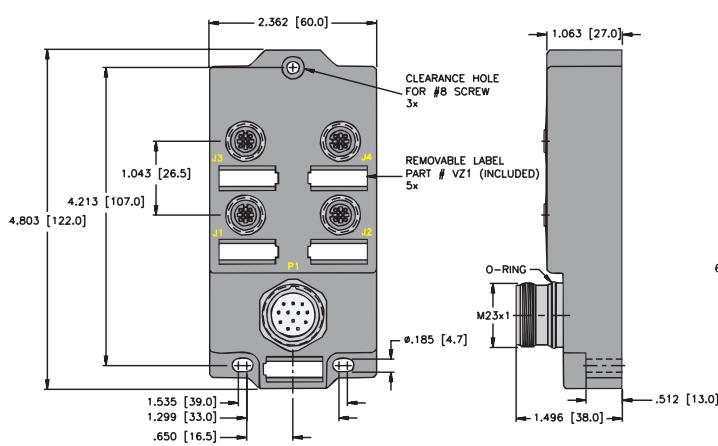

8-Port

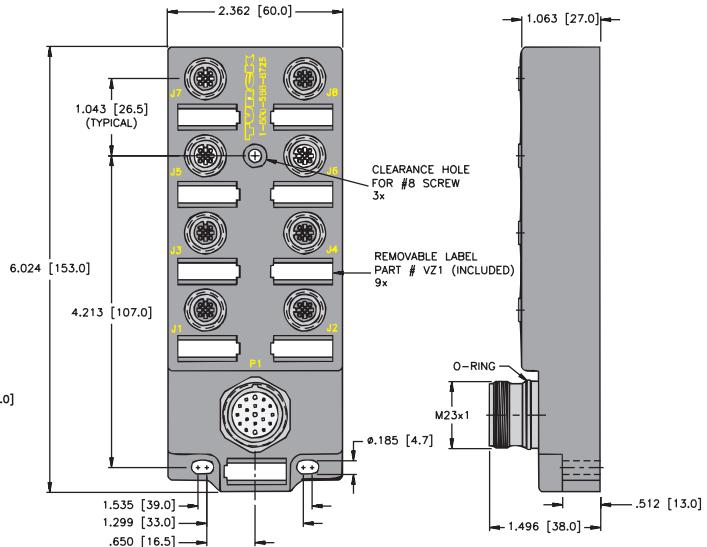

## Pinouts

Female	Male	
	12-Pin multifast®	19-Pin multifast®
4-Pin eurofast®	12-Pin multifast®	19-Pin multifast®



### multibox® eurofast® Metal Junction Boxes

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations or Unclassified Locations



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

#### 4-port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																												
4-port cast aluminum junction box, <b>eurofast</b> port connectors, <b>multifast</b> home-run connector, 1 analog signal per port	12-pin <b>multifast</b> connector	<table border="1"> <thead> <tr> <th>Pin, Port</th> <th>Home-Run</th> <th>Port, Pin</th> <th>Home-Run</th> </tr> </thead> <tbody> <tr> <td>Port 1, Pin 1</td> <td>1</td> <td>Port 4, Pin 1</td> <td>7</td> </tr> <tr> <td>Port 1, Pin 2</td> <td>2</td> <td>Port 4, Pin 2</td> <td>8</td> </tr> <tr> <td>Port 2, Pin 1</td> <td>3</td> <td>NC</td> <td>9</td> </tr> <tr> <td>Port 2, Pin 2</td> <td>4</td> <td>NC</td> <td>10</td> </tr> <tr> <td>Port 3, Pin 1</td> <td>5</td> <td>Ports 1-4, Pin 3</td> <td>11</td> </tr> <tr> <td>Port 3, Pin 2</td> <td>6</td> <td>Ports 1-4, Pin 4</td> <td>12</td> </tr> </tbody> </table>	Pin, Port	Home-Run	Port, Pin	Home-Run	Port 1, Pin 1	1	Port 4, Pin 1	7	Port 1, Pin 2	2	Port 4, Pin 2	8	Port 2, Pin 1	3	NC	9	Port 2, Pin 2	4	NC	10	Port 3, Pin 1	5	Ports 1-4, Pin 3	11	Port 3, Pin 2	6	Ports 1-4, Pin 4	12	P-VBM 40-CS12	P-VBMV 40-CSV12
Pin, Port	Home-Run	Port, Pin	Home-Run																													
Port 1, Pin 1	1	Port 4, Pin 1	7																													
Port 1, Pin 2	2	Port 4, Pin 2	8																													
Port 2, Pin 1	3	NC	9																													
Port 2, Pin 2	4	NC	10																													
Port 3, Pin 1	5	Ports 1-4, Pin 3	11																													
Port 3, Pin 2	6	Ports 1-4, Pin 4	12																													
			P-VBM 40-CS12/C	P-VBMV 40-CSV12/C																												

See pages K85 - K92 for mating home-run cordsets.


#### 8-port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																																												
8-port cast aluminum junction box, <b>eurofast</b> port connectors, <b>multifast</b> home-run connector, 1 analog signal per port	19-pin <b>multifast</b> connector	<table border="1"> <thead> <tr> <th>Port, Pin</th> <th>Home-Run</th> <th>Port, Pin</th> <th>Home-Run</th> </tr> </thead> <tbody> <tr> <td>Port 1, Pin 1</td> <td>1</td> <td>Port 5, Pin 1</td> <td>10</td> </tr> <tr> <td>Port 1, Pin 2</td> <td>2</td> <td>Port 5, Pin 2</td> <td>11</td> </tr> <tr> <td>Port 2, Pin 1</td> <td>3</td> <td>Ports 1-8, Pin 4</td> <td>12</td> </tr> <tr> <td>Port 2, Pin 2</td> <td>4</td> <td>Port 6, Pin 1</td> <td>13</td> </tr> <tr> <td>Port 3, Pin 1</td> <td>5</td> <td>Port 6, Pin 2</td> <td>14</td> </tr> <tr> <td>Port 3, Pin 2</td> <td>6</td> <td>Port 7, Pin 1</td> <td>15</td> </tr> <tr> <td>Port 3, Pin 3</td> <td>7</td> <td>Port 7, Pin 2</td> <td>16</td> </tr> <tr> <td>Port 4, Pin 1</td> <td>8</td> <td>Port 8, Pin 1</td> <td>17</td> </tr> <tr> <td>Port 4, Pin 2</td> <td>9</td> <td>Port 8, Pin 2</td> <td>18</td> </tr> <tr> <td></td> <td>NC</td> <td>NC</td> <td>19</td> </tr> </tbody> </table>	Port, Pin	Home-Run	Port, Pin	Home-Run	Port 1, Pin 1	1	Port 5, Pin 1	10	Port 1, Pin 2	2	Port 5, Pin 2	11	Port 2, Pin 1	3	Ports 1-8, Pin 4	12	Port 2, Pin 2	4	Port 6, Pin 1	13	Port 3, Pin 1	5	Port 6, Pin 2	14	Port 3, Pin 2	6	Port 7, Pin 1	15	Port 3, Pin 3	7	Port 7, Pin 2	16	Port 4, Pin 1	8	Port 8, Pin 1	17	Port 4, Pin 2	9	Port 8, Pin 2	18		NC	NC	19	P-VBM 80-CS19	P-VBMV 80-CSV19
Port, Pin	Home-Run	Port, Pin	Home-Run																																													
Port 1, Pin 1	1	Port 5, Pin 1	10																																													
Port 1, Pin 2	2	Port 5, Pin 2	11																																													
Port 2, Pin 1	3	Ports 1-8, Pin 4	12																																													
Port 2, Pin 2	4	Port 6, Pin 1	13																																													
Port 3, Pin 1	5	Port 6, Pin 2	14																																													
Port 3, Pin 2	6	Port 7, Pin 1	15																																													
Port 3, Pin 3	7	Port 7, Pin 2	16																																													
Port 4, Pin 1	8	Port 8, Pin 1	17																																													
Port 4, Pin 2	9	Port 8, Pin 2	18																																													
	NC	NC	19																																													
			P-VBM 80-CS19/C	P-VBMV 80-CSV19/C																																												


See pages K85 - K92 for mating home-run cordsets.

### Wiring Diagrams

#### 4-Port Diagram, 1 Analog Signal Per Port

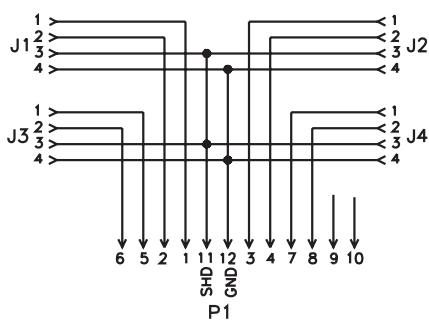

#### 8-Port Diagram, 1 Analog Signal Per Port

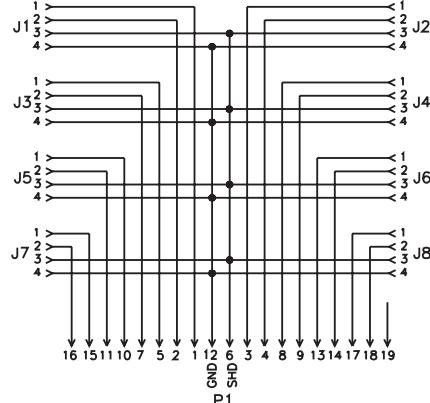


## Specifications


<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 12-pin: 250 V, 4 A per conductor. Standard Version: 12-pin: 250 V, 4 A per conductor. "/C" Versions: 30 V, 600 mA

## Dimensions

**4-Port**

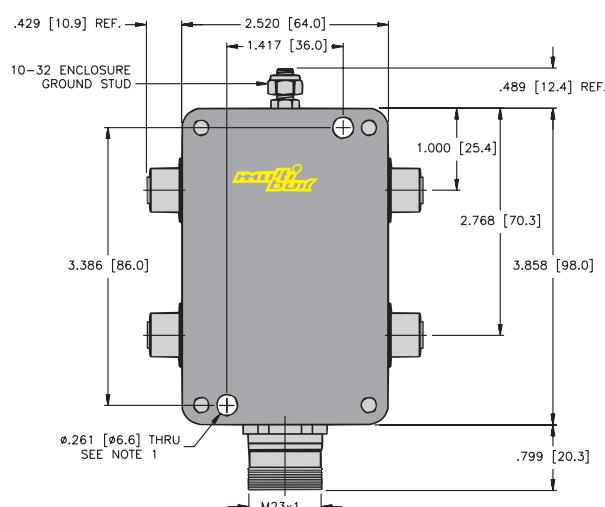

**8-Port**

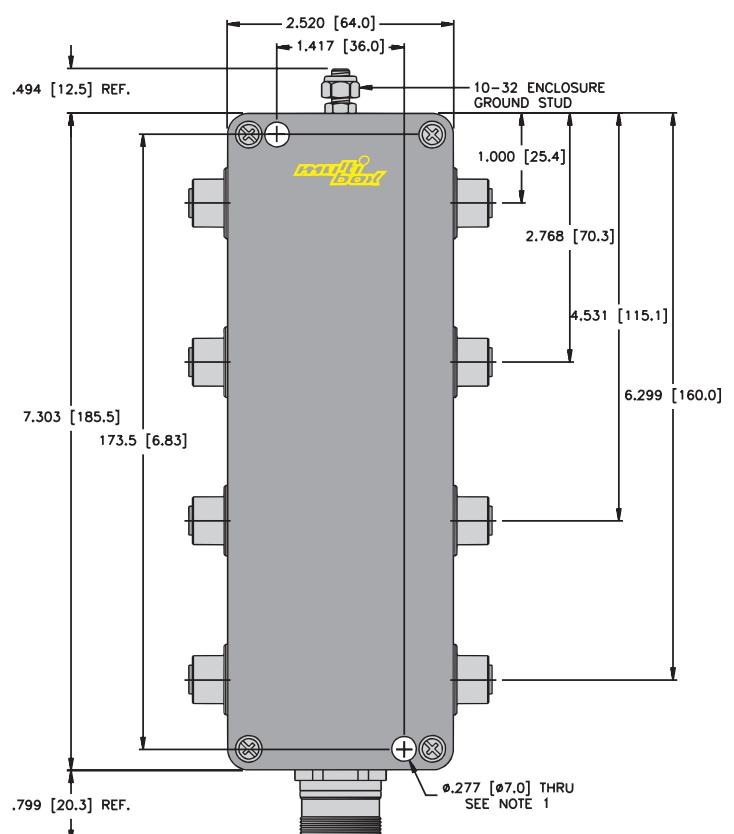

Notes:


1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

Female	Male	
<b>4-Pin eurofast®</b>	<b>12-Pin multifast®</b>	<b>19-Pin multifast</b>


**minifast® Cordset Part Number Key, 2-Wire Analog or HART Control Circuits**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

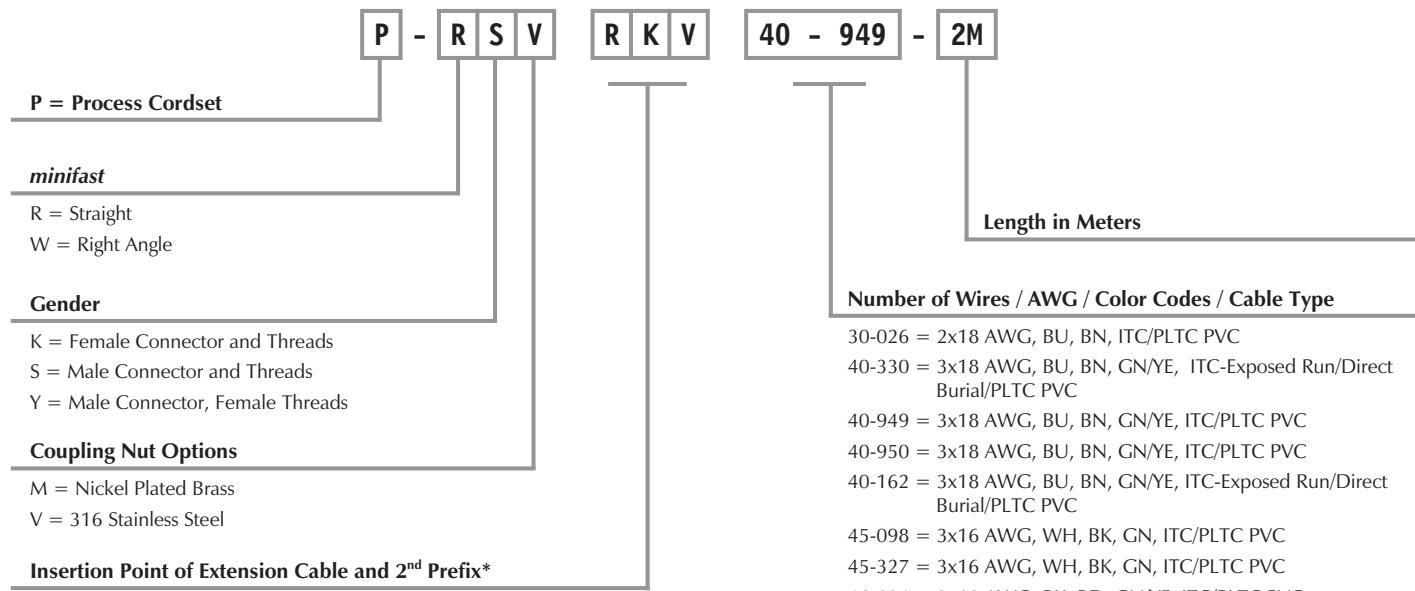

**Single Ended Example:**


P - R S V      40- 949 - 2M

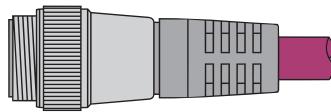

RSV ..

**Extension Example:**


P - R S V      R K V      40- 949 - 2M

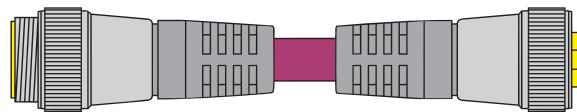

RSV .. - RKV ..


***minifast®* Cordset Extensions**

**Other Extension Examples:**

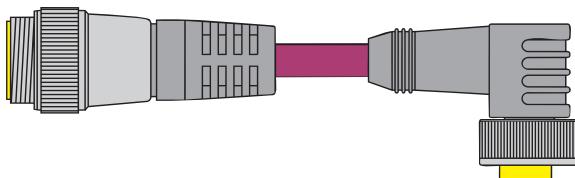


P - R S V    W K V    40- 949 - 2M

**RSV .. - WKV ..**

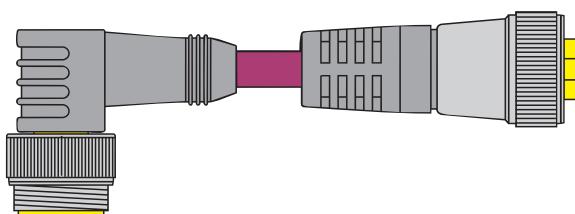

P - W S V    R K V    40- 949 - 2M

**WSV .. - RKV ..**

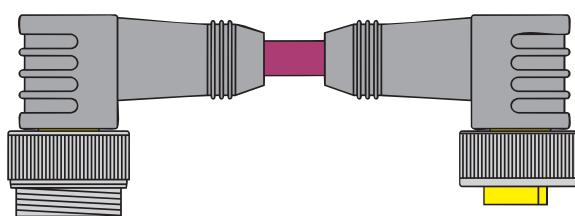


P - W S V    W K V    40- 949 - 2M

**WSV .. - WKV ..**

Note: Hybrid connector extensions also available. Consult factory.


***minifast® Receptacle with Cable Part Number Key, 2-Wire Analog or HART Control Circuits***

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

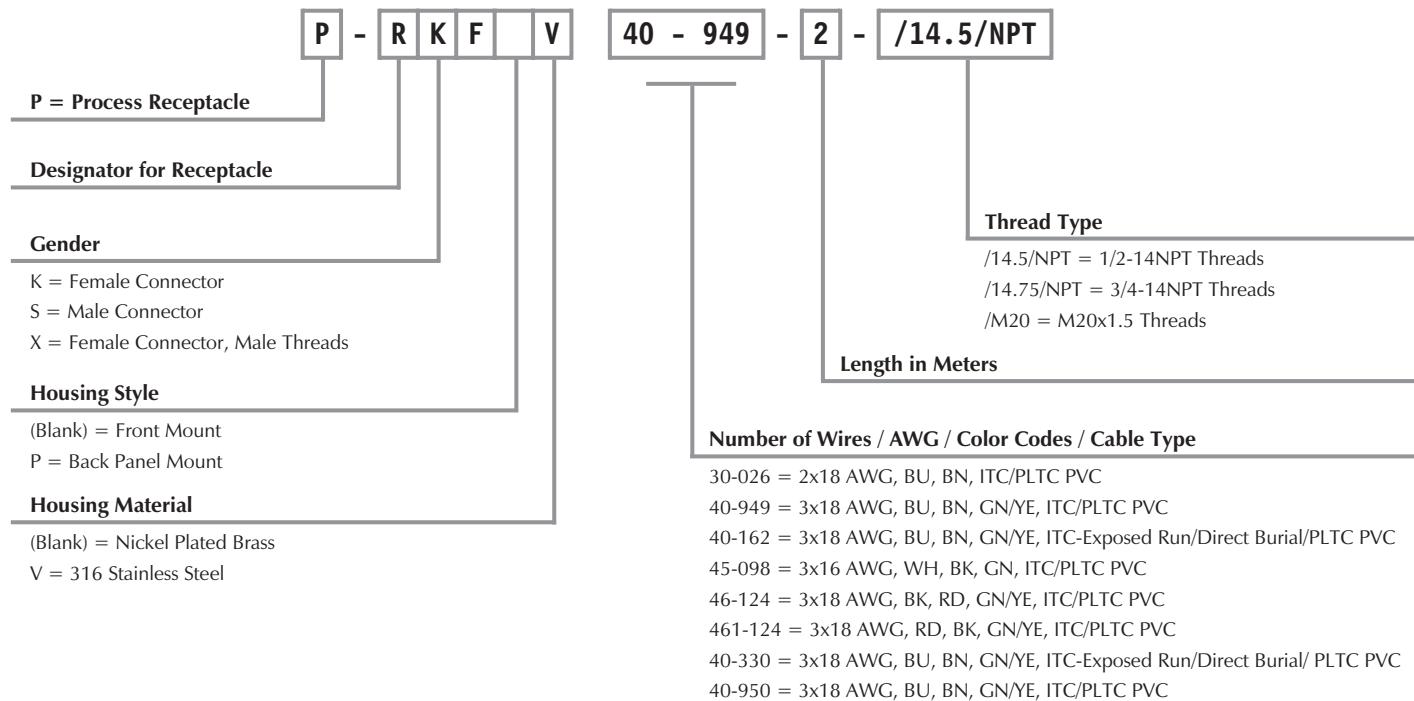

## minifast® Receptacle with Leads Part Number Key, 2-Wire Analog or HART Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

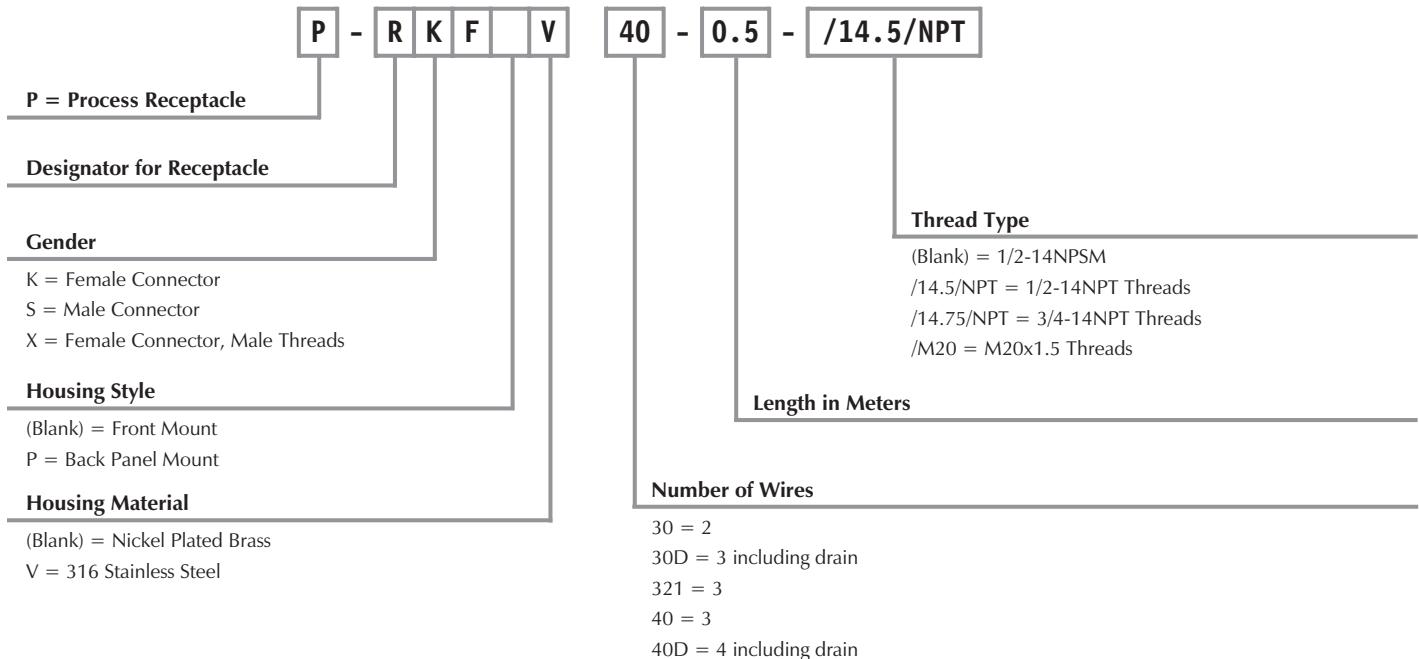

**minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-RKM ..	P-RKM 30-026-*M	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BU 2. BN 3. Drain
	P-RKM 40-949-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-RKM 40-162-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-RKM 45-098-*M	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>		1. 2 2. 3 3. 1 4. 2

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RKM.."; "P-RKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.


## minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits

- Straight Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-RKM..	P-RKM 40-950-*M	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKM 40-330-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-RKM 45-327-*M	ITC/PLTC PVC Blue 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51327-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-RKM 46-124-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-RKM 461-124-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
P-RKM..	P-RKM 40A-947-*M	ITC/PLTC Armor Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 13.5 mm OD Cable #RF50947-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
				1. BU 2. BN 3. Drain 4. GN/YE



\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RKM.."; "P-RKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Right Angle Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-WKM ..	P-WKM 30-026-*M	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain
	P-WKM 40-949-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-WKM 40-162-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-WKM 45-098-*M	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>		1. 2 2. 3 3. 1 4. 2

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WKM.."; "P-WKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits

- Right Angle Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-WKM..	P-WKM 40-950-*M	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.	1. BU 2. BN 3. Drain 4. GN/YE
	P-WKM 40-330-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		
	P-WKM 45-327-*M	ITC/PLTC PVC Blue 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51327-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. WH 2. BK 3. Drain 4. GN
	P-WKM 46-124-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-WKM 461-124-*M			1. RD 2. BK 3. Drain 4. GN/YE

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WKM.."; "P-WKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
 <b>P-RSM ..</b>	P-RSM 30-026-*M	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M†	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain
	P-RSM 40-949-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M†		1. BU 2. BN 3. Drain 4. GN/YE
	P-RSM 40-162-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M†		1. WH 2. BK 3. Drain 4. GN
	P-RSM 45-098-*M	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M†		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSM.."; "P-RSV.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits

- Straight Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-RSM..	P-RSM 40-330-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.	1. BU 2. BN 3. Drain 4. GN/YE
	P-RSM 40-950-*M	ITC/PLTC PVC Blue 3x18 AWG 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-RSM 45-327-*M	ITC/PLTC PVC Blue 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51327-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BK 2. RD 3. Drain 4. GN/YE
	P-RSM 46-124-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-RSM 461-124-*M			
P-RSM..	P-RSM 40A-947-*M	ITC/PLTC Armor Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 13.5 mm OD Cable #RF50947-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BU 2. BN 3. Drain 4. GN/YE

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-RSM.."; "P-RSV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits**

- Right Angle Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-WSM ..	P-WSM 30-026-*M	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BN 2. BU 3. Drain
	P-WSM 40-949-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-WSM 40-162-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-WSM 45-098-*M	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>		1 2 3 4

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WSM.."; "P-WSV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, 2-Wire Analog or HART Control Circuits

- Right Angle Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinout
P-WSM..	P-WSM 40-330-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-WSM 40-950-*M	ITC/PLTC PVC Blue 3x18 AWG 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		
	P-WSM 45-327-*M	ITC/PLTC PVC Blue 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51327-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH 2. BK 3. Drain 4. GN
	P-WSM 46-124-*M	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-WSM 461-124-*M			1. RD 2. BK 3. Drain 4. GN/YE


\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WSM.."; "P-WSV.." indicates 316 stainless steel.


<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE) in Class I, Division 2 applications.


Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

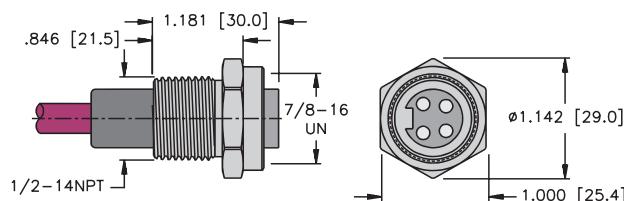***minifast®* Receptacles with Cable, 2-Wire Analog or HART Control Circuits****1****P-RKF .. 14.5/NPT**


Page K56

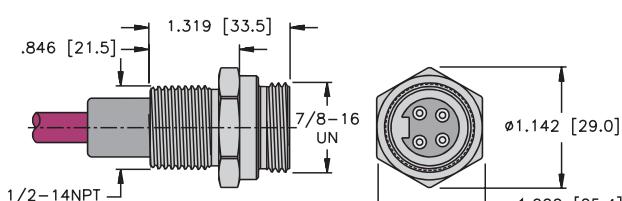**2****P-RSF .. 14.5/NPT**


Page K57

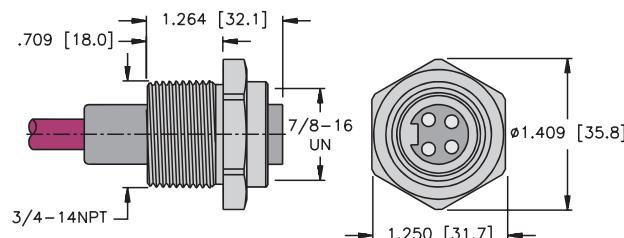**3****P-RKF .. 14.75/NPT**


Page K58

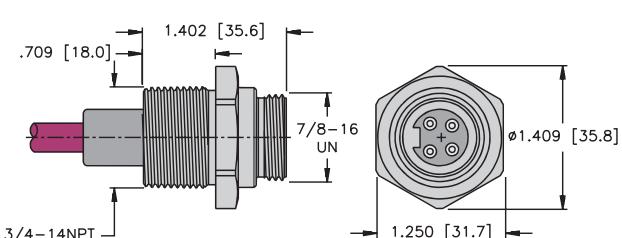**4****P-RSF .. 14.75/NPT**

Page K59

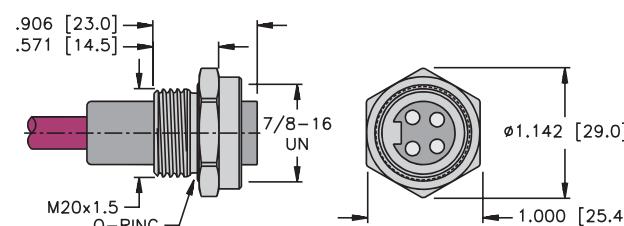**5****P-RKF .. M20**

Page K60

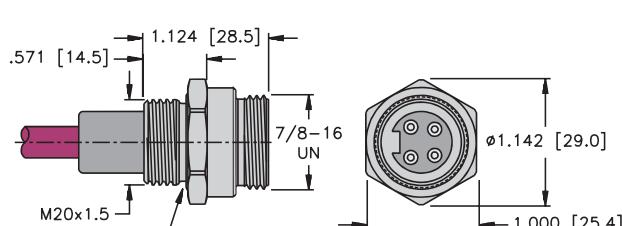**6****P-RSF .. M20**

Page K61

## minifast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RKF 30-026-* /14.5/NPT	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>		1. BU 2. BN 3. Drain
	P-RKF 40-949-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-RKF 40-162-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. WH 2. BK 3. Drain 4. GN
	P-RKF 45-098-* /14.5/NPT	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-RKF 46-124-* /14.5/NPT	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-RKF 40-950-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKF 40-330-* /14.5/NPT	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		

See page K55 for dimensional drawings.

\* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.


**minifast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RSF 30-026-* /14.5/NPT	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	1. BU 2. BN 3. Drain	
	P-RSF 40-949-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	1. BU 2. BN 3. Drain	
	P-RSF 40-162-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations. 1/2-14NPT Conduit Entry Thread.	1. BU 2. BN 3. Drain 4. GN/YE
	P-RSF 45-098-* /14.5/NPT	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>	1. WH 2. BK 3. Drain 4. GN	
	P-RSF 46-124-* /14.5/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>	1. BK 2. RD 3. Drain 4. GN/YE	
	P-RSF 461-124-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>	1. RD 2. BK 3. Drain 4. GN/YE	
	P-RSF 40-330-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. 1/2-14NPT Conduit Entry Thread.	1. BU 2. BN 3. Drain 4. GN/YE
	P-RSF 40-950-* /14.5/NPT	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	1/2-14NPT Conduit Entry Thread.	

2



**See page K55 for dimensional drawings.**

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RKF 30-026-*/14.75/NPT	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. Drain
	P-RKF 40-949-*/14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE
	P-RKF 40-162-*/14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-RKF 45-098-*/14.75/NPT	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-RKF 46-124-*/14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-RKF 40-330-*/14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	<i>Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKF 40-950-*/14.75/NPT	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE

See page K55 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.  
Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Male Receptacles
  - IEC IP 67 Protection
  - 300 V, 9 A
- (use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RSF 30-026-* /14.75/NPT	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	1. BU 2. BN 3. Drain	
	P-RSF 40-949-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	1. BU 2. BN 3. Drain	
4	P-RSF 40-162-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. 3/4-14NPT Conduit Entry Thread.	
	P-RSF 45-098-* /14.75/NPT	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>	1. WH 2. BK 3. Drain 4. GN	
	P-RSF 46-124-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>	1. BK 2. RD 3. Drain 4. GN/YE	
	P-RSF 461-124-* /14.75/NPT	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>	1. RD 2. BK 3. Drain 4. GN/YE	
	P-RSF 40-330-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. 3/4-14NPT Conduit Entry Thread.	
	P-RSF 40-950-* /14.75/NPT	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	1. BU 2. BN 3. Drain 4. GN/YE	

See page K55 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for *reelfast®* cable information.


Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



5



Housing Style	Part Number	Cable	Application	Pinout
	P-RKF 30-026-*/M20	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>		1. BU 2. BN 3. Drain
	P-RKF 40-949-*/M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>		1. BU 2. BN 3. Drain
	P-RKF 40-162-*/M20	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. <i>M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKF 45-098-*/M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. GN
	P-RKF 46-124-*/M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. BK 2. RD 3. Drain 4. GN/YE
	P-RKF 461-124-*/M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>		1. RD 2. BK 3. Drain 4. GN/YE
	P-RKF 40-330-*/M20	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. <i>M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKF 40-950-*/M20	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>		1. BU 2. BN 3. Drain 4. GN/YE

See page K55 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RSF 30-026-* /M20	ITC/PLTC PVC Plum 2x18 AWG, 1 STP Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51026-*M <sup>†</sup>	1. BU 2. BN 3. Drain	
	P-RSF 40-949-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50949-*M <sup>†</sup>	1. BU 2. BN 3. Drain	
	P-RSF 40-162-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51162-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.	
6	P-RSF 45-098-* /M20	ITC/PLTC PVC Plum 3x16 AWG, 1 STP with GND Foil/Drain (18) 105°C 7.6 mm OD Cable #RF51098-*M <sup>†</sup>	1. WH 2. BK 3. Drain 4. GN	
	P-RSF 46-124-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>	1. BK 2. RD 3. Drain 4. GN/YE	
	P-RSF 461-124-* /M20	ITC/PLTC PVC Plum 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51124-*M <sup>†</sup>	1. RD 2. BK 3. Drain 4. GN/YE	
	P-RSF 40-330-* /M20	ITC-Exposed Run/Direct Burial/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF51330-*M <sup>†</sup>	Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations. M20 Conduit Entry Thread.	
	P-RSF 40-950-* /M20	ITC/PLTC PVC Blue 3x18 AWG, 1 STP with GND Foil/Drain (20) 105°C 7.2 mm OD Cable #RF50950-*M <sup>†</sup>	1. BU 2. BN 3. Drain 4. GN/YE	

See page K55 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.









<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

# Process Automation




Notes:

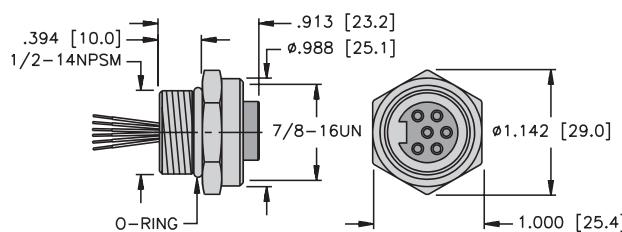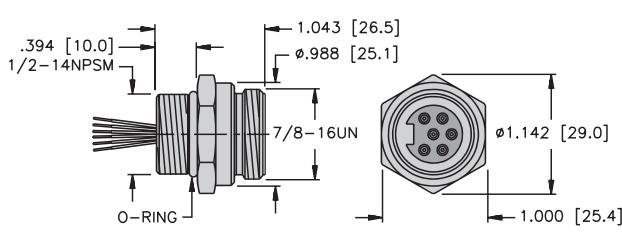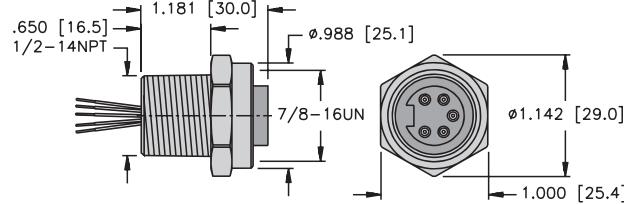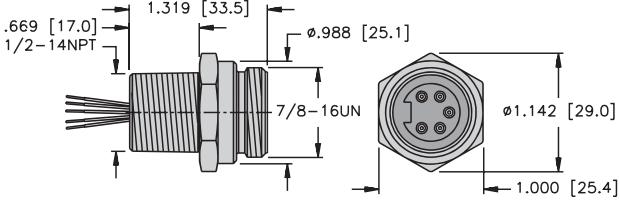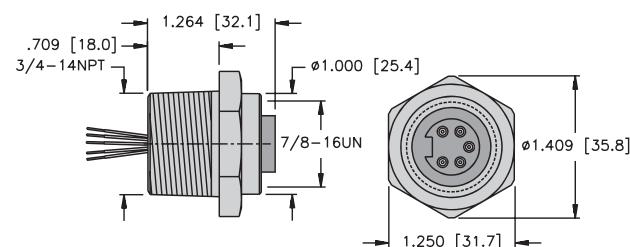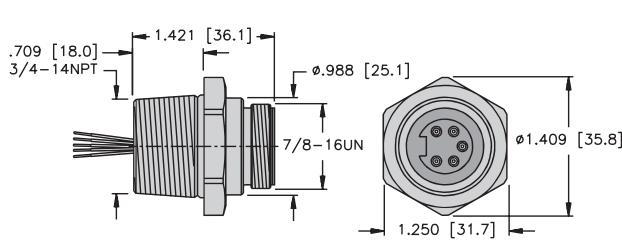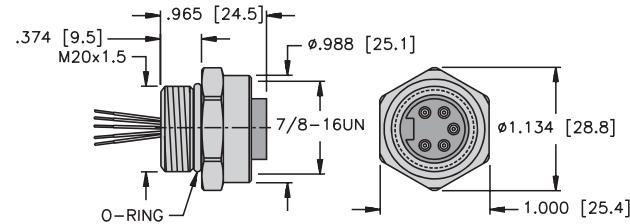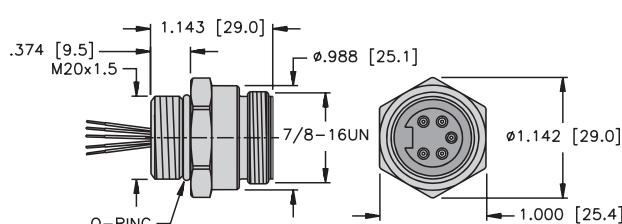**minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits****1****P-RKF ..****Page K65****2****P-RSF ..****Page K66****3****P-RKF .. 14.5/NPT****Page K67****4****P-RSF .. 14.5/NPT****Page K68****5****P-RKF .. 14.75/NPT****Page K69****6****P-RSF .. 14.75/NPT****Page K70****7****P-RKF .. M20****Page K71****8****P-RSF .. M20****Page K72**

**minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits**


**9**

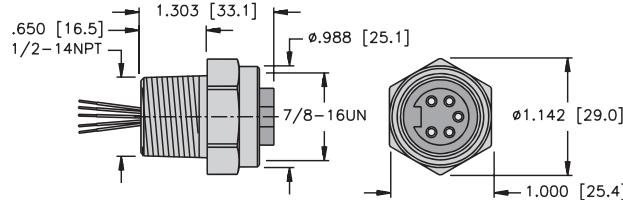

P-RKFV .. EX-\*/14.5/NPT

Page K73


**10**

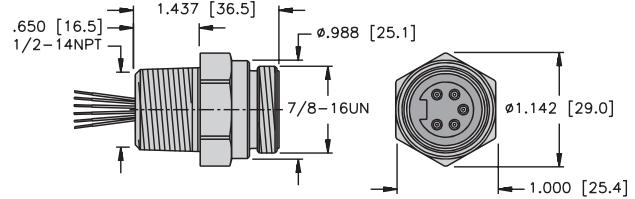

P-RSFV .. EX-\*/14.5/NPT

Page K74


**11**

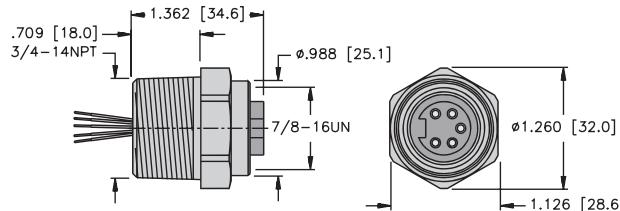

P-RKFV .. EX-\*/14.75/NPT

Page K75

**12**

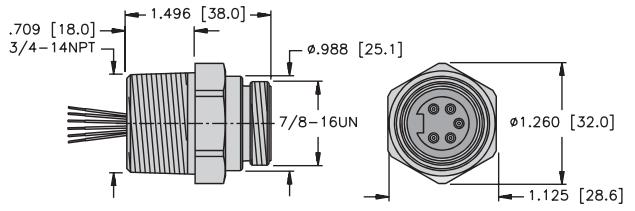

P-RSFV .. EX-\*/14.75/NPT

Page K76

***minifast®* Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
1 	P-RKF 30-*	UL, CSA 2x18 AWG 105°C 600 V, 9A	1/2-14NPSM	1. BU 2. BN 3. N/C
	P-RKF 30D-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GY
	P-RKF 321-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads	1. GN/YE 2. BN 3. BU
	P-RKF 40-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-RKF 40D-*	UL, CSA 4x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE

**See page K63 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
	P-RSF 30-*	UL, CSA 2x18 AWG 105°C 600 V, 9A	1/2-14NPSM	1. BU 2. BN 3. N/C	
	P-RSF 30D-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GY	
	P-RSF 321-*		1/2-14NPSM Threads	1. GN/YE 2. BN 3. BU	
	P-RSF 40-*	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RSF 40D-*	UL, CSA 4x18 AWG 105°C 600 V, 9A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	

See page K63 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

***minifast®* Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
3 	P-RKF 30-*/14.5/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. BU 2. BN 3. N/C
	P-RKF 30D-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY
	P-RKF 321-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. GN/YE 2. BN 3. BU
	P-RKF 40-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-RKF 40D-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE

**See page K63 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFD.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
	P-RSF 30-*/14.5/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. BU 2. BN 3. N/C	
	P-RSF 30D-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY	
	P-RSF 321-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. GN/YE 2. BN 3. BU	
	P-RSF 40-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RSF 40D-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9A	1/2-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	

**See page K63 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

***minifast®* Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
5	P-RKF 30-*/14.75/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads	1. BU 2. BN 3. N/C	
	P-RKF 30D-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY	
	P-RKF 321-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads	1. GN/YE 2. BN 3. BU	
	P-RKF 40-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RKF 40D-*/14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	

**See page K63 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFD.." indicates 316 stainless steel.





Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
 <b>6</b>	P-RSF 30-* /14.75/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads	1. BU 2. BN 3. N/C	
	P-RSF 30D-* /14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY	
	P-RSF 321-* /14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads	1. GN/YE 2. BN 3. BU	
	P-RSF 40-* /14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RSF 40D-* /14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE	

See page K63 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.


Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

***minifast®* Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
7 	P-RKF 30-*/M20	UL, CSA 2x18 AWG 105°C 600 V, 9A	<i>M20 Threads</i>	1. BU 2. BN 3. N/C
	P-RKF 30D-*/M20	UL, CSA 3x18 AWG 105°C 600 V, 9A	<i>M20 Threads, Drain Wire</i>	1. BU 2. BN 3. GY
	P-RKF 321-*/M20	UL, CSA 3x18 AWG 105°C 600 V, 9A	<i>M20 Threads</i>	1. GN/YE 2. BN 3. BU
	P-RKF 40-*/M20	UL, CSA 3x18 AWG 105°C 600 V, 9A	<i>M20 Threads</i>	1. BU 2. BN 3. N/C 4. GN/YE
	P-RKF 40D-*/M20	UL, CSA 4x18 AWG 105°C 600 V, 9A	<i>M20 Threads, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE

**See page K63 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
8 	P-RSF 30-*/M20	UL, CSA 2x18 AWG 105°C 600 V, 9A	<i>M20 Threads</i>	1. BU 2. BN 3. N/C
	P-RSF 30D-*/M20	UL, CSA 3x18 AWG 105°C 600 V, 9A	<i>M20 Threads, Drain Wire</i>	1. BU 2. BN 3. GY
	P-RSF 321-*/M20	UL, CSA 3x18 AWG 105°C 600 V, 9A	<i>M20 Threads</i>	1. GN/YE 2. BN 3. BU
	P-RSF 40-*/M20	UL, CSA 3x18 AWG 105°C 600 V, 9A	<i>M20 Threads</i>	1. BU 2. BN 3. N/C 4. GN/YE
	P-RSF 40D-*/M20	UL, CSA 4x18 AWG 105°C 600 V, 9A	<i>M20 Threads, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE

See page K63 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.




Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
9 	P-RKVF 30 EX-*/14.5/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. BU 2. BN 3. N/C	
	P-RKVF 30D EX-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY	
	P-RKVF 40 EX-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RKVF 40D EX-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	

See page K64 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.




Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
<b>10</b> 	P-RSFV 30 EX-*/14.5/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. BU 2. BN 3. N/C	
	P-RSFV 30D EX-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY	
	P-RSFV 40 EX-*/14.5/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RSFV 40D EX-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	

**See page K64 for dimensional drawings.**




\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.  
Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
11 	P-RKFV 30 EX-*/14.75/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. BU 2. BN 3. N/C	
	P-RKFV 30D EX-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY	
	P-RKFV 40 EX-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RKFV 40D EX-*/14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	

See page K64 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
<b>12</b> 	P-RSFV 30 EX-*/14.75/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. BU 2. BN 3. N/C	
	P-RSFV 30D EX-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY	
	P-RSFV 40 EX-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. BU 2. BN 3. N/C 4. GN/YE	
	P-RSFV 40D EX-*/14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GY 4. GN/YE	

**See page K64 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.




### minifast® "Y" Fittings, 2-Wire Analog or HART Control Circuits

- 600 V
- 9 A Per Conductor
- Installs in Standard Conduit Entries
- Stainless Steel Housing

Specifications	Wiring Dia.	Housing Material	1/2-14NPT				3/4-14NPT	
			J1 Female	J2 Female	P1 Male	P2 Male	P1 Male	J2 Female
4/18 AWG leads per connector	1	SS	P-2RKFV-40EX-*/14.5/NPT	P-2RSFV-40EX-*/14.5/NPT			P-RSFV RKFV-40EX-*/14.5/NPT	P-2RKFV-40EX-*/14.75/NPT
3/18 AWG leads per connector	2	SS	P-2RKFV-40BEX-*/14.5/NPT	P-2RSFV-40BEX-*/14.5/NPT			P-RSFV RKFV-40BEX-*/14.5/NPT	P-2RKFV-40BEX-*/14.75/NPT


\* Length in meters.  
SS = Stainless steel

### Dimensions

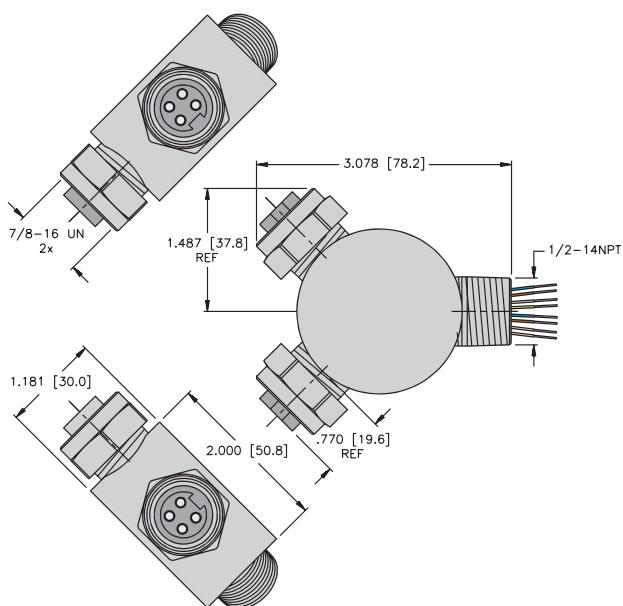


### Wiring Diagrams

1

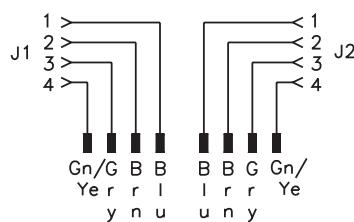

2

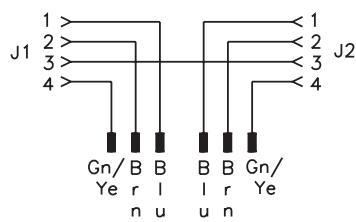


## Specifications

<b>Housing:</b>	316 stainless steel (SS), passivated.
<b>Contact Carrier:</b>	PUR black.
<b>Electrical Ratings:</b>	600 V, 9 A per conductor.
<b>Temperature:</b>	-30° to +105°C (-22° to +221°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67 (only when all receptacles are mated or covered with plugs).
<b>Leads:</b>	High flex stranding, PVC, insulated, 600 V, UL recognized, CSA certified.

3/4-14NPT				M20x1.5					
P1	P2	P1	J2	J1	J2	P1	P2	P1	J2
Male	Male	Male	Female	Female	Female	Male	Male	Male	Female
P-2RSFV-40EX-*/14.75/NPT		P-RSFV RKFV-40EX-*/14.75/NPT		P-2RKFV-40EX-*/M20		P-2RSFV-40EX-*/M20		P-RSFV RKFV-40EX-*/M20	
P-2RSFV-40BEX-*/14.75/NPT		P-RSFV RKFV-40BEX-*/14.75/NPT		P-2RKFV-40BEX-*/M20		P-2RSFV-40BEX-*/M20		P-RSFV RKFV-40BEX-*/M20	

## Dimensions

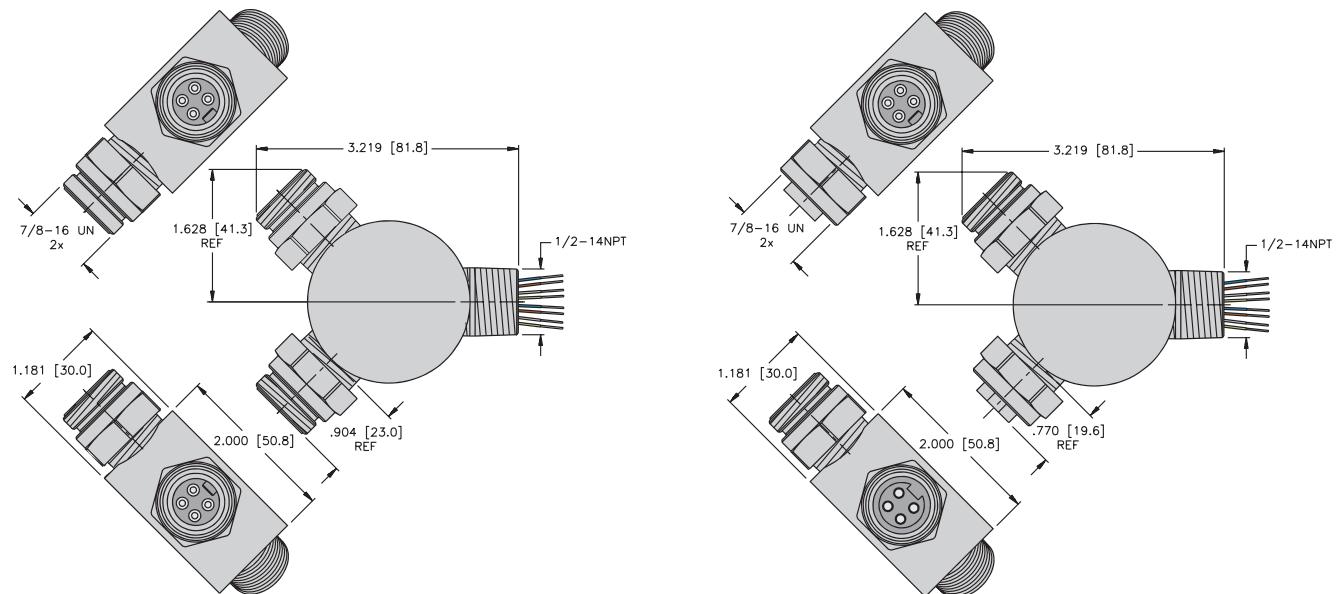

## Pinouts

Female	Male
4-Pin	4-Pin


***multibox® minifast® Metal Junction Boxes w/Integral Home Run Cable***

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations\*\* or Unclassified Locations



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.

"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

**4-port, 1 Analog Signal Per Port, Common Ground and Shield**

Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
4-port cast aluminum junction box, <b>minifast</b> port connectors, integral home-run cable	Home-run cable with 4/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 10.0 mm OD	Port, Pin	Wire Color	Port, Pin	Wire Color	P-4 RKF 40-960-*	P-4 RKFV 40-960-*
		Port 1, Pin 1	WH/BK	Port 3, Pin 2	RD/WH		
		Port 1, Pin 2	BK/WH	Port 4, Pin 1	WH/OG		
		Port 2, Pin 1	WH/GN	Port 4, Pin 2	OG/WH		
		Port 2, Pin 2	GN/WH	Ports 1-4, Pin 3	Drain		
		Port 3, Pin 1	WH/RD	Ports 1-4, Pin 4	GN/YE		

**8-port, 1 Analog Signal Per Port, Common Ground and Shield**



Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
8-port cast aluminum junction box, <b>minifast</b> port connectors, integral home-run cable	Home-run cable with 8/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	Port, Pin	Wire Color	Port, Pin	Wire Color	P-8 RKF 40-959-*	P-8 RKFV 40-959-*
		Port 1, Pin 1	WH/BK	Port 5, Pin 2	BU/WH		
		Port 1, Pin 2	BK/WH	Port 6, Pin 1	WH/BN		
		Port 2, Pin 1	WH/GN	Port 6, Pin 2	BN/WH		
		Port 2, Pin 2	GN/WH	Port 7, Pin 1	WH/YE		
		Port 3, Pin 1	WH/RD	Port 7, Pin 2	YE/WH		
		Port 3, Pin 2	RD/WH	Port 8, Pin 1	WH/VT		
		Port 4, Pin 1	WH/OG	Port 8, Pin 2	VT/WH		
		Port 4, Pin 2	OG/WH	Ports 1-8, Pin 3	Drain		
		Port 5, Pin 1	WH/BU	Ports 1-8, Pin 4	GN/YE		

\* Length in meters.

\*\* Use with **lokfast** LOCK-MINI or LOCK-MINI-FW for port connectors in Class I, Division 2 applications and for mating home run cable use

"L" and "T" versions.

† Each circuit has dedicated drain wire not connected in the junction box.

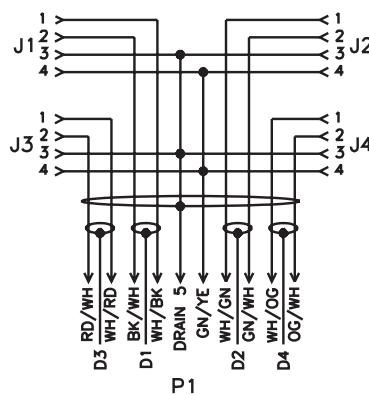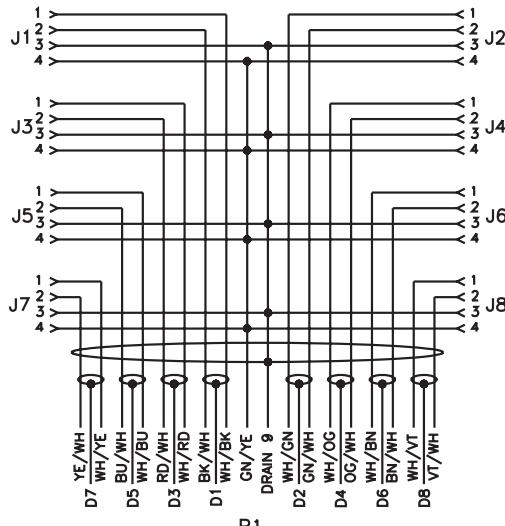
**Wiring Diagrams**
**4-Port**

**8-Port**


## Specifications


<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Cable:</b>	Standard Version: Plum PVC jacket, UL ITC/PLTC/AWM, CSA CMX-Outdoor/CMG/AWM FT4, 300 V, 105°C. "/C" Versions: Plum PUR jacket, UL ITC/PLTC, CSA CIC/CMX-Outdoor-CM, 300 V, 105°C, FT1.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 300 V, 4 A per conductor (use as ITC is limited to 150 V, 3 A for 22 AWG conductors). "/C" Versions: 30 V, 600 mA

## Dimensions

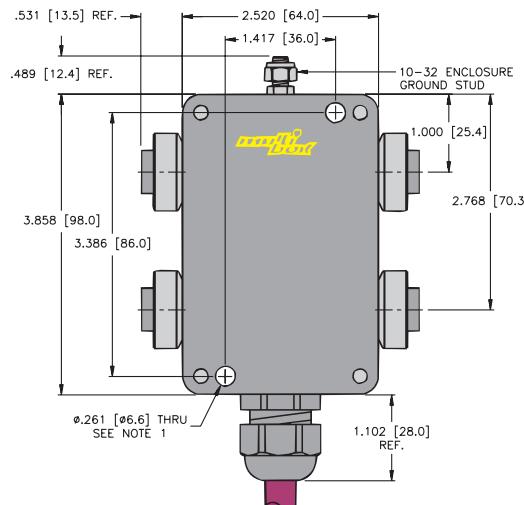**4-Port**




**8-Port**

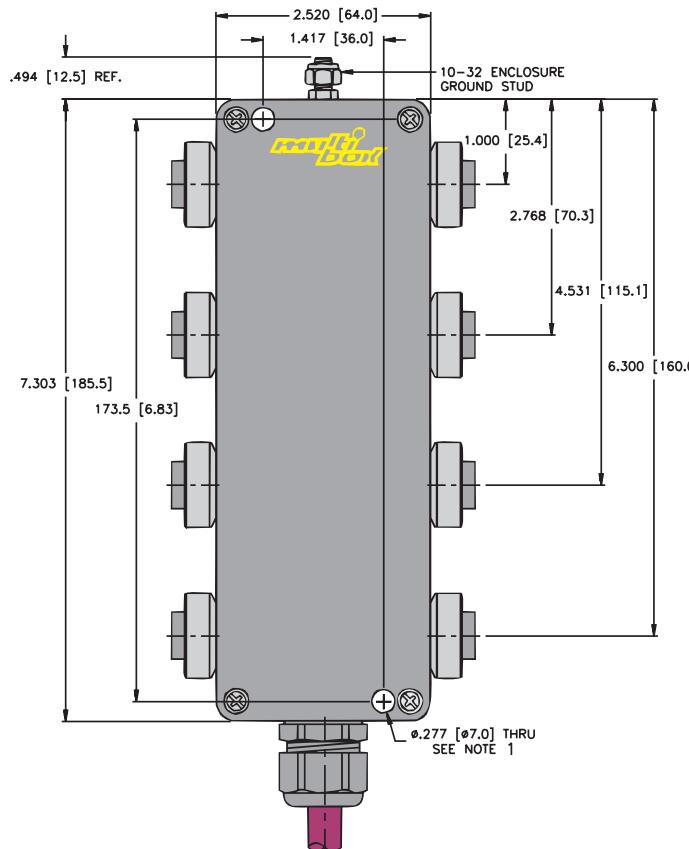

Notes:

1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

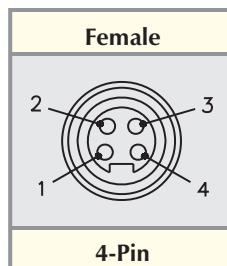


***multibox® minifast® Metal Junction Boxes w/Integral Home Run Cable***

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations or Unclassified Locations
- Blue Jacket Color may be used as Identification of Intrinsically Safe Circuits.



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
 "/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

***4-port, 1 Analog Signal Per Port, Common Ground and Shield***



Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
4-port cast aluminum junction box, <b>minifast</b> port connectors, integral home-run cable	Home-run cable with 4/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	Port, Pin	Wire Color	Port, Pin	Wire Color	P-4 RKF 40-978-*	P-4 RKVF 40-978-*
		Port 1, Pin 1 Port 1, Pin 2 Port 2, Pin 1 Port 2, Pin 2 Port 3, Pin 1	WH/BK BK/WH WH/GN GN/WH WH/RD	Port 3, Pin 2 Port 4, Pin 1 Port 4, Pin 2 Ports 1-4, Pin 3 Ports 1-4, Pin 4	RD/WH WH/OG OG/WH Drain GN/YE	P-4 RKF 40-978-*/C	P-4 RKVF 40-978-*/C

***8-port, 1 Analog Signal Per Port, Common Ground and Shield***

Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
8-port cast aluminum junction box, <b>minifast</b> port connectors, integral home-run cable	Home-run cable with 8/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	Port, Pin	Wire Color	Port, Pin	Wire Color	P-8 RKF 40-977-*	P-8 RKVF 40-977-*
		Port 1, Pin 1 Port 1, Pin 2 Port 2, Pin 1 Port 2, Pin 2 Port 3, Pin 1 Port 3, Pin 2 Port 4, Pin 1 Port 4, Pin 2 Port 5, Pin 1	WH/BK BK/WH WH/GN GN/WH WH/RD RD/WH WH/OG OG/WH WH/BU	Port 5, Pin 2 Port 6, Pin 1 Port 6, Pin 2 Port 7, Pin 1 Port 7, Pin 2 Port 8, Pin 1 Port 8, Pin 2 Ports 1-8, Pin 3 Ports 1-8, Pin 4	BU/WH WH/BN BN/WH WH/YE YE/WH WH/VT VT/WH Drain GN/YE	P-8 RKF 40-977-*/C	P-8 RKVF 40-977-*/C

\* Length in meters.

<sup>†</sup> Each circuit has dedicated drain wire not connected in the junction box.

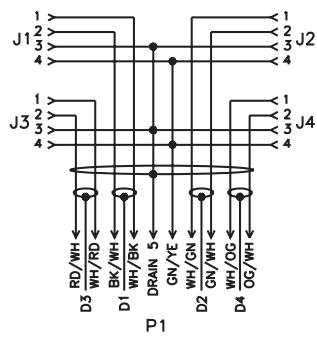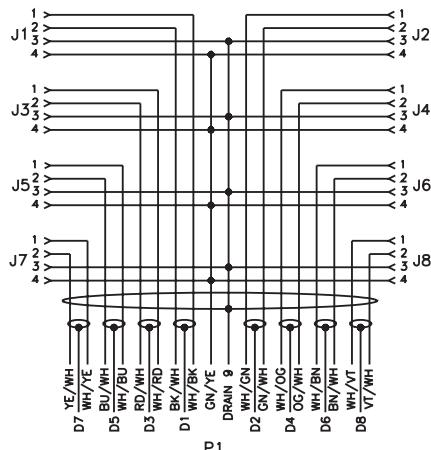
**Wiring Diagrams**
**4-Port Diagram**

**8-Port Diagram**


## Specifications


<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Cable:</b>	Blue PVC jacket, UL ITC/PLTC/AWM, CSA CMX-Outdoor/CMG/AWM FT4, 300 V, 105°C.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 300 V, 4 A per conductor (use as ITC is limited to 150 V, 3 A for 22 AWG conductors). "/C" Versions: 30 V, 600 mA

## Dimensions
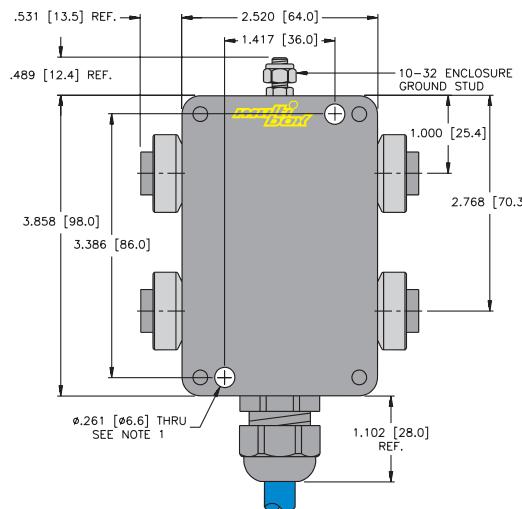
### 4-Port




### 8-Port

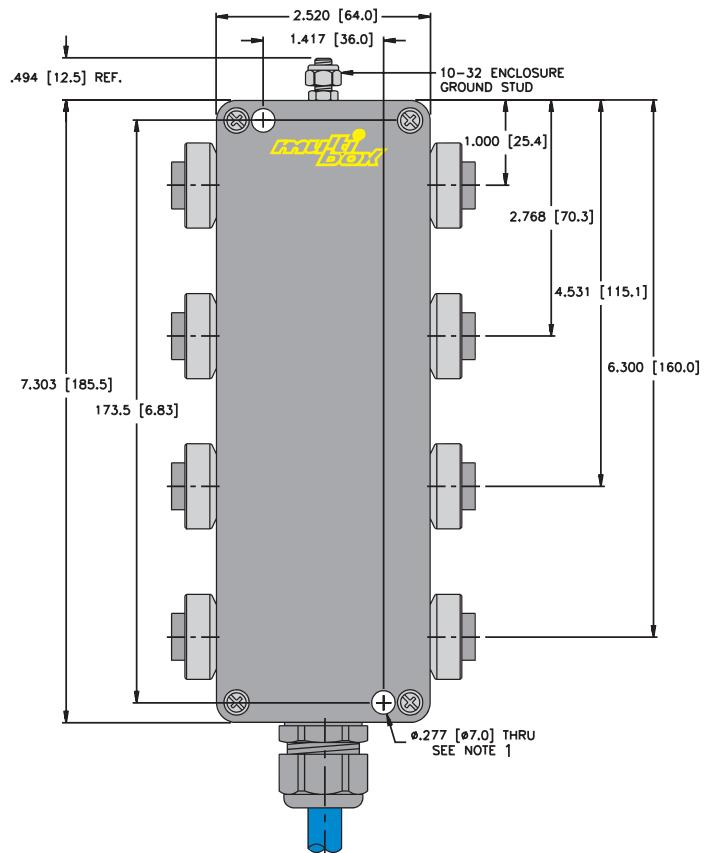

Notes:

1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

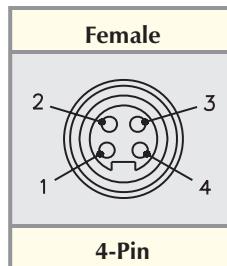



### multibox® minifast® Metal Junction Boxes

- Consolidation of 2-wire Analog or HART Control Circuits in Hazardous Locations\* or Unclassified Locations



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
"C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

#### 4-port, Common Ground and Shield

Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
4-port cast aluminum junction box, <b>minifast</b> port connectors, <b>multifast</b> home-run connector, 1 analog signal per port	12-pin <b>multifast</b> connector, 9 conductors plus drain	Port, Pin	Home Run	Port, Pin	Home Run	P-4 RKF 40-CS12	P-4 RKFV 40-CSV12
		Port 1, Pin 1	1	Port 4, Pin 1	7		
		Port 1, Pin 2	2	Port 4, Pin 2	8		
		Port 2, Pin 1	3	NC	9		
		Port 2, Pin 2	4	NC	10		
		Port 3, Pin 1	5	Ports 1-4, Pin 3	11		
		Port 3, Pin 2	6	Ports 1-4, Pin 4	12	P-4 RKF 40-CS12/C	P-4 RKFV 40-CSV12/C

See pages K85 - K92 for mating home run cordsets.

#### 8-port, Common Ground and Shield


Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
8-port cast aluminum junction box, <b>minifast</b> port connectors, <b>multifast</b> home-run connector, 1 analog signal per port	19-pin <b>multifast</b> connector, 17 conductors plus drain	Port, Pin	Home Run	Port, Pin	Home Run	P-8 RKF 40-CS19	P-8 RKFV 40-CSV19
		Port 1, Pin 1	1	Port 5, Pin 1	10		
		Port 1, Pin 2	2	Port 5, Pin 2	11		
		Port 2, Pin 1	3	Ports 1-8, Pin 4	12		
		Port 2, Pin 2	4	Port 6, Pin 1	13		
		Port 3, Pin 1	5	Port 6, Pin 2	14		
		Ports 1-8, Pin 3	6	Port 7, Pin 1	15		
		Port 3, Pin 2	7	Port 7, Pin 2	16		
		Port 4, Pin 1	8	Port 8, Pin 1	17		
		Port 4, Pin 2	9	Port 8, Pin 2	18	P-8 RKF 40-CS19/C	P-8 RKFV 40-CSV19/C
				NC	19		

\* Use with **lokfast** LOCK-MINI or LOCK-MINI-FW for port connectors in Class I, Division 2 applications and for mating Home-Run cable use "L" and "T" versions.


See pages K85 - K92 for mating home run cordsets.

### Wiring Diagrams

#### 4-Port Diagram, 1 Analog Signal Per Port

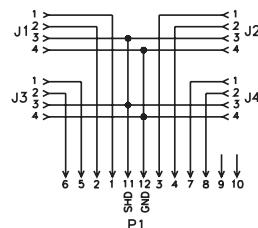

#### 8-Port Diagram, 1 Analog Signal Per Port

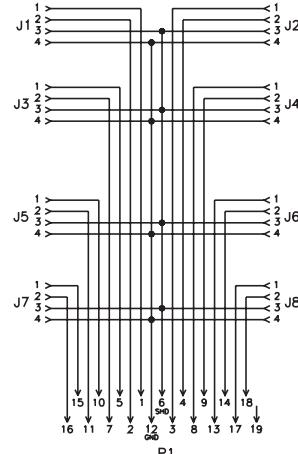


## Specifications


<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 12-pin: 300 V, 4 A per conductor. 19-pin: 150 V, 5 A per conductor. "/C" Versions: 30 V, 600 mA

## Dimensions

### 4-Port

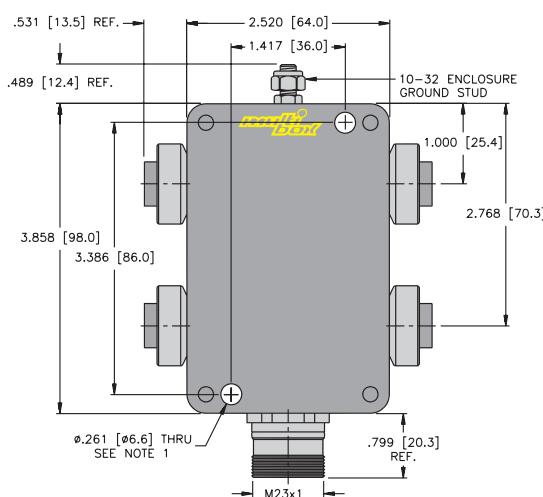

### 8-Port

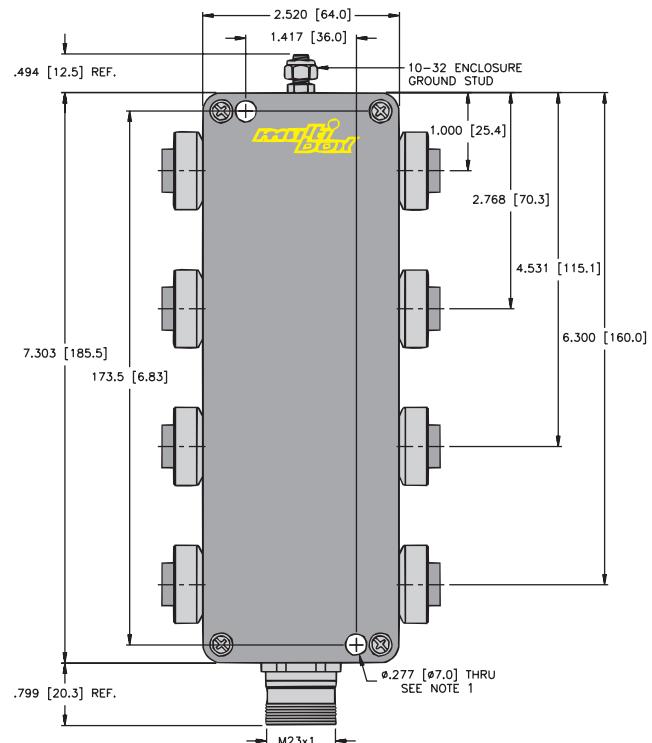

#### Notes:

1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

Female	Male	
	4-Pin minifast®	12-Pin multifast®
	12-Pin multifast®	19-Pin multifast®

**multifast® Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout
P-CKM ..	P-CKM 12-960-*	ITC/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 10 mm OD Cable #RF50960-*M†	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	
	P-CKM 12-229-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF51229-*M†		1. WH/BK 7. WH/OG 2. BK/WH 8. OG/WH 3. WH/GN 9. N/C 4. GN/WH 10. N/C 5. WH/RD 11. Drain 6. RD/WH 12. GN/YE
	P-CKM 12-415-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF5145-*M†		
	P-CKM 19-959-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12 mm OD Cable #RF50959-*M†		
	P-CKM 19-230-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.7 mm OD Cable #RF51230-*M†		1. WH/BK 11. BU/WH 2. BK/WH 12. GN/YE 3. WH/GN 13. WH/BN 4. GN/WH 14. BN/WH 5. WH/RD 15. WH/YE 6. Drain 16. YE/WH 7. RD/WH 17. WH/VT 8. WH/OG 18. VT/WH 9. OG/WH 19. N/C 10. WH/BU
	P-CKM 19-416-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.5 mm OD Cable #RF5146-*M†		

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CKM(L).."; "P-CKM(T)V.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## **multifast® Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout
P-CSM ..	P-CSM 12-960-*	ITC/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 10 mm OD Cable #RF50960-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	
	P-CSM 12-229-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF51229-*M <sup>†</sup>		1. WH/BK 7. WH/OG 2. BK/WH 8. OG/WH 3. WH/GN 9. N/C 4. GN/WH 10. N/C 5. WH/RD 11. Drain 6. RD/WH 12. GN/YE
	P-CSM 12-415-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF5145-*M <sup>†</sup>		
	P-CSM 19-959-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12 mm OD Cable #RF50959-*M <sup>†</sup>		
	P-CSM 19-230-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.7 mm OD Cable #RF51230-*M <sup>†</sup>		1. WH/BK 11. BU/WH 2. BK/WH 12. GN/YE 3. WH/GN 13. WH/BN 4. GN/WH 14. BN/WH 5. WH/RD 15. WH/YE 6. Drain 16. YE/WH 7. RD/WH 17. WH/VT 8. WH/OG 18. VT/WH 9. OG/WH 19. N/C 10. WH/BU
	P-CSM 19-416-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.5 mm OD Cable #RF5146-*M <sup>†</sup>		

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CSM(L).."; "P-CSM(T)V.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**multifast® Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Right Angle Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout
P-CKWM ..	P-CKWM 12-960-*	ITC/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 10 mm OD Cable #RF50960-*M <sup>†</sup>	Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	
	P-CKWM 12-229-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF51229-*M <sup>†</sup>		1. WH/BK 7. WH/OG 2. BK/WH 8. OG/WH 3. WH/GN 9. N/C 4. GN/WH 10. N/C 5. WH/RD 11. Drain 6. RD/WH 12. GN/YE
	P-CKWM 12-415-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF5145-*M <sup>†</sup>		
	P-CKWM 19-959-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12 mm OD Cable #RF50959-*M <sup>†</sup>		
	P-CKWM 19-230-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.7 mm OD Cable #RF51230-*M <sup>†</sup>		1. WH/BK 11. BU/WH 2. BK/WH 12. GN/YE 3. WH/GN 13. WH/BN 4. GN/WH 14. BN/WH 5. WH/RD 15. WH/YE 6. Drain 16. YE/WH 7. RD/WH 17. WH/VT 8. WH/OG 18. VT/WH 9. OG/WH 19. N/C 10. WH/BU
	P-CKWM 19-416-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.5 mm OD Cable #RF5146-*M <sup>†</sup>		

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CKWM(L).."; "P-CKWM(T)V.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## **multifast® Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout
P-CSWM ..	P-CSWM 12-960-*	ITC/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 10mm OD Cable #RF50960-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	
	P-CSWM 12-229-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6mm OD Cable #RF51229-*M <sup>†</sup>		1. WH/BK 7. WH/OG 2. BK/WH 8. OG/WH 3. WH/GN 9. N/C 4. GN/WH 10. N/C 5. WH/RD 11. Drain 6. RD/WH 12. GN/YE
	P-CSWM 12-415-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF5145-*M <sup>†</sup>		
	P-CSWM 19-959-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12mm OD Cable #RF50959-*M <sup>†</sup>		
	P-CSWM 19-230-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.7mm OD Cable #RF51230-*M <sup>†</sup>		1. WH/BK 11. BU/WH 2. BK/WH 12. GN/YE 3. WH/GN 13. WH/BN 4. GN/WH 14. BN/WH 5. WH/RD 15. WH/YE 6. Drain 16. YE/WH 7. RD/WH 17. WH/VT 8. WH/OG 18. VT/WH 9. OG/WH 19. N/C 10. WH/BU
	P-CSWM 19-416-*	CSA CIC/CMX-Outdoor-CM UL ITC/PLTC PUR Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.5 mm OD Cable #RF5146-*M <sup>†</sup>		

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CSWM(L).."; "P-CSWM(T)V.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See **TURCK** Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

***multifast®* Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Female Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout	
P-CKM ..	P-CKM 12-978-*	ITC/PLTC PVC Blue 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 10 mm OD 250 V, 4 A Cable #RF50978-*M†	<i>Multiple 2-wire Intrinsically Safe analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH	7. WH/OG 8. OG/WH 9. N/C 10. N/C 11. Drain 12. GN/YE
	P-CKM 19-977-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 12 mm OD 150 V, 2 A Cable #RF50977-*M†		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. Drain 7. RD/WH 8. WH/OG 9. OG/WH 10. WH/BU	11. BU/WH 12. GN/YE 13. WH/BN 14. BN/WH 15. WH/YE 16. YE/WH 17. WH/VT 18. VT/WH 19. N/C 10. WH/BU

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CKWM.."; "P-CKWMV.." indicates 316 stainless steel.

† See pages K236 - K244 for *reelfast®* cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## **multifast® Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Straight Male Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout																				
P-CSM ..	P-CSM 12-978-*	ITC/PLTC PVC Blue 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 10 mm OD 250 V, 4 A Cable #RF50978-*M <sup>†</sup>	<i>Multiple 2-wire Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	<table> <tbody> <tr> <td>1. WH/BK</td> <td>7. WH/OG</td> </tr> <tr> <td>2. BK/WH</td> <td>8. OG/WH</td> </tr> <tr> <td>3. WH/GN</td> <td>9. N/C</td> </tr> <tr> <td>4. GN/WH</td> <td>10. N/C</td> </tr> <tr> <td>5. WH/RD</td> <td>11. Drain</td> </tr> <tr> <td>6. RD/WH</td> <td>12. GN/YE</td> </tr> </tbody> </table>	1. WH/BK	7. WH/OG	2. BK/WH	8. OG/WH	3. WH/GN	9. N/C	4. GN/WH	10. N/C	5. WH/RD	11. Drain	6. RD/WH	12. GN/YE								
1. WH/BK	7. WH/OG																							
2. BK/WH	8. OG/WH																							
3. WH/GN	9. N/C																							
4. GN/WH	10. N/C																							
5. WH/RD	11. Drain																							
6. RD/WH	12. GN/YE																							
	P-CSM 19-977-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 12 mm OD 150 V, 2 A Cable #RF50977-*M <sup>†</sup>		<table> <tbody> <tr> <td>1. WH/BK</td> <td>11. BU/WH</td> </tr> <tr> <td>2. BK/WH</td> <td>12. GN/YE</td> </tr> <tr> <td>3. WH/GN</td> <td>13. WH/BN</td> </tr> <tr> <td>4. GN/WH</td> <td>14. BN/WH</td> </tr> <tr> <td>5. WH/RD</td> <td>15. WH/YE</td> </tr> <tr> <td>6. Drain</td> <td>16. YE/WH</td> </tr> <tr> <td>7. RD/WH</td> <td>17. WH/VT</td> </tr> <tr> <td>8. WH/OG</td> <td>18. VT/WH</td> </tr> <tr> <td>9. OG/WH</td> <td>19. N/C</td> </tr> <tr> <td>10. WH/BU</td> <td></td> </tr> </tbody> </table>	1. WH/BK	11. BU/WH	2. BK/WH	12. GN/YE	3. WH/GN	13. WH/BN	4. GN/WH	14. BN/WH	5. WH/RD	15. WH/YE	6. Drain	16. YE/WH	7. RD/WH	17. WH/VT	8. WH/OG	18. VT/WH	9. OG/WH	19. N/C	10. WH/BU	
1. WH/BK	11. BU/WH																							
2. BK/WH	12. GN/YE																							
3. WH/GN	13. WH/BN																							
4. GN/WH	14. BN/WH																							
5. WH/RD	15. WH/YE																							
6. Drain	16. YE/WH																							
7. RD/WH	17. WH/VT																							
8. WH/OG	18. VT/WH																							
9. OG/WH	19. N/C																							
10. WH/BU																								

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CSWM.."; "P-CSWMV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

***multifast®*** Home Run Cordsets, 2-Wire Analog or HART Control Circuits

- Right Angle Female Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout	
<b>P-CKWM ..</b>  	P-CKWM 12-978-*	ITC/PLTC PVC Blue 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 10 mm OD 250 V, 4 A Cable #RF50978-*M <sup>†</sup>	<i>Multiple 2-wire Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH	7. WH/OG 8. OG/WH 9. N/C 10. N/C 11. Drain 12. GN/YE
	P-CKWM 19-977-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 12 mm OD 150 V, 2 A Cable #RF50977-*M <sup>†</sup>		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. Drain 7. RD/WH 8. WH/OG 9. OG/WH 10. WH/BU	11. BU/WH 12. GN/YE 13. WH/BN 14. BN/WH 15. WH/YE 16. YE/WH 17. WH/VT 18. VT/WH 19. N/C 10. WH/BU

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CKWM.."; "P-CKWMV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## **multifast® Home Run Cordsets, 2-Wire Analog or HART Control Circuits**

- Right Angle Male Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout																				
P-CSWM ..	P-CSWM 12-978-*	ITC/PLTC PVC Blue 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 10 mm OD 250 V, 4 A Cable #RF50978-*M <sup>†</sup>	<i>Multiple 2-wire Intrinsically Safe Analog or HART control circuits in Class I, Division 1 hazardous locations.</i>	<table> <tbody> <tr> <td>1. WH/BK</td> <td>7. WH/OG</td> </tr> <tr> <td>2. BK/WH</td> <td>8. OG/WH</td> </tr> <tr> <td>3. WH/GN</td> <td>9. N/C</td> </tr> <tr> <td>4. GN/WH</td> <td>10. N/C</td> </tr> <tr> <td>5. WH/RD</td> <td>11. Drain</td> </tr> <tr> <td>6. RD/WH</td> <td>12. GN/YE</td> </tr> </tbody> </table>	1. WH/BK	7. WH/OG	2. BK/WH	8. OG/WH	3. WH/GN	9. N/C	4. GN/WH	10. N/C	5. WH/RD	11. Drain	6. RD/WH	12. GN/YE								
1. WH/BK	7. WH/OG																							
2. BK/WH	8. OG/WH																							
3. WH/GN	9. N/C																							
4. GN/WH	10. N/C																							
5. WH/RD	11. Drain																							
6. RD/WH	12. GN/YE																							
	P-CSWM 19-977-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 12 mm OD 150 V, 2 A Cable #RF50977-*M <sup>†</sup>		<table> <tbody> <tr> <td>1. WH/BK</td> <td>11. BU/WH</td> </tr> <tr> <td>2. BK/WH</td> <td>12. GN/YE</td> </tr> <tr> <td>3. WH/GN</td> <td>13. WH/BN</td> </tr> <tr> <td>4. GN/WH</td> <td>14. BN/WH</td> </tr> <tr> <td>5. WH/RD</td> <td>15. WH/YE</td> </tr> <tr> <td>6. Drain</td> <td>16. YE/WH</td> </tr> <tr> <td>7. RD/WH</td> <td>17. WH/VT</td> </tr> <tr> <td>8. WH/OG</td> <td>18. VT/WH</td> </tr> <tr> <td>9. OG/WH</td> <td>19. N/C</td> </tr> <tr> <td>10. WH/BU</td> <td></td> </tr> </tbody> </table>	1. WH/BK	11. BU/WH	2. BK/WH	12. GN/YE	3. WH/GN	13. WH/BN	4. GN/WH	14. BN/WH	5. WH/RD	15. WH/YE	6. Drain	16. YE/WH	7. RD/WH	17. WH/VT	8. WH/OG	18. VT/WH	9. OG/WH	19. N/C	10. WH/BU	
1. WH/BK	11. BU/WH																							
2. BK/WH	12. GN/YE																							
3. WH/GN	13. WH/BN																							
4. GN/WH	14. BN/WH																							
5. WH/RD	15. WH/YE																							
6. Drain	16. YE/WH																							
7. RD/WH	17. WH/VT																							
8. WH/OG	18. VT/WH																							
9. OG/WH	19. N/C																							
10. WH/BU																								

\* Length in meters. Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-CSWM.."; "P-CSWMV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**multifast® Home Run Receptacles with Cable, 2-Wire Analog or HART Control Circuits**

- Female Receptacles
  - NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout
P-CKFL ..	P-CKFL 12-960-*	ITC/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 10 mm OD Cable #RF50960-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH/BK 7. WH/OG 2. BK/WH 8. OG/WH 3. WH/GN 9. N/C 4. GN/WH 10. N/C 5. WH/RD 11. Drain 6. RD/WH 12. GN/YE
	P-CKFL 12-229-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF51229-*M <sup>†</sup>		
	P-CKFL 19-959-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12mm OD Cable #RF50959-*M <sup>†</sup>		1. WH/BK 11. BU/WH 2. BK/WH 12. GN/YE 3. WH/GN 13. WH/BN 4. GN/WH 14. BN/WH 5. WH/RD 15. WH/YE 6. Drain 16. YE/WH 7. RD/WH 17. WH/VT 8. WH/OG 18. VT/WH 9. OG/WH 19. N/C 10. WH/BU
	P-CKFL 19-230-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.7 mm OD Cable #RF51230-*M <sup>†</sup>		

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.


Standard housing material is nickel plated brass "P-CKFL.."; "P-CKFLV.." indicates 316 stainless steel.

\*\* Use with "T" or "L" cordsets for Class I, Division 2 applications.

<sup>+</sup> See pages K236 - K244 for **reelfast**® cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## Dimensions

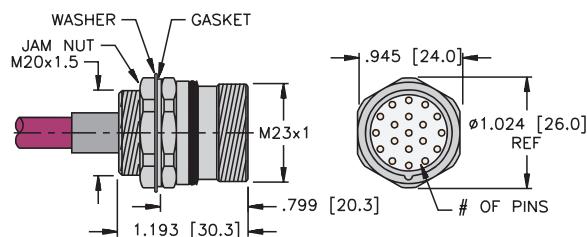

## multifast® Home Run Receptacles with Cable, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Application	Pinout
P-CSFL ..	P-CSFL 12-960-*	ITC/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 10 mm OD Cable #RF50960-*M <sup>†</sup>	<i>Analog or HART control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH/BK    7. WH/OG 2. BK/WH    8. OG/WH 3. WH/GN    9. N/C 4. GN/WH    10. N/C 5. WH/RD    11. Drain 6. RD/WH    12. GN/YE
	P-CSFL 12-229-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 8x22 AWG, 4 STP with GND Foil/Drain (22) 105°C 250 V, 4 A 9.6 mm OD Cable #RF51229-*M <sup>†</sup>		
	P-CSFL 19-959-*	ITC/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12 mm OD Cable #RF50959-*M <sup>†</sup>		1. WH/BK    11. BU/WH 2. BK/WH    12. GN/YE 3. WH/GN    13. WH/BN 4. GN/WH    14. BN/WH 5. WH/RD    15. WH/YE 6. Drain    16. YE/WH 7. RD/WH    17. WH/VT 8. WH/OG    18. VT/WH 9. OG/WH    19. N/C 10. WH/BU
	P-CSFL 19-230-*	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 16x22 AWG, 8 STP with GND Foil/Drain (22) 105°C 150 V, 2 A 12.7 mm OD Cable #RF51230-*M <sup>†</sup>		


\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-CSFL.."; "P-CSFLV.." indicates 316 stainless steel.

\*\* Use with "T" or "L" cordsets for Class I, Division 2 applications.

† See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## Dimensions

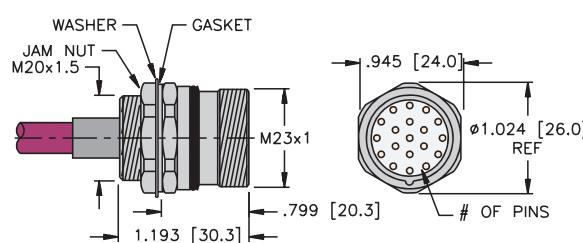

***multifast® Home Run Receptacles with Leads, 2-Wire Analog or HART Control Circuits***

- Female Receptacles
- IEC IP 67 Protection




Housing Style	Part Number	Lead Specs	Features	Pinout																		
P-CKFL ..	P-CKFL 12-*	UL, CSA 10x22 AWG 105°C 300 V, 6 A	<i>Multiple 2-wire analog or HART control circuits in hazardous locations or unclassified locations.</i>	<table> <tr><td>1. WH/BK</td><td>7. WH/OG</td></tr> <tr><td>2. BK/WH</td><td>8. OG/WH</td></tr> <tr><td>3. WH/GN</td><td>9. N/C</td></tr> <tr><td>4. GN/WH</td><td>10. N/C</td></tr> <tr><td>5. WH/RD</td><td>11. GY</td></tr> <tr><td>6. RD/WH</td><td>12. GN/YE</td></tr> </table>	1. WH/BK	7. WH/OG	2. BK/WH	8. OG/WH	3. WH/GN	9. N/C	4. GN/WH	10. N/C	5. WH/RD	11. GY	6. RD/WH	12. GN/YE						
1. WH/BK	7. WH/OG																					
2. BK/WH	8. OG/WH																					
3. WH/GN	9. N/C																					
4. GN/WH	10. N/C																					
5. WH/RD	11. GY																					
6. RD/WH	12. GN/YE																					
P-CKFL 19-*	UL, CSA 18x22 AWG 105°C 150 V, 2 A	<table> <tr><td>1. WH/BK</td><td>11. BU/WH</td></tr> <tr><td>2. BK/WH</td><td>12. GN/YE</td></tr> <tr><td>3. WH/GN</td><td>13. WH/BN</td></tr> <tr><td>4. GN/WH</td><td>14. BN/WH</td></tr> <tr><td>5. WH/RD</td><td>15. WH/YE</td></tr> <tr><td>6. GY</td><td>16. YE/WH</td></tr> <tr><td>7. RD/WH</td><td>17. WH/VT</td></tr> <tr><td>8. WH/OG</td><td>18. VT/WH</td></tr> <tr><td>9. OG/WH</td><td>19. N/C</td></tr> <tr><td>10. WH/BU</td><td></td></tr> </table>	1. WH/BK	11. BU/WH	2. BK/WH	12. GN/YE	3. WH/GN	13. WH/BN	4. GN/WH	14. BN/WH	5. WH/RD	15. WH/YE	6. GY	16. YE/WH	7. RD/WH	17. WH/VT	8. WH/OG	18. VT/WH	9. OG/WH	19. N/C	10. WH/BU	
1. WH/BK	11. BU/WH																					
2. BK/WH	12. GN/YE																					
3. WH/GN	13. WH/BN																					
4. GN/WH	14. BN/WH																					
5. WH/RD	15. WH/YE																					
6. GY	16. YE/WH																					
7. RD/WH	17. WH/VT																					
8. WH/OG	18. VT/WH																					
9. OG/WH	19. N/C																					
10. WH/BU																						

\* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-CKFL.."; "P-CKFLV.." indicates 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

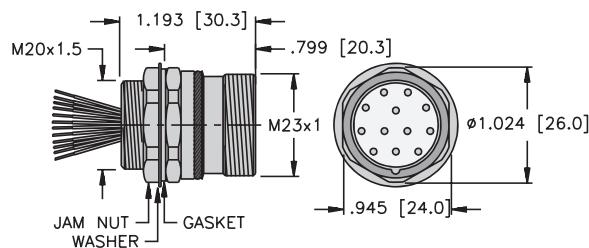**Dimensions**

## **multifast® Home Run Receptacles with Leads, 2-Wire Analog or HART Control Circuits**

- Male Receptacles
- IEC IP 67 Protection




Housing Style	Part Number	Lead Specs	Features	Pinout	
<b>P-CSFL ..</b>  	P-CSFL 12-*	UL, CSA 10x22 AWG 105°C 300 V, 6 A	<i>Multiple 2-wire analog or HART control circuits in hazardous locations or unclassified locations.</i>	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH	7. WH/OG 8. OG/WH 9. N/C 10. N/C 11. GY 12. GN/YE
	P-CSFL 19-*	UL, CSA 18x22 AWG 105°C 150 V, 2 A		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. GY 7. RD/WH 8. WH/OG 9. OG/WH 10. WH/BU	11. BU/WH 12. GN/YE 13. WH/BN 14. BN/WH 15. WH/YE 16. YE/WH 17. WH/VT 18. VT/WH 19. N/C 10. WH/BU

\* Length in meters. Standard lead length is 1 meter. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-CSFL.."; "P-CSFLV.." indicates 316 stainless steel.

Note: See **TURCK** Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## **Dimensions**

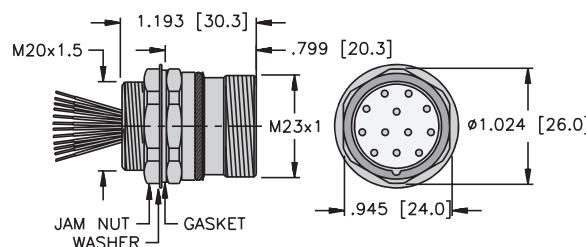

## Additional Analog or Discrete Control Circuits Selection Guide



M12 eurofast® Thread	Drop Cordsets	Receptacles with Cable	Receptacles with Leads	Junction Boxes
Pages	K101 - K104	K105 - K108	K109 - K112	K113 - K116




7/8", 1, & 1-1/8" minifast® Thread	Drop Cordsets	Receptacles with Cable	Receptacles with Leads	Explosionproof Receptacles	"Y" Fitting Receptacles	Junction Boxes
Pages	K121 - K128	K129 - K142	K144 - K160	K161 - K168	K169 - K170	K171 - K172



M23 multifast® Thread	Home Run Cordsets
Pages	K173 - K174


## eurofast® Cordset Part Number Key, Additional Analog or Discrete Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

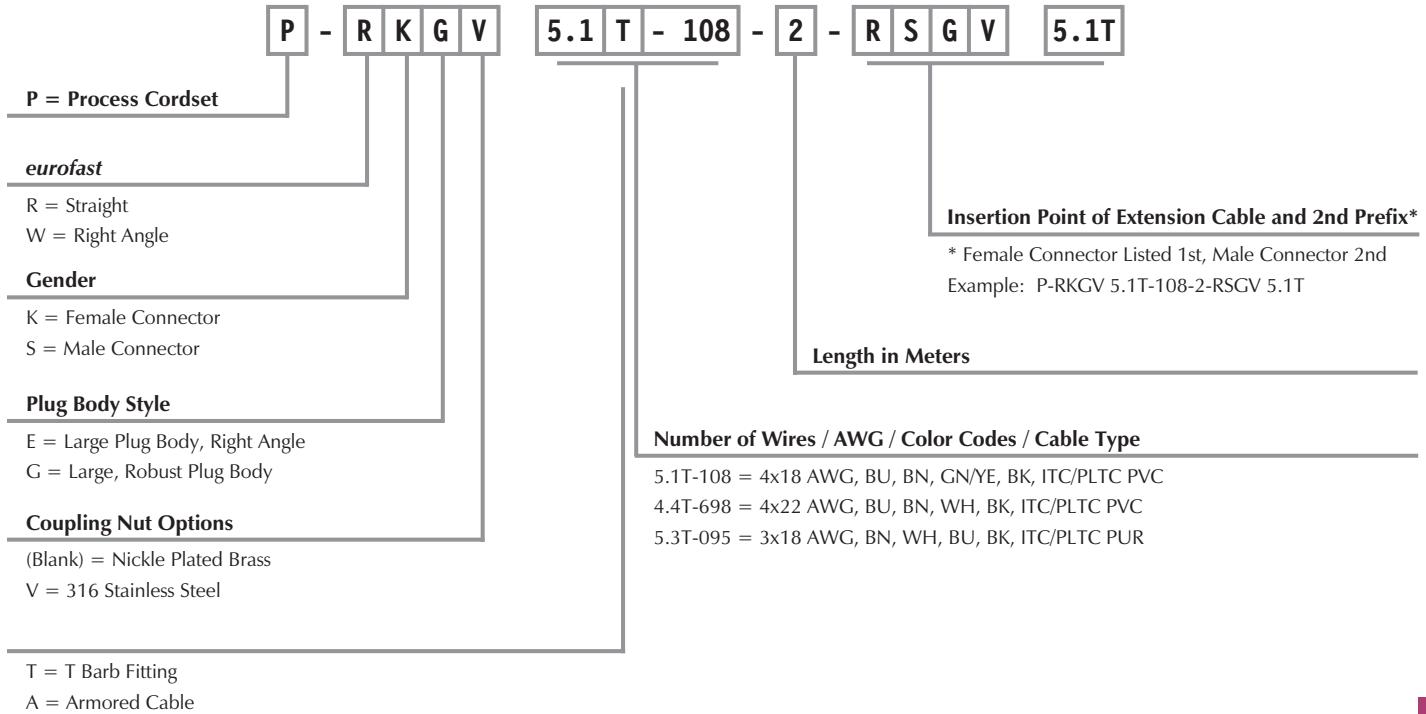

**Single Ended Example:**


P - R K G V 5.1 T - 108 - 2

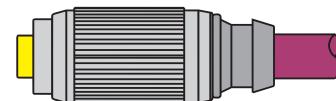


RKGV ..

**Extension Example:**

P - R K G 5.1 T - 108 - 2 - R S G 5.1 T

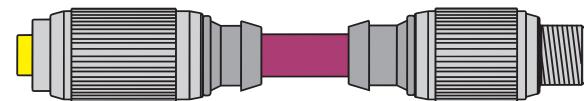


RKG .. - RSG ..

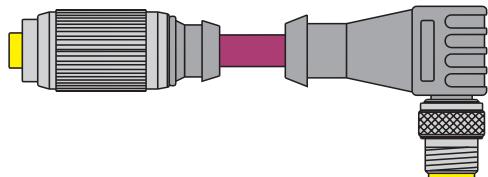**eurofast® Cordset Part Number Key, Additional Analog or Discrete Control Circuits****Other Extension Examples:**


P - R K G    5.1 T - 108 - 2 - W S E    5.1 T

RKG .. - WSE ..

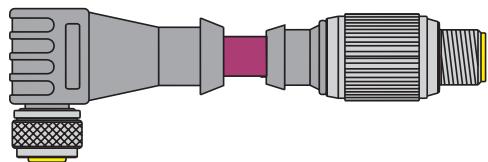

P - W K E    5.1 T - 108 - 2 - R S G    5.1 T

WKE .. - RSG ..

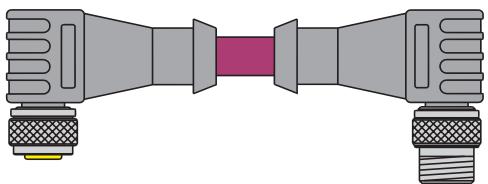

P - W K E    5.1 T - 108 - 2 - W S E    5.1 T

WKE .. - WSE ..


Note: Hybrid connector extensions also available. Consult factory.

# Process Automation




## eurofast® Receptacle w/Cable Part Number Key, Additional Analog or Discrete Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

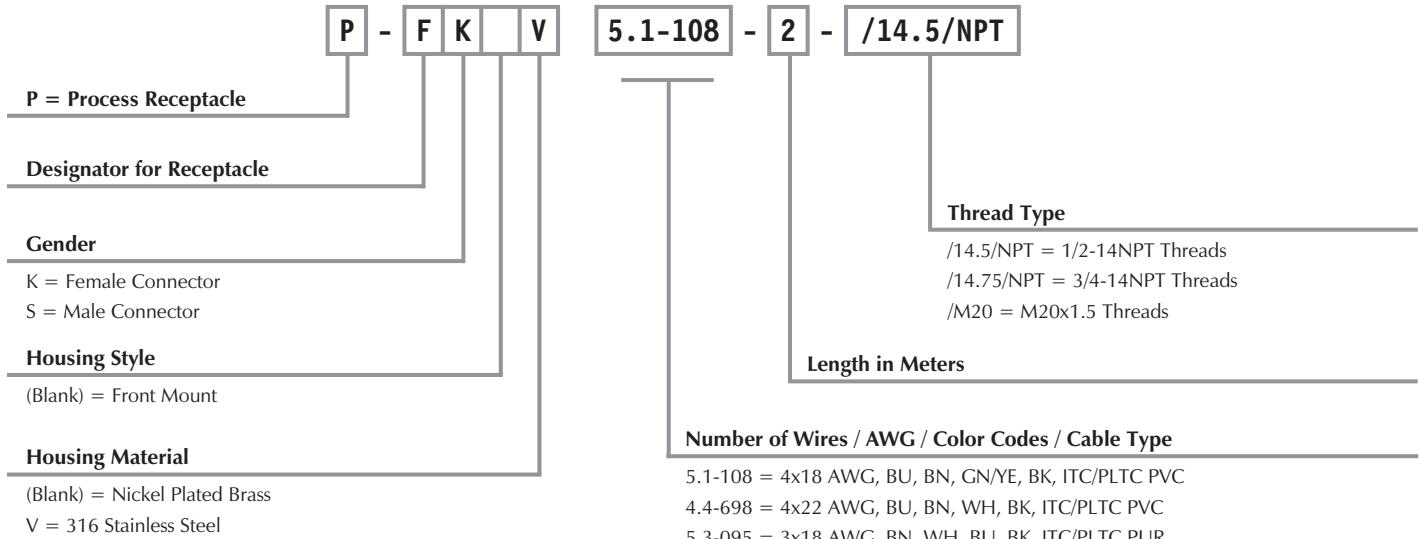

## eurofast Receptacle with Leads Part Number Key, Additional Analog or Discrete Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

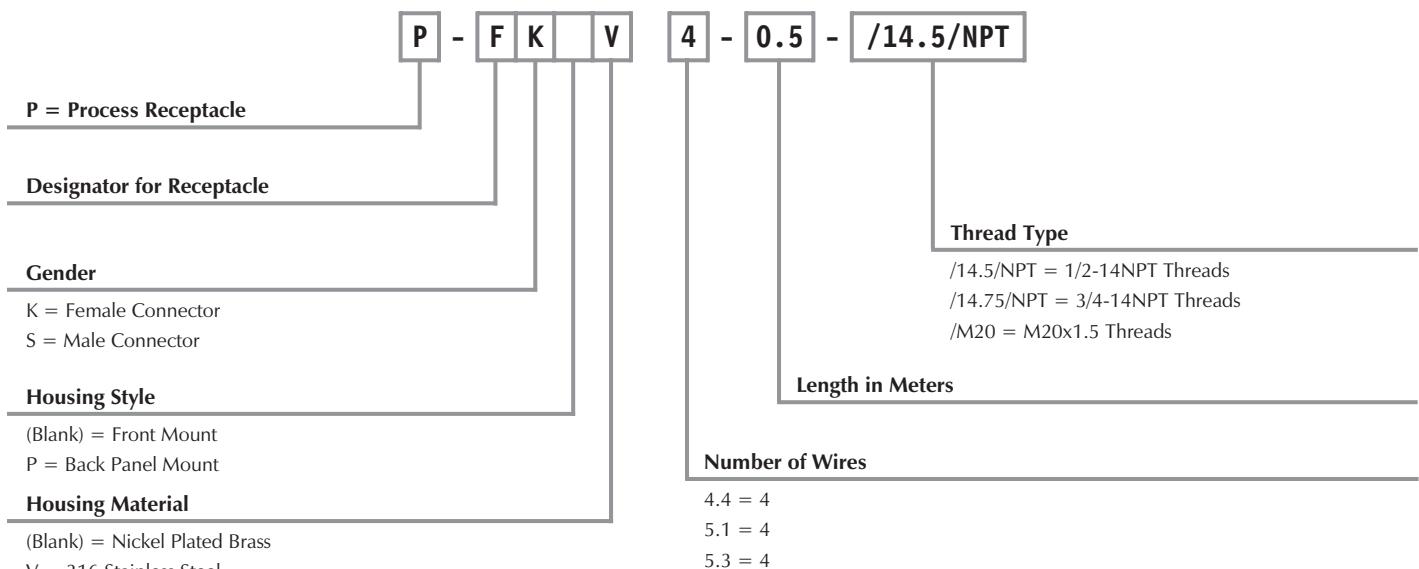

**eurofast® Drop Cordsets, Additional Analog or Discrete Control Circuits**

- Straight Female Connectors
- IEC IP 68 Protection
- 250 V, 4 A (Use as ITC Limited to 150 V, 3 A for 22 AWG Conductors)



Housing Style	Part Number	Cable	Features	Pinout
 P-RKG ..	P-RKG 4.4T-698-*	ITC/PLTC PVC Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50698-*M†	<i>4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. WH 4. BK
	P-RKG 5.1T-108-*	ITC/PLTC PVC Plum 4x18 AWG, 1 Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M†	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. BK 5. GN/YE
	P-RKG 5.3T-095-*	ITC/PLTC PUR Black 4x22 AWG Foil/Drain (22) 105°C 6.8 mm OD Cable #RF51095-*M†	<i>4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BN 2. WH 3. BU 4. BK 5. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RKG .."; "P-RKGV .." indicates 316 stainless steel.

\*\* Use with **lokfast eurofast** guards (part number: LOCK-EURO-G) in Class I, Division 2 applications.

† See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Drop Cordsets, Additional Analog or Discrete Control Circuits

- Straight Male Connectors
- IEC IP 68 Protection
- 250 V, 4 A (Use as ITC Limited to 150 V, 3 A for 22 AWG Conductors)



Housing Style	Part Number	Cable	Features	Pinout	
 <b>P-RSG ..</b>	P-RSG 4.4T-698-*	ITC/PLTC PVC Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50698-*M <sup>†</sup>	<i>4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. WH 4. BK	
	P-RSG 5.1T-108-*	ITC/PLTC PVC Plum 4x18 AWG, 1 Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. BK 5. GN/YE	
	P-RSG 5.3T-095-*	ITC/PLTC PUR Black 4x22 AWG Foil/Drain (22) 105°C 6.8 mm OD Cable #RF51095-*M <sup>†</sup>	<i>4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BN 2. WH 3. BU 4. BK 5. Drain	

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSG .."; "P-RSGV .." indicates 316 stainless steel.

\*\* Use with **lokfast eurofast** guards (part number: LOCK-EURO-G) in Class I, Division 2 applications.

† See pages K236 - K244 for **reelfast**® cable information.

Note: See **TURCK** Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**eurofast® Drop Cordsets, Additional Analog or Discrete Control Circuits**

- Right Angle Female Connectors
- IEC IP 68 Protection
- 250 V, 4 A (Use as ITC Limited to 150 V, 3 A for 22 AWG Conductors)



Housing Style	Part Number	Cable	Features	Pinout
<b>P-WKE ..</b> 	P-WKE 4.4T-698-*	ITC/PLTC PVC Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50698-*M <sup>†</sup>	<i>4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. WH 4. BK
	P-WKE 5.1T-108-*	ITC/PLTC PVC Plum 4x18 AWG, 1 Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. Drain 4. BK 5. GN/YE
	P-WKE 5.3T-095-*	ITC/PLTC PUR Black 4x22 AWG Foil/Drain (22) 105°C 6.8 mm OD Cable #RF51095-*M <sup>†</sup>	<i>4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BN 2. WH 3. BU 4. BK 5. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WKE .."; "P-WKEV .." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Drop Cordsets, Additional Analog or Discrete Control Circuits

- Right Angle Male Connectors
- IEC IP 68 Protection
- 250 V, 4 A (Use as ITC Limited to 150 V, 3 A for 22 AWG Conductors)









Housing Style	Part Number	Cable	Features	Pinout
P-WSE ..	P-WSE 4.4T-698-*	ITC/PLTC PVC Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50698-*M†	4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BU 2. BN 3. WH 4. BK
	P-WSE 5.1T-108-*	ITC/PLTC PVC Plum 4x18 AWG, 1 Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M†	Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BU 2. BN 3. Drain 4. BK 5. GN/YE
	P-WSE 5.3T-095-*	ITC/PLTC PUR Black 4x22 AWG Foil/Drain (22) 105°C 6.8 mm OD Cable #RF51095-*M†	4-wire RTD control circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BN 2. WH 3. BU 4. BK 5. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WSE .."; "P-WSEV .." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

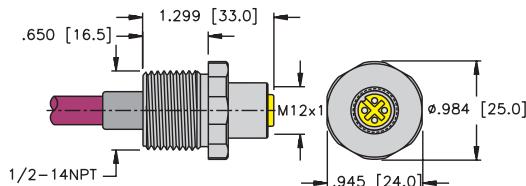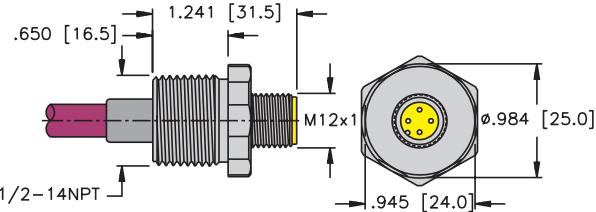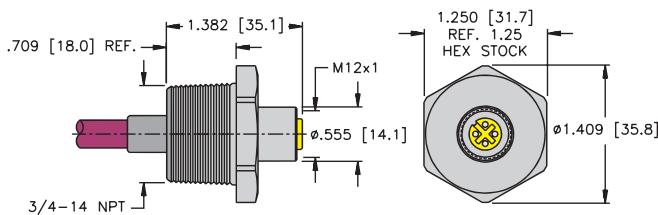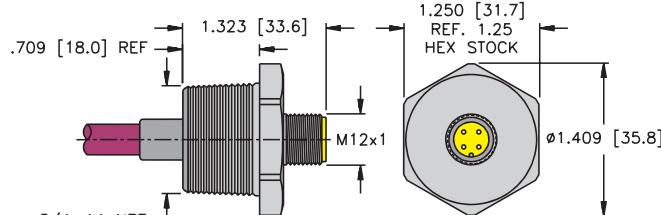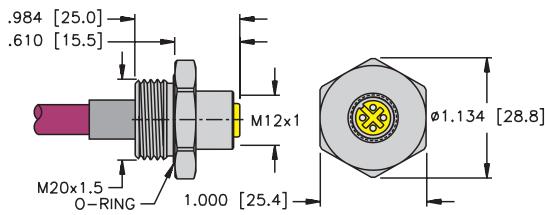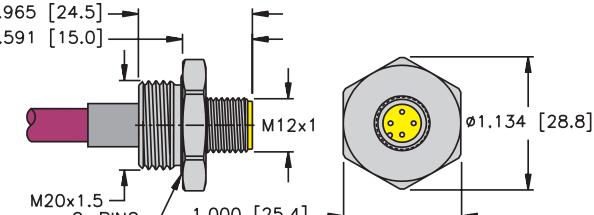**eurofast® Receptacles with Cable, Additional Analog or Discrete Control Circuits****1****P-FK .. 14.5/NPT****2****P-FS .. 14.5/NPT****Pages K106 - K108****3****P-FK .. 14.75/NPT****Pages K106 - K108****4****Pages K106 - K108****5****P-FK .. M20****Pages K106 - K108****6****Pages K106 - K108**

## eurofast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Male and Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(Use as ITC Limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
1	P-FK 5.1-108-* /14.5/NPT		<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> 1/2-14NPT Threads.	
2	P-FS 5.1-108-* /14.5/NPT		<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> 1/2-14NPT Threads.	
3	P-FK 5.1-108-* /14.75/NPT	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> 3/4-14NPT Threads.	
4	P-FS 5.1-108-* /14.75/NPT		<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> 3/4-14NPT Threads.	
5	P-FK 5.1-108-* /M20		<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> M20 Threads.	
6	P-FS 5.1-108-* /M20		<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> M20 Threads.	

See page K105 for dimensional drawings.

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-FK(S).."; "P-FK(S)V.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20. 1-1/16" (27.0 mm) for 3/4-14NPT.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

**eurofast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Male and Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(Use as ITC Limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
1	P-FK 4.4-698-* /14.5/NPT		4-wire RTD control circuits in Class I, Division 2 hazardous locations or unclassified locations. 1/2-14NPT Threads.	
2	P-FS 4.4-698-* /14.5/NPT			
3	P-FK 4.4-698-* /14.75/NPT	ITC/PLTC PVC Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50698-*M†	4-wire RTD control circuits in Class I, Division 2 hazardous locations or unclassified locations. 3/4-14NPT Threads.	
4	P-FS 4.4-698-* /14.75/NPT			
5	P-FK 4.4-698-* /M20		4-wire RTD control circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Threads.	
6	P-FS 4.4-698-* /M20			

\* See page K105 for dimensional drawings.

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-FK(S).."; "P-FK(S)V.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20. 1-1/16" (27.0 mm) for 3/4-14NPT.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

† See pages K236 - K244 for **reelfast®** cable information.

## eurofast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Male and Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A  
(Use as ITC Limited to 150 V)



Housing Style	Part Number	Cable	Application	Pinout
1	P-FK 5.3-095-* /14.5/NPT		4-wire RTD control circuits in Class I, Division 2 hazardous locations or unclassified locations. 1/2-14NPT Threads.	
2	P-FS 5.3-095-* /14.5/NPT			
3	P-FK 5.3-095-* /14.75/NPT	ITC/PLTC PUR Black 4x22 AWG Foil/Drain (22) 105°C 6.8 mm OD Cable #RF51095-*M <sup>†</sup>	4-wire RTD control circuits in Class I, Division 2 hazardous locations or unclassified locations. 3/4-14NPT Threads.	
4	P-FS 5.3-095-* /14.75/NPT			
5	P-FK 5.3-095-* /M20		4-wire RTD control circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Threads.	
6	P-FS 5.3-095-* /M20			

See page K105 for dimensional drawings.







\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-FK(S).."; "P-FK(S)V.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20. 1-1/16" (27.0 mm) for 3/4-14NPT.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

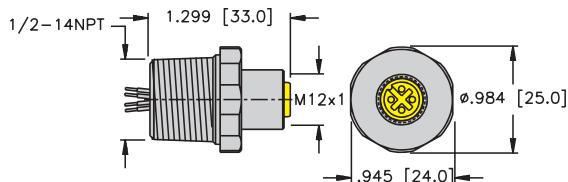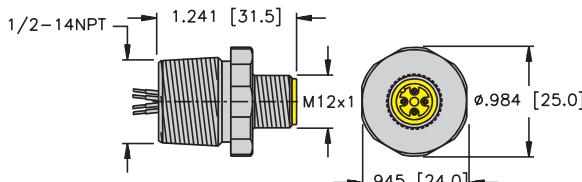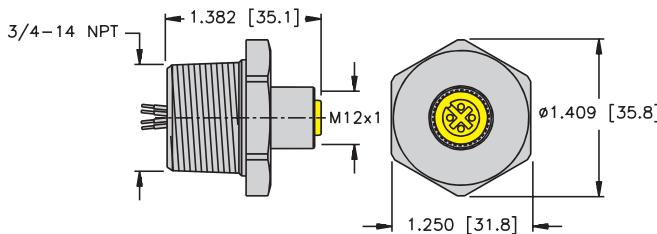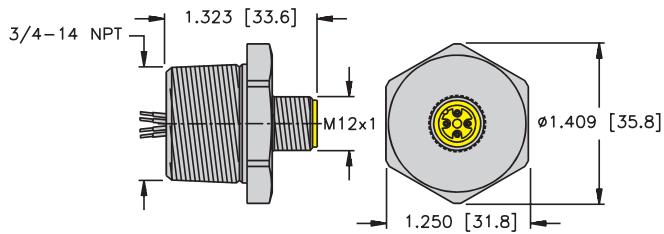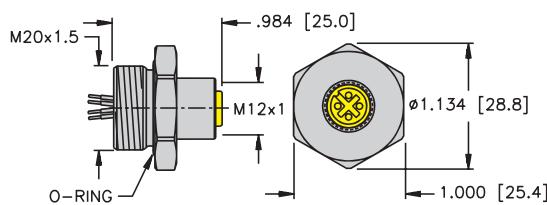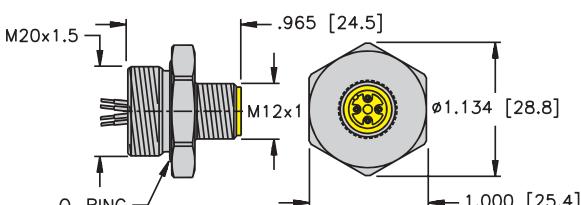**eurofast® Receptacles with Leads, Additional Analog or Discrete Control Circuits****1****P-FK .. 14.5/NPT****2****P-FS .. 14.5/NPT****Pages K110 - K112****3****P-FK .. 14.75/NPT****Pages K110 - K112****4****Pages K110 - K112****5****P-FK .. M20****Pages K110 - K112****6****Pages K110 - K112**

## eurofast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Male and Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A



Housing Style	Part Number	Cable	Application	Pinout
1	P-FK 5.1-* /14.5/NPT			
2	P-FS 5.1-* /14.5/NPT		1/2-14NPT Threads	
3	P-FK 5.1-* /14.75/NPT	UL, CSA 4x18 AWG 105°C	3/4-14NPT Threads	 1. BU 2. BN 3. N/C 4. BK 5. GN/YE
4	P-FS 5.1-* /14.75/NPT			
5	P-FK 5.1-* /M20			
6	P-FS 5.1-* /M20		M20 Threads	

**See page K109 for dimensional drawings.**

- \* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.
- Standard housing material is nickel plated brass "P-FK(S).."; "P-FK(S)V.." indicates 316 stainless steel.
- Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20. 1-1/16" (27.0 mm) for 3/4-14NPT.
- Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**eurofast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Male and Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A



Housing Style	Part Number	Cable	Application	Pinout
1	P-FK 4.4-* /14.5/NPT			
2	P-FS 4.4-* /14.5/NPT		1/2-14NPT Threads	
3	P-FK 4.4-* /14.75/NPT	UL, CSA 4x22 AWG 105°C	3/4-14NPT Threads	
4	P-FS 4.4-* /14.75/NPT			
5	P-FK 4.4-* /M20			
6	P-FS 4.4-* /M20		M20 Threads	

\* See page K109 for dimensional drawings.

\* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-FK(S).."; "P-FK(S)V.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20. 1-1/16" (27.0 mm) for 3/4-14NPT.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## eurofast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Male and Female Receptacles
- IEC IP 68 Protection
- 250 V, 4 A



Housing Style	Part Number	Cable	Application	Pinout
1	P-FK 5.3-* /14.5/NPT			
2	P-FS 5.3-* /14.5/NPT		1/2-14NPT Threads	
3	P-FK 5.3-* /14.75/NPT	UL, CSA 4x22 AWG 105°C	3/4-14NPT Threads	 1. BU 2. WH 3. BU 4. BK 5. N/C
4	P-FS 5.3-* /14.75/NPT			
5	P-FK 5.3-* /M20		M20 Threads	
6	P-FS 5.3-* /M20			

See page K109 for dimensional drawings.

- \* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.
- Standard housing material is nickel plated brass "P-FK(S).."; "P-FK(S)V.." indicates 316 stainless steel.
- Receptacles recommend 13/16" (21.0 mm) hole for panel mounting. 1/2-14NPT and M20. 1-1/16" (27.0 mm) for 3/4-14NPT.
- Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.


**multibox® eurofast® Metal Junction Boxes w/Integral Home Run Cable**

- Consolidation of Analog or Discrete Circuits in Hazardous Locations or Unclassified Locations
- Blue Jacket Color may be used as Identification of Intrinsically Safe Circuits



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.

"C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.

**4-port, 1 Analog Signal Per Port, Common Ground and Shield**



Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
4-port cast aluminum junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 4/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 10.0 mm OD	Port, Pin	Wire Color	Port, Pin	Wire Color	P-VBM 40-978-*	P-VBMV 40-978-*
		Port 1, Pin 1	WH/BK	Port 3, Pin 2	RD/WH	P-VBM 40-978-*/C	P-VBMV 40-978-*/C
		Port 1, Pin 2	BK/WH	Port 4, Pin 1	WH/OG		
		Port 2, Pin 1	WH/GN	Port 4, Pin 2	OG/WH		
		Port 2, Pin 2	GN/WH	Ports 1-4, Pin 3	Drain		
		Port 3, Pin 1	WH/RD	Ports 1-4, Pin 4	GN/YE		

**8-port, 1 Analog Signal Per Port, Common Ground and Shield**

Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
8-port cast aluminum junction box, <b>eurofast</b> port connectors, integral home-run cable	Home-run cable with 8/22 AWG shielded twisted pairs, each with 22 AWG drain <sup>†</sup> , plus overall shield with 22 AWG drain and 18 AWG overall ground, 12.0 mm OD	Port, Pin	Wire Color	Port, Pin	Wire Color	P-VBM 80-977-*	P-VBMV 80-977-*
		Port 1, Pin 1	WH/BK	Port 6, Pin 1	WH/BN	P-VBM 80-977-*/C	P-VBMV 80-977-*/C
		Port 1, Pin 2	BK/WH	Port 6, Pin 2	BN/WH		
		Port 2, Pin 1	WH/GN	Port 7, Pin 1	WH/YE		
		Port 2, Pin 2	GN/WH	Port 7, Pin 2	YE/WH		
		Port 3, Pin 1	WH/RD	Port 8, Pin 1	WH/VT		
		Port 3, Pin 2	RD/WH	Port 8, Pin 2	VT/WH		
		Port 4, Pin 1	WH/OG	Ports 1-8, Pin 3	Drain		
		Port 4, Pin 2	OG/WH	Ports 1-8, Pin 4	GN/YE		
		Port 5, Pin 1	WH/BU				
		Port 5, Pin 2	BU/WH				

\* Length in meters.

<sup>†</sup> Each circuit has dedicated drain wire not connected in the junction box.

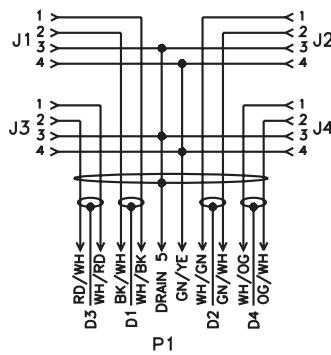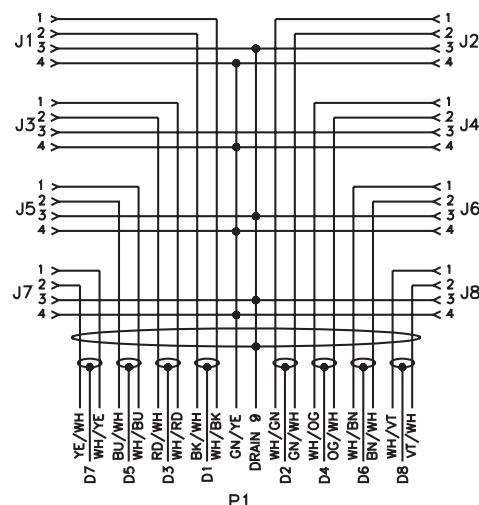
**Wiring Diagrams**
**4-Port**

**8-Port**


## Specifications


<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 68.
<b>Cable:</b>	Blue PVC jacket, UL ITC/PLTC/AWM, CSA CMX-Outdoor/CMG/AWM FT4, 300 V, 105°C.
<b>Electrical Rating:</b>	Standard Version: 250 V, 4 A per conductor (use as ITC is limited to 150 V, 3 A for 22 AWG conductors). "/C" Versions: 30 V, 600 mA

## Dimensions
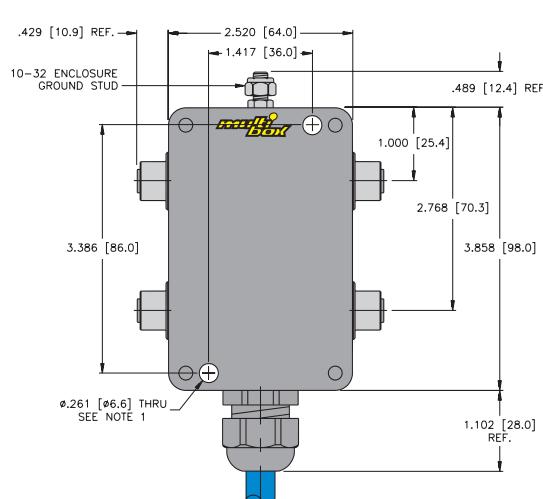
### 4-Port




### 8-Port

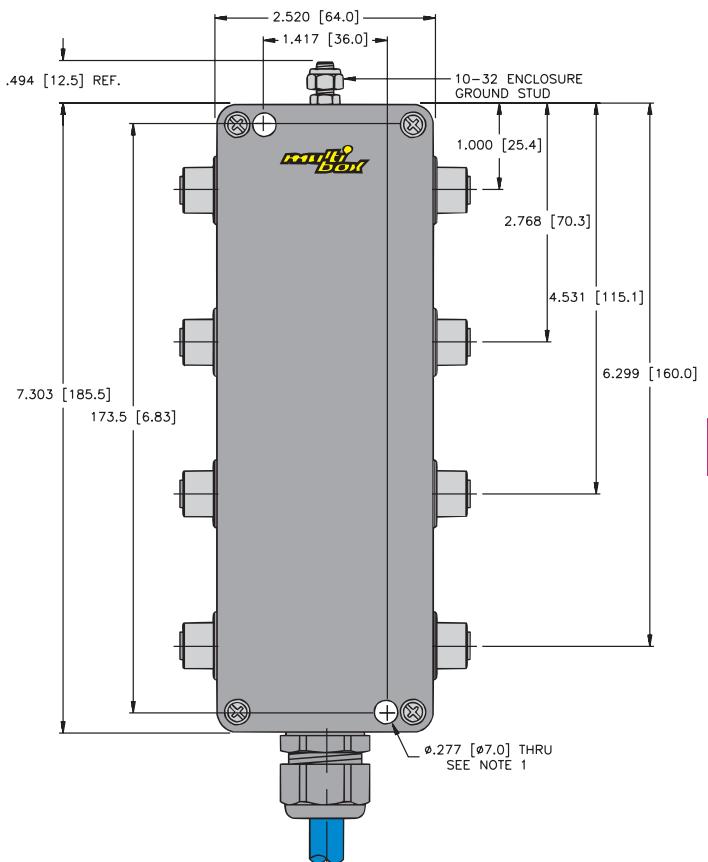

#### Notes:

1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

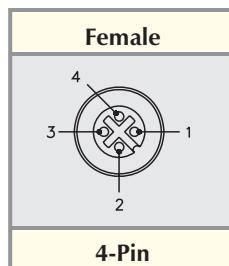



### multibox® eurofast® Metal Junction Boxes

- Consolidation of Analog or Discrete Circuits in Hazardous Locations\*\* or Unclassified Locations



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.


#### 8-port, Common Ground and Shield

Application	Specifications	Pinout	Nickel Plated Brass	Stainless Steel																												
8-port cast aluminum junction box, <b>eurofast</b> port connectors, <b>multifast</b> home-run connector, 1 discrete signal per port	12-pin <b>multifast</b> connector	<table> <thead> <tr> <th>Port, Pin</th> <th>Home-Run</th> <th>Port, Pin</th> <th>Home-Run</th> </tr> </thead> <tbody> <tr> <td>V+</td> <td>1</td> <td>Port 4, Pin 4</td> <td>7</td> </tr> <tr> <td>NC</td> <td>2</td> <td>Port 5, Pin 4</td> <td>8</td> </tr> <tr> <td>V-</td> <td>3</td> <td>Port 6, Pin 4</td> <td>9</td> </tr> <tr> <td>Port 1, Pin 4</td> <td>4</td> <td>Port 7, Pin 4</td> <td>10</td> </tr> <tr> <td>Port 2, Pin 4</td> <td>5</td> <td>Port 8, Pin 4</td> <td>11</td> </tr> <tr> <td>Port 3, Pin 4</td> <td>6</td> <td>Ports 1-8, Pin 5</td> <td>12</td> </tr> </tbody> </table>	Port, Pin	Home-Run	Port, Pin	Home-Run	V+	1	Port 4, Pin 4	7	NC	2	Port 5, Pin 4	8	V-	3	Port 6, Pin 4	9	Port 1, Pin 4	4	Port 7, Pin 4	10	Port 2, Pin 4	5	Port 8, Pin 4	11	Port 3, Pin 4	6	Ports 1-8, Pin 5	12	P-VBM 84-CS12	P-VBMV 84-CSV12
Port, Pin	Home-Run	Port, Pin	Home-Run																													
V+	1	Port 4, Pin 4	7																													
NC	2	Port 5, Pin 4	8																													
V-	3	Port 6, Pin 4	9																													
Port 1, Pin 4	4	Port 7, Pin 4	10																													
Port 2, Pin 4	5	Port 8, Pin 4	11																													
Port 3, Pin 4	6	Ports 1-8, Pin 5	12																													
	P-VBM 84-CS12/C	P-VBMV 84-CSV12/C																														

\*\* Use with **lokfast** LOCK-EURO-G for port connectors in Class I, Division 2 applications and for mating Home-Run cable use "L" and "T" versions  
See page K173 for mating home run cable.

### Wiring Diagram

#### 8-Port Diagram, 1 Discrete Signal Per Port

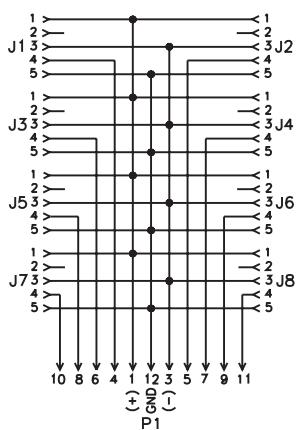


## Specifications

<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 150 V, 4 A per conductor. "/C" Versions: 30 V, 600 mA

## Dimensions

### 4-Port

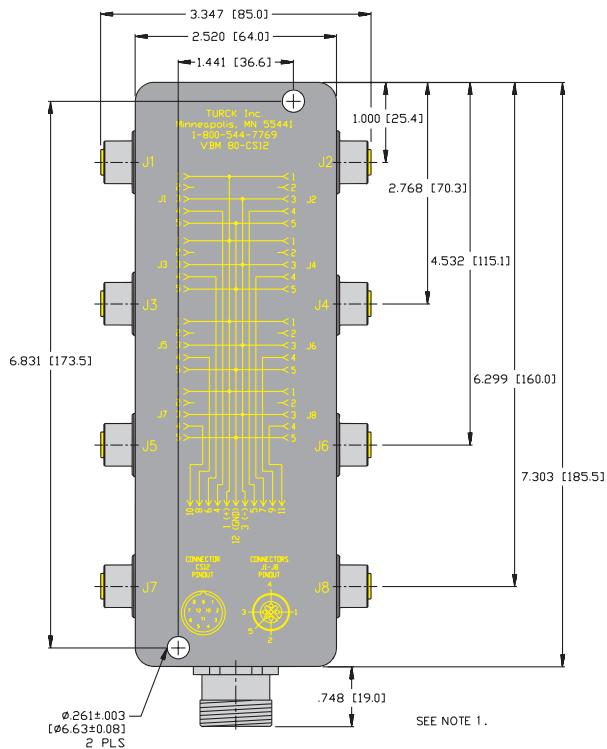

#### Notes:


1. Clearance hole for 1/4-20 mounting screws (2 not included).

## Pinouts

Female	Male
4-Pin eurofast®	12-Pin multifast®


**minifast® Cordset Part Number Key, Additional Analog or Discrete Control Circuits**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

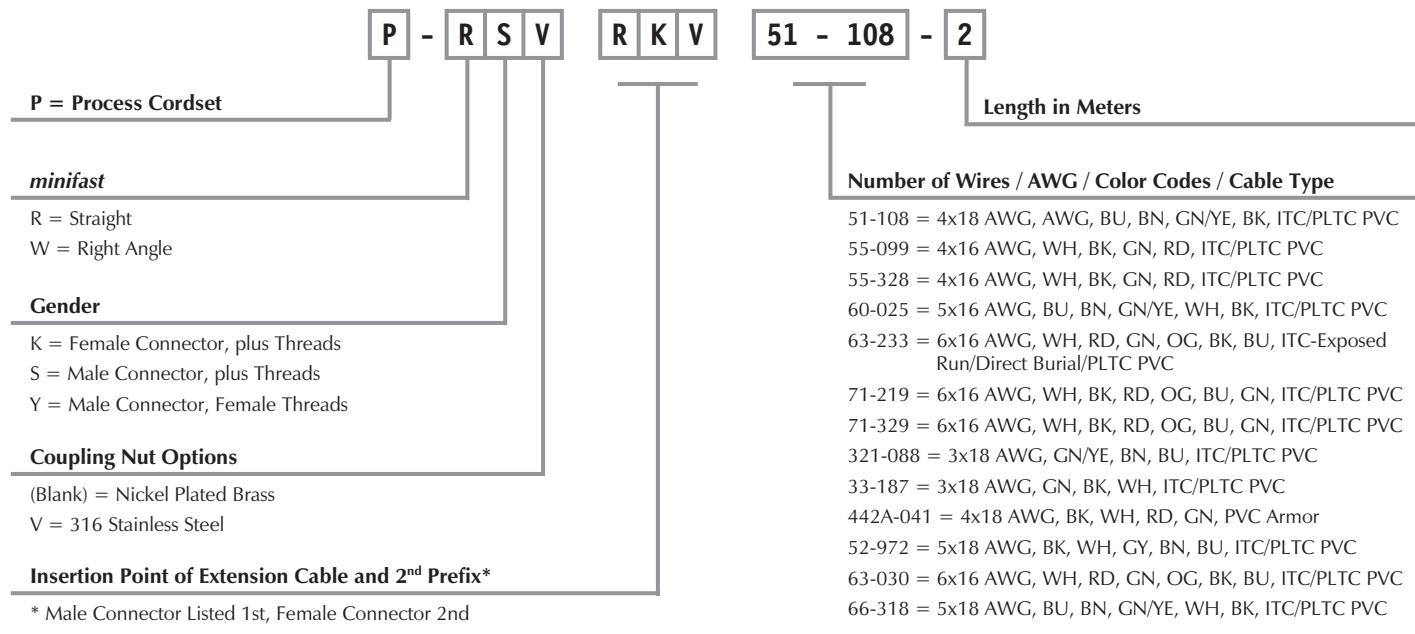

**Single Ended Example:**


**P - R S V      51- 108 - 2M**

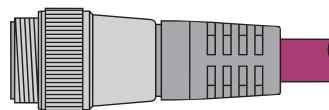

**RSV ..**

**Extension Example:**


**P - R S V      R K V      51- 108 - 2M**

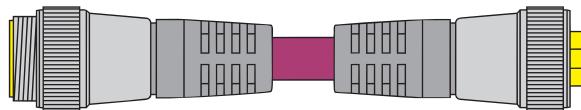

**RSV .. - RKV ..**


***minifast®* Cordset Part Number Key, Additional Analog or Discrete Control Circuits**

**Other Extension Examples:**

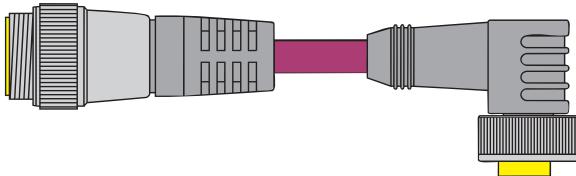


P - R S V    W K V    51 - 108 - 2M

**RSV .. - WKV ..**

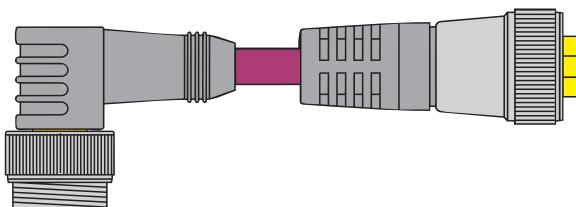

P - W S V    R K V    51 - 108 - 2M

**WSV .. - RKV ..**

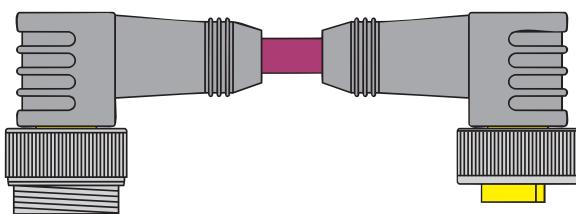


P - W S V    W K V    51 - 108 - 2M

**WSV .. - WKV ..**

Note: Hybrid connector extensions also available. Consult factory.


***minifast® Receptacles with Cable Part Number Key, Additional Analog or Discrete Control Circuits***

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

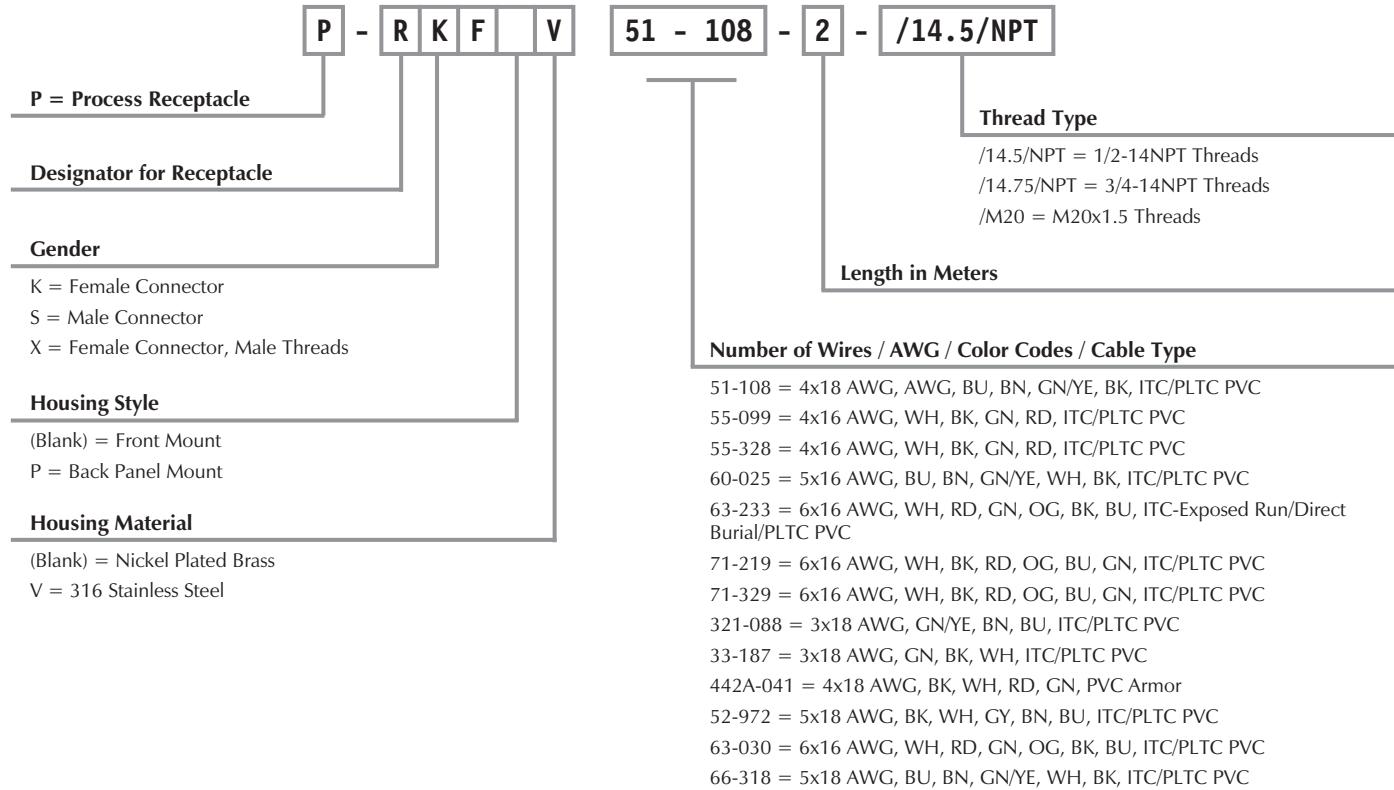

## minifast® Receptacles with Leads Part Number Key, Additional Analog or Discrete Control Circuits

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

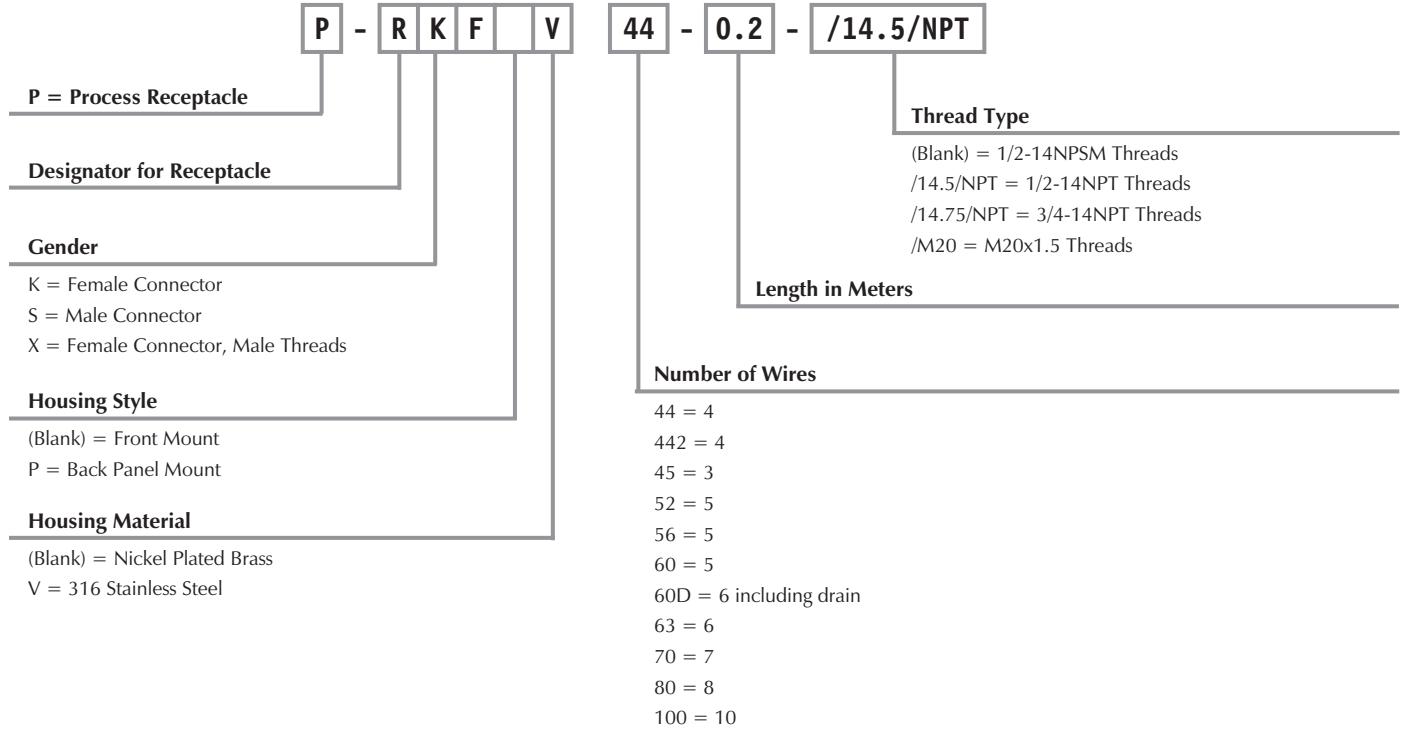

**minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits**

- Straight Female Connectors

- IEC IP 67 Protection

- 300 V, 9 A

(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
P-RKM ..	P-RKM 321-880-*M	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. GN/YE 2. BN 3. BU
	P-RKM 33-187-*M	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>		1. GN 2. BK 3. WH
	P-RKM 442A-041-*M	ITC/PLTC ARMOR PVC Yellow 4x18 AWG 105°C 13.5 mm OD Cable #RF51041-*M <sup>†</sup>		1. BK 2. WH 3. RD 4. GN
	P-RKM 51-108-*M	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>		1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RKM 52-972-*M	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKM 55-099-*M	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>		1. WH 2. BK 3. GN 4. RD 5. Drain
P-RKM 442A-041 ..	P-RKM 55-328-*M	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RKM.."; "P-RKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits

- Straight Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
P-RKM ..	P-RKM 60-025-*M	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power or signal circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. CN/YE 4. WH 5. BK 6. Drain
	P-RKM 63-030-*M	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKM 63-233-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKM 66-318-*M	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>		1. BU 2. BN 3. CN/YE 4. WH 5. BK 6. Drain
P-RKM ..	P-RKM 71-219-*M	ITC/PLTC PVC Plum 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RKM 71-329-*M	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RKM.."; "P-RKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI + LOCK-MINI-B&C) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits**

- Straight Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
P-RSM ..	P-RSM 321-880-*M	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M†	Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.	1. GN/YE 2. BN 3. BU
	P-RSM 33-187-*M	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M†		1. GN/YE 2. BN 3. BU
	P-RSM 442A-041-*M	ITC/PLTC ARMOR PVC Yellow 4x18 AWG 105°C 13.5 mm OD Cable #RF51041-*M†		1. BK 2. WH 3. RD 4. GN
	P-RSM 51-108-*M	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M†		1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RSM 52-972-*M	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M†		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSM 55-099-*M	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M†		1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RSM 55-328-*M	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M†	Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.	

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSM.."; "P-RSV.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits

- Straight Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
<b>P-RSM ..</b> 	P-RSM 60-025-*M	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power or signal circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. CN/YE 4. WH 5. BK 6. Drain
	P-RSM 63-030-*M	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSM 63-233-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSM 66-318-*M	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>		1. BU 2. BN 3. CN/YE 4. WH 5. BK 6. Drain
<b>P-RSM ..</b> 	P-RSM 71-219-*M	ITC/PLTC PVC Plum 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.</i>	1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RSM 71-329-*M	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-RSM.."; "P-RSV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI + LOCK-MINI-B&C) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits**

- Right Angle Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
P-WKM ..	P-WKM 321-880-*M	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M†	Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.	1. GN/YE 2. BN 3. BU
	P-WKM 33-187-*M	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M†		1. GN 2. BK 3. WH
	P-WKM 51-108-*M	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M†	Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-WKM 52-972-*M	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M†	Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.	1. BK 2. WH 3. GY 4. BN 5. BU
	P-WKM 55-099-*M	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M†	Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-WKM 55-328-*M	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M†		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WKM.."; "P-WKV.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits

- Right Angle Female Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
P-WKM ..	P-WKM 60-025-*M	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power or signal circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-WKM 63-030-*M	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-WKM 63-233-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-WKM 66-318-*M	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
P-WKM ..	P-WKM 71-219-*M	ITC/PLTC PVC Plum 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-WKM 71-329-*M	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WKM.."; "P-WKV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE + LOCK-MINI-B&C-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits**

- Right Angle Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)

Housing Style	Part Number	Cable	Application	Pinouts
P-WSM ..	P-WSM 321-880-*M	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. GN/YE 2. BN 3. BU
	P-WSM 33-187-*M	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>		1. GN 2. BK 3. WH
	P-WSM 51-108-*M	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-WSM 52-972-*M	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-WSM 55-099-*M	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>	<i>Discrete or Analog 3-wire circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-WSM 55-328-*M	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "P-WSM..", "P-WSV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Drop Cordsets, Additional Analog or Discrete Control Circuits

- Right Angle Male Connectors
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



FM tested to the cable sealing requirements of NEC Article 501-5(E)(2)







Housing Style	Part Number	Cable	Application	Pinouts
P-WSM ..	P-WSM 60-025-*M	ITC/PLTC PVC Plum 5x16 AWG, 1 STP Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power or signal circuits in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-WSM 63-030-*M	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-WSM 63-233-*M	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-WSM 66-318-*M	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
P-WSM ..	P-WSM 71-219-*M	ITC/PLTC PVC Plum 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-WSM 71-329-*M	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "P-WSM.."; "P-WSV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.


\*\* Use with **lokfast minifast** guards (Part Number: LOCK-MINI-ANGLE + LOCK-MINI-B&C-ANGLE) in Class I, Division 2 applications.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

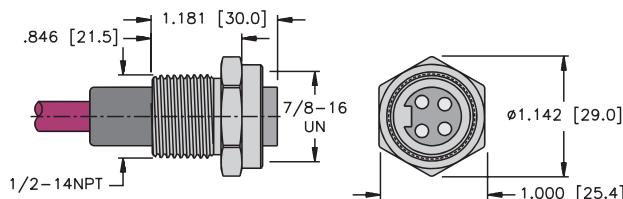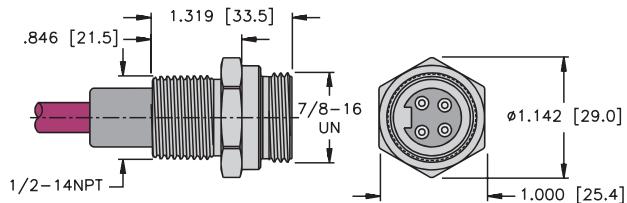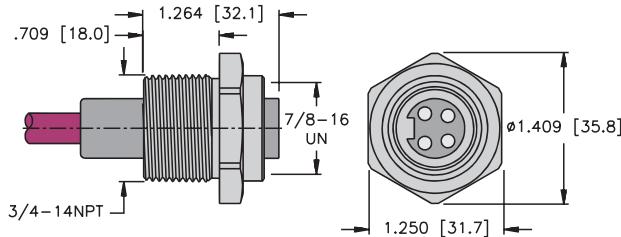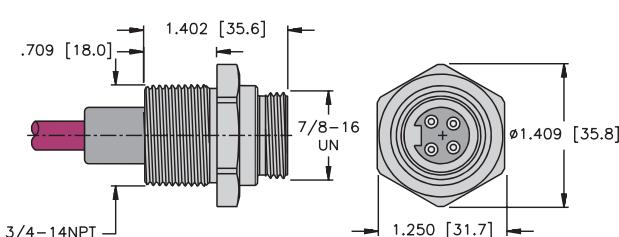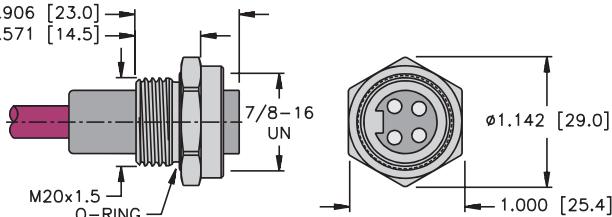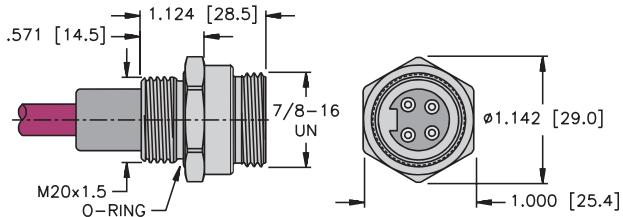***minifast®* Receptacles with Cable, Additional Analog or Discrete Control Circuits****1****P-RKF .. 14.5/NPT****2****P-RSF .. 14.5/NPT****Pages K133 - K134****3****P-RKF .. 14.75/NPT****Pages K136 - K136****4****Pages K137 - K138****5****P-RKF .. M20****Pages K139 - K140****6****Pages K141 - K142**


**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

**7**

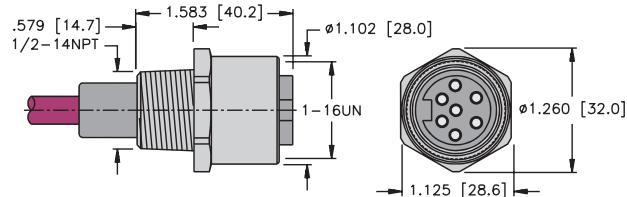

"B" Style P-RKF .. 14.5/NPT


**8**

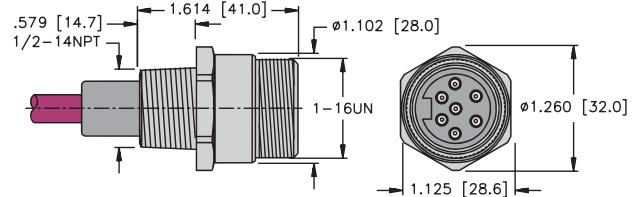

"B" Style P-RSF .. 14.5/NPT

Page K134


**9**

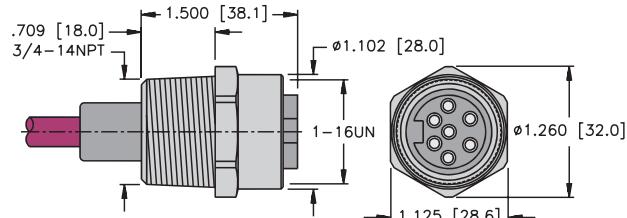

"B" Style P-RKF .. 14.75/NPT

Page K136


**10**

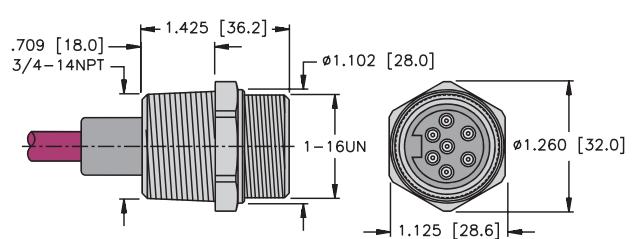

"B" Style P-RSF .. 14.75/NPT

Page K138


**11**

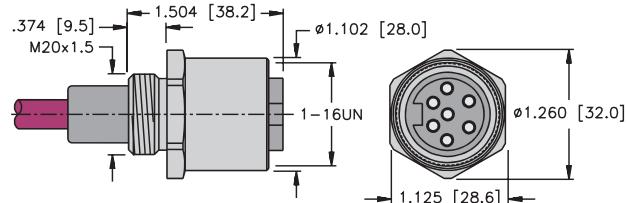

"B" Style P-RKF .. M20

Page K140

**12**

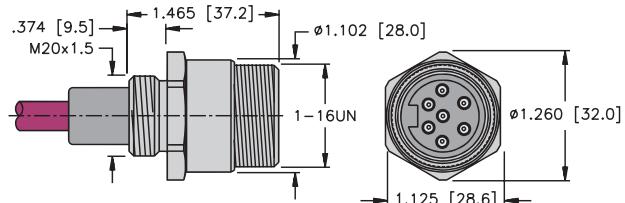

"B" Style P-RSF .. M20

Page K142

**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinouts
1 	P-RKF 321-880-*/14.5/NPT	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. GN/YE 2. BN 3. BU
	P-RKF 33-187-*/14.5/NPT	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>		1. GN 2. BK 3. WH
	P-RKF 51-108-*/14.5/NPT	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RKF 52-972-*/14.5/NPT	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 55-099-*/14.5/NPT	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RKF 55-328-*/14.5/NPT	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>	<i>1/2-14NPT Conduit Entry Thread.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain

**See page K129 for dimensional drawings.**

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKM.."; "P-RKV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
1	P-RKF 60-025-* /14.5/NPT	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	Instruments with separate power and signal circuits in Class I, Division 2 hazardous locations or unclassified locations. 1/2-14NPT Conduit Entry Thread.	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-RKF 63-030-* /14.5/NPT	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>	Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations.	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKF 63-233-* /14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKF 66-318-* /14.5/NPT	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>	1/2-14NPT Conduit Entry Thread.	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
7	P-RKF 71-219-* /14.5/NPT	ITC/PLTC PVC Plum 6x16 AWG Foil/Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>	Conduit Entry Thread.	1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RKF 71-329-* /14.5/NPT	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		1. 3 2. 4 3. 5 4. 6 5. 7

See page K129 - K130 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting; 7-pin recommends 7/8" (22.0 mm).

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
2	P-RSF 321-880-* /14.5/NPT	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. GN/YE 2. BN 3. BU
	P-RSF 33-187-* /14.5/NPT	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. GN 2. BK 3. WH
	P-RSF 51-108-* /14.5/NPT	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RSF 52-972-* /14.5/NPT	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSF 55-099-* /14.5/NPT	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RSF 55-328-* /14.5/NPT	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>1/2-14NPT Conduit Entry Thread.</i>	

See page K129 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
2	P-RSF 60-025-*/14.5/NPT	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M†	Instruments with separate power and signal circuits in Class I, Division 2 hazardous locations or unclassified locations. 1/2-14NPT Conduit Entry Thread.	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-RSF 63-030-*/14.5/NPT	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M†		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSF 63-233-*/14.5/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M†		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSF 66-318-*/14.5/NPT	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M†	Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations. 1/2-14NPT Conduit Entry Thread.	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
8	P-RSF 71-219-*/14.5/NPT	ITC/PLTC PVC Plum 6x16 AWG Foil/Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M†		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RSF 71-329-*/14.5/NPT	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M†		

See page K129 - K130 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting; 7-pin recommends 7/8" (22.0 mm).

† See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RKF 321-880-* /14.75/NPT	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. GN/YE 2. BN 3. BU
	P-RKF 33-187-* /14.75/NPT	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. GN 2. BK 3. WH
	P-RKF 51-108-* /14.75/NPT	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RKF 52-972-* /14.75/NPT	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 55-099-* /14.75/NPT	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RKF 55-328-* /14.75/NPT	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	

See page K129 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
3	P-RKF 60-025-* /14.75/NPT	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power and signal circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-RKF 63-030-* /14.75/NPT	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKF 63-233-* /14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKF 66-318-* /14.75/NPT	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
9	P-RKF 71-219-* /14.75/NPT	ITC/PLTC PVC Plum 6x16 AWG Foil/Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RKF 71-329-* /14.75/NPT	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		

See page K129 - K130 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting; 7-pin recommends 1-1/16" (27.0 mm).

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
4	P-RSF 321-880-*/14.75/NPT	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. GN/YE 2. BN 3. BU
	P-RSF 33-187-*/14.75/NPT	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>		1. GN 2. BK 3. WH
	P-RSF 51-108-*/14.75/NPT	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RSF 52-972-*/14.75/NPT	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSF 55-099-*/14.75/NPT	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RSF 55-328-*/14.75/NPT	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>		

See page K129 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
4	P-RSF 60-025-*/14.75/NPT	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power and signal circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-RSF 63-030-*/14.75/NPT	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSF 63-233-*/14.75/NPT	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSF 66-318-*/14.75/NPT	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>3/4-14NPT Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
10	P-RSF 71-219-*/14.75/NPT	ITC/PLTC PVC Plum 6x16 AWG Foil/Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RSF 71-329-*/14.75/NPT	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		

See page K129 - K130 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting; 7-pin recommends 1-1/16" (27.0 mm).

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.



Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
	P-RKF 321-880-*/M20	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M†	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	1. GN/YE 2. BN 3. BU
	P-RKF 33-187-*/M20	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M†		1. GN 2. BK 3. WH
5	P-RKF 51-108-*/M20	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M†	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RKF 52-972-*/M20	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M†	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 55-099-*/M20	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M†	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RKF 55-328-*/M20	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M†	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	



**See page K129 for dimensional drawings.**

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

† See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Female Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
5	P-RKF 60-025-*/M20	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power and signal circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-RKF 63-030-*/M20	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKF 63-233-*/M20	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKF 66-318-*/M20	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
11	P-RKF 71-219-*/M20	ITC/PLTC PVC Plum 6x16 AWG Foil/Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RKF 71-329-*/M20	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		

See page K129 - K130 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.  
Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits**

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
6	P-RSF 321-880-*/M20	ITC/PLTC PVC Yellow 3x18 AWG 105°C 7.2 mm OD Cable #RF50880-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations** or unclassified locations.</i>	1. GN/YE 2. BN 3. BU
	P-RSF 33-187-*/M20	ITC/PLTC PVC Grey 3x18 AWG 105°C 7.2 mm OD Cable #RF51187-*M <sup>†</sup>		1. GN 2. BK 3. WH
	P-RSF 51-108-*/M20	ITC/PLTC PVC Plum 4x18 AWG, 1 Shielded Triad with GND Foil/Drain (20) 105°C 8.1 mm OD Cable #RF51108-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. Drain 5. BK
	P-RSF 52-972-*/M20	ITC/PLTC PVC Grey 5x18 AWG 105°C 7.2 mm OD Cable #RF50972-*M <sup>†</sup>	<i>Discrete I/O Devices in Class I, Division 2 Hazardous Locations** or Unclassified Locations.</i>	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSF 55-099-*/M20	ITC/PLTC PVC Plum 4x16 AWG, 1 Shielded Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51099-*M <sup>†</sup>	<i>Discrete or analog 3-wire circuits in Class I, Division 2 hazardous locations or unclassified locations. M20 Conduit Entry Thread.</i>	1. WH 2. BK 3. GN 4. RD 5. Drain
	P-RSF 55-328-*/M20	ITC/PLTC PVC Blue 4x16 AWG, 1 Triad with GND Foil/Drain (18) 105°C 10.4 mm OD Cable #RF51328-*M <sup>†</sup>		

See page K129 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for *reelfast®* cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Cable, Additional Analog or Discrete Control Circuits

- Male Receptacles
- IEC IP 67 Protection
- 300 V, 9 A  
(use as ITC limited to 150 V, 5 A)



Housing Style	Part Number	Cable	Application	Pinout
6	P-RSF 60-025-*/M20	ITC/PLTC PVC Plum 5x16 AWG, 1 STP plus 1 Triad Foil/Drain (18) 105°C 12.5 mm OD Cable #RF51025-*M <sup>†</sup>	<i>Instruments with separate power and signal circuits in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
	P-RSF 63-030-*/M20	ITC/PLTC PVC Yellow 6x16 AWG 105°C 9.6 mm OD Cable #RF51030-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSF 63-233-*/M20	ITC-Exposed Run/Direct Burial/PLTC PVC Plum 6x16 AWG 105°C 11.2 mm OD Cable #RF51233-*M <sup>†</sup>		1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSF 66-318-*/M20	ITC/PLTC PVC Plum 5x18 AWG, 2 STP with GND Foil/Drain (20) 105°C 7.9 mm OD Cable #RF51318-*M <sup>†</sup>	<i>Discrete I/O devices in Class I, Division 2 hazardous locations or unclassified locations.</i> <i>M20 Conduit Entry Thread.</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. Drain
12	P-RSF 71-219-*/M20	ITC/PLTC PVC Plum 6x16 AWG Foil/Drain (18) 105°C 9.6 mm OD Cable #RF51219-*M <sup>†</sup>		1. WH 2. BK 3. Drain 4. RD 5. OG 6. BU 7. GN
	P-RSF 71-329-*/M20	ITC/PLTC PVC Blue 6x16 AWG Foil Drain (18) 105°C 9.6 mm OD Cable #RF51329-*M <sup>†</sup>		

See page K129 - K130 for dimensional drawings.

\* Length in meters. Standard cable length is 0.5 meters. Consult factory for other lengths.  
Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.  
Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.


**TURCK**

**Process Wiring Products**

**Notes:**


**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

**1**

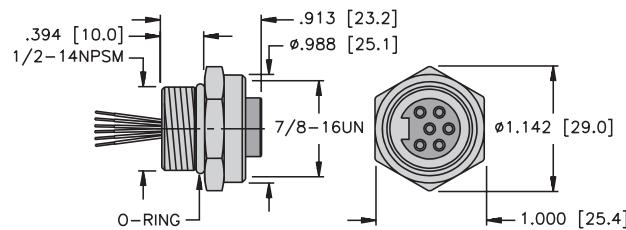


P-RKF ..

**2**

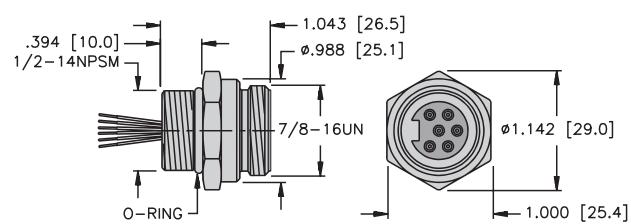

Page K148


**3**

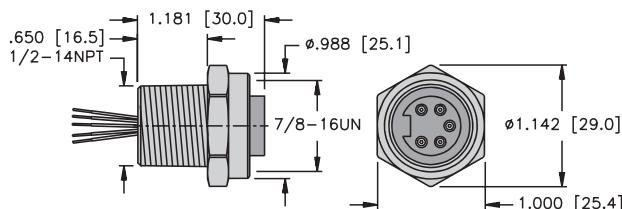

"A" P-RKF .. 14.5/NPT


Page K149

**4**

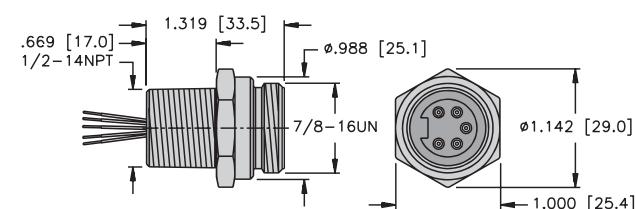

Page K151


**5**

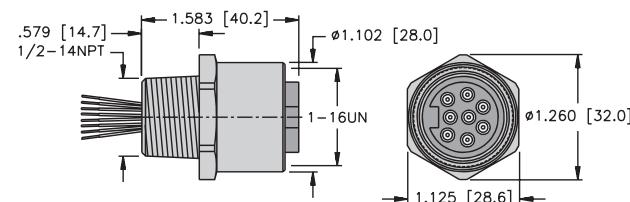

"B" P-RKF .. 14.5/NPT


Page K150

**6**

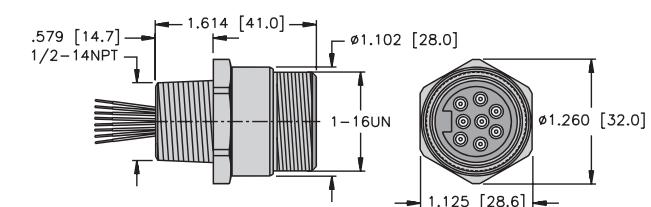

Page K152


**7**

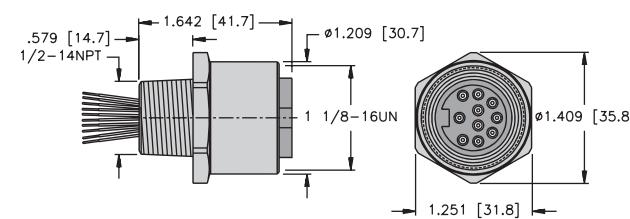

"C" P-RKF .. 14.5/NPT









Page K150

**8**

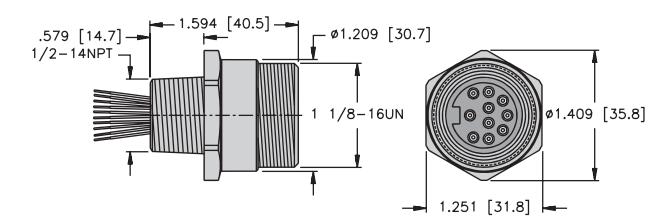


"C" P-RSF .. 14.5/NPT

Page K152

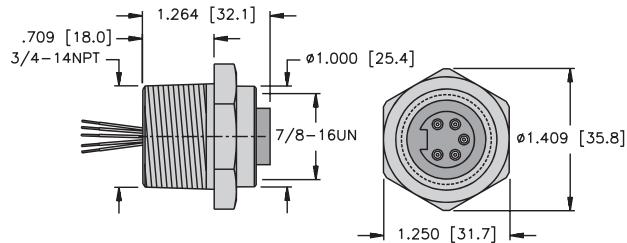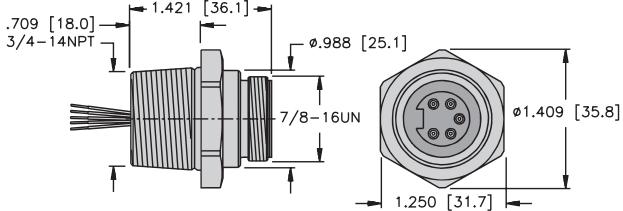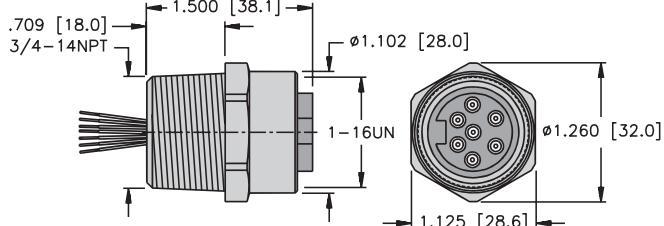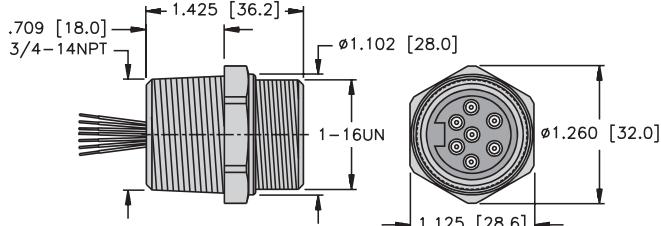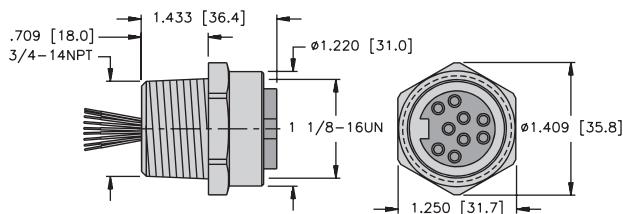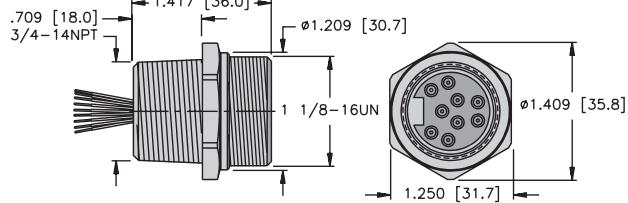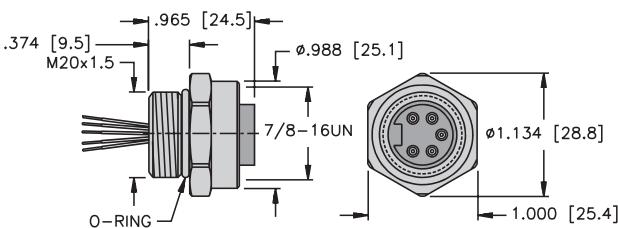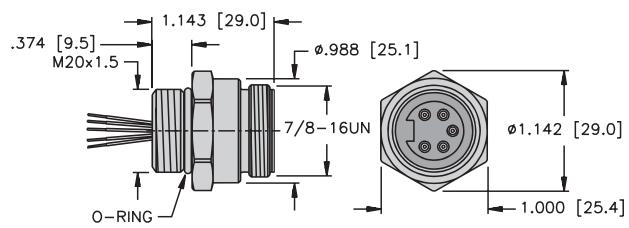**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits****9****"A" P-RKF .. 14.75/NPT****10****"A" P-RSF .. 14.75/NPT****Page K155****11****"B" P-RKF .. 14.75/NPT****Page K154****12****"B" P-RSF .. 14.75/NPT****Page K156****13****"C" P-RKF .. 14.75/NPT****Page K154****14****"C" P-RSF .. 14.75/NPT****Page K156****15****"A" P-RKF .. M20****Page K157****16****"A" P-RSF .. M20****Page K159**


**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

**17**

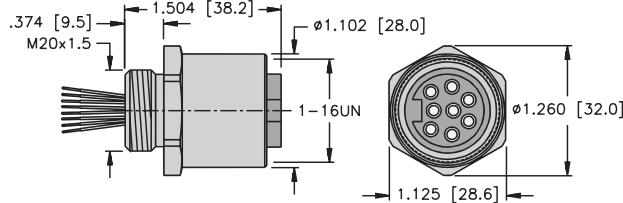


"B" P-RKF .. M20

**18**

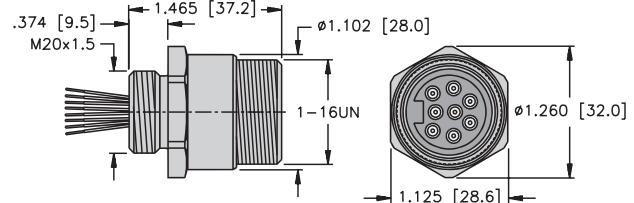

"B" P-RSF .. M20


**19**

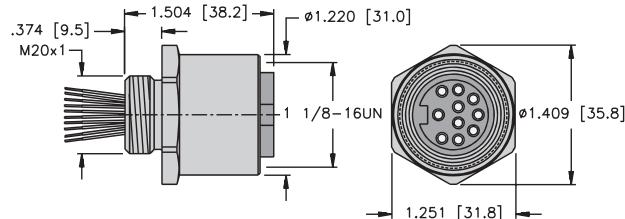

"C" P-RKF .. M20

Page K158


**20**

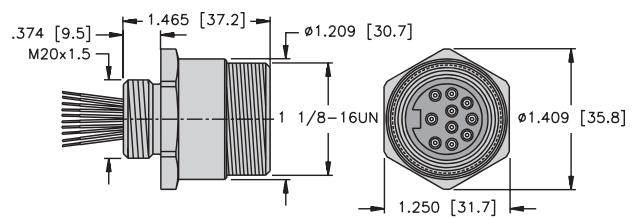

"C" P-RSF .. M20

Page K160


**21**

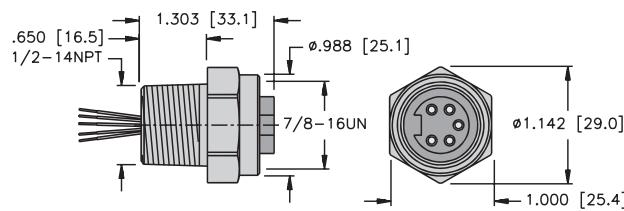

"A" P-RKF .. EX-14.5/NPT

Pages K161 - K162


**22**

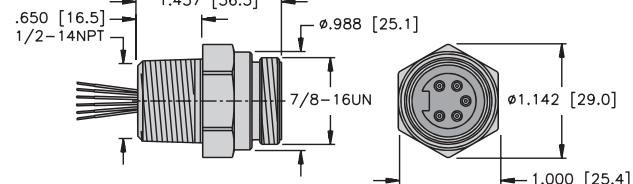

"A" P-RSF .. EX-14.5/NPT

Pages K163 - K164


**23**

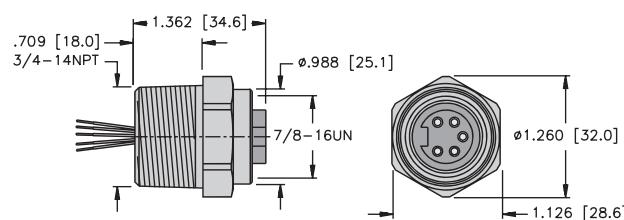

"A" P-RKF .. EX-14.75/NPT

Pages K165 - K166

**24**

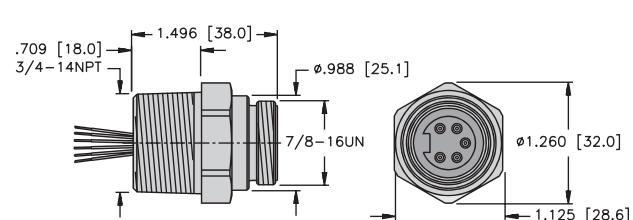


"A" P-RSF .. EX-14.75/NPT

Pages K167 - K168

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
1 	P-RKF 442-*	UL, CSA 4x18 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads	1. BK 2. WH 3. RD 4. GN
	P-RKF 45-*	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RKF 52-*	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 60D-*	UL, CSA 6x16 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RKF 63-*		1/2-14NPSM Threads	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU

See page K144 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.




Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
	P-RSF 442-*	UL, CSA 4x18 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads	1. BK 2. WH 3. RD 4. GN	
	P-RSF 45-*	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN	
	P-RSF 52-*	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU	
	P-RSF 60D-*	UL, CSA 6x16 AWG 105°C 600 V, 9 A	1/2-14NPSM Threads, Drain Wire	1. BU 2. BN 3. CN/YE 4. WH 5. BK 6. GY	
	P-RSF 63-*		1/2-14NPSM Threads	1. WH 2. RD 3. GN 4. OC 5. BK 6. BU	

**See page K144 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.


Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
3 	P-RKF 44-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	1/2-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RKF 442-*/14.5/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. RD 4. GN
	P-RKF 45-*/14.5/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RKF 52-*/14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 56-*/14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A	1/2-14NPT Threads, Drain Wire	1. BK 2. BU 3. GN/YE 4. BN 5. WH
	P-RKF 60-*/14.5/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RKF 60D-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RKF 63-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	1/2-14NPT Threads	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU

See page K144 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKVF.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
5 	P-RKF 70-* /14.5/NPT	UL, CSA 7x18 AWG 105°C 600 V, 8 A	1/2-14NPT Threads	1. BU 2. BN 3. GY 4. WH 5. BK 6. GY 7. GN/YE
	P-RKF 80-* /14.5/NPT	UL, CSA 8x18 AWG 105°C 600 V, 8 A		1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
7 	P-RKF 100-* /14.5/NPT	UL, CSA 10x18 AWG 105°C 600 V, 8 A		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. GY 8. GN/YE 9. WH/OG 10. OG/WH

See page K144 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Male Receptacles

- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
4	P-RSF 44-*/14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	1/2-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RSF 442-*/14.5/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. RD 4. GN
	P-RSF 45-*/14.5/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RSF 52-*/14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSF 56-*/14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A	1/2-14NPT Threads, Drain Wire	1. BK 2. BU 3. GN/YE 4. BN 5. WH
	P-RSF 60-*/14.5/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RSF 60D-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RSF 63-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	1/2-14NPT Threads	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU

See page K144 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
<b>6</b> 	P-RSF 70-* /14.5/NPT	UL, CSA 7x18 AWG 105°C 600 V, 8 A	1/2-14NPT Threads	1. BU 2. BN 3. GY 4. WH 5. BK 6. GY 7. GN/YE
	P-RSF 80-* /14.5/NPT	UL, CSA 8x18 AWG 105°C 600 V, 8 A		1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
<b>8</b> 	P-RSF 100-* /14.5/NPT	UL, CSA 10x18 AWG 105°C 600 V, 8 A		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. GY 8. GN/YE 9. WH/OG 10. OG/WH

See page K144 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
9 	P-RKF 44-*/14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	3/4-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RKF 442-*/14.75/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. RD 4. GN
	P-RKF 45-*/14.75/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RKF 52-*/14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A	3/4-14NPT Threads, Drain Wire	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 56-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH
	P-RKF 60-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RKF 60D-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RKF 63-*/14.75/NPT		3/4-14NPT Threads	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU

See page K145 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFD.."; indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
<b>11</b> 	P-RKF 70-* /14.75/NPT	UL, CSA 7x18 AWG 105°C 600 V, 8 A	3/4-14NPT Threads	 1. BU 2. BN 3. GY 4. WH 5. BK 6. GY 7. GN/YE
	P-RKF 80-* /14.75/NPT	UL, CSA 8x18 AWG 105°C 600 V, 8 A		 1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
<b>13</b> 	P-RKF 100-* /14.75/NPT	UL, CSA 10x18 AWG 105°C 600 V, 8 A		 1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. GY 8. GN/YE 9. WH/OG 10. OG/WH

See page K145 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Male Receptacles

- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
10	P-RSF 44-*/14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	3/4-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RSF 442-*/14.75/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. RD 4. GN
	P-RSF 45-*/14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RSF 52-*/14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A	3/4-14NPT Threads	1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSF 56-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH
	P-RSF 60-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A	3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RSF 60D-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 8 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RSF 63-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 8 A		3/4-14NPT Threads

See page K145 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout	
12	P-RSF 70-*/14.75/NPT	UL, CSA 7x18 AWG 105°C 600 V, 8 A	3/4-14NPT Threads	1. BU 2. BN 3. GY 4. WH 5. BK 6. GY 7. GN/YE	
	P-RSF 80-*/14.75/NPT	UL, CSA 8x18 AWG 105°C 600 V, 8 A		1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN	
14	P-RSF 100-*/14.75/NPT	UL, CSA 10x18 AWG 105°C 600 V, 8 A		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. GY 8. GN/YE 9. WH/OG 10. OG/WH	

See page K145 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 1-1/16" (27.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
15	P-RKF 44-*/M20	UL, CSA 4x18 AWG 105°C 600 V, 9 A	<i>M20 Threads</i>	1. BU 2. BN 3. WH 4. BK
	P-RKF 442-*/M20			1. BK 2. WH 3. RD 4. GN
	P-RKF 45-*/M20	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RKF 52-*/M20	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKF 56-*/M20	UL, CSA 5x18 AWG 105°C 600 V, 9 A	<i>M20 Threads, Drain Wire</i>	1. BK 2. BU 3. GN/YE 4. BN 5. WH
	P-RKF 60-*/M20	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RKF 60D-*/M20	UL, CSA 6x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RKF 63-*/M20		<i>M20 Threads</i>	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU

See page K145 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFD.."; indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
17	P-RKF 70-*/M20	UL, CSA 7x18 AWG 105°C 600 V, 8 A	<i>M20 Threads</i>	1. BU 2. BN 3. GY 4. WH 5. BK 6. GY 7. GN/YE
	P-RKF 80-*/M20	UL, CSA 8x18 AWG 105°C 600 V, 8 A		1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
19	P-RKF 100-*/M20	UL, CSA 10x18 AWG 105°C 600 V, 8 A		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. GY 8. GN/YE 9. WH/OG 10. OG/WH

See page K146 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RKF.."; "P-RKFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits**

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
16	P-RSF 44-*/M20	UL, CSA 4x18 AWG 105°C 600 V, 9 A	M20 Threads	1. BU 2. BN 3. WH 4. BK
	P-RSF 442-*/M20			1. BK 2. WH 3. RD 4. GN
	P-RSF 45-*/M20	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RSF 52-*/M20	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSF 56-*/M20	UL, CSA 5x18 AWG 105°C 600 V, 9 A	M20 Threads, Drain Wire	1. BK 2. BU 3. GN/YE 4. BN 5. WH
	P-RSF 60-*/M20	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RSF 60D-*/M20	UL, CSA 6x16 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RSF 63-*/M20		M20 Threads	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU

See page K145 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.

Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Receptacles with Leads, Additional Analog or Discrete Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
18	P-RSF 70-* /M20	UL, CSA 7x18 AWG 105°C 600 V, 8 A	<i>M20 Threads</i>	1. BU 2. BN 3. GY 4. WH 5. BK 6. GY 7. GN/YE
	P-RSF 80-* /M20	UL, CSA 8x18 AWG 105°C 600 V, 8 A		1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
20	P-RSF 100-* /M20	UL, CSA 10x18 AWG 105°C 600 V, 8 A		1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. GY 8. GN/YE 9. WH/OG 10. OG/WH

See page K146 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is nickel plated brass "P-RSF.."; "P-RSFV.." indicates 316 stainless steel.


Receptacles recommend 13/16" (21.0 mm) hole for panel mounting.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
21 	P-RKVF 44 EX-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 1/2-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RKVF 45 EX-* /14.5/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RKVF 52 EX-* /14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKVF 55 EX-* /14.5/NPT	UL, CSA 4x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. GN 4. RD 5. N/C
	P-RKVF 56 EX-* /14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH

**See page K146 for dimensional drawings.**


\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.  
Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
21 	P-RKFV 60 EX-*/14.5/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RKFV 60D EX-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RKFV 63 EX-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKFV 65 EX-*/14.5/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH 6. N/C
	P-RKFV 66 EX-*/14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C

**See page K146 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.


Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

***minifast®* Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits**

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
22 	P-RSFV 44 EX-* /14.5/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 1/2-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RSFV 45 EX-* /14.5/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RSFV 52 EX-* /14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSFV 55 EX-* /14.5/NPT	UL, CSA 4x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. GN 4. RD 5. N/C
	P-RSFV 56 EX-* /14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH

**See page K146 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.  
Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
22	P-RSFV 60 EX-*/14.5/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RSFV 60D EX-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RSFV 63 EX-*/14.5/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 1/2-14NPT Threads</i>	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSFV 65 EX-*/14.5/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH 6. N/C
	P-RSFV 66 EX-*/14.5/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C

See page K146 for dimensional drawings.

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.


Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits**

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
23 	P-RKVF 44 EX-* /14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 3/4-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RKVF 45 EX-* /14.75/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RKVF 52 EX-* /14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RKVF 55 EX-* /14.75/NPT	UL, CSA 4x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. GN 4. RD 5. N/C
	P-RKVF 56 EX-* /14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH

**See page K146 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.  
Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits

- Female Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
23	P-RKFV 60 EX-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RKFV 60D EX-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RKFV 63 EX-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RKFV 65 EX-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH 6. N/C
	P-RKFV 66 EX-*/14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C

**See page K146 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.


Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

**minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits**

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
24 	P-RSFV 44 EX-* /14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 3/4-14NPT Threads	1. BU 2. BN 3. WH 4. BK
	P-RSFV 45 EX-* /14.75/NPT	UL, CSA 3x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. N/C 4. GN
	P-RSFV 52 EX-* /14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. WH 3. GY 4. BN 5. BU
	P-RSFV 55 EX-* /14.75/NPT	UL, CSA 4x16 AWG 105°C 600 V, 9 A		1. WH 2. BK 3. GN 4. RD 5. N/C
	P-RSFV 56 EX-* /14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH

**See page K146 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.


Standard housing material is 316 stainless steel.


Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.

## minifast® Explosionproof Feed-Thru Receptacle w/Leads, Add. Analog or Discrete Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection
- For installation of explosionproof devices in Division 2 or feeding intrinsically safe circuits into or out of explosionproof enclosures



Housing Style	Part Number	Lead Specs	Features	Pinout
24 	P-RSFV 60 EX-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C
	P-RSFV 60D EX-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire</i>	1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. GY
	P-RSFV 63 EX-*/14.75/NPT	UL, CSA 6x16 AWG 105°C 600 V, 9 A	<i>Explosionproof Receptacle, 3/4-14NPT Threads</i>	1. WH 2. RD 3. GN 4. OG 5. BK 6. BU
	P-RSFV 65 EX-*/14.75/NPT	UL, CSA 5x16 AWG 105°C 600 V, 9 A		1. BK 2. BU 3. GN/YE 4. BN 5. WH 6. N/C
	P-RSFV 66 EX-*/14.75/NPT	UL, CSA 5x18 AWG 105°C 600 V, 9 A		1. BU 2. BN 3. GN/YE 4. WH 5. BK 6. N/C



**See page K146 for dimensional drawings.**

\* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.

Standard housing material is 316 stainless steel.

Note: See TURCK Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd](http://www.turck.com/fmcd) for guidance on installation in hazardous locations.



### minifast® "Y" Fittings, Additional Analog or Discrete Circuits


- 600 V
- 9 A Per Conductor
- Installs in Standard Conduit Entries
- Stainless Steel Housing

Specifications	Wiring Dia.	Housing Material	1/2-14NPT				3/4-14NPT	
			J1 Female	J2 Female	P1 Male	P2 Male	P1 Male	J2 Female
4/18 AWG leads per connector	1	SS	P-2RKFV-44EX-*/14.5/NPT	P-2RSFV-44EX-*/14.5/NPT			P-RSFV RKFV-44EX-*/14.5/NPT	P-2RKFV-44EX-*/14.75/NPT

\* Length in meters.


SS = Stainless steel

### Dimensions

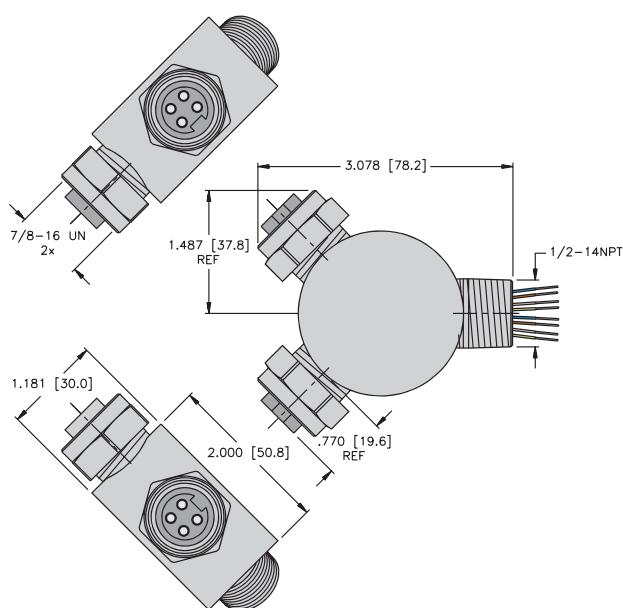

### Wiring Diagram

1

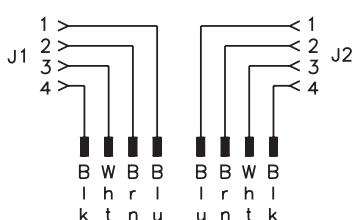


## Specifications

<b>Housing:</b>	316 stainless steel (SS), passivated.
<b>Contact Carrier:</b>	PUR black.
<b>Electrical Ratings:</b>	600 V, 9 A per conductor.
<b>Temperature:</b>	-30° to +105°C (-22° to +221°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67 (only when all receptacles are mated or covered with plugs).
<b>Leads:</b>	High flex stranding, PVC, insulated, 600 V, UL recognized, CSA certified.

3/4-14NPT				M20x1.5					
P1	P2	P1	J2	J1	J2	P1	P2	P1	J2
Male	Male	Male	Female	Female	Female	Male	Male	Male	Female
P-2RSFV-44EX-*/14.75/NPT		P-RSFV RKFV-44EX-*/14.75/NPT		P-2RKFV-44EX-*/M20		P-2RSFV-44EX-*/M20		P-RSFV RKFV-44EX-*/M20	

## Dimensions

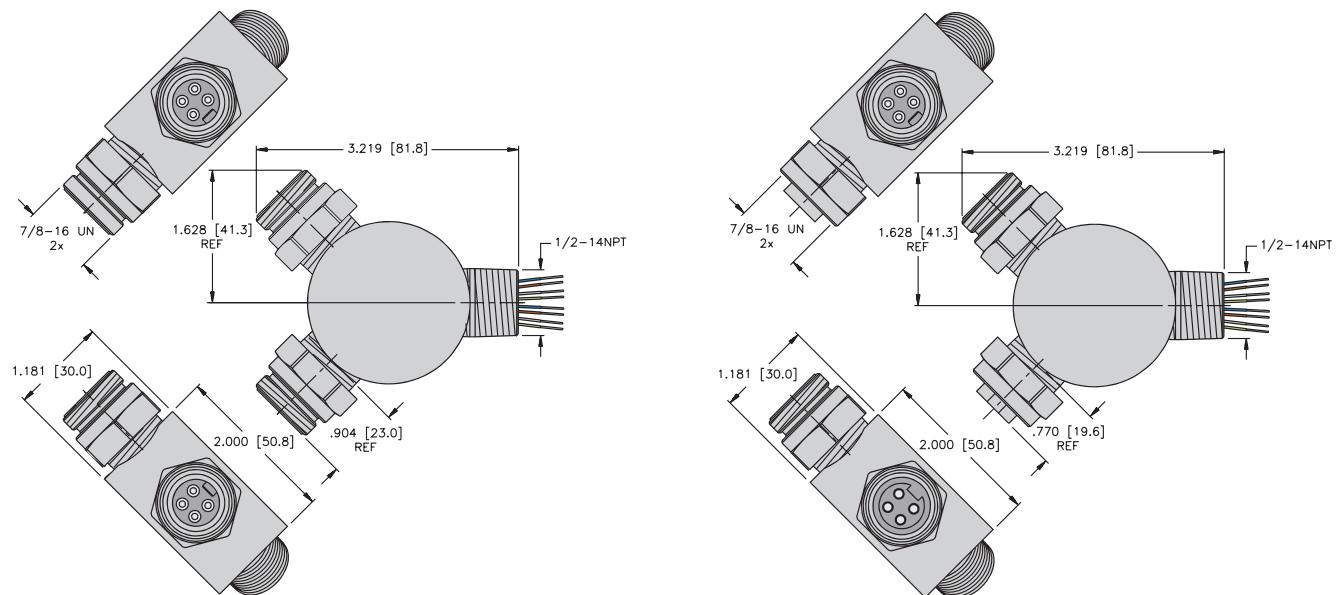

## Pinouts

Female	Male
4-Pin	4-Pin



### multibox® minifast® Metal Junction Boxes

- Consolidation of Analog or Discrete Circuits in Hazardous Locations or Unclassified Locations



FM approved for installation in hazardous locations when installed per **TURCK** Control Drawing QCF-00147 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) using specified accessory equipment.  
"/C" versions CSA certified for installation in hazardous locations when installed per **TURCK** Control Drawing Ni-2.404([www.turck.com/fmcd](http://www.turck.com/fmcd)) using certified accessory equipment.


#### 4-port, Common Ground and Shield

Application	Specifications	Pinout				Nickel Plated Brass	Stainless Steel
4-port cast aluminum junction box, <b>minifast</b> port connectors, <b>multifast</b> home-run connector, 4-wire discrete signal per port	19-pin <b>multifast</b> connector, 19 conductors	Port, Pin	Home-Run	Port, Pin	Home-Run		
		Port 1, Pin 1	1	Port 3, Pin 2	11	P-4 RKF 56-CS19	P-4 RKVF 56-CSV19
		Port 1, Pin 2	2	Ports 1-8, Pin 3	12		
		Port 1, Pin 4	3	Port 3, Pin 4	13		
		Port 1, Pin 5	4	Port 3, Pin 5	14		
		Port 2, Pin 1	5	Port 4, Pin 1	15		
		NC	6	Port 4, Pin 2	16		
		Port 2, Pin 2	7	Port 4, Pin 4	17		
		Port 2, Pin 4	8	Port 4, Pin 5	18	P-4 RKF 56-CS19/C	P-4 RKVF 56-CSV19/C
		Port 2, Pin 5	9	NC	19		
		Port 3, Pin 1	10				
4-port cast aluminum junction box, <b>minifast</b> port connectors, <b>multifast</b> home-run connector, 2 analog signals per port	19-pin <b>multifast</b> connector, 16 conductors plus drain	Port, Pin	Home-Run	Port, Pin	Home-Run		
		Port 1, Pin 1	1	Port 3, Pin 2	11	P-4 RKF 66-CS19	P-4 RKVF 66-CSV19
		Port 1, Pin 2	2	Ground	12		
		Port 1, Pin 4	3	Port 3, Pin 4	13		
		Port 1, Pin 5	4	Port 3, Pin 5	14		
		Port 2, Pin 1	5	Port 4, Pin 1	15		
		Shield	6	Port 4, Pin 2	16		
		Port 2, Pin 2	7	Port 4, Pin 4	17		
		Port 2, Pin 4	8	Port 4, Pin 5	18	P-4 RKF 66-CS19/C	P-4 RKVF 66-CSV19/C
		Port 2, Pin 5	9	NC	19		
		Port 3, Pin 1	10				


See pages K85 and K89 for mating home run cordsets.

### Wiring Diagrams

4-Wire Discrete

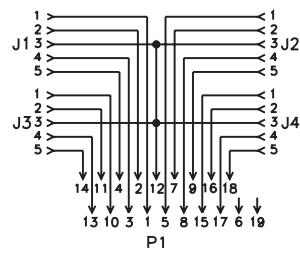

2 Analog Signals Per Port

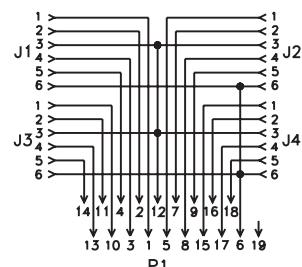


## Specifications

<b>Housing:</b>	Die-cast aluminum alloy.
<b>Connectors</b>	Nickel plated brass or 316 stainless steel housings (see table), oil resistant PUR contact carrier.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Contacts:</b>	Gold plated brass.
<b>Protection:</b>	IP 67.
<b>Electrical Rating:</b>	Standard Version: 150 V, 4 A per conductor. "/C" Versions: 30 V, 600 mA

## Dimensions

4-Port

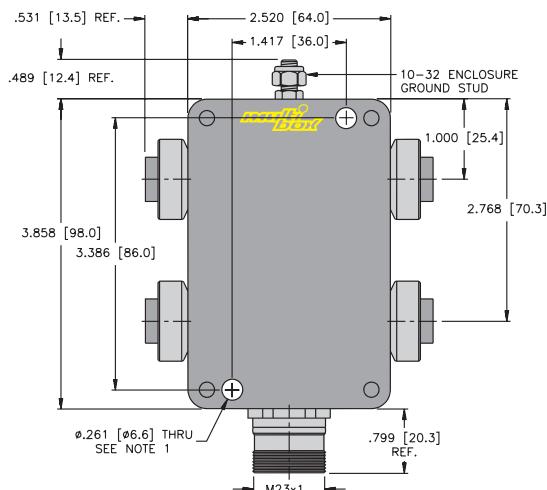

Notes:

1. Clearance hole for 1/4-20 mounting screws (2 not included)

## Pinouts

Female	Male
6-Pin minifast®	5-Pin minifast
	19-Pin multifast

**multifast® Home Run Cordsets, Additional Analog or Discrete Control Circuits**

- Female Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Features	Pinout
P-CKM ..				
	P-CKM 12-088-*			
P-CKML .. (for Class I, Division 2 applications)				
	P-CKML 12-088-*	ITC/PLTC PVC Yellow 11x18 AWG Foil/Drain (20) 105°C 10 mm OD 300 V, 6 A Cable #RF51088-*M†	<i>Discrete control circuits in Class I, Division 2 hazardous locations or unclassified locations.</i>	<ol style="list-style-type: none"> <li>1. BN</li> <li>2. N/C</li> <li>3. BU</li> <li>4. WH</li> <li>5. GN</li> <li>6. YE</li> <li>7. GY</li> <li>8. PK</li> <li>9. RD</li> <li>10. BK</li> <li>11. VT</li> <li>12. GN/YE</li> </ol>
P-CKWM ..				
	P-CKWM 12-088-*			
P-CKWML .. (for Class I, Division 2 applications)				
	P-CKWML 12-088-*			

\* Length in meters. Standard cable lengths are 2, 4, 6, 8, and 10 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "CKM(L).."/"CKWM(L).."; "CKM(L)V.."/"CKWM(L)V" indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

**multifast® Home Run Cordsets, Additional Analog or Discrete Control Circuits**

- Male Connectors
- IEC IP 67 Protection



Housing Style	Part Number	Cable	Features	Pinout
P-CSM ..				
P-CSML .. (for Class I, Division 2 applications)	P-CSM 12-088-*	ITC/PLTC PVC Yellow 11x18 AWG Foil/Drain (20) 105°C 10 mm OD 300 V, 6 A Cable #RF51088-*M†	<i>Discrete control circuits in Class I, Division 2 hazardous locations or unclassified locations.</i>	
P-CSWM ..				
P-CSWML .. (for Class I, Division 2 applications)	P-CSWM 12-088-*			

\* Length in meters. Standard cable lengths are 2, 4, 6, 8, and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "CSM(L).."/"CSWM(L).."; "CSM(L)V.."/"CSWM(L)V" indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast®** cable information.

**TURCK**

**Process Wiring Products**

**Notes:**

## NAMUR Circuits Selection Guide




M12 eurofast® Thread	Drop Cordsets	2-Branch Molded Junctions	Junction Boxes
Pages	D179 - D182	D183 - D186	D187 - D190



M23 multifast® Thread	Cordsets
Pages	D191 - D193


**eurofast® NAMUR Cordset Part Number Key, Class I, Division 1 Hazardous Locations**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

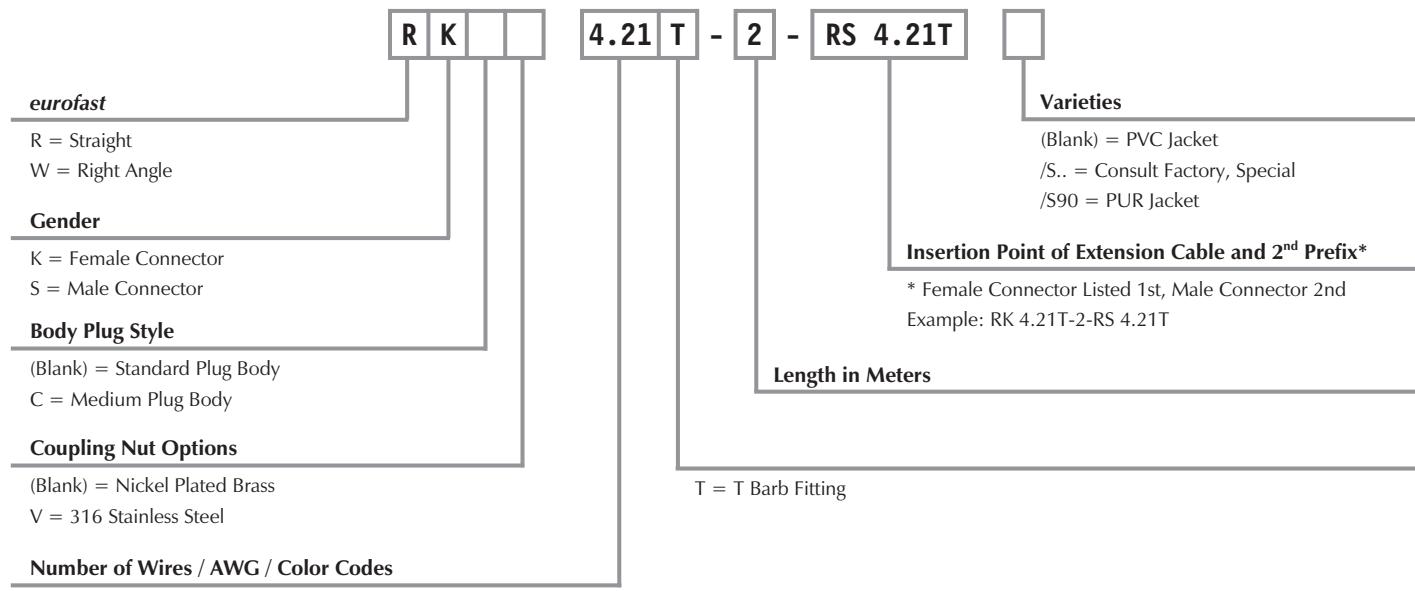

**Single Ended Example:**


R K    4.21 T - 2



RK ..

**Extension Example:**


R K    4.21 T - 2 - RS    4.21 T



RK .. - RS ..


**eurofast® NAMUR Cordset Extensions**

**Other Extension Examples:**

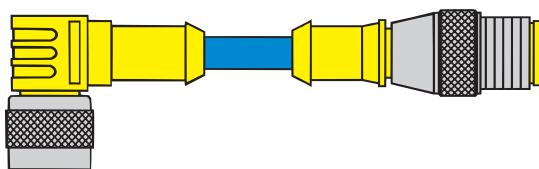


W K    4.21 T - 2 - RS    4.21 T

**WK .. - RS ..**

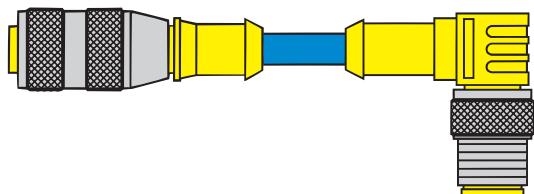

R K    4.21 T - 2 - WS    4.21 T

**RK .. - WS ..**

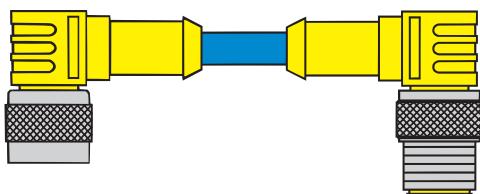

W K    4.21 T - 2 - WS    4.21 T

**WK .. - WS ..**

## 2, 4, 5 and 6-Wire eurofast® Drop Cordsets, NAMUR

- Straight Female Connectors
- For Use With NAMUR Sensors
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Cable	Features	Pinout
RK ..	RK 4.21T-*	AWM PVC NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF20003-*M <sup>†</sup>	<i>flexlife</i> ®	1. BN 2. BU 3. N/C 4. N/C
	RK 4.21T-* /S90	AWM PUR NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF50657-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	
	RK 4.41T-*	AWM PVC NAMUR Blue 4x22 AWG 105°C 5.2 mm OD Cable #RF50598-*M <sup>†</sup>	<i>flexlife</i>	1. BN 2. WH 3. BU 4. BK
RKC ..	RKCN 5T-*	PLTC PVC NAMUR Blue 5x22 AWG 105°C 6.8 mm OD Cable #RF50767-*M <sup>†</sup>	<i>flexlife</i> , 22 AWG, Over 2 million cycles, for VBN 40-H1141 multibox	1. GN 2. WH 3. OG 4. BK 5. RD
	RKC 6T-* /S90/CS10476	AWM PUR NAMUR Blue 5x24 AWG Foil/Drain 105°C 60 VAC/75 VDC, 2 A 5.7 mm OD Cable #RF50928-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	1. OR 2. RD 3. YE 4. BK 5. BU 6. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "RK®"; "RK(C)V.." indicates 316 stainless steel.

† See pages K236 - K244 for *reelfast*® cable information.

## 2, 4, 5 and 6-Wire eurofast® Drop Cordsets, NAMUR

- Straight Male Connectors
- For Use With NAMUR Sensors
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Cable	Features	Pinout
RS ..	RS 4.21T-*	AWM PVC NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF20003-*M <sup>†</sup>	<i>flexlife</i> ®	1. BN 2. BU 3. N/C 4. N/C
	RS 4.21T-*/S90	AWM PUR NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF50657-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	
	RS 4.41T-*	AWM PVC NAMUR Blue 4x22 AWG 105°C 5.2 mm OD Cable #RF50598-*M <sup>†</sup>	<i>flexlife</i>	1. BN 2. WH 3. BU 4. BK
	RSCN 5T-*	PLTC PVC NAMUR Blue 5x22 AWG 105°C 6.8 mm OD Cable #RF50767-*M <sup>†</sup>	<i>flexlife</i> , 22 AWG, Over 2 million cycles, for VBN 40-H1141 multibox	1. GN 2. WH 3. OG 4. BK 5. RD
	RSC 6T-*/S90/CS10476	AWM PUR NAMUR Blue 5x24 AWG Foil/Drain 105°C 60 VAC/75 VDC, 2 A 5.7 mm OD Cable #RF50928-*M <sup>†</sup>	<i>Cut/Abrasion Immune</i>	1. OG 2. RD 3. YE 4. BK 5. BU 6. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "RS®"; "RS(C)V.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast**® cable information.

## 2, 4, 5 and 6-Wire eurofast® Drop Cordsets, NAMUR

- Right Angle Female Connectors
- For Use With NAMUR Sensors
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection



Housing Style	Part Number	Cable	Features	Pinout
WK ..	WK 4.21T-*	AWM PVC NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF20003-*M†	<i>flexlife</i> ®	1. BN 2. BU 3. N/C 4. N/C
	WK 4.21T-*/S90	AWM PUR NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF50657-*M†	<i>Cut/Abrasion Immune</i>	
	WK 4.41T-*	AWM PVC NAMUR Blue 4x22 AWG 105°C 5.2 mm OD Cable #RF50598-*M†	<i>flexlife</i>	1. BN 2. WH 3. BU 4. BK
WKC ..	WKCN 5T-*	PLTC PVC NAMUR Blue 5x22 AWG 105°C 6.8 mm OD Cable #RF50767-*M†	<i>flexlife</i> , 22 AWG, Over 2 million cycles, for VBN 40-H1141 multibox	1. GN 2. WH 3. OG 4. BK 5. RD
	WKC 6T-*/S90/CS10476	AWM PUR NAMUR Blue 5x24 AWG Foil/Drain 105°C 60 VAC/75 VDC, 2 A 5.7 mm OD Cable #RF50928-*M†	<i>Cut/Abrasion Immune</i>	1. OG 2. RD 3. YE 4. BK 5. BU 6. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "WK®"; "WK(C)V.." indicates 316 stainless steel.

† See pages K236 - K244 for *reelfast*® cable information.

## 2, 4, 5 and 6-Wire eurofast® Drop Cordsets, NAMUR

- Right Angle Male Connectors
- For Use With NAMUR Sensors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Cable	Features	Pinout
WS ..	WS 4.21T-*	AWM PVC NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF20003-*M†	<i>flexlife</i> ®	1. BN 2. BU 3. N/C 4. N/C
	WS 4.21T-*/S90	AWM PUR NAMUR Blue 2x20 AWG 105°C 5.2 mm OD Cable #RF50657-*M†	<i>Cut/Abrasion Immune</i>	
	WS 4.41T-*	AWM PVC NAMUR Blue 4x22 AWG 105°C 5.2 mm OD Cable #RF50598-*M†	<i>flexlife</i>	1. BN 2. WH 3. BU 4. BK
WSC ..	WSCN 5T-*	PLTC PVC NAMUR Blue 5x22 AWG 105°C 6.8 mm OD Cable #RF50767-*M†	<i>flexlife</i> , 22 AWG, Over 2 million cycles, for VBN 40-H1141 multibox	1. GN 2. WH 3. OG 4. BK 5. RD
	WSC 6T-*/S90/CS10476	AWM PUR NAMUR Blue 5x24 AWG Foil/Drain 105°C 60 VAC/75 VDC, 2 A 5.7 mm OD Cable #RF50928-*M†	<i>Cut/Abrasion Immune</i>	1. OG 2. RD 3. YE 4. BK 5. BU 6. Drain

\* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.  
Standard coupling nut material is nickel plated brass "WS(C)"; "WS(C)V.." indicates 316 stainless steel.

† See pages K236 - K244 for **reelfast**® cable information.


**eurofast® 2 - Branch Molded Junctions, NAMUR Wiring**

- Combine Two NAMUR Sensors into One Cable
- Tough Polyurethane Construction
- For use with NAMUR Junction Boxes



Application	Specifications	Wiring	Housing	Part Number
Combine 2 NAMUR sensors into one cable	250 V 4 A	NAMUR		VB2-FSM 4.41/2FKM 4.21
Combine 2 NAMUR sensors into one cable	250 V 4 A RS 4.41T = Blue PVC 5.2 mm OD, 4/22 AWG			VB2-RS 4.41T-*/2FKM 4.21
Combine 2 NAMUR sensors into one cable	250 V 4 A RK 4.21T = Blue PVC 5.2 mm OD, 2/20 AWG			VB2-FSM 4.41/2RK 4.21T-*/*
Combine 2 NAMUR sensors into one cable	250 V 4 A Blue PVC, 5.2 mm OD RK 4.21T – 2/20 AWG RS 4.41T – 4/22 AWG			VB2-RS 4.41T-*/2RK 4.21T-*/*

\* Length in meters.

**NAMUR Diagram**

<b>Junction Body:</b>	Oil resistant yellow polyurethane.
<b>Connector:</b>	Oil resistant polyurethane body material, Nylon or PUR contact carrier, spacings to VDE 0110 Group C.
<b>Contacts:</b>	Gold plated brass.
<b>Coupling Nuts:</b>	Nickel plated brass.
<b>Cable:</b>	See table.
<b>Temperature:</b>	-40° to +105°C (-40° to +221°F).
<b>Protection:</b>	NEMA 1,3,4,6P and IEC IP 68.

**Cable Length:** Trunk - nominal 1 meter. Branches - nominal 0.3 meters. Other lengths available by request - consult factory.





**Connector Options:** (for legs with cable)

Stainless steel coupling nut add "V" to part number (RS to RSV, RK to RKV).

Nylon coupling nut add "K" to part number (RS to RSK, RK to RKK).

Right angle connectors, change part number (RS to WS, RK to WK).

**Notes:** Mounting holes accept #8 screw.

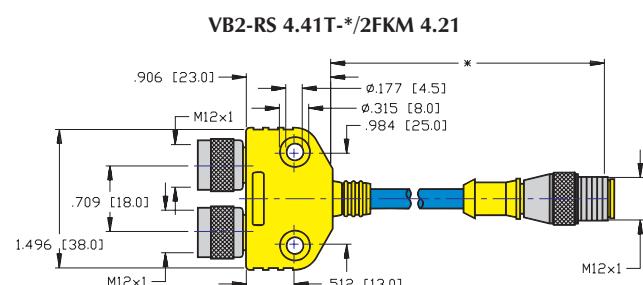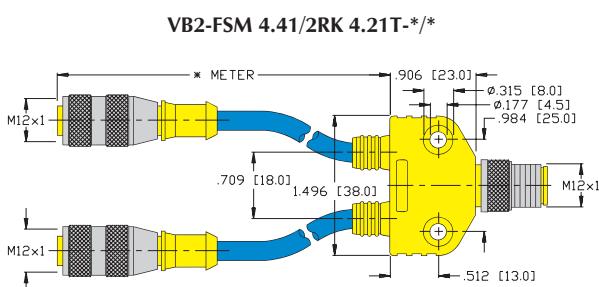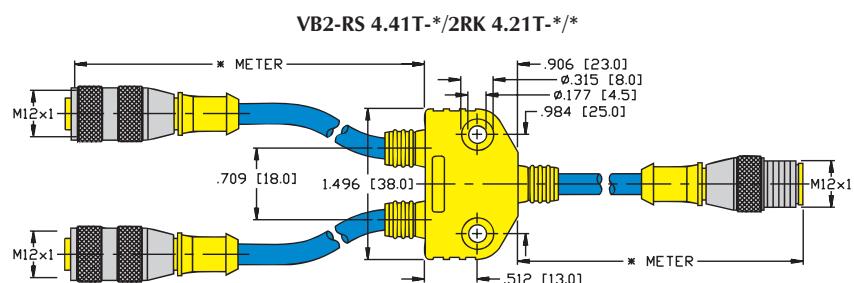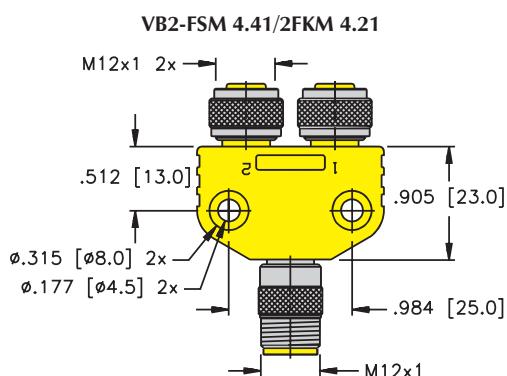

## Pinouts

Female	Male


**eurofast® 2 - Branch Molded Junctions, NAMUR Wiring**

- Combine Two NAMUR Sensors into One Cable
- eurofast Connection Features Anti-Vibration Coupling Nut (main leg only)



Application	Specifications	Wiring	Housing	Part Number
Combine 2 NAMUR sensors into one cable. Connects directly to eurofast junction box.	250 V 4 A 2/20 AWG Blue PVC 5.2 mm OD	NAMUR		VBRS 4.41-2RK 4.21T-*/*


\* Length in meters.  
To add mounting hole; add /S857 to the end of the part number.

**NAMUR Diagram**

<b>Connector:</b>	Oil resistant yellow polyurethane Nylon or PUR contact carrier, spacings to VDE 0110 Group C.
<b>Contacts:</b>	Gold plated brass, machined from solid stock.
<b>Coupling Nuts:</b>	Nickel plated brass.
<b>Cable:</b>	See table.
<b>Conductors:</b>	High flex stranding, PVC insulation.
<b>Temperature:</b>	-40° to +105°C (-40° to +221°F).
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67.
<b>Accessories:</b>	KS 5/10 labels included.

**Cable Length:** Branches - nominal 0.3 meters. Other lengths available by request - consult factory.

**VBRS 4.41-2RK 4.21T-\*/\***

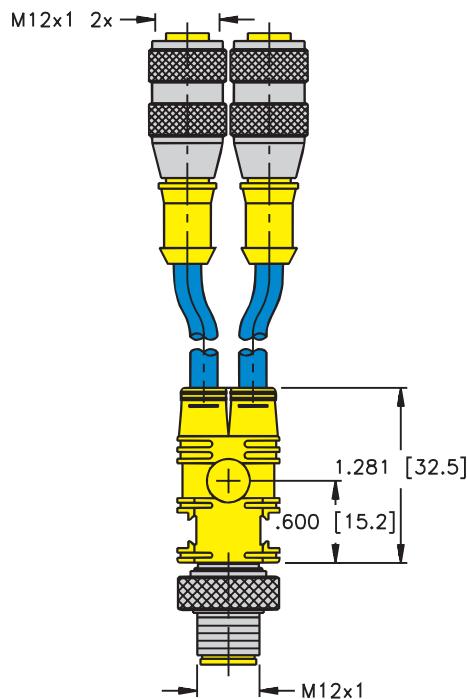

## Pinouts

Female	Male
<b>4-Pin eurofast®</b>	<b>4-Pin eurofast</b>


**multibox® eurofast® Junction Boxes, NAMUR, 1 Circuit Per Port**


- 4 Port
- Rugged Plastic Housing with Flush Connectors
- Quick Disconnect or Integral Home Run Cable
- For use with NAMUR Sensors

**1 Circuit Per Port, Common Positive, 100 VDC**


Application	Specifications	Pinout				Part Number
4-port J-box 1 circuit per port Integral cable	4 A/port, 9 A total Blue PVC cable, PLTC 5/22 AWG	Function +V	Color GN	Function J1/Pin 2 J2/Pin 2 J3/Pin 2 J4/Pin 2	Color WH OG BK RD	VB 40N-*
4-port J-box 1 circuit per port <b>eurofast</b> connector	4 A/port, 4 A total 5-pin <b>eurofast</b> connector 5 conductors Mates with RKCN 5T-*	Function +V	Pin / Color 1/GN	Function J1/Pin 2 J2/Pin 2 J3/Pin 2 J4/Pin 2	Pin / Color 2/WH 3/OG 4/BK 5/RD	VB 40N-H1151

**1 Circuit Per Port, Isolated Circuits, 100 VDC**


Application	Specifications	Pinout				Part Number
4-port J-box 1 circuit per port Integral cable	4 A/port, 9 A total Blue PVC cable, PLTC 9/22 AWG	Function J1/Pin 1 J1/Pin 2 J2/Pin 1 J2/Pin 2	Color WH BK GN RD	Function J3/Pin 1 J3/Pin 2 J4/Pin 1 J4/Pin 2	Color OG BU YE VT	VB 4X1N-*
4-port J-box 1 circuit per port <b>multifast</b> connector	4 A/port, 8 A total 12-pin <b>multifast</b> connector 9 conductors Mates with CKNWM 12-9-*	Function J1/Pin 1 J1/Pin 2 J2/Pin 1 J2/Pin 2	Pin / Color 2/WH 3/BK 4/GN 5/RD	Function J3/Pin 1 J3/Pin 2 J4/Pin 1 J4/Pin 2	Pin / Color 6/OG 7/BU 8/YE 9/VT	VB 4X1N-CS12

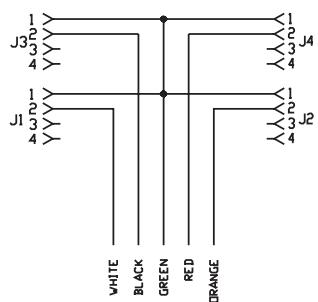**Functional Wiring Diagrams**
**Common Positive  
Integral Cable**


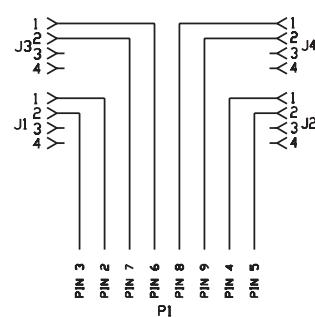
VB 40N-\*

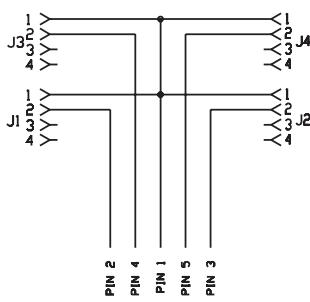**Common Positive  
eurofast Connector**


VB 40N-H1151

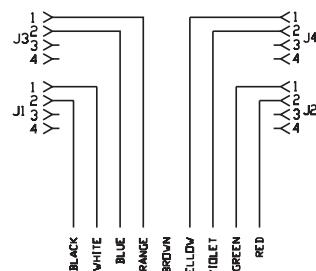**Isolated Circuit  
Integral Cable**


VB 4X1N-\*

**Isolated Circuit  
multifast Connector**


VB 4X1N-CS12


## Specifications

<b>Housing:</b>	Nylon.
<b>Connectors:</b>	<b>eurofast®</b> : Nylon or PUR, spacings to VDE 0110 Group C.
<b>Contacts:</b>	Gold plated brass, machined from solid stock.
<b>Thread Inserts:</b>	Nickel plated brass.
<b>Cable:</b>	See table.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67.
<b>Accessories:</b>	(2) VZ 3 closure caps and one VZ 1 label kit (8 labels) included.

### Cable Length:

Standard length for junction boxes and **multifast®** series quick disconnect cordsets is nominal 5 meters.  
Other lengths available by request. Consult factory.


## Dimensions

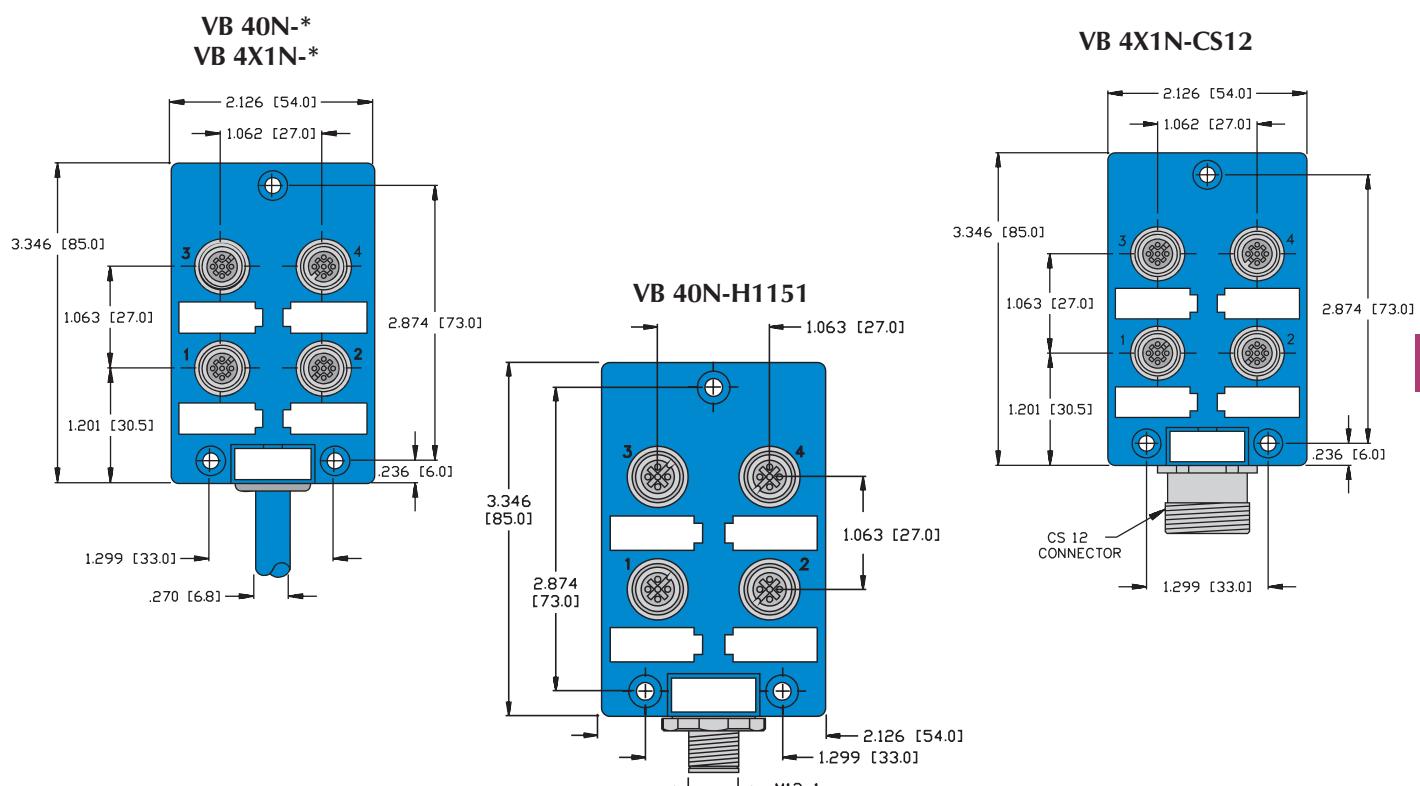

### Notes:

1. Removable labels included (Part number VZ 1).
2. Clearance hole for #8 screw (3 places).
3. Housings with integral cable: 23.0 mm thickness. Housings with quick disconnect: 33.0 mm thickness.

## Pinout Diagram



**multibox® eurofast® Junction Boxes, NAMUR, 2 Circuits Per Port**


- 4 Ports
- Rugged Plastic Housing with Flush Connectors
- Quick Disconnect or Integral Home Run Cable
- For use with NAMUR Sensors

**2 Circuits Per Port, Common Positive, 100 VDC**


Application	Specifications	Pinout				Part Number
4-port J-box 2 circuits per port Integral cable	4 A/port, 9 A total Blue PVC cable, PLTC 9/22 AWG	Function	Color	Function	Color	VB 40.5N-*
		V+	BN	J3/Pin 2	OG	
		J1/Pin 2	WH	J3/Pin 4	BU	
		J1/Pin 4	BK	J4/Pin 2	YE	
		J2/Pin 2	GN	J4/Pin 4	VT	
		J2/Pin 4	RD			

**2 Circuits Per Port, Isolated Circuits, 100 VDC**


Application	Specifications	Pinout				Part Number
4-port J-box 2 circuits per port Integral cable	4 A/port, 9 A total Blue PVC cable, PLTC 16/22 AWG	Function	Color	Function	Color	VB 4X1.5N-*
		J1/Pin 1	WH	J3/Pin 1	VT	
		J1/Pin 2	BK	J3/Pin 2	GY	
		J1/Pin 3	GN	J3/Pin 3	PK	
		J1/Pin 4	RD	J3/Pin 4	TN	
		J2/Pin 1	OG	J4/Pin 1	WH/BK	
		J2/Pin 2	BU	J4/Pin 2	WH/GN	
		J2/Pin 3	BN	J4/Pin 3	WH/RD	
		J2/Pin 4	YE	J4/Pin 4	WH/BU	

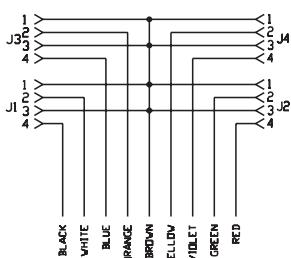**Functional Wiring Diagrams****Common Positive Integral Cable**


VB 40.5N-\*

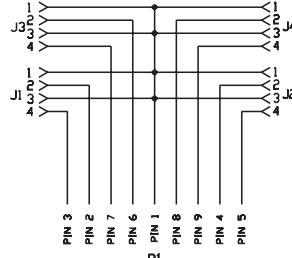**Common Positive multifast Connector**

VB 40.5N-CS12

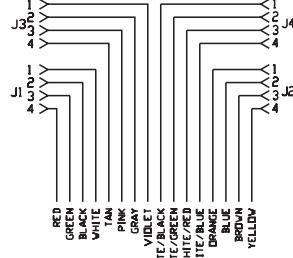**Isolated Circuit Integral Cable**

VB 4X1.5N-\*

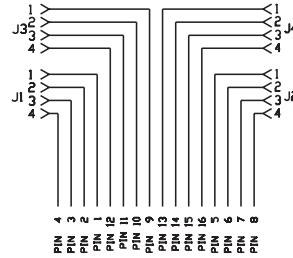**Isolated Circuit multifast Connector**

VB 4X1.5N-CS16


## Specifications

<b>Housing:</b>	Nylon.
<b>Connectors:</b>	<b>eurofast®</b> : Nylon or PUR, spacings to VDE 0110 Group C.
<b>Contacts:</b>	Gold plated brass, machined from solid stock.
<b>Thread Inserts:</b>	Nickel plated brass.
<b>Cable:</b>	See table.
<b>Temperature:</b>	-30° to +80°C (-22° to +176°F).
<b>Protection:</b>	NEMA 1, 3, 4, 6P and IEC IP 67.
<b>Accessories:</b>	(2) VZ 3 closure caps and one VZ 1 label kit (8 labels) included.

### Cable Length:

Standard length for junction boxes and **multifast®** series quick disconnect cordsets is nominal 5 meters.  
Other lengths available by request. Consult factory.


## Dimensions

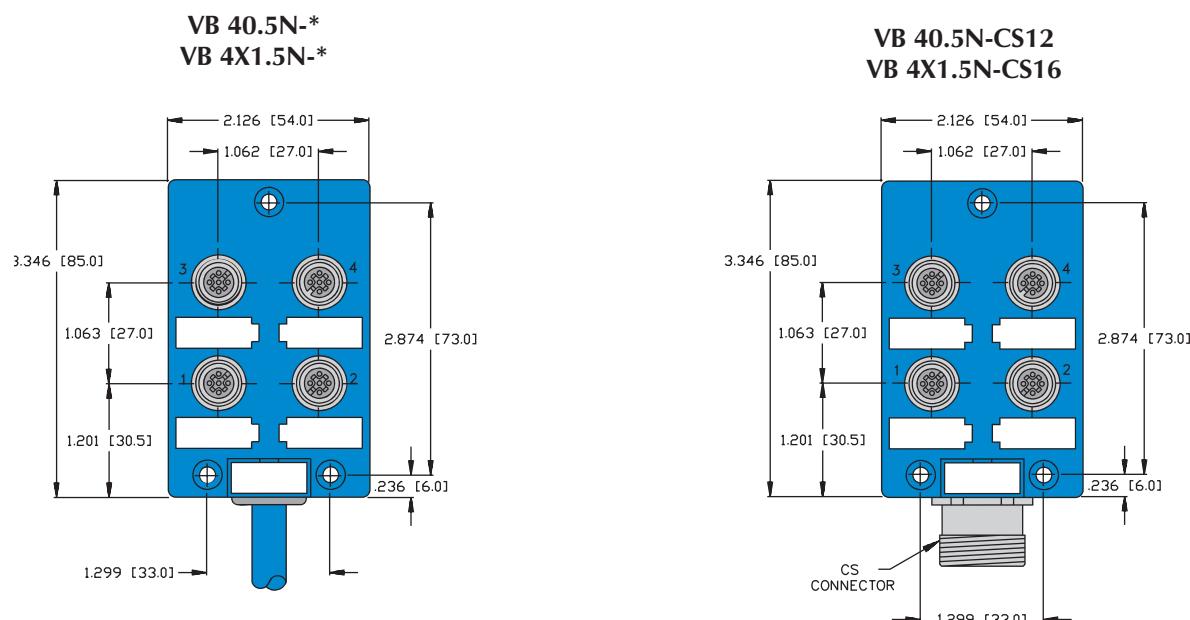

### Notes:

1. Removable labels included (Part number VZ 1).
2. Clearance hole for #8 screw (3 places).
3. Housings with integral cable: 23.0 mm thickness. Housings with quick disconnect: 33.0 mm thickness.





## Pinout Diagram



## **12 and 16-Pin *multifast*® Cordsets-NAMUR**

- Straight Male and Female Connectors
  - IEC IP 67 Protection
  - 300 V, 3 A



Housing Style	Part Number	Cable	Features	Pinout																
CKNM.. CSNM..	CKNM 12-9-*	PLTC PVC Blue 9x22 AWG 105°C 6.9 mm OD Cable #RF50741-*M†	For use with junction boxes and for multi-conductor applications	<table> <tr><td>1. BN</td><td>7. BU</td></tr> <tr><td>2. WH</td><td>8. YE</td></tr> <tr><td>3. BK</td><td>9. VT</td></tr> <tr><td>4. GN</td><td>10. N/C</td></tr> <tr><td>5. RD</td><td>11. N/C</td></tr> <tr><td>6. OG</td><td>12. N/C</td></tr> </table> 	1. BN	7. BU	2. WH	8. YE	3. BK	9. VT	4. GN	10. N/C	5. RD	11. N/C	6. OG	12. N/C				
1. BN	7. BU																			
2. WH	8. YE																			
3. BK	9. VT																			
4. GN	10. N/C																			
5. RD	11. N/C																			
6. OG	12. N/C																			
	CSNM 12-9-*																			
	CKNM 16-16-*	PLTC PVC Blue 16x22 AWG 105°C 8.3 mm OD Cable #RF50744-*M†		<table> <tr><td>1. WH</td><td>9. VT</td></tr> <tr><td>2. BK</td><td>10. GY</td></tr> <tr><td>3. GN</td><td>11. PK</td></tr> <tr><td>4. RD</td><td>12. TN</td></tr> <tr><td>5. OG</td><td>13. WH/BK</td></tr> <tr><td>6. BU</td><td>14. WH/GN</td></tr> <tr><td>7. BN</td><td>15. WH/RD</td></tr> <tr><td>8. YE</td><td>16. WH/BU</td></tr> </table> 	1. WH	9. VT	2. BK	10. GY	3. GN	11. PK	4. RD	12. TN	5. OG	13. WH/BK	6. BU	14. WH/GN	7. BN	15. WH/RD	8. YE	16. WH/BU
1. WH	9. VT																			
2. BK	10. GY																			
3. GN	11. PK																			
4. RD	12. TN																			
5. OG	13. WH/BK																			
6. BU	14. WH/GN																			
7. BN	15. WH/RD																			
8. YE	16. WH/BU																			
	CSNM 16-16-*																			

\* Length in meters.

Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "CK(S)NM.."; "CK(S)NMV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for **reelfast**® cable information.

## 12 and 16-Pin *multifast*® Cordsets-NAMUR

- Right Angle Male and Female Connectors
- IEC IP 67 Protection
- 300 V, 3 A



Housing Style	Part Number	Cable	Features	Pinout
CKNWM.. CSNWM..	CKNWM 12-9-*	PLTC PVC Blue 9x22 AWG 105°C 6.9 mm OD Cable #RF50741-*M†		<p>1. BN 7. BU 2. WH 8. YE 3. BK 9. VT 4. GN 10. N/C 5. RD 11. N/C 6. OG 12. N/C</p>
	CSNWM 12-9-*		<i>For use with junction boxes and for multi-conductor applications</i>	<p>1. WH 9. VT 2. BK 10. GY 3. GN 11. PK 4. RD 12. TN 5. OG 13. WH/BK 6. BU 14. WH/GN 7. BN 15. WH/RD 8. YE 16. WH/BU</p>
	CKNWM 16-16-*	PLTC PVC Blue 16x22 AWG 105°C 8.3 mm OD Cable #RF50744-*M†		<p>1. WH 9. VT 2. BK 10. GY 3. GN 11. PK 4. RD 12. TN 5. OG 13. WH/BK 6. BU 14. WH/GN 7. BN 15. WH/RD 8. YE 16. WH/BU</p>
	CSNWM 16-16-*			<p>1. WH 9. VT 2. BK 10. GY 3. GN 11. PK 4. RD 12. TN 5. OG 13. WH/BK 6. BU 14. WH/GN 7. BN 15. WH/RD 8. YE 16. WH/BU</p>

\* Length in meters.

Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "CK(S)NWM.."; "CK(S)NWMV.." indicates 316 stainless steel.

† See pages K236 - K244 for *reelfast*® cable information.

12 and 16-Pin *multifast*® Cordsets-NAMUR

- Straight and Right Angle Male Connectors
- IEC IP 67 Protection
- 300 V, 3 A



Housing Style	Part Number	Cable	Features	Pinout																							
CSSNM..	CSSNM 12-9-*	PLTC PVC Blue 9x22 AWG 105°C 6.9 mm OD Cable #RF50741-*M <sup>†</sup>	<i>For use with junction boxes and for multi-conductor applications</i>	<table border="1"> <tr><td>1. BN</td><td>7. BU</td></tr> <tr><td>2. WH</td><td>8. YE</td></tr> <tr><td>3. BK</td><td>9. VT</td></tr> <tr><td>4. GN</td><td>10. N/C</td></tr> <tr><td>5. RD</td><td>11. N/C</td></tr> <tr><td>6. OG</td><td>12. N/C</td></tr> </table>	1. BN	7. BU	2. WH	8. YE	3. BK	9. VT	4. GN	10. N/C	5. RD	11. N/C	6. OG	12. N/C											
1. BN	7. BU																										
2. WH	8. YE																										
3. BK	9. VT																										
4. GN	10. N/C																										
5. RD	11. N/C																										
6. OG	12. N/C																										
CSSNWM 12-9-*		<table border="1"> <tr><td>4</td><td>5</td><td>6</td></tr> <tr><td>3</td><td>2</td><td>7</td></tr> <tr><td>12</td><td>11</td><td>9</td></tr> <tr><td>8</td><td>1</td><td>10</td></tr> <tr><td>11</td><td>9</td><td>1</td></tr> </table>	4	5	6	3	2	7	12	11	9	8	1	10	11	9	1										
4	5	6																									
3	2	7																									
12	11	9																									
8	1	10																									
11	9	1																									
CSSNWM..	CSSNM 16-16-*	PLTC PVC Blue 16x22 AWG 105°C 8.3 mm OD Cable #RF50744-*M <sup>†</sup>		<table border="1"> <tr><td>1. WH</td><td>9. VT</td></tr> <tr><td>2. BK</td><td>10. GY</td></tr> <tr><td>3. GN</td><td>11. PK</td></tr> <tr><td>4. RD</td><td>12. TN</td></tr> <tr><td>5. OG</td><td>13. WH/BK</td></tr> <tr><td>6. BU</td><td>14. WH/GN</td></tr> <tr><td>7. BN</td><td>15. WH/RD</td></tr> <tr><td>8. YE</td><td>16. WH/BU</td></tr> </table>	1. WH	9. VT	2. BK	10. GY	3. GN	11. PK	4. RD	12. TN	5. OG	13. WH/BK	6. BU	14. WH/GN	7. BN	15. WH/RD	8. YE	16. WH/BU							
1. WH	9. VT																										
2. BK	10. GY																										
3. GN	11. PK																										
4. RD	12. TN																										
5. OG	13. WH/BK																										
6. BU	14. WH/GN																										
7. BN	15. WH/RD																										
8. YE	16. WH/BU																										
CSSNWM 16-16-*		<table border="1"> <tr><td>7</td><td>6</td><td>5</td><td>14</td><td>4</td></tr> <tr><td>8</td><td>9</td><td>10</td><td>15</td><td>3</td></tr> <tr><td>9</td><td>11</td><td>12</td><td>1</td><td>13</td></tr> <tr><td>10</td><td>1</td><td>12</td><td>1</td><td>1</td></tr> <tr><td>11</td><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table>	7	6	5	14	4	8	9	10	15	3	9	11	12	1	13	10	1	12	1	1	11	1	1	1	1
7	6	5	14	4																							
8	9	10	15	3																							
9	11	12	1	13																							
10	1	12	1	1																							
11	1	1	1	1																							

\* Length in meters.

Standard cable length is 5 meters. Consult factory for other lengths.

Standard coupling nut material is nickel plated brass "CSSNM.."; "CSSNMV/CSSNWMV.." indicates 316 stainless steel.

<sup>†</sup> See pages K236 - K244 for *reelfast*® cable information.

## Cables and Cordsets for Extreme Applications

**TURCK *extremelife*** connectors are approved by DNV and ABS for use in marine shipboard environments. **TURCK** also has an entire line of junction boxes for wiring consolidation. From off-the-shelf junctions for 4-20 mA transmitters, to custom boxes for any application, **TURCK** reduces costs by making wiring faster, easier and more reliable.



- ABS Approved
- Certified petr IEEE-45
- UL listed for Marine Applications to STD UL 1309
- Meets IEC 332-3 Category A Flame Test
- CSA listed to C22.2 No. 245
- Jacket Material Provides Impact Protection to -50°C (-58°F)
- Available in Multiple Configurations


***extreme*  
*life***®



**extremelife**® cables are heavy duty for extreme temperature environments and provide excellent resistance to extreme cold temperatures and oilfield drilling muds. **TURCK** offers multiple single and twisted pair conductor options. **extremelife** cables are available in two jacket types, **extremelife-25** and **extremelife-55**.

The following characteristics are specific to each cable.

Characteristics	<b>extremelife-25</b>	<b>extremelife-55</b>
Cable Gage Range	16 to 22	
UL Rating	UL1309	
CSA Rating	CSA 22.2 No. 245	
ABS Approval No.	03-HS400763-PDA	
IEEE Approvals	IEEE 45-1998 and IEEE 1580-2001	
Flexible Stranding	Yes	
Standard Insulation	T75 and T90 UL and CSA, T75 IEEE	
XLPE Insulation	110X for increased electrical properties required for network applications	
Flame Retardancy	IEEE 1202/FT4 and IEC 332-3 Category A	
Cold Bend Pass Temperature	-40°C (-40°F)	-55°C (-67°F)
Cold Impact Pass Temperature	Good	-50°C (-58°F)
Cut through and Abrasion Resistance	Good	Excellent
Moisture and Oil Resistance	Excellent	
Installation Handling	Good	
Oilfield Drilling Mud Resistance	Excellent	
Braided Armor	Available with or without	
Sunlight Resistance	Yes	

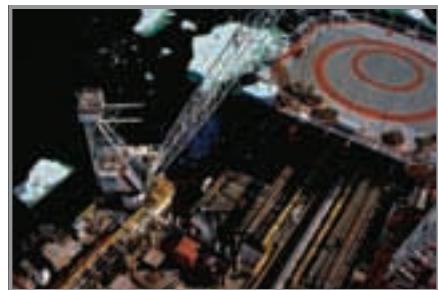

**extremelife**® cables have been extensively tested in various drilling muds/fluids. Samples of five different drilling fluids were used to evaluate how **extremelife** cables handle harsh environments. Cable samples were placed in the muds and put in a test oven at +65.6°C (+150°F). Shrink/swell and tensile strength/elongation were monitored throughout a 28 day aging test.

The **extremelife** cables, with their exclusive jacket materials, were compared with the industry standard neoprene cables. All tested cables passed the tensile strength and elongation tests. The **extremelife** cables proved to be much more stable in size through the tests when compared to the neoprene jacketed cables.

## Drilling Mud Types Used:

- Water based
- Synthetic based (two types)
- Diesel based
- Mineral oil based




## **extremelife** Cables:


- Standard cables are stocked for quick delivery, and custom designs ship within 6 to 10 weeks.
- Multiple designs and custom configurations can be built using 16 to 22 AWG wires.
- Bronze armor styles combined with stable tinned-copper armor.
- Cost effective cables, since **extremelife** can be made with 22 AWG conductors and tinned-copper armor.
- Assorted conductor sizes and insulation materials allow usage in network applications.

**minifast® extremelite® Extension Cordset Part Number Key - Control Cable**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult Factory for catalog items not identified.

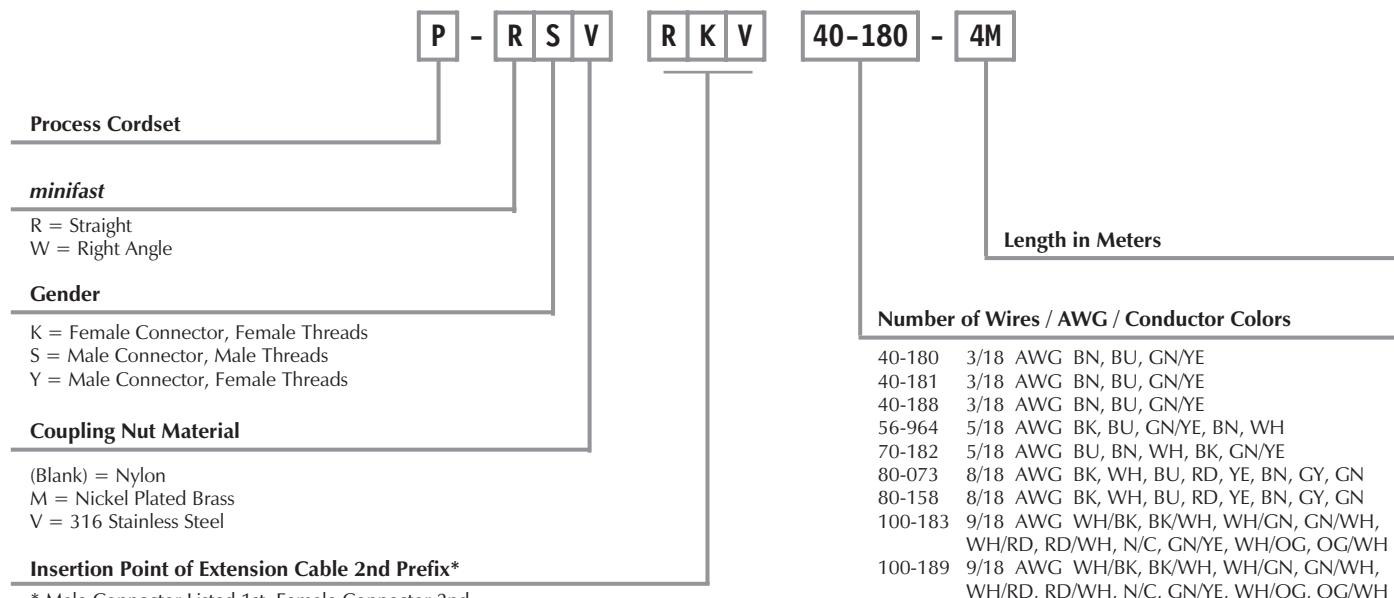
**Extension Examples:**

P - R S V    R K V    40-180 - 4M




RSV .. - RKV ..

P - W S V    R K V    40-180 - 4M

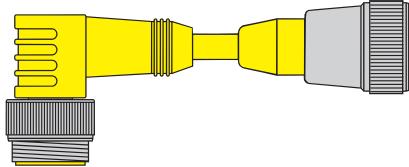


WSV .. - RKV ..

P - R S V    W K V    40-180 - 4M

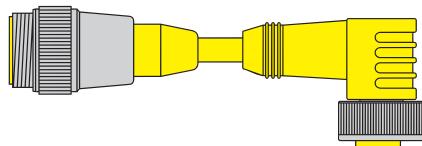

RSV .. - WKV ..

P - W S V    W K V    40-180 - 4M

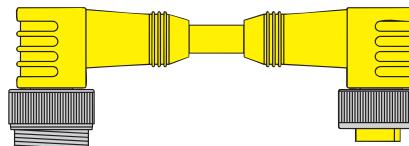

WSV .. - WKV ..

## 4 and 5-Wire *minifast® extremelife®* Control Cordsets

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinouts
	P-RKV 40-180-*M	PVC Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51180-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog	1. BU 2. BN 3. Drain 4. GN/YE
	P-RKV 40-181-*M	PVC Black, Braided Armor 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 12.5 mm OD Cable #RF51181-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor</i> <i>Cable</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-RKV 40-188-*M	TPE Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51188-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-RKV 56-964-*M	PVC Blue 5x18 AWG, Foil/Drain 90°C 300 V, 9 A 10.4 mm OD Cable #RF50964-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 5-wire shielded	1. BK 2. BU 3. GN/YE 4. BN 5. WH

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-RKV .."; "P-RKM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for **reelfast®** cable information.

7, 8, and 9-Wire *minifast® extremelife®* Control Cordsets

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinout
	P-RKV 70-182-*M	PVC Black 5x18 AWG, 2 STP with GND 90°C 300 V, 9 A 10.4 mm OD Cable #RF51182-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog x 2	1. BU 2. BN 3. Drain 4. WH 5. BK 6. Drain 7. GN/YE
	P-RKV 80-073-*M	PVC Blue, Braided Armor 8x18 AWG, 4 STP 90°C 300 V, 9 A 17.8 mm OD Cable #RF51073-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor Cable</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
	P-RKV 80-158-*M	TPE Black 8x18 AWG, 4 STP 90°C 300 V, 9 A 15.1 mm OD Cable #RF51158-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH
	P-RKV 100-183-*M	PVC Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 13.2 mm OD Cable #RF51183-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH
	P-RKV 100-189-*M	TPE Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 15.1 mm OD Cable #RF51189-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-RKV .."; "P-RKM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for *reelfast®* cable information.

## 4 and 5-Wire *minifast® extremelife®* Control Cordsets

- Right Angle Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinouts
	P-WKV 40-180-*M	PVC Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51180-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-WKV 40-181-*M	PVC Black, Braided Armor 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 12.5 mm OD Cable #RF51181-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor Cable</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-WKV 40-188-*M	TPE Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51188-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-WKV 56-964-*M	PVC Blue 5x18 AWG, Foil/Drain 90°C 300 V, 9 A 10.4 mm OD Cable #RF50964-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 5-wire shielded	

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-WKV .."; "P-WKM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for *reelfast®* cable information.

**7, 8, and 9-Wire *minifast*® *extremelife*® Control Cordsets**

- Right Angle Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinouts
	P-WKV 70-182-*M	PVC Black 5x18 AWG, 2 STP with GND 90°C 300 V, 9 A 10.4 mm OD Cable #RF51182-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog x 2	1. BU 2. BN 3. Drain 4. WH 5. BK 6. Drain 7. GN/YE
	P-WKV 80-073-*M	PVC Blue, Braided Armor 8x18 AWG, 4 STP 90°C 300 V, 9 A 17.8 mm OD Cable #RF51073-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor Cable</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
	P-WKV 80-158-*M	TPE Black 8x18 AWG, 4 STP 90°C 300 V, 9 A 15.1 mm OD Cable #RF51158-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH
	P-WKV 100-183-*M	PVC Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 13.2 mm OD Cable #RF51183-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH
	P-WKV 100-189-*M	TPE Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 15.1 mm OD Cable #RF51189-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-WKV .."; "P-WKM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for *reelfast*® cable information.

## 4 and 5-Wire *minifast® extremelife®* Control Cordsets

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinouts
	P-RSV 40-180-*M	PVC Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51180-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-RSV 40-181-*M	PVC Black, Braided Armor 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 12.5 mm OD Cable #RF51181-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor</i> <i>Cable</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-RSV 40-188-*M	TPE Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51188-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-RSV 56-964-*M	PVC Blue 5x18 AWG, Foil/Drain 90°C 300 V, 9 A 10.4 mm OD Cable #RF50964-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 5-wire shielded	

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.






Standard coupling nut material is 316 stainless steel "P-RSV .."; "P-RSM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for *reelfast®* cable information.

**7, 8, and 9-Wire *minifast*® *extremelife*® Control Cordsets**

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection

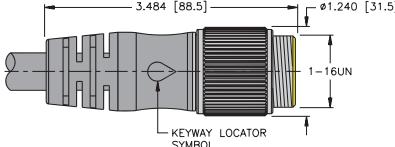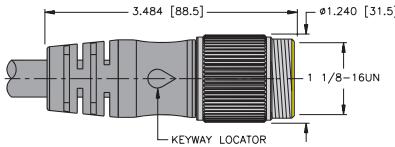

Housing	Part Number	Cable	Features	Pinouts
	P-RSV 70-182-*M	PVC Black 5x18 AWG, 2 STP with GND 90°C 300 V, 9 A 10.4 mm OD Cable #RF51182-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog x 2	1. BU 2. BN 3. Drain 4. WH 5. BK 6. Drain 7. GN/YE 
	P-RSV 80-073-*M	PVC Blue, Braided Armor 8x18 AWG, 4 STP 90°C 300 V, 9 A 17.8 mm OD Cable #RF51073-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor Cable</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN 
	P-RSV 80-158-*M	TPE Black 8x18 AWG, 4 STP 90°C 300 V, 9 A 15.1 mm OD Cable #RF51158-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH 
	P-RSV 100-183-*M	PVC Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 13.2 mm OD Cable #RF51183-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog x 4	
	P-RSV 100-189-*M	TPE Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 15.1 mm OD Cable #RF51189-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog x 4	

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-RSV .."; "P-RSM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for *reelfast*® cable information.

## 4 and 5-Wire *minifast® extremelife®* Control Cordsets

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinouts
	P-WSV 40-180-*M	PVC Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51180-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-WSV 40-181-*M	PVC Black, Braided Armor 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 12.5 mm OD Cable #RF51181-*M <sup>†</sup>	<i>extremelife-25</i> <i>Braided Armor</i> <i>Cable</i> <i>UL 1309 approved</i> 2-wire Analog	1. BU 2. BN 3. Drain 4. GN/YE
	P-WSV 40-188-*M	TPE Black 3x18 AWG, 1 STP with GND Foil/Drain 90°C 300 V, 9 A 8.4 mm OD Cable #RF51188-*M <sup>†</sup>	<i>extremelife-55</i> <i>UL 1309 approved</i> 2-wire Analog	
	P-WSV 56-964-*M	PVC Blue 5x18 AWG, Foil/Drain 90°C 300 V, 9 A 10.4 mm OD Cable #RF50964-*M <sup>†</sup>	<i>extremelife-25</i> <i>UL 1309 approved</i> 5-wire shielded	1. BK 2. BU 3. GN/YE 4. BN 5. WH

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-WSV .."; "P-WSM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for *reelfast®* cable information.

7, 8 and 9-Wire **minifast**<sup>®</sup> **extremelife**<sup>®</sup> Control Cordsets

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing	Part Number	Cable	Features	Pinouts
	P-WSV 70-182-*M	PVC Black 5x18 AWG, 2 STP with GND 90°C 300 V, 9 A 10.4 mm OD Cable #RF51182-*M <sup>†</sup>	<b>extremelife-25</b> <i>UL 1309 approved</i> 2-wire Analog x 2	1. BU 2. BN 3. Drain 4. WH 5. BK 6. Drain 7. GN/YE
	P-WSV 80-073-*M	PVC Blue, Braided Armor 8x18 AWG, 4 STP 90°C 300 V, 9 A 17.8 mm OD Cable #RF51073-*M <sup>†</sup>	<b>extremelife-25</b> <i>Braided Armor Cable</i> <i>UL 1309 approved</i> 2-wire Analog x 4	1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
	P-WSV 80-158-*M	TPE Black 8x18 AWG, 4 STP 90°C 300 V, 9 A 15.1 mm OD Cable #RF51158-*M <sup>†</sup>	<b>extremelife-55</b> <i>UL 1309 approved</i> 2-wire Analog x 4	1. BK 2. WH 3. BU 4. RD 5. YE 6. BN 7. GY 8. GN
	P-WSV 100-183-*M	PVC Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 13.2 mm OD Cable #RF51183-*M <sup>†</sup>	<b>extremelife™-25</b> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH
	P-WSV 100-189-*M	TPE Black 9x18 AWG, 4 STP with GND 90°C 300 V, 7 A 15.1 mm OD Cable #RF51189-*M <sup>†</sup>	<b>extremelife-55</b> <i>UL 1309 approved</i> 2-wire Analog x 4	1. WH/BK 2. BK/WH 3. WH/GN 4. GN/WH 5. WH/RD 6. RD/WH 7. N/C 8. GN/YE 9. WH/OG 10. OG/WH

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

Standard coupling nut material is 316 stainless steel "P-WSV ..", "P-WSM .." indicates nickel plated brass.

<sup>†</sup> See pages K236 - K244 for **reelfast**<sup>®</sup> cable information.

## Process Wiring Accessories Selection Guide



<i>7/8", 1, &amp; 1-1/8" minifast® Thread</i>	<i>lokfast® Guard</i>	Conduit Adapters	Conduit Adapter Ground Ring	Field Wireables	Closure Caps
Pages	K207	K209	K213	K215	K229



<i>M12 eurofast® Thread</i>	<i>lokfast</i> Guard	Conduit Adapters	Conduit Adapter Ground Ring	Field Wireables	Closure Caps
Pages	K207	K211	K213	K219	K232



<i>M23 multifast® Thread</i>	Conduit Adapters	Field Wireables	Accessories
Pages	K212	K223	K234

**TURCK****Process Wiring Products*****minifast® lokfast® Guards***

Part Number	Application
LOCK-MINI	<i>Nylon locking guard for straight minifast standard body connectors (RKM, RKV, RSM and RSV) in Class I, Division 2 installations*</i>
LOCK-MINI (10/BAG)	
LOCK-MINI-ANGLE	<i>Nylon locking guard for right angle minifast standard body connectors (WKM, WKV, WSM and WSV) in Class I, Division 2 installations*</i>
LOCK-MINI-ANGLE (10/BAG)	
LOCK-MINI-FW	<i>Nylon locking guard for straight minifast field wireable connectors (BS 41..., and B 41...) in Class I, Division 2 installations*</i>
LOCK-MINI-FW (10/BAG)	
LOCK-MINI-B&C	<i>Nylon locking guard for straight minifast "B" Style and "C" Style connectors (RKM, RKV, RSM and RSV) in Class I, Division 2 installations*</i>
LOCK-MINI-B&C (10/BAG)	
LOCK-MINI-B&C-ANGLE	<i>Nylon locking guard for right angle minifast "B" Style and "C" Style connectors (WKM, WKV, WSM and WSV) in Class I, Division 2 installations*</i>
LOCK-MINI-B&C-ANGLE (10/BAG)	

*lokfast Closed**lokfast Open****eurofast® lokfast Guards***

Part Number	Application
LOCK-EURO-G	<i>Nylon locking guard for straight eurofast G-body connectors (RKG, RKGV, RSG and RSGV) in Class I, Division 2 installations*</i>
LOCK-EURO-G (10/BAG)	
LOCK-EURO-R	<i>Nylon locking guard for straight eurofast R-body connectors (RKR, RKRV, RSR and RSRV) in Class I, Division 2 installations*</i>
LOCK-EURO-R (10/BAG)	
LOCK-EURO-FW	<i>Nylon locking guard for straight eurofast field wireable connectors (B81.., BS81.. and BM81..) in Class I, Division 2 installations*</i>
LOCK-EURO-FW (10/BAG)	

*lokfast Open**lokfast Closed*

\* See **TURCK** Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at [www.turck.com/fmcd/](http://www.turck.com/fmcd/) for guidance on installation in hazardous locations.

## **lokfast® Guards for use with AIM Stations**

Part Number	Application
LOCK-FP-T	Nylon locking guard kit for use with models FDNP-L0808G-TT, FDNP-XSG16-TT in Class I, Division 2 installations*
LOCK-FL-T	Nylon locking guard kit for use with models FDNL-L1600-T, FDNL-CPG88-TT in Class I, Division 2 installations*
LOCK-FQ-T	Nylon locking guard kit for use with models FDNQ-XSG08-T, FDNQ-S0800-T in Class I, Division 2 installations*
LOCK-4MB12	Nylon locking guard kit for use with models 4MB12-4P2-CS12, 4MB12-5P3-5 in Class I, Division 2 installations*
LOCK-8MB12	Nylon locking guard kit for use with models 8MB12-4P2-CS12, 8MB12-5P3-5 in Class I, Division 2 installations*
LOCK-FP-E	Nylon locking guard kit for use with model FENP-XSG16 in Class I, Division 2 installations*
LOCK-FP-C	Nylon locking guard kit for use with model FLDP-IOM 88-0001 in Class I, Division 2 installations*
LOCK-FL-E	Nylon locking guard kit for use with model FDNL-S1600-E in Class I, Division 2 installations*
LOCK-FL-C	Nylon locking guard kit for use with model FDNL-L1600-C in Class I, Division 2 installations*
LOCK-FQ-E	Nylon locking guard kit for use with model FDNQ-CSG44-E in Class I, Division 2 installations*
LOCK-FQ-C	Nylon locking guard kit for use with model FDNQ-S0400-C in Class I, Division 2 installations*
LOCK-FP-REP	Nylon locking guard kit for use with models FDN-DN1, REP-DN, FDN-MSTR in Class I, Division 2 installations*



Guards for *lokfast* Bus Ports



Guards for *lokfast* Aux Power Ports



Guards for *lokfast* I/O Ports

\* *lokfast* kit includes guards for Bus / I/O / Aux Power depending on module kits.



**minifast® Conduit Adapters, 1 Port**

- Attaches to Standard Crouse-Hinds 3/4" Form 8, Mark 9 Conduit Bodies for Transition to 3 and 5-Wire minifast Connectors
- Gasket and 8-32 x 1/2 Mounting Screws
- IP 67 Protection  
(only when all receptacles are mated or covered with plugs)
- Terminal Strips Accept Up to 12 AWG Wires



Drawing	Part Number	Specs	Application	Wiring Diagrams
	CA-1/RKF 30	Nylon Housing 80°C 250 V, 9 A	Attaches to standard conduit body for transition to 3-wire minifast connector	
	CA-1/RKF 40		Attaches to standard conduit body for transition to 4-wire minifast connector	
	CA-1/RKF 50		Attaches to standard conduit body for transition to 5-wire minifast connector	

Standard receptacle housing material is nickel plated brass.. "RKF"; "RKFV" indicates 316 stainless steel.

Example: CA-1/RKFV 50.

**Pinouts**

Female		
3-Pin	4-Pin	5-Pin

## minifast® Conduit Adapters, 2 Port

- Attaches to Standard Crouse-Hinds 3/4" Form 8, Mark 9 Conduit Bodies for Transition to 3-5 Wire minifast Connectors
- Gasket and 8-32 x 1/2 Mounting Screws
- IP 67 Protection (only when all receptacles are mated or covered with plugs)
- Terminal Strips Accept Up to 12 AWG Wires



Drawing	Part Number	Specs	Application	Wiring Diagrams
	CA-2/RKF 30	Nylon Housing 80°C 250 V, 9 A	Attaches to standard conduit body for transition to 3-wire minifast connector.	
	CA-2/RKF 30/S651	Attaches to standard conduit body for transition to 3-wire minifast connector, parallel wired.		
	CA-2/RKF 40	Attaches to standard conduit body for transition to 4-wire minifast connector.		
	CA-2/RKF 40/S651	Attaches to standard conduit body for transition to 4-wire minifast connector, parallel wired.		
	CA-2/RKF 50	Attaches to standard conduit body for transition to 5-wire minifast connector.		
	CA-2/RKF 50/S651	Attaches to standard conduit body for transition to 5-wire minifast connector, parallel wired.		

Standard receptacle housing material is nickel plated brass.. "RKF"; "RKFV" indicates 316 stainless steel.  
Example: CA-2/RKFV 50.

For pinouts see bottom of page K222.

**eurofast® Conduit Adapters**

- Attaches to Standard Crouse-Hinds 3/4" Form 8 Conduit Bodies for Transition to 5-Wire eurofast® Connectors
- Gasket and 8-32 x 1/2 Mounting Screws Included
- IP 67 Protection  
(only when all receptacles are mated or covered with plugs)
- Terminal Strips Accept Up to 12 AWG Wires



Drawing	Part Number	Specs	Application	Pinout	Wiring Diagrams
	CA-1/FK 4.5				
	CA-2/FK 4.5	Nylon housing 80°C 250 V, 4 A	Attaches to standard conduit body for transition to 5-wire eurofast connector		

Standard receptacle housing material is nickel plated brass "CA-1(2)/FK 4.5"; "CA-1(2)/FKV 4.5" indicates stainless steel.


## **multifast® Conduit Adapters, 1 Port**

- Attaches to Standard Crouse-Hinds 3/4" Form 8, Mark 9 Conduit Bodies for Transition to 12 and 19-Pin *multifast* Connectors
- Gasket and 8-32 x 1/2 Mounting Screws Included
- IP 67 Protection (only when all receptacles are mated or covered with plugs)
- Terminal Strips Accept Up to 14 AWG Wires



Drawing	Part Number	Specs	Application	Wiring Diagrams
	CA-1/CK 12	Nylon housing Nickel plated brass receptacle housing 80°C 300 V, 4 A	Attaches to standard conduit body for transition to 12-pin <i>multifast</i> connector.	
	CA-1/CKV 12	Nylon housing Stainless steel receptacle housing 80°C 300 V, 4 A		
	CA-1/CK 19	Nylon housing Nickel plated brass receptacle housing 80°C 150 V, 4 A	Attaches to standard conduit body for transition to 19-pin <i>multifast</i> connector.	
	CA-1/CKV 19	Nylon housing Stainless steel receptacle housing 80°C 150 V, 4 A		

### **Pinouts**

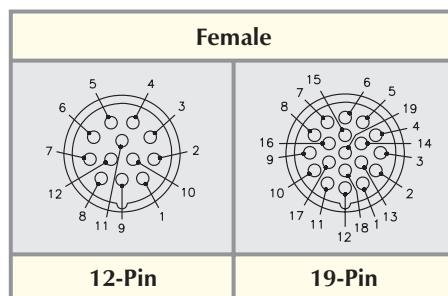

***minifast® eurofast® Conduit Adapter Ground Rings***

Drawing	Part Number	Specs	Application
	CA GROUND RING - MINI FEMALE	Nickel plated brass plating Stainless steel Ground + Set screw material	<i>Grounding of coupling nuts of armored cordsets</i>
	CA GROUND RING - EURO FEMALE		

# Process Automation



Notes:

3, 4 and 5-Pin *minifast*® Field Wireable Connectors

- Straight Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Drawing Number	Part Number	Housing Specs.	Application	Pinout
	B 4131-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	Mates with all 3-pin cordsets and receptacles	
	B 4131-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	Mates with all 3-pin cordsets and receptacles	
	B 4141-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 4-pin cordsets and receptacles	
	B 4141-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 4-pin cordsets and receptacles	
	B 4151-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	
	B 4151-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	
	B 4151-0/16	Glass filled nylon PG 16 cable gland, accepts 12-14 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	

## 3, 4 and 5-Pin *minifast*® Field Wireable Connectors

- Right Angle Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection







Drawing Number	Part Number	Housing Specs.	Application	Pinout
	B 4231-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	B 4241-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	
	B 4251-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	

3, 4 and 5-Pin *minifast*® Field Wireable Connectors

- Straight Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection

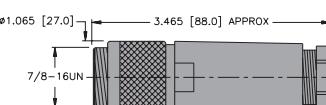

Drawing Number	Part Number	Housing Specs.	Application	Pinout
	BS 4131-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	Mates with all 3-pin cordsets and receptacles	
	BS 4131-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	Mates with all 3-pin cordsets and receptacles	
	BS 4141-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 4-pin cordsets and receptacles	
	BS 4141-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 4-pin cordsets and receptacles	
	BS 4151-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	
	BS 4151-0/13.5	Glass filled nylon PG 13.5 cable gland, accepts 10-12 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	
	BS 4151-0/16	Glass filled nylon PG 16 cable gland, accepts 12-14 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	Mates with all 5-pin cordsets and receptacles	

## 3, 4 and 5-Pin *minifast*® Field Wireable Connectors

- Right Angle Male Connectors
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Drawing Number	Part Number	Housing Specs.	Application	Pinout
	BS 4231-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 12 A	<i>Mates with all 3-pin cordsets and receptacles</i>	
	BS 4241-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 4-pin cordsets and receptacles</i>	
	BS 4251-0/9	Glass filled nylon PG 9 cable gland, accepts 6-8 mm cable diameter Screw terminals, accepts up to 16 AWG conductors 85°C 250 V, 9 A	<i>Mates with all 5-pin cordsets and receptacles</i>	

## 4, 5 and 8-Wire eurofast® Field Wireable Connectors, Standard and Reverse Key

- Straight Female Connectors
- IEC IP 67 Protection



Drawing	Part Number	Housing Specs.	Application	Pinout
	B 8141-0	PBT, Black PG 7 cable gland accepts 4-6 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 250 V, 4 A	Mates with standard key 4-pin cordsets and receptacles	
	B 8141-0/PG 9	PBT, Black PG 9 cable gland accepts 6-8 mm cable diameter Screw terminals 85°C 250 V, 4 A	Mates with standard key 4-pin cordsets and receptacles	
	B 8151-0/PG 9	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	Mates with standard key 5-pin cordsets and receptacles	
	BM 8151-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals Metal coupling nut 85°C 125 V, 4 A	Mates with standard key 5-pin cordsets and receptacles	
	BWS 8141-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals Metal coupling nut 85°C 250 V, 4 A	Mates with reverse key 4-pin cordsets and receptacles	
	BWS 8151-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	Mates with reverse key 5-pin cordsets and receptacles	
	B 8181-0	Nylon, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 60 VAC/75 VDC, 2 A	Mates with standard key 8-pin cordsets and receptacles	

## 4 and 5-Wire eurofast® Field Wireable Connectors, Standard and Reverse Key

- Right Angle Female Connectors
- IEC IP 67 Protection



Drawing	Part Number	Housing Specs.	Application	Pinout
	B 8241-0	PBT, Black PG 7 cable gland accepts 4-6 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 250 V, 4 A	<i>Mates with standard key 4-pin cordsets and receptacles</i>	
	B 8241-0/PG 9	PBT, Black PG 9 cable gland accepts 6-8 mm cable diameter Screw terminals 85°C 250 V, 4 A	<i>Mates with standard key 4-pin cordsets and receptacles</i>	
	B 8251-0/PG 9	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	<i>Mates with standard key 5-pin cordsets and receptacles</i>	
	BWS 8251-0/PG 9	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	<i>Mates with reverse key 5-pin cordsets and receptacles</i>	

## 4, 5 and 8-Wire eurofast® Field Wireable Connectors, Standard and Reverse Key

- Straight Male Connectors
- IEC IP 67 Protection



Drawing	Part Number	Housing Specs.	Application	Pinout
	BS 8141-0	PBT, Black PG 7 cable gland accepts 4-6 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 250 V, 4 A	<i>Mates with standard key 4-pin cordsets and receptacles</i>	
	BS 8141-0/PG 9	PBT, Black PG 9 cable gland accepts 6-8 mm cable diameter Screw terminals 85°C 250 V, 4 A	<i>Mates with standard key 4-pin cordsets and receptacles</i>	
	BS 8151-0/PG 9	PBT, Black PG 9 cable gland, accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	<i>Mates with standard key 5-pin cordsets and receptacles</i>	
	BSWS 8141-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 250 V, 4 A	<i>Mates with reverse key 4-pin cordsets and receptacles</i>	
	BSWS 8151-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	<i>Mates with reverse key 5-pin cordsets and receptacles</i>	
	BS 8181-0	Nylon, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 60 VAC/75 VDC, 2 A	<i>Mates with standard key 8-pin cordsets and receptacles</i>	

## 4, 5 and 8-Wire eurofast® Field Wireable Connectors, Standard and Reverse Key

- Right Angle Male Connectors
- IEC IP 67 Protection








Drawing	Part Number	Housing Specs.	Application	Pinout
	BS 8241-0	PBT, Black PG 7 cable gland accepts 4-6 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 250 V, 4 A	<i>Mates with standard key 4-pin cordsets and receptacles</i>	
	BS 8241-0/PG 9	PBT, Black PG 9 cable gland accepts 6-8 mm cable diameter Screw terminals 85°C 250 V, 4 A	<i>Mates with standard key 4-pin cordsets and receptacles</i>	
	BS 8251-0/PG 9	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	<i>Mates with standard key 5-pin cordsets and receptacles</i>	
	BSWS 8241-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 250 V, 4 A	<i>Mates with reverse key 4-pin cordsets and receptacles</i>	
	BSWS 8251-0	PBT, Black PG 9 cable gland accepts 4-8 mm cable diameter Screw terminals accepts up to 18 AWG conductors 85°C 125 V, 4 A	<i>Mates with reverse key 5-pin cordsets and receptacles</i>	

12, 16 and 19-Pin *multifast*® Field Wireable In-line Connectors

- Female Contact Holder & Thread
- For Use with Custom Wiring & Junction Boxes
- Convert Hard Wiring into Quick Disconnect

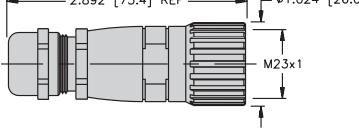

Housing Style	Part Number	Cable	Features	Pinouts
	CK 12-0	Nickel plated brass PG 11 cable gland, Accepts 4-10 mm cable diameter Accepts up to 12x18 AWG conductors 125°C 300 V, 8 A	<i>Field wireable 12-pin in-line connector, for use with minifast®, eurofast® (single input per port) and microfast® junctions boxes</i>	
	CK 16-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 16x18 AWG conductors 125°C 150 V, 8 A	<i>Field wireable 16-pin in-line connector, for use with eurofast (isolated power supply) junctions boxes</i>	
	CK 19-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 19x18 AWG conductors 125°C 150 V, 8 A	<i>Field wireable 19-pin in-line connector, for use with eurofast (two Signals per port) junctions boxes</i>	
	CK 125-0	Nickel plated brass IAC, Accepts 3-10 mm cable diameter Accepts up to 12x18 AWG conductors 125°C 150 V, 8 A	<i>Field wireable 12-pin in-line connector</i>	

## 12, 16 and 19-Pin *multifast*® Field Wireable In-line Connectors

- Male Contact Holder & Thread
- For Use with Custom Wiring & Junction Boxes
- Convert Hard Wiring into Quick Disconnect



Housing Style	Part Number	Cable	Features	Pinouts
	CSS 12-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 12x18 AWG conductor 125°C 300 V, 8 A	<i>Field wireable 12-pin in-line connector, for use with minifast®, eurofast® (single input per port) and microfast® junctions boxes</i>	
	CSS 16-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 16x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 16-pin in-line connector, for use with eurofast (isolated power supply) junctions boxes</i>	
	CSS 19-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 19x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 19-pin in-line connector, for use with eurofast (two signals per port) junctions boxes</i>	
	CSS 125-0	Nickel plated brass IAC, Accepts 3-10 mm cable diameter Accepts up to 12x18 AWG conductors 125°C 150 V, 8 A	<i>Field wireable 12-pin in-line connector</i>	

12, 16 and 19-Pin *multifast*® Field Wireable In-line Connectors

- Male Contact Holder, Female Thread
- For Use with Custom Wiring & Junction Boxes
- Convert Hard Wiring into Quick Disconnect
- IEC IP 65 Protection



Housing Style	Part Number	Cable	Features	Pinouts
	CS 12-0	Nickel plated brass PG 11 cable gland, Accepts 4-10 mm cable diameter Accepts up to 12x18 AWG conductor 125° C 300 V, 8 A	<i>Field wireable 12-pin in-line connector, for use with multifast®, eurofast® (single input per port) and microfast® junctions boxes</i>	
	CS 16-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 16x18 AWG conductor 125° C 150 V, 8 A	<i>Field wireable 16-pin in-line connector, for use with eurofast® (isolated power supply) junctions boxes</i>	
	CS 19-0	Nickel plated brass PG 13.5 cable gland, Accepts 5-12 mm cable diameter Accepts up to 19x18 AWG conductor 125° C 150 V, 8 A	<i>Field wireable 19-pin in-line connector, for use with eurofast® (two Signals per port) junctions boxes</i>	
	CS 125-0	Nickel plated brass IAC, Accepts 3-10 mm cable diameter Accepts up to 12x18 AWG conductors 125° C 150 V, 8 A	<i>Field wireable 12-pin in-line connector</i>	

## 12, 16 and 19-Pin *multifast*® Field Wireable, Front Mount

- Female and Male Connectors
- For Use with Custom Wiring & Junction Boxes
- Convert Hard Wiring into Quick Disconnect
- IEC IP 65 Protection



Housing Style	Part Number	Cable	Features	Pinout
	CKF 12-0	Nickel plated brass Accepts up to 12x18 AWG conductor 125° C 300 V, 8 A	<i>Field wireable 12-pin receptacle, for use with minifast®, eurofast® (single input per port) and microfast® junctions boxes</i>	
	CKF 16-0	Nickel plated brass Accepts up to 16x18 AWG conductor 125° C 150 V, 8 A	<i>Field wireable 16-pin receptacle, for use with eurofast (isolated power supply) junctions boxes</i>	
	CKF 19-0	Nickel plated brass Accepts up to 19x18 AWG conductor 125° C 150 V, 8 A	<i>Field wireable 19-pin receptacle, for use with eurofast (two signals per port) junctions boxes</i>	
	CSF 12-0	Nickel plated brass Accepts up to 12x18 AWG conductor 125° C 300 V, 8 A	<i>Field wireable 12-pin receptacle, for use with minifast, eurofast (single input per port) and microfast junctions boxes</i>	
	CSF 16-0	Nickel plated brass Accepts up to 16x18 AWG conductor 125° C 150 V, 8 A	<i>Field wireable 16-pin receptacle, for use with eurofast (isolated power supply) junctions boxes</i>	
	CSF 19-0	Nickel plated brass Accepts up to 19x18 AWG conductor 125° C 150 V 8 A	<i>Field wireable 19-pin receptacle, for use with eurofast (two signals per port) junctions boxes</i>	

12, 16 and 19-Pin *multifast*® Field Wireable Receptacles, Front Mount, Long Threads

- Female and Male Connectors
- For Use with Custom Wiring & Junction Boxes
- Convert Hard Wiring into Quick Disconnect
- IEC IP 65 Protection



Housing Style	Part Number	Cable	Features	Pinouts
	CKFL 12-0	Nickel plated brass Accepts up to 12x18 AWG conductor 125°C 300 V, 8 A	<i>Field wireable 12-pin receptacle, for use with minifast®, eurofast® (single input per port) and microfast® junctions boxes</i>	
	CKFL 16-0	Nickel plated brass Accepts up to 16x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 16-pin receptacle, for use with eurofast (isolated power supply) junctions boxes</i>	
	CKFL 19-0	Nickel plated brass Accepts up to 19x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 19-pin receptacle, for use with eurofast (two signals per port) junctions boxes</i>	
	CSFL 12-0	Nickel plated brass Accepts up to 12x18 AWG conductor 125°C 300 V, 8 A	<i>Field wireable 12-pin receptacle, for use with minifast, eurofast (single input per port) and microfast junctions boxes</i>	
	CSFL 16-0	Nickel plated brass Accepts up to 16x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 16-pin receptacle, for use with eurofast (isolated power supply) junctions boxes</i>	
	CSFL 19-0	Nickel plated brass Accepts up to 19x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 19-pin receptacle, for use with eurofast (two Signals per port) junctions boxes</i>	

## 12, 16 and 19-Pin *multifast*® Field Wireable Receptacles, Rear Mount

- Female Contact Holder & Thread
- For Use with Custom Wiring & Junction Boxes
- Convert Hard Wiring into Quick Disconnect
- IEC IP 65 Protection



Housing Style	Part Number	Cable	Features	Pinouts
	CKFD 12-0	Nickel plated brass Accepts up to 12x18 AWG conductor 125°C 300 V, 8 A	<i>Field wireable 12-pin receptacle, for use with minifast®, eurofast® (single input per port) and microfast junctions boxes</i>	
	CKFD 16-0	Nickel plated brass Accepts up to 16x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 16-pin receptacle, for use with eurofast (isolated power supply) junctions boxes</i>	
	CKFD 19-0	Nickel plated brass Accepts up to 19x18 AWG conductor 125°C 150 V, 8 A	<i>Field wireable 19-pin receptacle, for use with eurofast (two signals per port) junctions boxes</i>	

**minifast® Closure Caps, Standard**

- 7/8-16UN Thread
- Nickel Plated Brass and Stainless Steel
- Male and Female Caps



Housing	Part Number	Specs	Application
 	RKM-CC	Nickel plated brass 7/8-16UN threads 6' stainless steel lanyard	<i>Closure cap, mates to male cordsets</i>
	RKMV-CC	Stainless steel 7/8-16UN threads 6' stainless steel lanyard	
 	RSM-CC	Nickel plated brass 7/8-16UN threads 6' stainless steel lanyard	<i>Closure cap, mates to female cordsets</i>
	RSMV-CC	Stainless steel 7/8-16UN threads 6' stainless steel lanyard	
 	RKF-CC	Nickel plated brass 7/8-16UN threads 6' stainless steel lanyard	<i>Closure cap, mates to male receptacles</i>
	RKFV-CC	Stainless steel 7/8-16UN threads 6' stainless steel lanyard	
 	RSF-CC	Nickel plated brass 7/8-16UN threads 6' stainless steel lanyard	<i>Closure cap, mates to female receptacles</i>
	RSFV-CC	Stainless steel 7/8-16UN threads 6' stainless steel lanyard	
 	RKF-MC	Nickel plated brass 7/8-16UN threads BUNA-N gasket	<i>Closure cap, mates to male receptacles</i>
	RKFV-MC	Stainless steel 7/8-16UN threads BUNA-N gasket	
 	RSF-MC	Nickel plated brass 7/8-16UN threads BUNA-N gasket and O-ring	<i>Closure cap, mates to female receptacles</i>
	RSFV-MC	Stainless steel 7/8-16UN threads BUNA-N gasket and O-ring	

Note: Add "/S1599" to the end of Part Number for closure caps assembled on cordsets.



## minifast® Closure Caps, "B" Style

- 1-16UN Threads
- Nickel Plated Brass and Stainless Steel
- Male and Female Caps



Housing	Part Number	Specs	Application
	RKMB-CC	Nickel plated brass 1-16UN threads 6" stainless steel lanyard	Closure cap, mates to male cordsets
	RKMBV-CC	Stainless steel 1-16UN threads 6" stainless steel lanyard	
	RSMB-CC	Nickel plated brass 1-16UN threads 6" stainless steel lanyard	Closure cap, mates to female cordsets
	RSMBV-CC	Stainless steel 1-16UN threads 6" stainless steel lanyard	
	RKFB-CC	Nickel plated brass 1-16UN threads 6" stainless steel lanyard	Closure cap, mates to male receptacles
	RKFBV-CC	Stainless steel 1-16UN threads 6" stainless steel lanyard	
	RSFB-CC	Nickel plated brass 1-16UN threads 6" stainless steel lanyard	Closure cap, mates to female receptacles
	RSFBV-CC	Stainless steel 1-16UN threads 6" stainless steel lanyard	
	RKFB-MC	Nickel plated brass 1-16UN threads BUNA-N gasket and O-ring	Closure cap, mates to male receptacles
	RKFBV-MC	Stainless steel 1-16UN threads BUNA-N gasket and O-ring	
	RSFB-MC	Nickel plated brass 1-16UN threads BUNA-N gasket and O-ring	Closure cap, mates to female receptacles
	RSFBV-MC	Stainless steel 1-16UN threads BUNA-N gasket and O-ring	

Note: Add "/S1599" to the end of Part Number for closure caps assembled on cordsets.



**minifast® Closure Caps, "C" Style**

- **1<sup>1</sup>/<sub>8</sub>-16UN Threads**
- **Nickel Plated Brass and Stainless Steel**
- **Male and Female Caps**



Housing	Part Number	Specs	Application
	RKMC-CC	Nickel plated brass 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	<i>Closure cap, mates to male cordsets</i>
	RKMVC-CC	Stainless steel 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	
	RSMC-CC	Nickel plated brass 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	<i>Closure cap, mates to female cordsets</i>
	RSMCV-CC	Stainless steel 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	
	RKFC-CC	Nickel plated brass 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	<i>Closure cap, mates to male receptacles</i>
	RKFCV-CC	Stainless steel 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	
	RSFC-CC	Nickel plated brass 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	<i>Closure cap, mates to female receptacles</i>
	RSFCV-CC	Stainless steel 1 <sup>1</sup> / <sub>8</sub> -16UN threads 6" stainless steel lanyard	
	RKFC-MC	Nickel plated brass 1 <sup>1</sup> / <sub>8</sub> -16UN threads BUNA-N gasket and O-ring	<i>Closure cap, mates to male receptacles</i>
	RKFCV-MC	Stainless steel 1 <sup>1</sup> / <sub>8</sub> -16UN threads BUNA-N gasket and O-ring	
	RSFC-MC	Nickel plated brass 1 <sup>1</sup> / <sub>8</sub> -16UN threads BUNA-N gasket and O-ring	<i>Closure cap, mates to female receptacles</i>
	RSFCV-MC	Stainless steel 1 <sup>1</sup> / <sub>8</sub> -16UN threads BUNA-N gasket and O-ring	

Note: Add "/S1599" to the end of Part Number for closure caps assembled on cordsets.



# Process Automation



## eurofast® Closure Caps

Drawing	Part Number	Cable	Features
	RK-CC	Nickel plated brass M12x1 threads 6" lanyard	Mates to male cordsets
	RKV-CC	Stainless steel M12x1 threads 6" lanyard	Mates to male cordsets
	RS-CC	Nickel plated brass M12x1 threads 6" lanyard	Mates to female cordsets
	RSV-CC	Stainless steel M12x1 threads 6" lanyard	Mates to female cordsets
	FK-CC	Nickel plated brass M12x1 threads 6" lanyard with eyelet	Mates to male receptacles
	FKV-CC	Stainless steel M12x1 threads 6" lanyard with eyelet	Mates to male receptacles
	FS-CC	Nickel plated brass M12x1 threads 6" lanyard with eyelet	Mates to female receptacles
	FSV-CC	Stainless steel M12x1 threads 6" lanyard with eyelet	Mates to female receptacles
	FKK-CC	Plastic M12x1 threads 3" lanyard with eyelet	Mates to male receptacles
	FSK-CC	Plastic M12x1 threads 3" lanyard with eyelet	Mates to female receptacles

**eurofast® Closure Caps**

Drawing	Part Number	Cable	Features
	RKK-CC	Plastic M12x1 threads	<i>Mates to male cordsets</i>
	RSK-CC	Plastic M12x1 threads	<i>Mates to female cordsets</i>
	RK-MC	Nickel plated brass M12x1 threads No lanyard	<i>Mates to male receptacles</i>
	RKV-MC	Stainless steel M12x1 threads No lanyard	<i>Mates to male receptacles</i>
	RS-MC	Nickel plated brass M12x1 threads No lanyard	<i>Mates to female receptacles</i>
	RSV-MC	Stainless steel M12x1 threads No lanyard	<i>Mates to female receptacles</i>
	VZ3-RED (8/BAG)	Red Nylon	<i>Mates to VB2 series junction boxes and female receptacles</i>
	VZ3 (8/BAG)	Nylon	<i>Mates to VB2 series junction boxes and female receptacles</i>

## **multifast® Accessories**

- Field Wireable Assembly Tools
- Closure Caps

Housing Style	Part Number	Cable	Features
	CK-TOLL	N/A	<i>Tool to aid assembly of all M23 multifast field wireables with female threads</i>
	CKF-TOLL	N/A	<i>Tool to aid assembly of all M23 multifast field wireables with male threads</i>
	CS-CC	Nickel plated brass Neoprene gasket	<i>Closure caps for multifast cordset connectors</i>
	CK-CC	Nickel plated brass Neoprene gasket	<i>Closure caps for multifast receptacles (CSF and CKF) and CSS cordset connectors</i>

**TURCK**

**Process Wiring Products**

**Notes:**

*reel*  
*fast.*®


## Bulk Wiring Control Cable

- Spooled in 30, 100, or 200 meter lengths in self-feeding packages
- 2-Wire Analog or HART, Additional Analog or Discrete, NAMUR and *extremelife*® cables to choose from
- ITC, PLC, Exposed Run/Direct Burial, Marine Shipboard and more




## 2-Wire Analog or HART Control Circuit *reelfast*® Cable Selection Guide


**Diagram A**

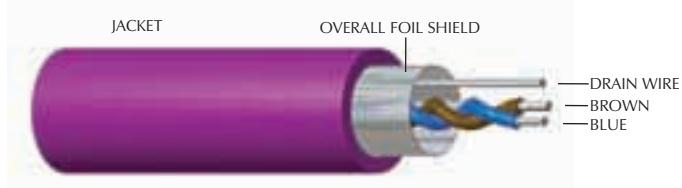


**Diagram B**

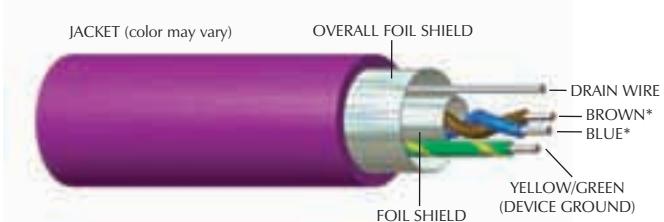

**Diagram C**

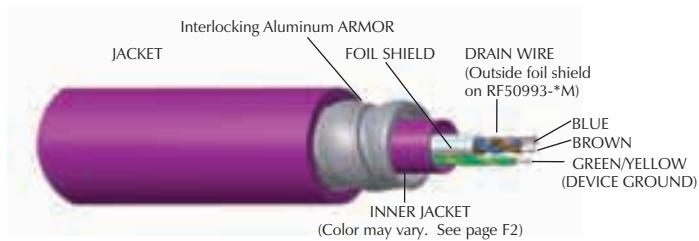

**Diagram D**

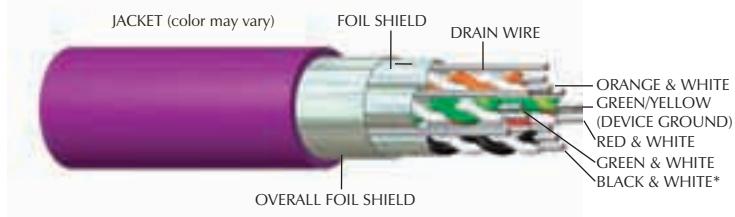

Up to 8 STP. See page F2 for details.

\* Conductor colors may vary. See table on page K240 for details.

STP = Shielded Twisted Pair

Note: See page K240 for corresponding bulk cable specifications.

# Process Automation



## 2-Wire Analog or HART Control Circuit *reelfast*® Cable Selection Guide

Diagram	No. of Cond.	AWG	Jacket Characteristics	ID Number	Ship Wt. (lb <sub>s</sub> )	Conductor Colors	Shield	UL	CSA	Type	MSHA	Temp. (°C)
A	2	18	PVC Plum 300 V 7.2 mm OD	RF51026-30M RF51026-100M RF51026-200M	5 17 34	1 pair = (BU, BN), Drain (20)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
B	3	16	PVC Plum 300 V 7.6 mm OD	RF51098-30M RF51098-100M RF51098-200M	7 22 44	1 pair = (WH, BK), GN, Drain (18)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
B	3	16	PVC Blue 300 V 7.6 mm OD	RF51327-30M RF51327-100M RF51327-200M	7 22 44	1 pair = (WH, BK), GN, Drain (18)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
B	3	18	PVC Blue 300 V 7.2 mm OD	RF51330-30M RF51330-100M RF51330-200M	6 19 38	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	ITC-Exposed Run/Direct Burial/PLTC		105° -25°
C	3	18	PVC ARMOR Plum 300 V 13.5 mm OD	RF50947-30M RF50947-100M RF50947-200M	14 47 94	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
B	3	18	PVC Plum 300 V 7.2 mm OD	RF50949-30M RF50949-100M RF50949-200M	6 19 38	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
B	3	18	PVC Plum 300 V 7.2 mm OD	RF51162-30M RF51162-100M RF51162-200M	6 19 38	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	ITC-Exposed Run/Direct Burial/PLTC		105° -25°
B	3	18	PVC Plum 300 V 7.2 mm OD	RF51124-30M RF51124-100M RF51124-200M	6 19 38	1 pair = (RD, BK), GN/YE, Drain (20)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
B	3	18	PVC BU 300 V 7.2 mm OD	RF50950-30M RF50950-100M RF50950-200M	6 19 38	1 pair = (BU, BN), GN/YE, Drain (20)	Foil/Drain	*	*	ITC/PLTC		105° -25°
C	3	22	PVC ARMOR Plum 11.2 mm OD	RF50993-30M RF50993-100M RF50993-200M	11 34 68	1 pair = (BU, BN), GN/YE, Drain (24)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
D	9	18 22	PVC Plum 300 V 10 mm OD	RF51229-30M RF51229-100M RF51229-200M	9 30 60	4 pair/22 AWG = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), 18 AWG=GN/YE, Drains (5x22)	STP Foil/Drain	*	*	ITC-Exposed Run/Direct Burial/PLTC		105° -25°
D	9	18 22	PVC Plum 300 V 10 mm OD	RF50960-30M RF50960-100M RF50960-200M	9 30 60	4 pair/22 AWG = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), 18 AWG = GN/YE, Drains (5x22)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
D	17	18 22	PVC Plum 300 V 12 mm OD	RF50959-30M RF50959-100M RF50959-200M	14 45 90	8 pair/22 AWG = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), (WH/BU, BU/WH), (WH/BN, BN/WH), (WH/YE, YE/WH), (WH/VT, VT/WH), 18 AWG = GN/YE, Drains (9x22)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
D	17	18 22	PVC Plum 300 V 12.7 mm OD	RF51230-30M RF51230-100M RF51230-200M	17 55 110	8 pair/22 AWG = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), (WH/BU, BU/WH), (WH/BN, BN/WH), (WH/YE, YE/WH), (WH/VT, VT/WH), 18 AWG = GN/YE, Drains (9x22)	STP Foil/Drain	*	*	ITC-Exposed Run/Direct Burial/PLTC		105° -25°
D	8	22	PVC BU 300 V 10 mm OD	RF50978-30M RF50978-100M RF50978-200M	9 30 60	4 Pair = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), (WH/BU, BU/WH), (WH/BN, BN/WH), (WH/YE, YE/WH), (WH/VT, VT/WH), GN/YE, Drain (22)	4 STP Foil/Drain	*	*	ITC/PLTC		105° -25°
D	16	22	PVC BU 300 V 12 mm OD	RF50977-30M RF50977-100M RF50977-200M	14 45 90	8 Pair = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), (WH/BU, BU/WH), (WH/BN, BN/WH), (WH/YE, YE/WH), (WH/VT, VT/WH), GN/YE, Drain (22)	8 STP Foil/Drain	*	*	ITC/PLTC		105° -25°


STP = Shielded Twisted Pair.

## Additional Analog or Discrete Control Circuit reelfast® Cable Selection Guide


**Diagram A**



**Diagram B**

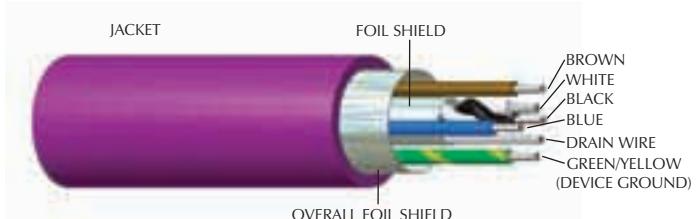


**Diagram C**

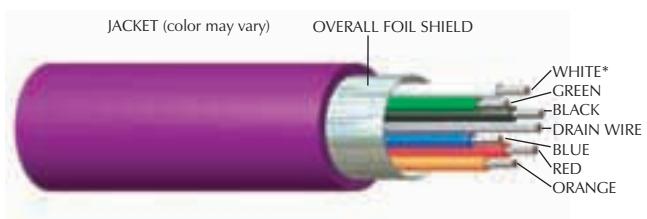

**Diagram D**



**Diagram E**

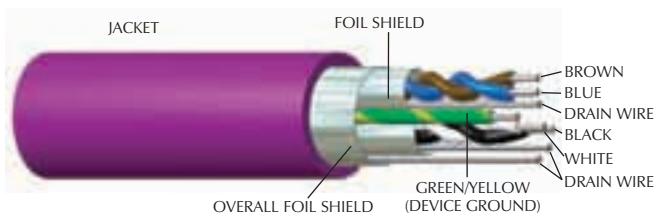

\* Conductor colors may vary. See table on page K240 for details.

STP = Shielded Twisted Pair

Note: See page K240 for corresponding bulk cable specifications.

## Additional Analog or Discrete Control Circuit *reelfast*® Cable Selection Guide

Photo/Diagram	No. of Cond.	AWG	Jacket Characteristics	ID Number	Ship Wt. (lbs)	Conductor Colors	Shield	UL	CSA	Type	MSHA	Temp.
	3	18	PVC YE 300 V 7.2 mm OD	RF50880-30M RF50880-100M RF50880-200M	6 18 35	BN, BU, GN/YE		*	*	ITC/PLTC		105° -25°
	3	18	PVC GY 300 V 7.2 mm OD	RF51187-30M RF51187-100M RF51187-200M	6 18 36	BK, WH, GN		*	*	ITC/PLTC		105° -25°
A	4	16	PVC Plum 300 V 10.4 mm OD	RF51099-30M RF51099-100M RF51099-200M	10 32 64	Triad = (WH, RD, BK), GN, Drain (18)	Triad Foil/Drain	*	*	ITC/PLTC		105° -25°
A	4	16	PVC BU 300 V 10.4 mm OD	RF51328-30M RF51328-100M RF51328-200M	10 32 64	Triad = (WH, RD, BK), GN, Drain (18)	Triad Foil/Drain	*	*	ITC/PLTC		105° -25°
A	4	18	PVC Plum 300 V 8.1 mm OD	RF51108-30M RF51108-100M RF51108-200M	7 21 42	Triad = (BU, BN, BK), GN/YE, Drain (20)	Triad Foil/Drain	*	*	ITC/PLTC		105° -25°
D	4	18	ARMOR PVC YE 600 V 13.5 mm OD	RF51041-30M RF51041-100M RF51041-200M	11 36 71	BK, WH, RD, GN		*	*	UL 1569 MC, ITC/PLTC		105° -25°
	4	22	PVC GY 300 V 5.2 mm OD	RF50698-30M RF50698-100M RF50698-200M	3 9 18	BN, WH, BU, BK		*	*	ITC/PLTC		105° -25°
C	4	22	PUR BK 300 V 6.9 mm OD	RF51095-30M RF51095-100M RF51095-200M	4 14 28	BN, WH, BU, BK, Drain (22)	Foil/Drain	*	*	ITC/PLTC		105° -60°
B	5	16	PVC Plum 300 V 12.5 mm OD	RF51025-30M RF51025-100M RF51025-200M	15 49 98	1 pair = (WH, BK), BU, BN, GN/YE, Drain (18)	STP Foil/Drain	*	*	ITC/PLTC		105° -25°
	5	18	PVC GY 300 V 7.2 mm OD	RF50972-30M RF50972-100M RF50972-200M	7 21 42	BK, WH, GY, BN, BU		*	*	ITC/PLTC		105° -25°
E	5	18	PVC Plum 300 V 7.9 mm OD	RF51318-30M RF51318-100M RF51318-200M	8 26 53	2 pair = (BK, WH), (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	ITC-Exposed Run/Direct Burial/PLTC		105° -25°
C	6	16	PVC BU 300 V 9.6 mm OD	RF50329-30M RF50329-100M RF50329-200M	11 36 72	WH, RD, GN, OG, BK, BU, Drain (18)	Foil/Drain	*	*	ITC/PLTC		105° -25°
	6	16	PVC YE 600 V 9.6 mm OD	RF51030-30M RF51030-100M RF51030-200M	11 34 68	BK, WH, RD, OG, BU, GN		*	*	ITC/PLTC		105° -25°
	6	16	PVC Plum 300 V 11.2 mm OD	RF51233-30M RF51233-100M RF51233-200M	13 45 90	WH, RD, GN, OG, BK, BU		*	*	ITC-Exposed Run/Direct Burial/PLTC		105° -25°
C	6	16	PVC Plum 300 V 9.6 mm OD	RF51219-30M RF51219-100M RF51219-200M	11 36 72	WH, RD, GN, OG, BK, BU, Drain (18)	Foil/Drain	*	*	ITC/PLTC		105° -25°
C	11	18	PVC YE 300 V 10 mm OD	RF51088-30M RF51088-100M RF51088-200M	13 42 84	GN, YE, GY, PK, RD, BK, VT, BU, WH, BN, GN/YE, Drain (20)	Foil/Drain	*	*	ITC/PLTC		105° -25°

STP = Shielded Twisted Pair.

**Intrinsically Safe NAMUR Circuit reelfast® Cable Selection Guide**

<i>Photo</i>	<i>No. of Cond.</i>	<i>AWG</i>	<i>Jacket Characteristics</i>	<i>ID Number</i>	<i>Ship Mt. (lbs.)</i>	<i>Conductor Colors</i>	<i>Shield</i>	<i>UL</i>	<i>CSA</i>	<i>Type</i>	<i>MSHA</i>	<i>Temp. (°C)</i>
	2	20	PVC BU 300 V 5.15 mm OD	RF20003-30M RF20003-100M RF20003-200M	3 10 19	BN, BU		*	*	AWM 2517	*	105° -50°
	2	20	PUR BU 300 V 5.2 mm OD	RF50657-30M RF50657-100M RF50657-200M	3 8 16	BN, BU		*	*	AWM 21002		105° -60°
	4	22	PVC BU 300 V 5.2 mm OD	RF50598-30M RF50598-100M RF50598-200M	3 9 18	BN, WH, BU, BK		*	*	AWM 2517	*	105° -50°
	5	22	PVC BU 300 V 6.8 mm OD	RF50767-30M RF50767-100M RF50767-200M	5 15 29	WH, BK, GN, RD, OG		*	*	PLTC	*	105° -30°
	5	24	PUR BU 300 V 5.7 mm OD	RF50928-30M RF50928-100M RF50928-200M	4 11 20	BU, OG, RD, YE, BK, Drain (24)	Foil/Drain	*	*	AWM 21002		105° -60°
	9	22	PVC BU 300 V 6.9 mm OD	RF50741-30M RF50741-100M RF50741-200M	5 13 26	WH, BK, GN, RD, OG, BU, BN, YE, VT		*	*	PLTC		105° -25°
	16	22	PVC BU 300 V 8.3 mm OD	RF50744-30M RF50744-100M RF50744-200M	8 25 50	WH, BK, GN, RD, OG, BU, BN, YE, VT, GY, PK, TN, WH/BK, WH/GN, WH/RD, WH/BU		*	*	PLTC		105° -25°

# Process Automation




Notes:


## Control *extremelite*® *reelfast*® Cable Selection Guide

- UL 1309 Approved
- ABS Approved
- Marine Shipboard

**Diagram A**

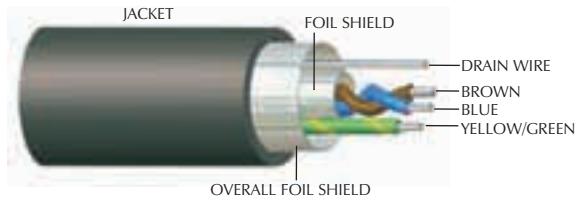


**Diagram B**

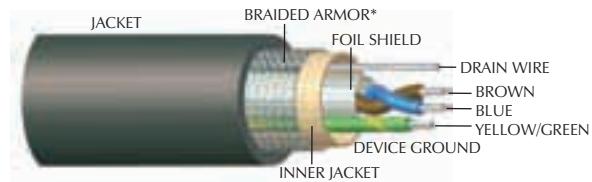


\*AVAILABLE ON SOME CABLE TYPES

**Diagram C**

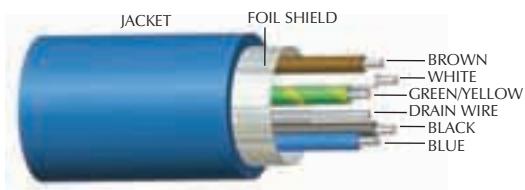

**Diagram D**

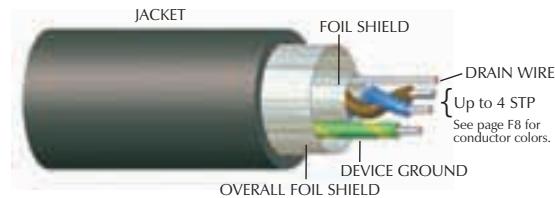

**Diagram E**



STP = Shielded Twisted Pair

Note: See page K244 for corresponding bulk cable specifications.

# Process Automation



## Control *extremelife*® *reelfast*® Cable Selection Guide

Diagram	No. of Cond.	AWG	Jacket Characteristics	ID Number	Ship Wt. (lbs)	Conductor Colors	Shield	Type	Temp. (°C)		
								UL			
A	3	18	PVC BK 300 V 8.4 mm OD <i>extremelife</i> -25	RF51180-30M RF51180-100M RF51180-200M	7 21 42	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	A	105° -40°
B	3	18	PVC, ARMOR, BK 300 V 12.5 mm OD <i>extremelife</i> -25	RF51181-30M RF51181-100M RF51181-200M	17 57 114	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*		105° -40°
A	3	18	TPE BK 300 V 8.4 mm OD <i>extremelife</i> -55	RF51188-30M RF51188-100M RF51188-200M	6 20 40	1 pair = (BU, BN), GN/YE, Drain (20)	STP Foil/Drain	*	*	B	105° -55°
C	5	18	PVC BU 300 V 10.4 mm OD <i>extremelife</i> -25	RF50964-30M RF50964-100M RF50964-200M	10 33 66	BN, WH, BK, BU, GN/YE, Drain (20)	Foil/Drain	*	*	A	105° -40°
D	5	18	PVC BK 300 V 10.4 mm OD <i>extremelife</i> -25	RF51182-30M RF51182-100M RF51182-200M	10 32 64	2 pair = (BN, BU), (BK, WH), GN/YE, Drain (2 x 20)	STP Foil/Drain	*	*		105° -40°
E	8	18	PVC, ARMOR, BU 300 V 17.8 mm OD <i>extremelife</i> -25	RF51073-30M RF51073-100M RF51073-200M	31 103 206	4 pair = (BK, WH), (BU, RD), (YE, BN), (GY, GN), Drains (4 x 20)	STP Foil/Drain	*	*	B	105° -40°
D	8	18	TPE BK 300 V 15.1 mm OD <i>extremelife</i> -55	RF51158-30M RF51158-100M RF51158-200M	18 60 120	4 pair = (BK, WH), (BU, RD), (YE, BN), (GY, GN), Drains (5 x 20)	STP Foil/Drain	*	*		105° -55°
D	9	18	PVC BK 300 V 13.2 mm OD <i>extremelife</i> -25	RF51183-30M RF51183-100M RF51183-200M	16 52 104	4 pair = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), GN/YE, Drains (4 x 20)	STP Foil/Drain	*	*	A	105° -40°
D	9	18	TPE BK 300 V 15.1 mm OD <i>extremelife</i> -55	RF51189-30M RF51189-100M RF51189-200M	19 60 120	4 pair = (WH/BK, BK/WH), (WH/GN, GN/WH), (WH/RD, RD/WH), (WH/OG, OG/WH), GN/YE, Drains (4 x 20)	STP Foil/Drain	*	*	B	105° -55°

STP = Shielded Twisted Pair

### Type A - All *extremelife*-25 Cables

- Marine Shipboard
- UL1309
- IEEE 1202/FT4
- IEEE 45-1998
- IEEE 1580-2001
- IEC 332-3

### Type B - All *extremelife*-55 Cables

- Marine Shipboard
- UL1309
- ITC
- ABS App.No. 03-HS400-763-PDA

**TURCK Standards**

One or more of the following standards may apply to products or components of products in this catalog. This section is intended to provide a reference to the applicable standards only. Original or facsimiles of the original standards documents should be used for interpretation. It is the responsibility of the user to determine the suitability of use of the products represented in this catalog.

**ANSI/B93.55M**

Generally defines the geometry and connection scheme of "mini" type connectors used in fluid power (valve) applications. It defines the numerical marking of the pins and the conductor size and colors for 3 and 5 pin versions. This specification was the basis for the so-called "automotive" standard conductor colors that are widely used on sensors.

**CENELEC EN 50 044**

Identifies connections for inductive proximity switches. The specification defines conductor colors for proximity switches with 2, 3, or 4 conductors. It also defines numerical marking of the terminals, whether quick disconnect, or not. **TURCK** sensors and recommended cordsets that apply within the scope of the standard comply with CENELEC EN 50 044. The conventions defined in this standard have been widely adopted in industry to include photoelectric controls and other related sensing devices.

**CSA**

The Canadian equivalent of UL in Canada. It is a government-run organization that tests and certifies that products conform to their own set of safety-related specifications.

**DIN 43650**

Defines the geometry and other characteristics of the "square" connectors most frequently used on hydraulic and pneumatic solenoid valves and other devices in the fluid power industry.

**MSHA**

The Mine Safety and Health Administration - a US Government agency that ensures and regulates safety for mines and mine workers. The MSHA approval is required for products used in underground mines, including electrical equipment, power cords, and instrumentation components.

The MSHA standards require special fire-resistant properties and characteristics that prevent the propagation of flames.

**NRTL**

Nationally Recognized Test Laboratory - An independent laboratory authorized by the US Government to perform product safety evaluations. Test laboratories must meet government laboratory standards, and are audited annually by OSHA to maintain this credential. UL standards are adopted by the US government and OSHA as being "Safety Standards", and these accredited labs then use the UL standards to perform product evaluations.

The Canadian Standards Association, (CSA) is authorized as a NRTL to perform product evaluations and tests to the UL Standards. The certification mark "CSA NRTL/C" is then applied to products that satisfy all construction and performance criteria for both US and Canada. This certification mark is generally accepted by local building, safety, and quality agencies as meeting safety, construction, and performance criteria in both the US and Canada.


## Shielded Cordsets

Whenever wire is used to transmit electrical data, it is possible for the wire to absorb external noise, possibly changing the characteristics of the electrical signal, or to give off noise that could cause changes in other electrical components that are near. Shielding is the act of placing conductive material between the potential noise emitters and receivers.

Electrical noise is usually classified as electro-magnetic interference (EMI) or radio frequency interference (RFI).

**TURCK** offers a number of shielding options:


1. Foil shield with drain, drain not connected

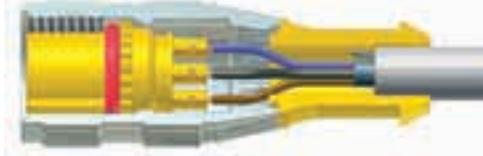


3. Foil and braid shield with shield tied to coupling nut



2. Foil shield with drain, drain connected to a pin

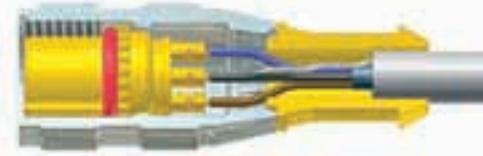

4. Aluminum armored cable with armor tied to coupling nut

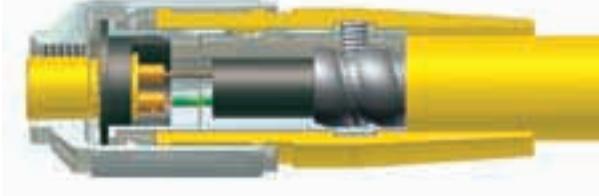

For a shield to be effective, it must be tied to a ground at some point. It is usually preferred to not tie the shield to ground at more than one point to avoid ground loops. A shield not tied to a ground will reflect some noise and is better than no shield at all, but will be much more effective if tied to a ground.

High frequency noise, RFI, is handled well with a foil shield. The wavelength of RFI is usually small and can pass through the 'holes' in a braided shield. EMI is usually larger wavelengths and needs a braided shield to increase the mass of shielding material to be effective.

Aluminum armored cables provide the ultimate in noise immunity as they are basically flexible conduit.

Select the shielded cordset that best meets your needs. If it is easier to tie the shield to ground inside the panel, the foil/drain with the drain not connected inside the cordset is a good choice. If you can connect the drain via a pin inside the device being connected, the foil/drain with the drain connected to a pin is a good choice. Any environments with EMI noise from things like large motors or welding equipment will benefit from a braided shield tied to the coupling nut.

**TURCK** shielded cordsets with the shield tied to the coupling nut offer complete shielding for the entire length of the cordset. A metal sleeve inside the molded body connects the braid/foil shield of the cable to the metal coupling nut with no loss of shielding potential.

**TURCK** armored cordsets are the ultimate in shielded connectors. A **TURCK** patented process allows the interlocked aluminum armor to be connected directly to the coupling nut offering the same protection as running conductors inside metal conduit.

## IP Protection Class

IP	Dust Protection						
	0 Unprotected	1 Objects ≥50mm	2 Objects ≥12.5mm	3 Objects ≥2.5mm	4 Objects ≥1.0mm	5 Dust Protected	6 Dust Tight
_0 Unprotected	IP 00	IP 10	IP 20	IP 30	IP 40	IP 50	IP 60
_1 Dripping Water		IP 11	IP 21	IP 31	IP 41	IP 51	IP 61
_2 Dripping Water on 15° slant		IP 12	IP 22	IP 32	IP 42	IP 52	IP 62
_3 Spraying Water			IP 23	IP 33	IP 43	IP 53	IP 63
_4 Splashing Water				IP 34	IP 44	IP 54	IP 64
_4K Splashing Water High Pressure				IP 34K	IP 44K	IP 54K	IP 64K
_5 Jet Water						IP 55	IP 65
_6 Intense Jet Water						IP 56	IP 66
_6K Intense Jet Water High Pressure						IP 56K	IP 66K
_7 Temporary immersion							IP 67
_8 Continuous immersion as specified by manufacturer							IP 68
_9K Water at high pressure/Steam jet cleaning							IP 69K

**IP 67 Protection**

First ID Number	Protection from penetration of...	Requirements
0	Unprotected	N/A
1	Solid Foreign Particles Ø50 mm	No full penetration of sphere with Ø50 mm
2	Solid Foreign Particles Ø12.5 mm	No full penetration of sphere with Ø12.5 mm
3	Solid Foreign Particles Ø2.5 mm	No penetration of rod with Ø2.5 mm
4	Solid Foreign Particles Ø1.0 mm	No penetration of wire with Ø1.0 mm
5	Dust	Dust may only penetrate in such quantity that function and safety are not impacted
6	Dust	No penetration of dust

Second ID Number	Protection from penetration of...	Requirements
0	Unprotected	N/A
1	Dripping water	Vertically falling drips may not cause any damage
2	Dripping water when the enclosure is in a slanted position of up to 15°	Vertically falling drips may not cause any damage
3	Spraying water	Spraying water, which is sprayed in a perpendicular angle of up to 60° may not cause any damage
4	Splashing water	Water splashing against the enclosure from every direction may not cause any damage
4K	Splashing water with increased pressure	Water splashing against the enclosure from every direction and with increased pressure may not cause any damage
5	Jet water	Water which is hosed against the enclosure from every direction may not cause damage
6	Intense jet water	Water which is hosed against the enclosure with high intensity may not cause any damage
6K	Intense jet water with increased pressure	Water which is hosed against the enclosure with high intensity and increased pressure may not cause any damage
7	Temporary immersion in water	Water may not enter the enclosure in such quantity as to cause damage when the enclosure is held under water for a set period of time using predetermined pressure (1 m for 30 min)
8	Continuous immersion in water	Water may not enter the enclosure in such quantity as to cause damage when the enclosure is held under water for a set period of time using predetermined pressure (TURCK standard is 6' of water, and other chemicals, for a period of 24 hours)
9K	Water at high-pressure/steam jet cleaning	Water which is directed against the enclosure from every direction with extremely high pressure may not cause any damage (14 to 16 l/min at 8,000 to 10,000 kPa)

## NEMA Standards

NEMA		NEMA 1	NEMA 2	NEMA 12	NEMA 13	NEMA 3	NEMA 3R	NEMA 4	NEMA 4X	NEMA 6	NEMA 6P
Rating Type		Indoor				Outdoor		Indoor/Outdoor			
Protection against:	Test Number										
Incidental Contact	6.2	•	•	•	•	•	•	•	•	•	•
Falling Dirt	6.2	•	•	•	•	•	•	•	•	•	•
Rust	6.8	•		•	•	•	•	•	•	•	•
Circulating Dust, Lint, Fibers (nonhazardous)	6.5.1.2(2)			•	•	•		•	•	•	•
Windblown Dust	6.5.1.1(2)					•		•	•	•	•
Falling Liquids/Light Splashing	6.3.2.2		•	•	•	•		•	•	•	•
Rain	6.4.2.1					•	•	•	•	•	•
Rain	6.4.2.2					•		•	•	•	•
Snow and Sleet	6.6.2.2					•	•	•	•	•	•
Hose Down and Splashing Water	6.7							•	•	•	•
Occasional Prolonged Submersion	6.11(2)								•	•	
Oil and Coolant Drip	6.3.2.2			•	•						
Oil and Coolant, Spray/Splash	6.12				•						
Corrosive Agents	6.9					•	•		•		•

**6.2 Rod Entry Test** - a 1/2" diameter rod may not enter the enclosure and a 1/8" rod cannot enter within 4" of live components

**6.3 Drip Test** - 20 drops per minute for 30 minutes with no water entering enclosure 6.3.2.2 Evaluation, no water shall enter enclosure

**6.4 Rain Test** - All exposed surfaces are sprayed with 5 psi of water for 60 minutes at a rate of 18" per hour rise in a straight sided pan 6.4.2.1 Evaluation, No water shall have reached live parts, insulation, or mechanisms 6.4.2.2 Evaluation, No water shall have entered enclosure

**6.5.1.1 (2) Outdoor Dust Test (alternate method)** - Stream of water at 45 gallons per minute from a 1" diameter nozzle, from all directions at a distance from 10' to 12'. Test time is a minimum of 5 minutes. No water shall enter enclosure.

**6.5.1.2 (2) Indoor Dust Test (alternate method)** - Atomized water at 30 psi is sprayed from all directions from a distance of 12" to 15" at a rate of 3 gallons per hour. No water shall enter enclosure.

**6.6 External Icing Test** - The enclosure is sprayed with water between 0°C and 3°C in a room at 2°C. The spray is between 1 and 2 gallons per hour per square foot. Spray for 1 hour. The room temp is then dropped to between -7°C and -3°C with the spray still going. Ice needs to build up on a test bar at a rate of 1/4 inch per hour. Spray continues until 3/4 inch of ice is on the enclosure. Room temperature is maintained for at least 3 hours. 6.6.2.2 Evaluation, enclosure is undamaged after ice has melted.

**6.7 Hose down Test** - Stream of water at 65 gallons per minute from a 1" diameter nozzle from all angles at a distance of 10' to 12'. Test time is 48 seconds times (height + width + depth of enclosure in feet) or a minimum of 5 seconds. No water shall enter enclosure.

**6.8 Rust Resistance Test** - only applicable to enclosures incorporating external ferrous parts

**6.9 Corrosion Protection** - Test per UL 508, 6.9 or 6.10.

**6.11 (2) Air Pressure Test (alternate method)** - Enclosure is submerged in water at a pressure equal to a depth of 6' for 24 hours. No water shall enter enclosure.

**6.12 Oil Exclusion Test** - Stream of test liquid at 2 gallons per minute from a 3/8" nozzle for 30 minutes. Water with 0.1% wetting agent is directed from all angles from a distance of 12" to 18". No test liquid shall enter the enclosure.

**Conversion Chart****AWG to Metric**

<b>AWG</b>	<b>Diameter mm</b>	<b>Section mm<sup>2</sup></b>
8	3.26	10
10	2.59	6
12	2.05	4
14	1.63	2.5
16	1.29	1.5
18	1.024	0.75
20	0.813	0.5
22	0.643	0.34
24	0.511	0.25
26	0.405	0.14
28	0.32	0.05
30	0.255	0.05

**Thread Conversion Chart****PG to Metric**

<b>PG</b>	<b>Diameter (mm)</b>
7	12
9	16
11	20
16	25

**Cable Length Tolerance Chart**

<b>All Lengths</b>	
<b>Strip Length</b>	<b>Diameter (mm)</b>
0-7 mm	±0.5 mm
8-29 mm	±1.0 mm
30-49 mm	±2.0 mm
50-69 mm	±3.0 mm
70-100 mm	±4.0 mm
Over 100 mm	±5.0 mm

## Installing Cable Products in Accordance with the National Electrical Code (NEC)

The NEC is a set of guidelines for installation of electrical devices, including cables, meant to reduce the risk of electrical shock, fire, etc. The NEC is simply a code and local laws may or may not require installation based on the NEC. Check local laws for applicability.

The NEC generally does not cover cables installed inside a machine. Any cables installed in an exposed manner, on the outside of a machine or from one machine to something else, must be an approved type and installed in accordance with the appropriate NEC articles.

UL (Underwriters Laboratory) and CSA (Canadian Standards Association) are the primary sources in North America for approving cables to specific standards. While a cable installed within a piece of machinery does not fall under the NEC, most people want to install an approved cable. **TURCK** cables have both UL and CSA approvals. Many of these approvals are the UL AWM (Appliance Wiring) approvals and are acceptable for use in a UL approved device. A UL Listed cable may be installed outside a machine per the NEC standards. UL Listed cables available from **TURCK** include NEC designations for hard duty cables (SOOW, SJOOW, STOOW, SEOW), armored cables (MC), and tray-rated cables (PLTC, ITC).

Hard duty cables designations are:

- S - Service Grade (600V)
- SJ - Service Grade Junior (300V)
- ST - Service Grade Thermoplastic (600V)
- SE - Service Grade Thermoplastic Elastomer (600V)
- O - Oil resistant jacket material
- OO - Oil resistant jacket and conductor insulation
- W - Weather proof

**TURCK** armored cables are available in 3 different configurations. Type MC cables, type MC cables with ITC/PLTC approvals and simply ITC/PLTC approved. Armored cables with ITC/PLTC approvals may be installed in an exposed run without being offered additional mechanical protection.

Tray-rated cables from **TURCK** include Instrument Tray Cable (ITC) and/or Power Limited Tray Cable (PLTC).

**TURCK** NEC type approved cables are dual listed with other UL type approvals. For example, the RKM 126-\*M cordset has a 12 conductor 16 AWG cable with UL AWM 600V approval and ITC/PLTC approval.

Please refer to the NEC and local laws for specific installation requirements based on your environment.

## Cable Applications

Proper management of cabling systems can mean the difference between a dependable and smooth operating installation and costly reoccurring down time. The suggestions outlined below illustrate some of the common sources of problems and provide simple and effective solutions.

### Proper Bend Radius for Fixed and Moving Applications

Providing sufficient bend radius will allow the cable to absorb the energy of bending over a greater portion of its length, increasing its effective working life. Small increases in the radius of the bend can produce substantial increases in cable life.

**Fixed Applications:**  
Minimum bend radius 5x cable diameter



**Moving Applications:**  
Minimum bend radius 10x cable diameter



### Eliminating Stress Points in Cable Dress

Installing cables to allow for adequate stress loops and freedom of motion increase the life of the cables. **TURCK** cordsets incorporate molded strain reliefs that will assist in preventing stress.

**Tie Down Loops**

Correct



Incorrect




**Strain Relief**

Correct




Incorrect

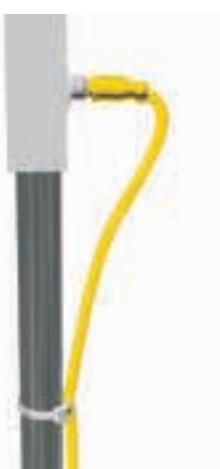

## Cable Bundling Techniques

When bundling several cables together, always keep the bundle loose enough to move within itself. Tightly tied bundles create both compression and tension stresses when the bundle is moved.

**Correct**

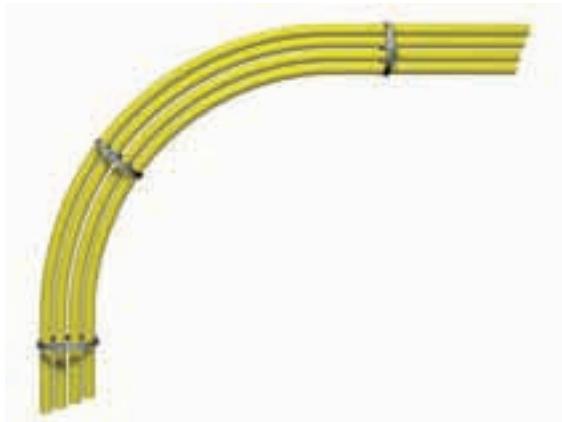


**Incorrect**




## Cabling for Motion Applications

Where cabling is subjected to linear, angular or rotational motion between two points, always allow adequate cable length to absorb the energy imparted by the motion. Use of coiled cords, mechanical support mechanisms, or large, well supported cable loops will maximize cable life.


**Coil Cord**

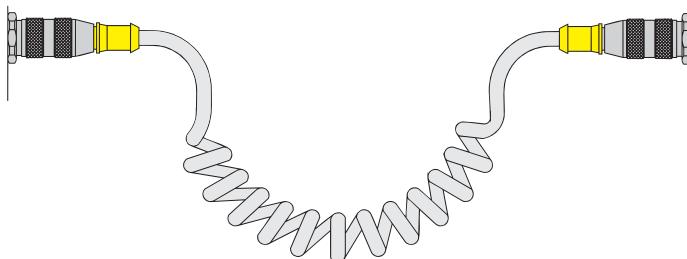

**"C" Track**

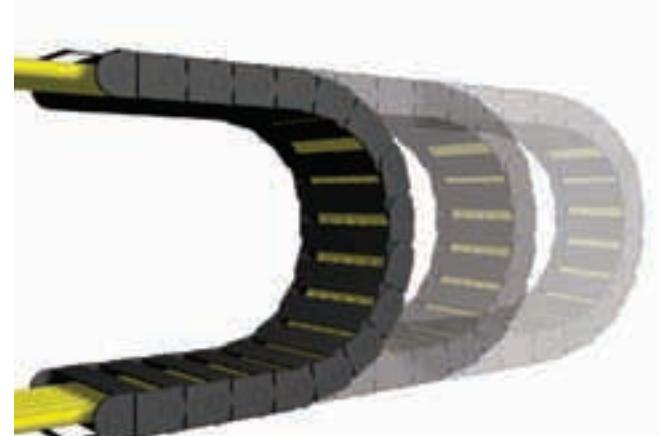


**Cable Loop**

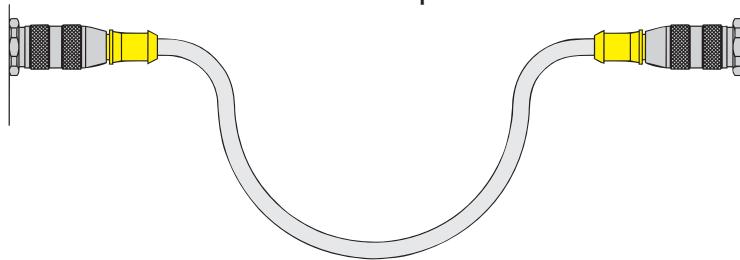


### Tying Cables with Cable Ties

When tying cable with self locking cable ties, always leave the ties loose enough for the cables to slide freely under the tie. Over tightening will create stress concentrations that can cause the conductors to fail prematurely. Never tighten the tie to the point where the cable jacket becomes deformed or pinched.

**Correct**

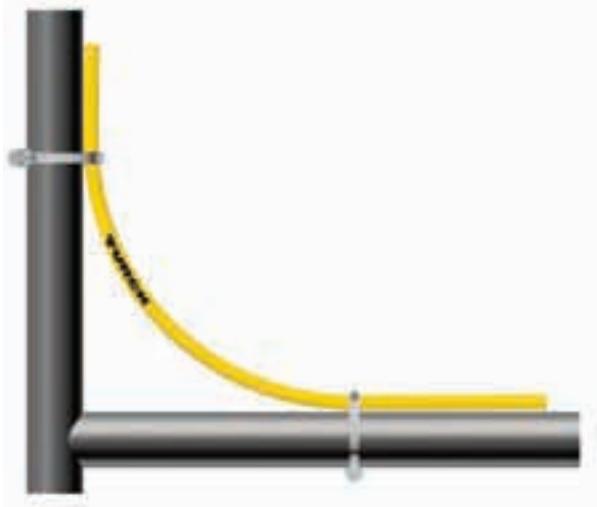

**Incorrect**

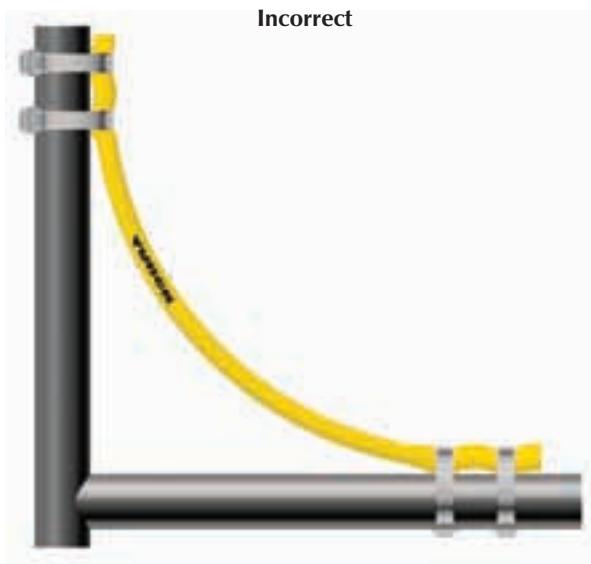

## Installation Instructions for TURCK's *minifast*® and *eurofast*® Connectivity Products

Follow these simple steps to ensure that your **TURCK** connectivity products are installed for best performance and safety.

### Step One:

Many instruments are available with a **TURCK** receptacle pre-installed. If a receptacle is already installed, proceed to Step Two. If field installation of a receptacle is necessary, feed the receptacle leads through the instrument's conduit entry and thread the receptacle into the entry threads. Receptacles with NPT threads should be tightened per the requirements for NPT conduit fittings. Receptacles with straight threads (M20 or NPSM) should be tightened to deflect the O-ring just sufficiently to effect a good seal. The receptacle leads should then be connected to the terminals of the instrument. Consult the instrument manual for terminal identification and preferred method of connection. Also, please refer to the product catalog or online at [www.turck.com](http://www.turck.com) for the pin-out of the receptacle.



### Step Two:

**minifast** connectors are designed to industry standards SAE H1738 and ANSI/B93.55M. The environmental seal for mated connectors is formed by the 'cork and bottle' design of the pin and socket carriers in which each connection chamber is individually sealed. The connection must be properly secured to achieve this seal, as well as to ensure a good electrical performance.

The keyed cordset should be aligned with the key on the instrument receptacle. The cordset should then be pushed into the receptacle and the coupling nut turned until hand tight. The cordset should then be pushed firmly into the receptacle a second time and the coupling nut hand tightened again. This generally allows an additional 1/8 - 1/4 turn and ensures that a tight, weather-proof connection is made. No tools should be used in tightening the connections, as damage to the contacts could occur if the connection is over-tightened.

**eurofast** connectors are designed to industry standard SAE H1738.

The environmental seal for mated connectors is formed by an O-ring seal. The connection must be properly secured to achieve this seal, as well as to ensure a good electrical performance.

The keyed cordset should be aligned with the key on the instrument receptacle. The cordset should then be pushed into the receptacle and the couple nut turned until hand tight. While rotating the coupling nut, the installer may notice a 'ratcheting' sensation. This is an anti-vibration feature designed to maintain the connection in high-vibration environments. No tools should be used in tightening the connection, as damage to the contacts could occur if the connection is over-tightened.



**Installation Instructions for TURCK's *minifast*® and *eurofast*® Connectivity Products****Step Three:**

Most **TURCK** process wiring products are designed and approved for use in hazardous locations. If the installation is in a hazardous location, there may be additional actions necessary, such as locking the connection with a **lokfast™** guard (as shown in the figure below), using an approved energy limiting source of power, or ensuring that the instrument has the appropriate approval. FM approved control drawings detail the requirements for compliant installation of **TURCK** products. The appropriate control drawing number will be identified in the product markings and may be viewed or downloaded from [www.turck.com/fmcd](http://www.turck.com/fmcd). Consult the instrument manual to ensure the instrument has the appropriate approval and to determine if the approval imposes any additional constraints.





**TURCK**  
**Process Automation**

**Notes:**

# **SENSORS**



## Valve Position Sensors



Type	35 mm	26 mm	20 mm	16 mm
Sensing Range	4 mm	4 mm	4 mm	2.5 mm
Pages	L9 - L14	L15 - L18	L19 - L20	L21 - L22



Type	Valve Sensor Pucks	EZ-track®
Pages	L23 - L26	L28 - L46

Type	Accessories
Pages	L27

## Valve Position Sensors

Position control in actuators and drives is essential in most chemical, petrochemical, and food industry applications. **TURCK** valve position sensors provide a quality solution to valve position feedback in a variety of applications. Each industry has different needs, and while the DS20 series works well in most general applications, **TURCK** has created a variety of styles that were designed with specific industries in mind.



### Chemical and Petrochemical Industries

The DSU35 provides superior protection against environmental influences, and is highly resistant to harsh chemicals, making it the ideal choice for chemical and petrochemical applications. This sensor and target puck can be mounted to several different actuator sizes without the need for adapters or spacer plates. The DSU35 is available with numerous outputs circuits such as a 2-wire DC, 2-wire NAMUR, 2-wire AC/DC, as well as with DeviceNet™ and AS-I bus protocols. We also offer the DSU35 with a terminal chamber, which is often a requirement in chemical process applications where conduit must be used.



Rising stem valve shown with  
**TURCK Vprox® 773 sensors.**

### Food & Beverage Industries

**TURCK** uses injection-molding technology to make the compact DSC26 sensor, ensuring that it is fully sealed and well suited in wet surroundings. These features make the DSC26 ideal for use in a number of food or beverage applications. The DSC26 has a smooth housing which makes it easy to clean, yet it also has a high degree of protection against high pressure cleaning, and is highly resistant to aggressive cleaning agents.

### Overview

**TURCK** has met with market demand to create an extensive line of valve position sensors. With a variety of standard **eurofast®**, **microfast®**, and **minifast®** connections available, **TURCK's** dual sensors reduce installation costs and minimize the cost of maintenance. These robust and impact resistant sensors are ideal when valve position information must be provided.

**Valve Position Sensor Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

**Mounting**

B = Embeddable  
N = Nonembeddable

**Principle of Operation**

I = Inductive

**Rated Operating Distance (mm)****Housing Style**

EG16CA = Stainless Steel 5/8 -18 UNF; 1/2-14 NPT  
DSU = Dual Sensor Universal  
DS = Dual Sensor  
DSC = Dual Sensor Compact

**Housing Height**

20 = 20 mm  
26 = 26 mm  
35 = 35 mm

**Housing Modifier**

TC = Terminal Chamber

**Number of Outputs**

2 = Dual Output  
Blank = Single Output

**Output Function**

A = Normally Open  
F = Connection Programmable  
Y0 = NAMUR Output, Requires Remote Amplifier  
Y1 = NAMUR Output, Requires Remote Amplifier

**Factory Code****Number of Pins****Connector / Sensor Transition**

1 = Straight  
3 = Straight with Adapter

**Connector Family**

B1 = *minifast*®, Metal, Male  
H1 = *eurofast*®, Metal, Male

**Number of LEDs**

Blank = No LEDs  
X2 = 2 LEDs

**Voltage Range**

4 = 10-65 VDC (SCP)\*  
6 = 10-30 VDC (SCP)\*  
30 = 20-250 VAC; 10-300 VDC (SCP)\*  
31 = 20-250 VAC; 10-300 VDC (No SCP)  
32 = 20-250 VAC; 10-300 VDC (SCP)\*

\* Short-Circuit Protection

**Output**

ASI = AS-I Protocol  
DZ = 2-Wire AC/DC  
DNET = DeviceNet™ Protocol  
N = NPN (Current Sinking)  
P = PNP (Current Sourcing)  
Z = 2-Wire AC/DC

**Dual DC NAMUR – Y0, Y1**

<b>Temperature Drift</b>	$\leq \pm 10\%$
<b>Differential Travel (Hysteresis)</b>	1-10% (5% typical)
<b>Nominal Voltage</b>	8.2 VDC (EN60947-5-6)
<b>Resistance Change from</b>	
<b>Nonactivated to Activated Condition</b>	Typical <1.0 to >8.0 k $\Omega$
<b>Rated Insulation Voltage</b>	$\leq 1.5$ kV
<b>Resulting Current Change</b>	$\geq 2.2$ mA to $\leq 1.0$ mA
<b>Recommended Switching Point for</b>	
<b>Remote Amplifier</b>	>1.2 to <2.1 mA, typ. 1.55 mA ON/1.75 mA OFF
<b>Power-On Effect</b>	Realized in Amplifier
<b>Reverse Polarity Protection</b>	Yes, up to 10 VDC
<b>Wire-Break Protection</b>	Realized in Amplifier
<b>Transient Protection</b>	Realized in Amplifier
<b>Shock</b>	30 g, 11 ms
<b>Vibration</b>	55 Hz, 1 mm Amplitude in all 3 Planes
<b>Repeatability</b>	$\leq 2\%$ of Rated Operating Distance
<b>Short-Circuit Protection</b>	Yes, when connected to NAMUR amplifier up to 15 VDC

**Dual AC/DC without Short-Circuit Protection – ADZ31, ADZ35**

<b>Temperature Drift</b>	$\leq \pm 10\%$
<b>Line Frequency</b>	40-60 Hz
<b>Differential Travel (Hysteresis)</b>	3-15% (5% typical)
<b>Voltage Drop Across Conducting Sensor</b>	$\leq 6.0$ V at 400 mA
<b>Off-State (Leakage) Current</b>	$\leq 1.7$ mA
<b>Minimum Load Current</b>	$\geq 5.0$ mA
<b>Inrush Current</b>	$\leq 8.0$ A ( $\leq 10$ ms, 5% Duty Cycle)
<b>Power-On Effect</b>	Per IEC 947-5-2
<b>Transient Protection</b>	Per EN 60947-5-2
<b>Shock</b>	30 g, 11 ms
<b>Vibration</b>	55 Hz, 1 mm Amplitude in all 3 Planes
<b>Repeatability</b>	$\leq 2\%$ of Rated Operating Distance
<b>Short-Circuit Protection</b>	No

**Dual AC/DC with Short-Circuit Protection – ADZ30, ADZ32, FDZ32**

<b>Temperature Drift</b>	≤±10%
<b>Line Frequency</b>	40-60 Hz
<b>Differential Travel (Hysteresis)</b>	3-15% (5% typical)
<b>Voltage Drop Across Conducting Sensor</b>	≤6.0 V at 400 mA; 8 & 12 mm ≤6.0 V at 100 mA
<b>Trigger Current for Overload Protection</b>	AC: ≥440 mA; DC: ≥330 mA
<b>Rated Insulation Voltage</b>	≤1.5 kV
<b>Off-State (Leakage) Current</b>	≤1.7 mA (AC) ≤1.5 mA (DC)
<b>Minimum Load Current</b>	≥3.0 mA
<b>Inrush Current</b>	4.0 A (≤20 ms, 10% Duty Cycle)
<b>Power-On Effect</b>	Per IEC 947-5-2
<b>Transient Protection</b>	Per EN 60947-5-2
<b>Shock</b>	30 g, 11 ms
<b>Vibration</b>	55 Hz, 1 mm Amplitude in all 3 Planes
<b>Repeatability</b>	≤2% of Rated Operating Distance
<b>Short-Circuit Protection</b>	Yes

**Dual DC or Discrete Output – 2AP4X2, 2AP6X2, 2AN4X2, 2AN6X2**

<b>Temperature Drift</b>	≤±10%
<b>Ripple</b>	≤10%
<b>Differential Travel (Hysteresis)</b>	3-15% (5% typical)
<b>Voltage Drop Across Conducting Sensor</b>	≤1.8 V
<b>Rated Insulation Voltage</b>	≤0.5 kV
<b>Trigger Current for Overload Protection</b>	≥220 mA on 200 mA Load Current ≥170 mA on 150 mA Load Current ≥120 mA on 100 mA Load Current
<b>Off-State (Leakage) Current</b>	<100 µA
<b>No-Load Current</b>	<10 mA
<b>Time Delay Before Availability</b>	≤8 ms
<b>Power-On Effect</b>	Per IEC 947-5-2
<b>Reverse Polarity Protection</b>	Incorporated
<b>Wire-Break Protection</b>	Incorporated
<b>Transient Protection</b>	Per EN 60947-5-2
<b>Shock</b>	30 g, 11 ms
<b>Vibration</b>	55 Hz, 1 mm Amplitude in all 3 Planes
<b>Repeatability</b>	≤2% of Rated Operating Distance
<b>Short-Circuit Protection</b>	Yes

## Dual DC – AS-interface®

<b>Temperature Drift</b>	≤±10%
<b>Differential Travel (Hysteresis)</b>	3-15% (5% typical)
<b>No-Load Current</b>	≤35 mA
<b>Rated Insulation Voltage</b>	≤0.5 kV
<b>E/A Configuration (HEX) / ID-Code (HEX)</b>	7 / F
<b>I/O Matrix Input</b>	0 = upper sensor S01 1 = lower sensor S02 2 = wire-break at output 3 = not used
<b>I/O Matrix Output</b>	0 = output "ON" 1-3 = not used
<b>Short-Circuit Protection / Output Watchdog</b>	Yes / Yes
<b>Wire-Break Protection <math>I_{out}</math></b>	≤0.1 mA
<b>Shock</b>	30 g, 11 ms
<b>Vibration</b>	55 Hz, 1 mm Amplitude in all 3 Planes
<b>Repeatability</b>	≤2% of Rated Operating Distance
<b>AS-I Version</b>	AS-I V2.1

## Dual DC – DeviceNet™

<b>Temperature Drift</b>	≤±10%
<b>Differential Travel (Hysteresis)</b>	3-15% (5% typical)
<b>No-Load Current</b>	≤60 mA
<b>Rated Insulation Voltage</b>	≤0.5 kV
<b>Address (MacID)</b>	0-63, via EDS file
<b>Baud Rate</b>	via EDS Date
<b>Input Data DeviceNet</b>	Bit 0 S01 input / Bit 1 S02 input / Bit 2 output error / Bit 7 input error / Bit 3-6, not used
<b>Output Data DeviceNet</b>	Bit 0 valve output / Bit 1-7, not used
<b>Output Voltage</b>	V+ - 3 V, PNP
<b>Short-Circuit Protection / Output Watchdog</b>	Yes / No
<b>Wire-Break Protection <math>I_{out}</math></b>	≤0.1 mA
<b>Shock</b>	30 g, 11 ms
<b>Vibration</b>	55 Hz, 1 mm Amplitude in all 3 Planes
<b>Repeatability</b>	≤2% of Rated Operating Distance

LED	Color	State	Status
S01	YE	On	Target detected
S02	YE	On	Target detected
Out	YE	Off	Output Off
		On	Output On
ERR	RD	On	Output On/Off wirebreak detected
Status	RD/GN	Off	Sensor not powered
		GN On Steady	Sensor active and allocated by master
		GN Flashing	Sensor active and not allocated by master
		RD Flashing	Recoverable fault (open output, invalid input state, low bus voltage, I/O timeout)
		RD On Steady	Major fault (duplicate address, baud rate, bus off comm.)
		GN+RD On	Autobaud detect
		GN+RD Flashing	Power-up test



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
35 mm - Nonembeddable, Dual Valve Sensor, Potted-In Cable	Ni 4-DSU35-2AN4X2	M1569921	<i>Short-Circuit Protection</i>	4	Dual NPN
	Ni 4-DSU35-2AP4X2	M1569900	<i>Short-Circuit Protection</i>	4	Dual PNP
	Ni 4-DSU35-2Y1X2	M1051002	<i>Short-Circuit Protection</i>	4	Dual NAMUR
	Ni 4-DSU35-2ADZ30X2	M4290000	<i>Short-Circuit Protection</i>	4	Dual AC/DC

Additional specifications on pages L6 - L8.

Target Pucks on pages L23 - L26.



Most Ni 4-DSU35... dual valve sensors are FM approved for installation in Class I, Division 2 hazardous locations. See **TURCK** control drawing Ni-1.002 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) for specific models and installation requirements. Ni 4-DSU35-2Y0X2... dual valve sensors are FM approved as intrinsically safe for installation in Class I, II or III, Division 1 hazardous locations per **TURCK** control drawing IS-1.000 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



	Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	2M/PVC	1		<b>Diagram 1</b> 
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	2M/PVC	2		<b>Diagram 2</b> 
5-30 VDC	50	Remote	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	2M/PVC	3		<b>Diagram 3</b> 
20-250 VAC 10-300 VDC	30	≤400/300	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	2M/PVC	4		<b>Diagram 4</b> 



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
35 mm - Nonembeddable, Dual Valve Sensor, Terminal Chamber	Ni 4-DSU35TC-2AP4X2	M1569902	<i>Short-Circuit Protection</i>	4	Dual PNP
	Ni 4-DSU35TC-2Y1X2	M1051004	<i>Short-Circuit Protection up to 15 VDC</i>	4	Dual NAMUR
	Ni 4-DSU35TC-2ADZ30X2	M4290002	<i>Short-Circuit Protection</i>	4	Dual AC/DC
	Ni 4-DSU35TC-2ASIX4	M1902005	<i>Short-Circuit Protection</i>	4	Dual ASI-BUS

Additional specifications on pages L6 - L8.








Target Pucks on pages L23 - L26.



Most Ni 4-DSU35... dual valve sensors are FM approved for installation in Class I, Division 2 hazardous locations. See **TURCK** control drawing Ni-1.002 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) for specific models and installation requirements. Ni 4-DSU35TC-2Y0X2 dual valve sensors are FM approved as intrinsically safe for installation in Class I, II or III, Division 1 hazardous locations per **TURCK** control drawing IS-1.000 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	N/A	1	<b>Diagram 1</b>  
5-30 VDC	50	Remote	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	N/A	2	<b>Diagram 2</b>  
20-250 VAC 10-300 VDC	30	≤400/300	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	N/A	3	<b>Diagram 3</b>  
18-33 VDC	30	≤80	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	N/A	4	<b>Diagram 4</b>  



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
35 mm - Nonembeddable, Dual Valve Sensor, eurofast® Connector	Ni 4-DSU35-2AN4X2-H1141	M1569920	<i>Short-Circuit Protection</i>	4	Dual NPN
	Ni 4-DSU35-2AP4X2-H1141	M1569901	<i>Short-Circuit Protection</i>	4	Dual PNP
	Ni 4-DSU35-2Y0X2-H1140	M1051003	<i>Short-Circuit Protection up to 15 VDC</i>	4	Dual NAMUR
35 mm - Nonembeddable, Dual Valve Sensor, minifast® Connector	Ni 4-DSU35-2ADZ30X2-B1151	M4290001	<i>Short-Circuit Protection</i>	4	Dual AC/DC
	Ni 4-DSU35-2ADZ35X2-B1151	M4290009		4	
35 mm - Nonembeddable, Dual Valve Sensor, eurofast Connector	Ni 4-DSU35-2ASIX4-H1140	M1902000	<i>Short-Circuit Protection</i>	4	Dual ASI-BUS
	Ni 4-DSU35-2DNETX5-H1150	M1569908	<i>Short-Circuit Protection</i>	4	Dual DeviceNet™
35 mm - Nonembeddable, Dual Valve Sensor, minifast Connector	Ni 4-DSU35-2AP4X2-B1160-FKE4.5	M1569923	<i>Short-Circuit Protection</i>	4	Dual PNP

Additional specifications on pages L6 - L8.

Target Pucks on pages L23 - L26.



Most Ni 4-DSU35... dual valve sensors are FM approved for installation in Class I, Division 2 hazardous locations. See **TURCK** control drawing Ni-1.002 ([www.turck.com/fmcd](http://www.turck.com/fmcd)) for specific models and installation requirements. Ni 4-DSU35-2Y0X2... dual valve sensors are FM approved as intrinsically safe for installation in Class I, II or III, Division 1 hazardous locations per **TURCK** control drawing IS-1.000 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RK 4.4T-*	1	<b>Diagram 1</b> 
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RK 4.4T-*	2	<b>Diagram 2</b> 
5-30 VDC	50	Remote	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RK 4.41T-*	6	<b>Diagram 3</b> 
20-250 VAC 10-300 VDC	30	≤400/300	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RKM 50-*M	4	
20-150 VAC 10-150 VDC	50	≤400/300	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RKM 50-*M	4	
18-33 VDC	30	≤80	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RKC 254-*M RS 4.4T-*	5	<b>Diagram 5</b> 
11-25 VDC	50	≤80	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RKC 572-*M RS 4.4T-*	6	<b>Diagram 6</b> 
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RKM 60-*M RK 4.5T-*	7	<b>Diagram 7</b> 

\* Length in meters.



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
26 mm - Nonembeddable, Dual Valve Sensor, <i>eurofast</i> ® Connector	Ni 4-DSC26-2AP6X2-H1141	M1650087	<i>Short-Circuit Protection</i>	4	Dual PNP
26 mm - Nonembeddable, Dual Valve Sensor, <i>eurofast</i> Connector	Ni 4-DSU26-2AP4X2-H1141	M1569904	<i>Short-Circuit Protection</i>	4	Dual PNP
	Ni 4-DSU26-2Y1X2-H1140	M1051007	<i>Short-Circuit Protection up to 15 VDC</i>	4	Dual NAMUR
26 mm - Nonembeddable, Dual Valve Sensor, <i>eurofast</i> Connector	Ni 4-DSU26-2ASIX4-H1140	M1902001	<i>Short-Circuit Protection</i>	4	Dual ASI-BUS

Additional specifications on pages L6 - L8.

Target Pucks on pages L23 - L26.



Most Ni 4-DSU26-Y0X2... dual valve sensors are FM approved as intrinsically safe for installation in Class I, Division 1 hazardous locations per TURCK control drawing IS-1.000 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-30 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RK 4.4T-*	1	<b>Diagram 1</b>  <b>Diagram 2</b>  <b>Diagram 3</b> 
10-65 VDC	50	≤200	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RK 4.4T-*	1	
5-30 VDC	50	Remote	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RK 4.41T-*	2	
18-33 VDC	30	≤80	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	RKC 254-* RS 4.4T-*	3	

\* Length in meters.



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
26 mm - Nonembeddable, Dual Valve Sensor, Potted-In Cable	Ni 4-DSU26-2ADZ30X2	M4290005	<i>Short-Circuit Protection</i>	4	Dual AC/DC
26 mm - Nonembeddable, Dual Valve Sensor, Terminal Chamber	Ni 4-DSU26TC-2ADZ30X2	M4290004	<i>Short-Circuit Protection</i>	4	Dual AC/DC

Additional specifications on pages L6 - L8.

Target Pucks on pages L23 - L26.



Most Ni 4-DS20-2Y1X2-... dual valve sensors are FM approved as intrinsically safe for installation in Class I, Division 1 hazardous locations per TURCK control drawing IS-1.000 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
20-250 VAC 10-300 VDC	30	≤400/300	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	2M/PVC	1	<b>Diagram 1</b> 
20-250 VAC 10-300 VDC	30	≤400/300	-25 to +70	IP 67	PP	PP	N/A	N/A	YE/RD	N/A	2	<b>Diagram 2</b> 



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
<b>20 mm - Nonembeddable Dual Valve Sensor</b> <i>eurofast® Connection</i>	Ni 4-DS20-2AP6X2-H1141	M1650020	<i>Short-Circuit Protection</i>	4	Dual PNP
	Ni 4-DS20-2Y1X2-H1140	M1050001	<i>Short-Circuit Protection up to 15 VDC</i>	4	Dual NAMUR
<b>20 mm - Nonembeddable Dual Valve Sensor</b> <i>microfast® Connection</i>	Ni 4-DS20-2AZ31X2-B3151	M1305000		4	Dual AC/DC
<b>20 mm - Nonembeddable Dual Valve Sensor</b> <i>Potted-In Cable</i>	Ni 4-DS20-2AP6X2	M1650022	<i>Short-Circuit Protection</i>	4	Dual PNP
	Ni 4-DS20-2Y1X2	M1050002	<i>Short-Circuit Protection up to 15 VDC</i>	4	Dual NAMUR

Additional specifications on pages L6 - L8.

Target Pucks on pages L23 - L26.



Most Ni 4-DS20-2Y1X2-... dual valve sensors are FM approved as intrinsically safe for installation in Class I, Division 1 hazardous locations per TURCK control drawing IS-1.000 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing	Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
10-30 VDC	50	≤200	-25 to +70	IP 67	PBT	PBT	N/A	N/A	YE/YE	RK 4.4T-*	1	<b>Diagram 1</b>  <b>Diagram 2</b> 
5-30 VDC	50	Remote	-25 to +70	IP 67	PBT	PBT	N/A	N/A	RD/RD	RK 4.41T-*	2	<b>Diagram 3</b> 
20-250 VAC 10-300 VDC	20	≤100/300	-25 to +70	IP 67	PBT	PBT	N/A	N/A	RD/RD	KB 5T-*	3	<b>Diagram 4</b> 
10-30 VDC	50	≤200	-25 to +70	IP 67	PBT	PBT	N/A	N/A	YE/YE	2M/PVC	4	<b>Diagram 5</b> 
5-30 VDC	50	Remote	-25 to +70	IP 67	PBT	PBT	N/A	N/A	RD/RD	2M/PVC	5	

\* Length in meters.



Housing Style	Part Number	ID Number	Features	Sensing Range (mm)	Output
16 mm - Embeddable, Vprox 773™, Potted-In Cable	Bi 2.5-EG16CA-FDZ32X2	T4205100-1	Prog. Outputs Low Temp. -40°C Short-Circuit Protection	2.5	2-Wire AC/DC
16 mm - Embeddable, Vprox 773, minifast® Connector	Bi 2.5-EG16CA-FDZ32X2-B1151	T4205190	Prog. Outputs Low Temp. -40°C Short-Circuit Protection	2.5	2-Wire AC/DC

Additional specifications on pages L6 - L8.



TURCK **Vprox** sensors are FM approved for installation in Class I, Division 2 hazardous locations when installed per **TURCK** control drawing Ni-1.002 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).


# Process Automation




Voltage	Switching Freq. (Hz)	Switching Current (mA)	Operating Temp. (°C)	Protection	Housing Face	End Cap	Power LED	Output LED	Mating Cord, Cable Length/jacket	Wiring Diagram #	Wiring Diagrams
20-250 VAC 10-300 VDC	50	≤100	-40 to +70	IP 67	SS	PA 12	N/A	GN	RD	2M/PVC	1
20-250 VAC 10-300 VDC	50	≤100	-40 to +70	IP 67	SS	PA 12	N/A	GN	RD	RK 50-*M	2

\* Length in meters.

**Diagram 1**



**Diagram 2**




## Valve Sensor Puck Selection Guide


Stem Height (A)		20 mm		30 mm		50 mm	
Mounting Dimension (B)		80 mm	130 mm	80 mm	130 mm	80 mm	130 mm
Part Number	Output Function						
DS20	End Position Indication- On	BTS-DS20-TP1 (M6900155)	Consult Factory	BTS-DS20-TK1 (M6900156)	BTS-DS20-TP1 (M6900155)	N/A	N/A
	Adjustable/End Position- On	BTS-DS20-KEY (M6900136)	BTS-DS20-KEY (M6900136)	Consult Factory	Consult Factory	N/A	N/A
DSC26	End Position Indication- On	BTS-DSC26-EB1 (M6900222)	Consult Factory	BTS-DSC26-EB2 (M6900223)	BTS-DSC26-EB3 (M6900224)	Consult Factory	Consult Factory
DSU35	End Position Indication- On	BTS-DSU35-EB1 (M6900225)	BTS-DSU35-EB1 (M6900225)	BTS-DSU35-EB1 (M6900225)	BTS-DSU35-EB1 (M6900225)	BTS-DSU35-EB1 (M6900225) and BTS-DSU35-Z07 (M6900403)	BTS-DSU35-EB1 (M6900225) and BTS-DSU35-Z07 (M6900403)
	Adjustable/End Position- On	BTS-DSU35-EBE1 (M6900226)	BTS-DSU35-EBE1 (M6900226)	BTS-DSU35-EBE2 (M6900228)	BTS-DSU35-EBE2 (M6900228)	BTS-DSU35-EBE1 (M6900226) and BTS-DSU35-Z07 (M6900403)	BTS-DSU35-EBE1 (M6900226) and BTS-DSU35-Z07 (M6900403)
	End Position Indication- Off	BTS-DSU35-EU1 (M6900227)	BTS-DSU35-EU1 (M6900227)	BTS-DSU35-EU1 (M6900227)	BTS-DSU35-EU1 (M6900227)	BTS-DSU35-EU1 (M6900227) and BTS-DSU35-Z07 (M6900403)	BTS-DSU35-EU1 (M6900227) and BTS-DSU35-Z07 (M6900403)

For stems that exceed 40 mm in diameter, consult drawings for appropriate shim package.


Actuator Side View

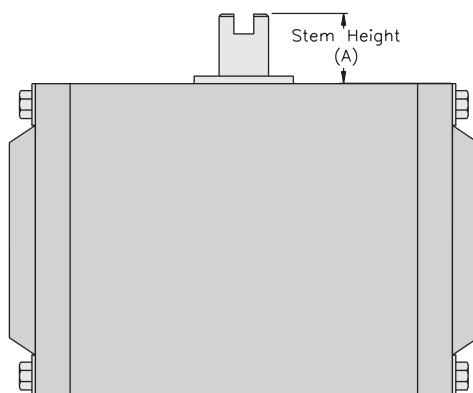


Actuator Top View

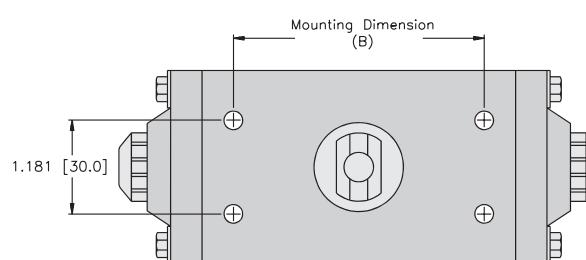

## Valve Sensor Puck Information

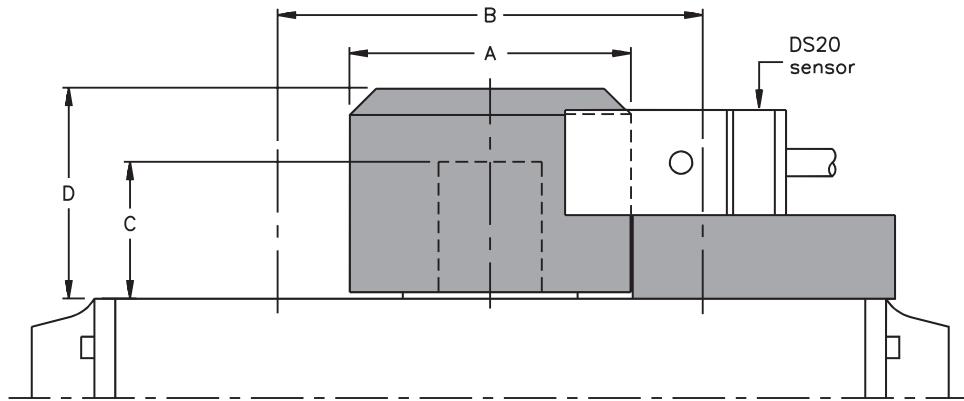


Part Number	Dimensions (mm)			
	A	B	C	D
BTS-DS20-KEY	40	80x130	20	37

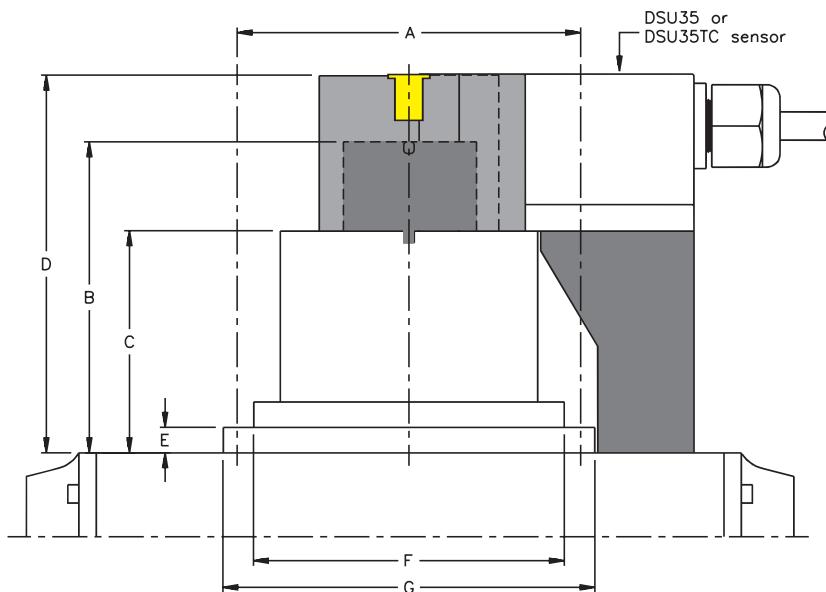


Part Number	Dimensions (mm)						
	A	B	C	D	E	F	G
BTS-DSU35-Z03	130	50	30	65	19 (max)	70	110
BTS-DSU35-Z07	130	70	50	85	19 (max)	10	110


## Valve Sensor Puck Information

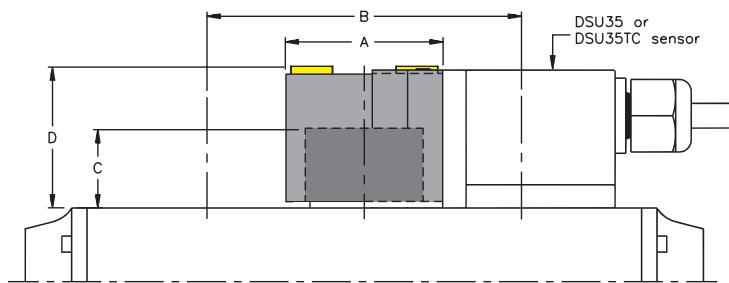

Part Number	Dimensions (mm)			
	A	B	C	D
BTS-DSU35-EU1	40	80x130	20x30	36

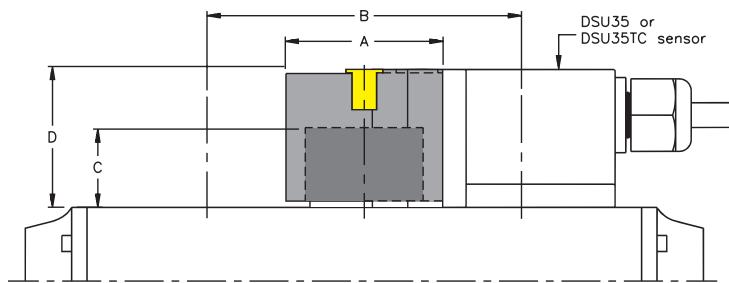


Part Number	Dimensions (mm)			
	A	B	C	D
BTS-DSU35-EB1	40	80x130	20x30	36
BTS-DSU35-EBE1	40	80x130	20	36
BTS-DS20-TP1	40	80	20	36

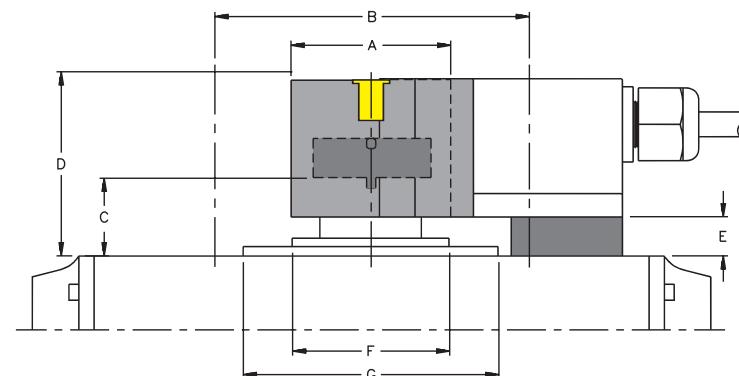


Part Number	Dimensions (mm)						
	A	B	C	D	E	F	G
BTS-DSU35-Z01	40	80x130	20	45	10	40	65
BTS-DSU35-Z02	40	80x130	20	55	20	40	65
BTS-DSU35-Z04	40	80x130	30	45	10	40	65
BTS-DSU35-Z05	40	80x130	30	55	20	30	65
BTS-DSU35-Z06	40	80x130	30	65	30	40	65
BTS-DS20-TK1	40	80x130	30	46	10	50	50

"Z" mounting packages include shims to increase height of sensor and may include similar shim for target puck (depending on package).


**Valve Sensor Puck Information**

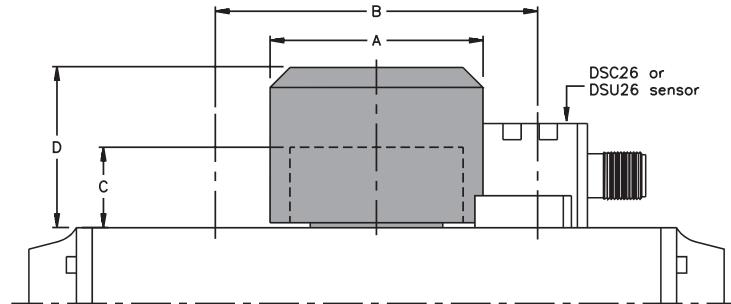



Part Number	Dimensions (mm)			
	A	B	C	D
BTS-DSC26-EB1	53	80	20	40
BTS-DSC26-EB2	65	80	30	50
BTS-DSC26-EB3	102	130	30	50

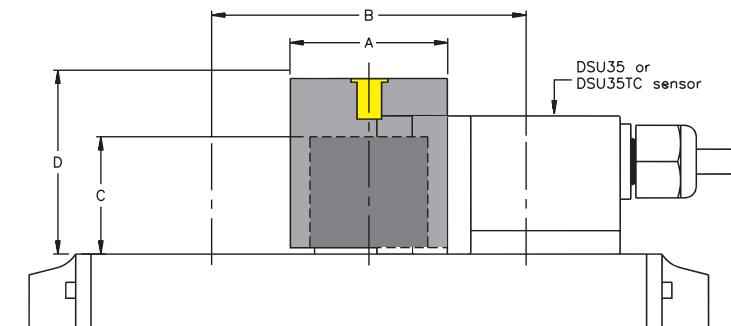


Part Number	Dimensions (mm)			
	A	B	C	D
BTS-DSU35-EBE2	40	80x130	30	47

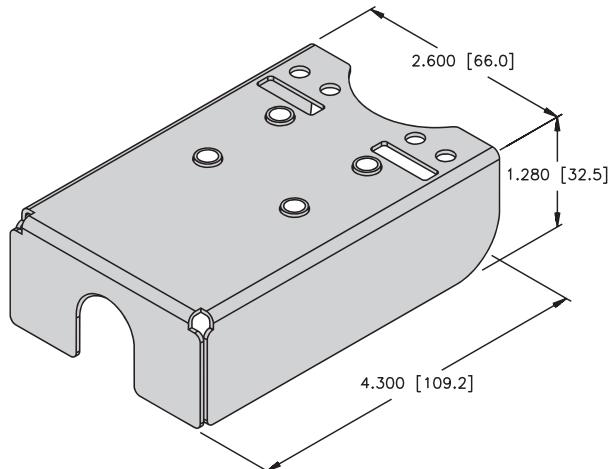**Valve Sensor Accessories for Class I, Division 2 Applications****GUARD-DSU35-AD**  
(A9235)

For use with: Ni 4-DSU35-ADZ35X2-B1151

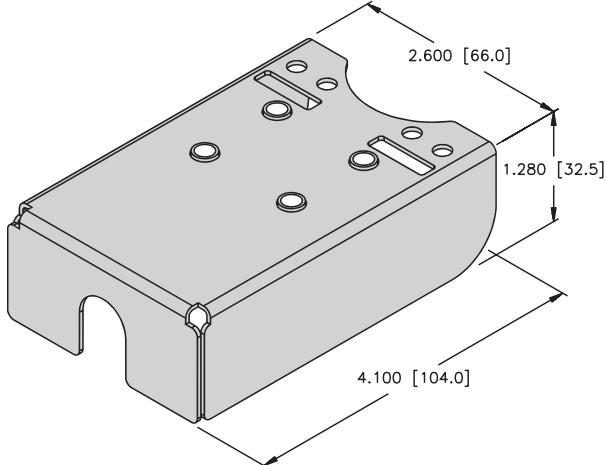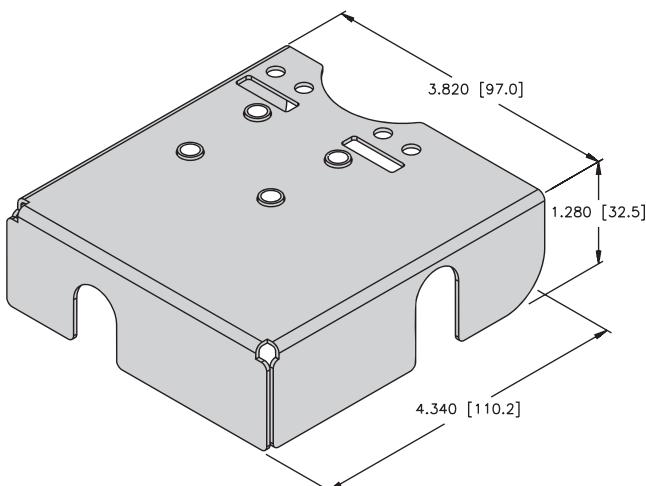**GUARD-DSU35-DC**  
(A9234)For use with: Ni 4-DSU35-2AP4X2-H1140  
Ni 4-DSU35-2AN4X2  
Ni 4-DSU35-2ADZ35X2  
Ni 4-DSU35-2AP4X2**GUARD-DSU35-DCS**  
(A9287)

For use with: Ni 4-DSU35-2AP4X2-B1160-FKE4.5

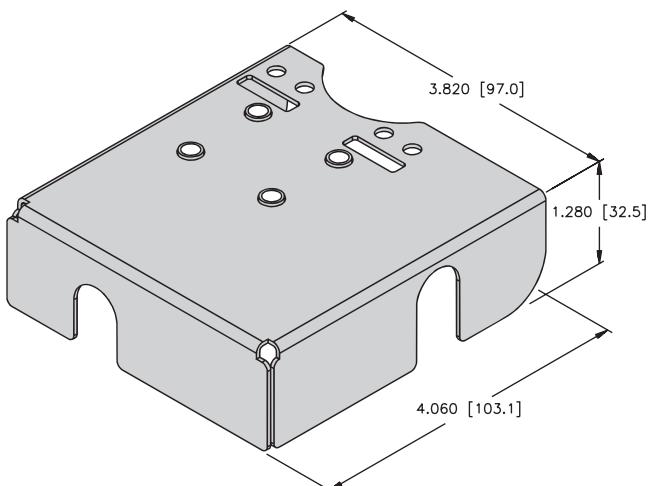**GUARD-DSU35-DCS**  
(A9150)For use with: Ni 4-DSU35-2ASIX4  
Ni 4-DSU35-2DNETX5

## EZ-track®

TURCK's **EZ-track** line of linear displacement transducers (LDTs) is the latest offering in TURCK's continuous effort to change the shape of sensing. Based on magnetostrictive technology, the **EZ-track** line will reliably operate in the harsh conditions for which TURCK products are known to withstand. With its unique features, IP 67 or optional IP 68 environmental rating, easy mounting and absolute positioning, the **EZ-track** line will be sure to fit into your tough linear sensing applications.



## Features and Benefits

### Non-Contact Sensing Reduces Wear, Breakage, Downtime, and Ultimately Cost

TURCK's **EZ-track** line is a family of magnetostrictive LDTs. These non-contact devices detect the position of an external magnet along the active stroke of the sensor without causing any wear on the sensor parts. Because there are no parts to wear or break, the sensors can offer better performance over a longer life than competing technologies. **EZ-track** LDTs also offer an alternative when a continuous, absolute reading is necessary in the application.

The absolute reading allows the sensor to accurately determine the position at power ON without the need to set up a home position. With this technology, repeatability of up to +/- 0.001% of full stroke can be achieved. See specifications for detailed information on each product family.

### Fast Connections

As a leading supplier of connectivity products, TURCK delivers the complete package. Standard, shielded 4 and 5-pin M12 **eurofast**® cables are always available from TURCK for quick connection to **EZ-track**.

### IP 67 / IP 68 (optional)


The **EZ-track** line will stand up in harsh environments, thus downtime situations due to environmental conditions can be reduced. Standard units have an environmental rating of IP 67, however IP 68 versions are also available. Consult factory for details.

## EZ-track® General Overview

### Programmable Stroke

**Programmable Zero and Span Allow Standard Sensors to Have Customized Stroke Lengths, Eliminating the Need to Stock Numerous Models**

**EZ-track's** analog outputs are not limited to the entire length of the sensor. The zero and span settings can be programmed anywhere along the active stroke. By utilizing this feature, the user can reduce stock levels for various length LDTs used in the plant by replacing them with standard sizes and programming to the specific applications. The **Q21** profile style transducers are available in stroke lengths up to 180 inches.

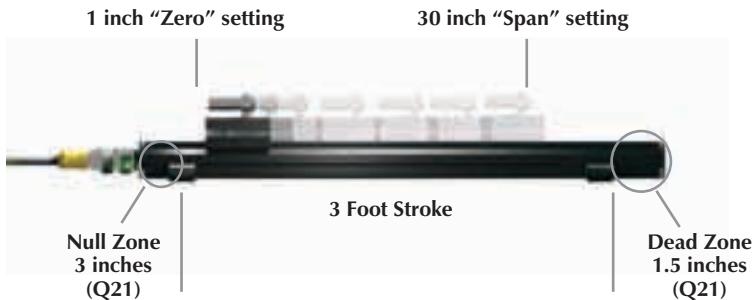

#### To Program the **EZ-track** Sensor:


Short pin 2 to pin 3 to obtain "Zero" setting, short pin 2 to pin 1 to obtain "Span" setting, or use **TURCK's RP-Q21 Programmer**.

## EZ-track® General Overview

### Reliable Accurate Technology

**EZ-track®** LDTs profile style probes use magnetostrictive technology by applying a mechanical strain pulse to a magnetostrictive waveguide that runs the length of the sensor. When the strain pulse encounters a magnetic field produced by the slide or floating magnet assembly, a current pulse is produced that is picked up by the electronic circuitry. A high speed timer measures the time difference between the applied strain pulse and the return of the induced current pulse. This time, proportional to position, is compared to the "zero" and "span" positions established during the calibration process to scale the output. Once the position has been scaled accordingly, it is converted to a signal in the form of an analog (voltage or current) output, quadrature pulse output, or digital (PWM or start/stop) outputs.

In the **Q21R** the magnetostrictive effect is used in the opposite manner, in that a current pulse is induced and a strain pulse returns to the sensor electronics. Utilizing the magnetostrictive effect gives you highly accurate, non-contact absolute position sensing with no wear on the sensing element.

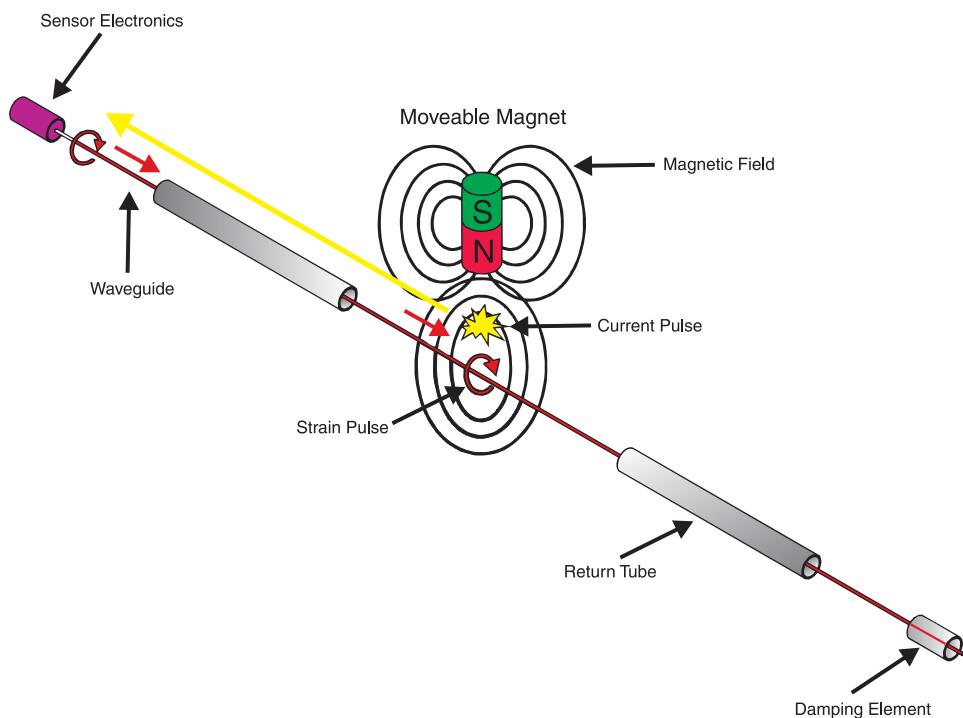

### Applications

- Hydraulic Cylinders
- Medical Systems
- Injection / Blow Molding
- X-Y Axis Positioning
- Palletizers
- Elevators
- Foundries
- Extruding Equipment
- Packaging Machines
- Valve / Actuator Position
- Die Casting
- Material Handling
- Laminating / Gluing Machines
- Saw Mills / Lumber Equipment
- Cutting / Slitting Machines
- Amusement Park Rides
- Flight Simulators
- Side Guides

## Analog Profile Series

### Low Profile Extrusion Housing

#### Low Profile Housings Reduce Mounting Restrictions and Eliminate Special Mounting Fixtures

The **Q21** series is housed in low profile, environmentally sealed, anodized aluminum housings. The electronics and the sensing element are incorporated into a housing that is less than 1 inch tall without the need for a can or head on the sensor to house the electronics (typical competitive devices are 2.5 times larger). By reducing the profile of the sensor lessens mounting issues, and allows the **Q21** series to fit into applications where others are too bulky.



### Diagnostic LED

#### An LED Indicating the Status of the Sensor Simplifies Troubleshooting and Reduces Maintenance

The **EZ-track®** Series utilizes a diagnostic LED that enables the operator to understand the state of the sensor dependent upon the position of the target magnet.



The LED is green when the power is on and the magnet is in an active programmed area.



The LED turns yellow when the magnet moves out of the programmed area, but is still within the active stroke.



The LED turns red when there is no magnet present or it is in the null or dead zones.

The LED flashes to indicate it is in AGC mode (**Q21**).

This feature simplifies programming and troubleshooting, effectively reducing setup and maintenance time.

## Analog Profile Series

### Various Analog Outputs Available Profile Style

The **Q21** series can be ordered in a variety of outputs.

Voltage:      Current:      Quadrature:

0-10 VDC      4-20 mA      10 kHz to 1 MHz

10-0 VDC      20-4 mA

-10 to 10 VDC

10 to -10 VDC

0-5 VDC

5-0 VDC

-5 to 5 VDC

5 to -5 VDC



Although sensors can be ordered with any of the above outputs, the units can easily be changed in the field to reverse the analog signal. Thus, one model can be used for two applications by programming the "zero" and "span" appropriately.

### Automatic Gain Control

The Automatic Gain Control (AGC) feature allows the **EZ-track**® to sense a magnet other than the standard slide magnet and adjust to the magnetic field strength accordingly. With the ability to sense a standard floating magnet up to 3/8 inch away, the user has greater mounting flexibility for various applications.

### FM Approved Installation (Class I, Division 2)

The **EZ-track** **Q21** unit can be ordered for use in a Class I, Division 2 environment. The unit will utilize a Euro-G Fast-Lock, as shown below. See page L37 for part number key and ordering information (S1690 unit rating option).

## Quadrature Profile Series

### Direct Quadrature Output

#### Reduce installation time, vendors and cost by directly interfacing to the PLC input card

The **Q21-DQ** provides a quadrature output directly from the transducer to the controller. The **Q21-DQ** provides A and B channel quadrature output signals that are proportional to the position of the magnet assembly along the length of the probe. The quadrature output makes it possible to have a direct interface to virtually any incremental encoder input or counter card, eliminating costly absolute encoder converters and special PLC interface modules. An index channel (Z) is also provided and its position can be set by the user at any position along the active system. The A, B and Z channels are differential outputs. That is, the connection for each output consists of two signal wires. These are typically described as the "+" and "-" signals. Differential signals are much less prone to interference caused by electrical noise or ground loops more often found in single ended connections.

### Replace Incremental Output Devices

The **Q21-DQ** can be used in certain applications to replace incremental rotary and linear encoders. The quadrature output can be used in applications requiring 0.001 inch resolution and repeatability.

### Velocity Feedback

The **EZ-track** quadrature produces pulses that are sent to the controller in packets at a fixed frequency. The period of the pulses do not change with magnet velocity. Therefore, velocity can not be determined from the pulse packets unless the controller can interpolate velocity from position over time. If your application requires a velocity feedback, please consider the Linear Encoder on pages M4-M5 or consult factory.

### Incremental Output, Absolute Functionality

#### No need to home the machine at start up or after power failure

The **Q21-DQ** allows you to use an incremental style of output while taking advantage of an absolute sensing technology. The Burst Input on the transducer triggers a data transfer of all incremental position data relative to the transducer's zero position. This can be used to achieve absolute position updates when power is restored to the system or anytime an update is needed to re-zero or home the machine.

### Programmable Zero Point

The Zero Input allows you to set the probes reference position at any point along the active stroke. The probe will output an increasing or decreasing signal based on the direction the magnet is moving in relation to the established zero point.

See Quadrature Part Number Key to select storage mode.

**Volatile Storage** - the zero point will be kept until a new zero pulse is sent or until the probe loses power.

The zero point can be programmed an infinite number of times.

**Non-Volatile Storage** - the probe will store the zero position even in the event of a power failure.

The zero point can be set 100,000 times.

## Quadrature Profile Series

### Transducer Inputs

The *Burst* and *Zero* Inputs are single ended connections. That is, the connection for each input consists of only one wire. The **Q21-DQ** is available with either +24 VDC level signal or TTL level thresholds. Additionally, the 24 VDC can be specified as either sinking or sourcing relative to the probe's input.

### Quadrature Output Resolution and Speed

The internal resolution of the **Q21-DQ** transducer is 0.001 inches. This would be represented to the encoder input device by specifying an output resolution of 1,000 cycles per inch (CPI).

### Frequency or Pulse Rate

For a typical incremental encoder output, the resolution of the encoder and the speed of travel govern the frequency and pulse width of the output pulses. The output pulse rate from the **EZ-track®** transducer is fixed and controlled internally. This output frequency is user specified (10 kHz to 1MHz) so that it does not exceed the maximum input rate of the counter card. If the controller's maximum input frequency falls between two available frequencies, choose the lower frequency.

### Output Drivers

The **Q21-DQ** uses an OL7272 line driver and can be configured for either a TTL level output or a 10-30 VDC level output. Option R has a 5 VDC TTL level output regardless of input power. Option L has an output of 1 volt less than the probe's input voltage and should be used when driving input cards that are not TTL compatible.

## Digital Profile Series

The **Q21D** is a non-contact LDT with a digital output. This transducer utilizes magnetostrictive technology to give absolute position that is repeatable to .006% of the active sensing distance. It also has the same auto-tuning capability that the other profile series transducers offer so that it can adjust its signal strength to various magnets. There is a diagnostic LED that is located at the connector end of the probe and provides visual status information regarding the operation of the **Q21D**. The indications are as follows:

**Green:** Magnet is present and within the active range, the LED will remain illuminated continuously during normal operation.

**Red:** Fault, the LDT has lost its signal from the magnet or the magnet has moved into the Null or Dead Zone.

**Yellow:** No external interrogation pulse is detected.

The **Q21D** digital transducer provides either a Start/Stop or a Variable Pulse signal interface that is proportional to the position of the slide magnet assembly along the length of the probe.

### Start/Stop (RS)

The Start/Stop signal interface of the **Q21D** digital output series is a differential RS-422 output. To initiate a start pulse, an external device must be used, and should be a minimum of 1ms in duration. A stop pulse of 1 ms in duration will follow. The time delay from the leading edge of the start pulse to the leading edge of the stop pulse is proportional to the distance from the Null Zone to the Magnet.

**Digital Profile Series****Variable Pulse (VP)**

The Variable Pulse interface digital output is a pulse width modulated signal (RS-422). The **Q21D** LDT can be ordered with either external (**VPE**) or internal (**VPI**) interrogation.


External interrogation occurs when an external device connected to the **Q21D-VPE** generates a start pulse. This start pulse should be a minimum of 1 ms in duration. Within 50 nanoseconds after the leading edge of the start pulse has been received, the LDT will generate an output pulse. The duration of the output pulse is proportional to the distance from the Null Zone to the Magnet.

The **Q21D-VPI** generates an internal interrogation, and will continually output pulse width modulated signals. The duration of this output pulse is also proportional to the distance from the Null Zone to The Magnet.

**Notes:**

**Analog Profile Series Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

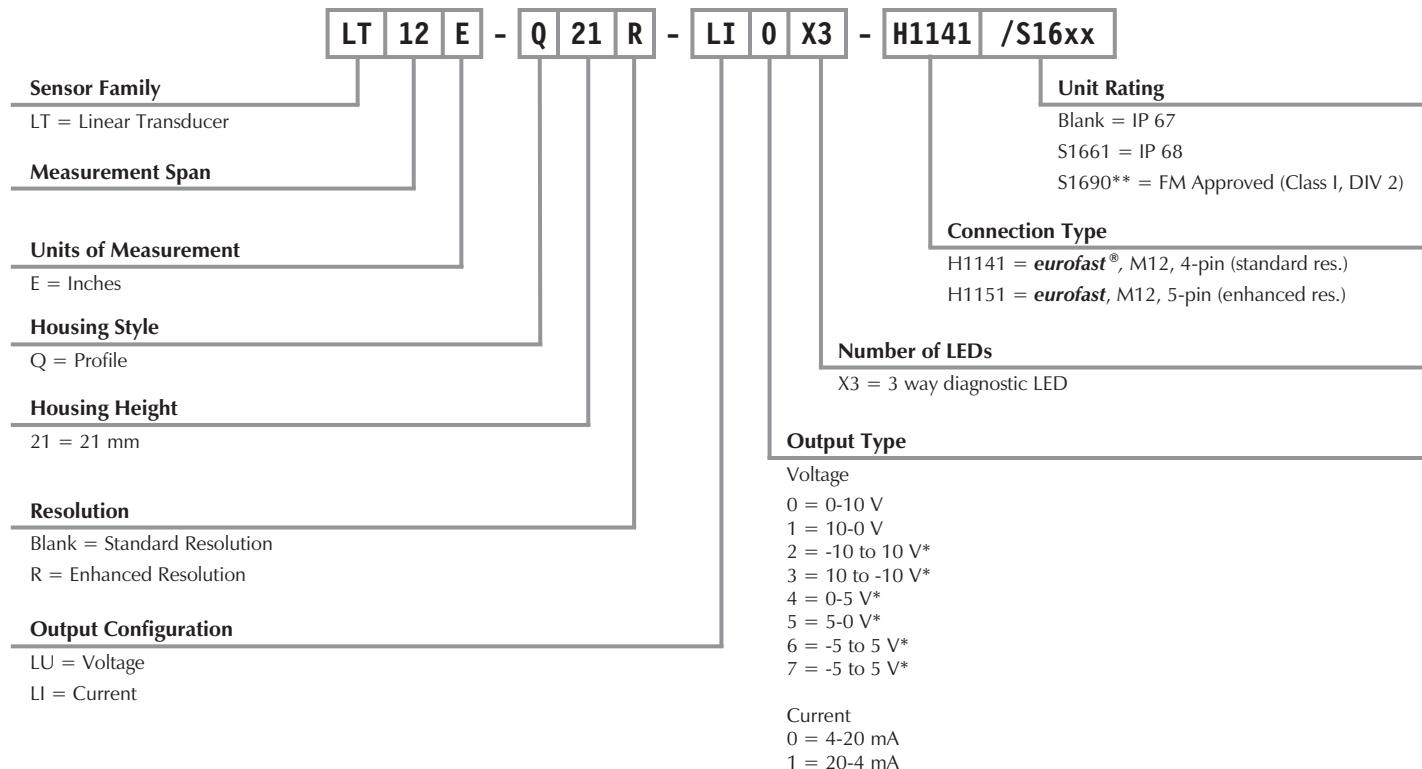

\* Q21 / Q35 versions only

\*\* FM approved units ship with Euro-G Fast Lock, which must be installed to maintain FM approval.

Note: In addition to the LDT, a typical system includes a magnet, mounting feet and cable (all sold separately).

# Process Automation



## Quadrature Profile Series Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

LT 12 E - Q 21 - DQ R A N N X2 - H11121

### Sensor Family

LT = Linear Transducer

### Measurement Span

### Units of Measurement

E = Inches

### Housing Style

Q = Low Profile

### Housing Height

21 = 21 mm

### Output Configuration

DQ = Quadrature

### Output Type

Quadrature

R = Differential RS422 line driver (TTL compatible)

L = Differential line driver - 10 to 30 VDC

### Connection Type

H11121 = 12-pin, M12, eurofast®

### Number of LEDs

Examples:

X2 = 2-way diagnostic LED

### Input Type (Quadrature)

N = Sinking Input (Used with sourcing outputs)

P = Sourcing Input (Used with sinking inputs)

T = TTL Level

### Zero Offset Storage (Quadrature)

V = Volatile (non-retentive)

N = Nonvolatile (100,000 storage cycles maximum)

### Quadrature Cycle Frequency (Quadrature)

A = 10 kHz

B = 25 kHz

C = 50 kHz

D = 75 kHz

E = 100 kHz

F = 150 kHz

G = 250 kHz

H = 500 kHz

I = 1.0 MHz

## Digital Profile Series Part Number Key

LT 12 E - Q 21 D - VPI - 001 - X3 - H11121 /S1661

### Sensor Family

LT = Linear Transducer

### Measurement Span

### Units of Measurement

E = Inches

### Housing Style

Q = Profile

### Housing Height

21 = 21 mm

### Resolution

D = Digital

### IP Rating

Blank = IP 67

S1661 = IP 68

### Connection Type

H11121 = eurofast, M12, 6-pin

### Number of LEDs

X3 = 3 way diagnostic LED

### Number of Recirculations (valid if VPI output, otherwise blank)

001 (standard) to 127

### Output Mode

RS = RS-422 Start/Stop pulse

VPI = Variable pulse internal interrogations

VPE = Variable pulse external interrogations

Note: In addition to the LDT, a typical system includes a magnet, mounting feet and cable (sold separately).

### Enhanced Resolution Analog Profile Style (Q21R) Specifications

<b>Output</b>	<b>Current:</b>	<b>Voltage:</b>
	4-20 mA	0-10 VDC
	20-4 mA	10-0 VDC
<b>Load Impedance</b>	$\leq (\text{voltage in} - 4) \div 0.02 \Omega$	$\geq 1000 \Omega$
	(example: 10 VDC $\leq 300 \Omega$ )	
<b>Span</b>	5 to 180 in. (Q35 style maximum length 36 in.)	
<b>Repeatability</b>	$\pm 0.006\%$ of full stroke or $\pm 0.002$ in., whichever is greater	
<b>Resolution</b>	0.001 in. internal (For stroke lengths $< 65''$ ); 16 bit (For lengths $> 65''$ )	
<b>Operating Temperature</b>	-40° to +70°C (-40° to +158°F)	
<b>Null Zone</b>	3.00 in.	
<b>Dead Zone</b>	2.00 in.	
<b>Operating Voltage</b>	13.5-30 VDC	
<b>Current Consumption</b>	120 mA at 15 VDC, 2.5 watts maximum	
<b>Response Time:</b>		
<b>≤ 50 in.</b>	1 ms	
<b>50 to 100 in.</b>	2 ms	
<b>101 to 150 in.</b>	3 ms	
<b>151 to 180 in.</b>	4 ms	
<b>LED</b>	Green = Power is applied and magnet is present in the programmed range Red = Fault, magnet is in the Null Zone, Dead Zone or lost	

### Standard Resolution Analog Profile Style (Q21) Specifications

<b>Output</b>	<b>Current:</b>	<b>Voltage:</b>
	4-20 mA	+5 to -5 VDC
	20-4 mA	-5 to +5 VDC
		0 to +5 VDC
		-10 to +10 VDC
		+5 to 0 VDC
		+10 to -10 VDC
<b>Load Impedance</b>	$\leq (\text{voltage in} - 4) \div 0.02 \Omega$	$\geq 1000 \Omega$
	(example: 10 VDC $\leq 300 \Omega$ )	
<b>Span</b>	4 to 180 in. (Q35 style maximum length 36 in.)	
<b>Repeatability</b>	$\pm 0.01\%$ of full stroke or $\pm 0.014$ in., whichever is greater	
<b>Resolution</b>	0.014 in. for stroke lengths less than 60 in.; For lengths over 60 in.: 12 bits	
<b>Operating Temperature</b>	-40° to +70°C (-40° to +158°F)	
<b>Null Zone</b>	3.00 in.	
<b>Dead Zone</b>	1.50 in.	
<b>Operating Voltage</b>	10-30 VDC	
<b>Current Consumption (max.)</b>	100 mA	
<b>Response Time:</b>		
<b>50 in. or Less:</b>	1 ms updates with 5 ms settling time	
<b>50 in. or Greater:</b>	2 ms updates with 4 ms settling time	
<b>LED</b>	Green = Power is applied and magnet is present in the programmed range Red = Fault, magnet is in the Null Zone, Dead Zone or lost Yellow = Magnet is out of the active programmed range, but still within the active	

## Quadrature Profile Style (Q21-DQ) Specifications

**Output** . . . . . Quadrature, A,  $\bar{A}$ , B,  $\bar{B}$ , Z,  $\bar{Z}$   
**Span** . . . . . 5 to 180 inches (Q35 maximum length 36 inches)  
**Repeatability** . . . . . +/-0.001% of full stroke or +/- 0.001 inches, whichever is greater  
**Resolution** . . . . . 0.001 inches internal (1000 pulses per inch)  
**Operating Temperature** . . . . . -20° to +70°C (-4° to +158°F)  
**Null Zone** . . . . . 3.00 in.  
**Dead Zone** . . . . . 2.00 in.  
**Operating Voltage** . . . . . 13.5-30 VDC  
**Current Consumption** . . . . . 3 watts maximum (1 watt typical)

**Response Time:**

<b>≤50 in</b> . . . . .	1 ms
<b>50 to 100 in</b> . . . . .	2 ms
<b>101 to 150 in</b> . . . . .	3 ms
<b>151 to 180 in</b> . . . . .	4 ms

**Inputs:**

<b>Option N</b> . . . . .	NPN (used with sourcing outputs)
<b>Option P</b> . . . . .	PNP (used with sinking outputs)
<b>Option T</b> . . . . .	TTL
<b>Option R</b> . . . . .	5 V differential
<b>Option L</b> . . . . .	10 to 30 VDC, $V_{out} = V_{in}-1$ Volt
<b>Output Frequency</b> . . . . .	10 kHz - 1 MHz
<b>Nonlinearity</b> . . . . .	+/- 0.05% of full stroke
<b>LED</b> . . . . .	Green = Power is applied and magnet is present in the programmed range Red = Fault, magnet is in the Null Zone, Dead Zone or lost

## Digital Profile Style (Q21D) Specifications

**Output** . . . . . Start/Stop Pulse: External interrogation; Variable Pulse: Internal or External interrogation  
**Number of Recirculations** . . . . . Variable Pulse: 001 (standard) to 127  
**Span** . . . . . 5 to 180 in.  
**Repeatability** . . . . . +/-0.006% of full stroke  
**Hysteresis** . . . . . +/-0.02% of full stroke  
**Operating Temperature** . . . . . -20° to +70°C (-4° to +158°F)  
**Null Zone** . . . . . 3.00 in.  
**Dead Zone** . . . . . 2.00 in.  
**Operating Voltage** . . . . . 13.5-30 VDC  
**Current Consumption** . . . . . 120 mA at 15 VDC, 2.5 watts maximum  
**Shock** . . . . . Tested to 40G  
**Vibration** . . . . . MIL-STD810E, 10G rms random, 20 Hz - 2 kHz  
**LED** . . . . . Green = Power is applied and magnet is present  
Red = Fault, magnet is in the Dead Zone or lost  
Yellow = No interrogation signal detected



Housing Style	Part Number	Output
<b>21 mm Anodized Aluminum, 5-pin eurofast® Connection</b>	LT***E-Q21R-LIOX3-H1151 LT***E-Q21R-LI1X3-H1151 LT***E-Q21R-LU0X3-H1151 LT***E-Q21R-LU1X3-H1151	Analog Current 4-20 mA Analog Current 20-4 mA Analog Voltage 0-10 V Analog Voltage 10-0 V
<b>21 mm Anodized Aluminum, 4-pin eurofast Connection</b>	LT***E-Q21-LI0X3-H1141 LT***E-Q21-LI1X3-H1141 LT***E-Q21-LU0X3-H1141 LT***E-Q21-LU1X3-H1141 LT***E-Q21-LU2X3-H1141 LT***E-Q21-LU3X3-H1141 LT***E-Q21-LU4X3-H1141 LT***E-Q21-LU5X3-H1141 LT***E-Q21-LU6X3-H1141 LT***E-Q21-LU7X3-H1141	Analog Current 4-20 mA Analog Current 20-4 mA Analog Voltage 0-10 V Analog Voltage 10-0 V Analog Voltage -10 to 10 V Analog Voltage 10 to -10 V Analog Voltage 0-5 V Analog Voltage 5-0 V Analog Voltage -5 to 5 V Analog Voltage 5 to -5 V

\*\*\* Span = measuring length in inches.

See page L45 for magnets and mounting accessories (not included).



TURCK LT...-Q21....-H1141 and LT...-Q21....-H1151 **EZ-track** sensors are FM approved for installation in Class I, Division 2 hazardous locations when installed per TURCK control drawing Ni-1.003 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

Voltage	Features	eurofast Connection	Enclosure Rating	Agency Approval	Mating Cordset	Wiring Diagram #	Wiring Diagrams
13.5-30 VDC	Analog Output Enhanced Resolution	5-pin	IP 67	CE	RKS 4.5T-*	1	
		5-pin	IP 67	CE	RKS 4.5T-*	1	
		5-pin	IP 67	CE	RKS 4.5T-*	1	
		5-pin	IP 67	CE	RKS 4.5T-*	1	
10-30 VDC	Analog Output Standard Resolution	4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	
		4-pin	IP 67	CE	RK 4.4T-*/S618	2	

\* Length in meters.



Housing Style	Part Number	Output
<b>21 mm Anodized Aluminum, 6-pin eurofast® Connection</b>	LT***E-Q21D-RS-X3-H1161 LT***E-Q21D-VPI***-X3-H1161 LT***E-Q21D-VPE-X3-H1161	RS 422 Start/Stop pulse Variable pulse internal interrogations Variable pulse external interrogations
<b>21 mm Anodized Aluminum, 12-pin eurofast Connection</b>	LT***E-Q21-DQR*N*X2-H11121 LT***E-Q21-DQR*N*X2-H11121 LT***E-Q21-DQL*N*X2-H11121 LT***E-Q21-DQL*N*X2-H11121 LT***E-Q21-DQR*V*X2-H11121 LT***E-Q21-DQR*V*X2-H11121 LT***E-Q21-DQR*V*X2-H11121 LT***E-Q21-DQR*V*X2-H11121	Quadrature RS 422 Line Driver (TTL) Quadrature RS 422 Line Driver (TTL) Quadrature 10-30 VDC Line Driver Quadrature 10-30 VDC Line Driver Quadrature RS 422 Line Driver (TTL) Quadrature RS 422 Line Driver (TTL) Quadrature 10-30 VDC Line Driver Quadrature 10-30 VDC Line Driver

\*\*\* Span = measuring length in inches.

See page L45 for magnets and mounting accessories (not included).

# Process Automation




Voltage	Features	Eurofast Connection	Enclosure Rating	Agency Approval	Mating Cordset	Wiring Diagram #	Wiring Diagrams
13.5-30 VDC	Digital Output	6-pin	IP 67	CE	RKS 6T-*	1	 <b>Diagram 1</b>
	Digital Output	6-pin	IP 67	CE	RKS 6T-*	1	
	Digital Output	6-pin	IP 67	CE	RKS 6T-*	1	
13.5-30 VDC	Nonvolatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	 <b>Diagram 2</b>
	Nonvolatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	
	Nonvolatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	
	Nonvolatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	
	Volatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	
	Volatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	
	Volatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	
	Volatile Zero Offset Storage	12-pin	IP 67	CE	RKS 10T-*	2	

\* Length in meters.


## Profile Style Accessories

Slide Magnet

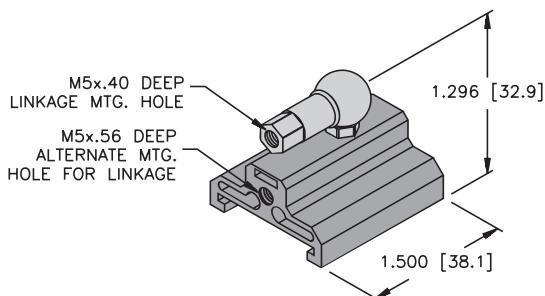


SM-Q21 (A5600)

Slide Magnet with Slide Adapter

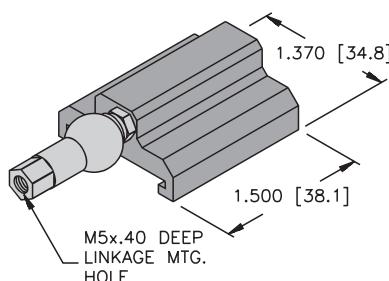


SA-Q21 (A0864)

Floating Magnet

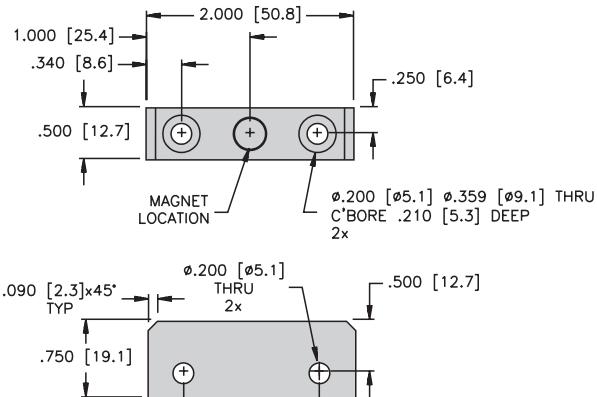


FM-Q21 (A5500)

Q21 Mounting Brackets

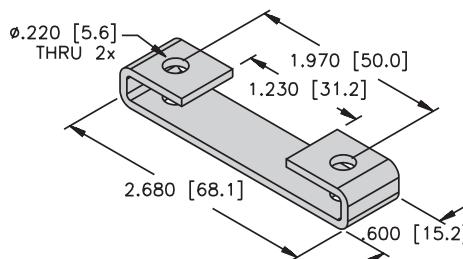
MB-Q21  
(\* mount every 3 feet) (A5700)

Control Arms

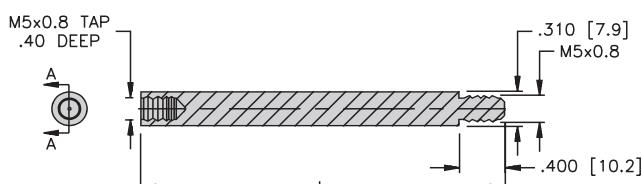

CA\*\*E-Q21

Rod Ends

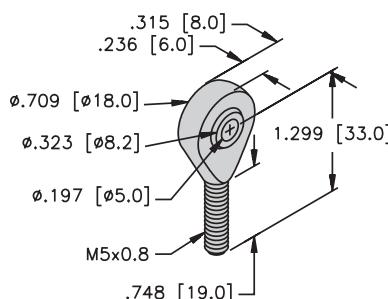


RE-Q21 (A0865)

\*\* Length in inches.  
Stocked in 3", 6" and 9" lengths.

All dimensions shown as: Inches [mm]


**Profile Style Accessories**

**Rocker Programmer**

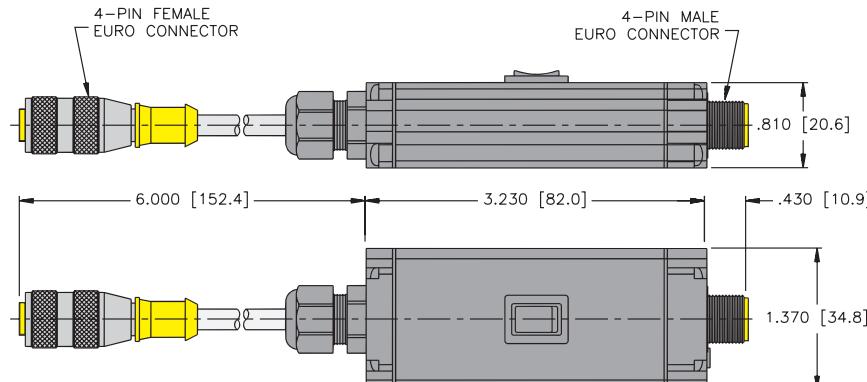


**RP-Q21 (A0875)**

**Q21 Upside Down Brackets**

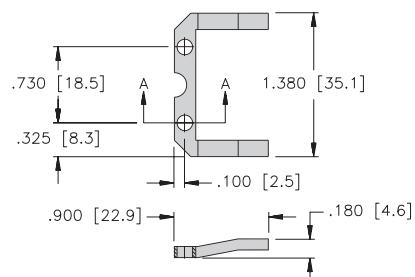

**UB-Q21 (2/bag)  
(A0876)**

**Test and Programming Device**

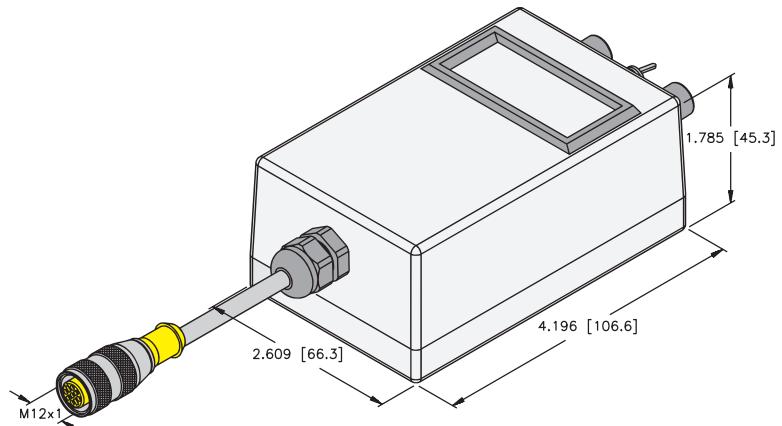

**TB2-LDT (voltage) (A58001)  
TB2-LDT-LI (current) (A58002)**

All dimensions shown as: Inches [mm]

## Hazardous Area Proximity Sensors



Type	NAMUR Barrel Style	NAMUR Rectangular Style	Hazardous Area Metal Barrel	Hazardous Area Plastic Barrel
Sensing Range	1.5 - 15 mm	3 - 10 mm	12 - 30 mm	12 - 30 mm
Pages	L49	L50	L53	L53

## Hazardous Area Proximity Sensors

**TURCK** NAMUR proximity sensors are 2-wire sensing devices meeting the interoperability requirements of EN 60947-5-6. Because NAMUR sensors operate on very low power, they can be designed to be intrinsically safe for use in hazardous locations. Turck NAMUR compliant sensors have intrinsic safety approval from FM, CSA, ATEX and others.

The operation of NAMUR sensors is similar to that of a variable resistor, with a change of impedance as a target approaches the sensor. When no metal is being sensed, an inductive sensor is in a low impedance state and draws a current of more than 2.2 mA. When a metal target enters the high-frequency field radiated from the sensor face, the impedance increases as the target approaches. When fully damped, the sensor draws less than 1.0 mA. This current change is used to trigger an external amplifier at a defined switch point, usually about 1.5 mA.

NAMUR sensors contain a relatively small number of components, which allows the construction of small devices and helps to ensure a high degree of reliability. As the sensors are 2-wire current loops with fairly low impedance, they are unaffected by most transients.

## General NAMUR Specifications

Differential Travel (Hysteresis) . . . . .	1-10% (5% typical)
Nominal Voltage . . . . .	8.2 VDC (EN60947-5-6)
Resistance Change from	
Nonactivated to Activated Condition . . . . .	typical <1.0 to >8.0 kΩ
Resulting Current Change . . . . .	≥2.2 mA to ≤1.0 mA
Recommended Switching Point for	
Remote Amplifier . . . . .	>1.2 to <2.1 mA, typ. 1.55 mA ON/1.75 mA OFF
Power-On Effect . . . . .	Realized in Amplifier
Reverse Polarity Protection . . . . .	Incorporated
Wire-Break Protection . . . . .	Realized in Amplifier
Transient Protection . . . . .	Realized in Amplifier
Shock . . . . .	30 g, 11 ms
Vibration . . . . .	55 Hz, 1 mm Amplitude in all 3 Planes
Repeatability . . . . .	≤2% of Rated Operating Distance

See **TURCK** Sensors Catalog for detailed individual specifications for all NAMUR sensors.



**TURCK** NAMUR proximity sensors are functionally compatible with all switch amplifiers with input characteristics that meet the NAMUR requirements. Their approved intrinsic safety entity parameters are compatible with all **TURCK** safety switch amplifiers and remote I/O systems. See Section B, IS Interface Technology, and Section C, IP 20 Slice I/O, for more information.

**NAMUR Barrel Style Sensors****Metal Barrel**

Quick Disconnect



Integral Cable

**Plastic Barrel**

Quick Disconnect



Integral Cable



Terminal Chamber

**8 mm Diameter, Sensing Range 1.5-3 mm**

Bi 1.5-EG08K-Y1-H1341	Bi 1.5-GS880-Y0
Bi 1.5-EG08K-Y1X-H1341	Bi 1.5-EG08K-Y1
Bi 1.5-EG08-Y1-H1341	Bi 1.5-EG08-Y1
Ni 1.5-EG08K-Y1-H1341	Bi 1.5-G08-Y1
Ni 1.5-EG08K-Y1X-H1341	Ni 2-G08-Y1
Ni 1.5-EG08-Y1-H1341	Ni 3-EG08K-Y1

**12 mm Diameter, Sensing Range 2-5 mm**

Bi 2-EM12-YOX-H1141	Bi 2-EG12-YOX
Bi 2-M12-Y1X-H1141	Bi 2-G12-Y0
Bi 2-MT12-YOX-H1141	Bi 2-G12-YOX
Bi 2-M12E-YOX-H1141	Ni 5-G12-Y0
Ni 5-M12-Y1X-H1141	Ni 5-G12-YOX
Ni 5-G12-Y0-H1141	

**18 mm Diameter, Sensing Range 5-10 mm**

Bi 5-M18-Y1X-H1141	Bi 5-EG18-Y0
Ni10-M18-Y1X-H1141	Bi 5-G18-Y0
BiD2-G18-Y0-H1141/S212	Bi 5-EG18-YOX
	BiD2-G180-Y1/S212
	Ni10-G18-Y0
	Ni10-G18-YOX

**30 mm Diameter, Sensing Range 10-15 mm**

Bi10-M30-Y1X-H1141	Bi10-G30-Y0
	Bi10-G30-YOX
	Bi10-G30-Y0/S90
	Ni15-G30-Y0
	Ni15-G30-YOX

**11 mm Diameter, Sensing Range 2-5 mm**

Bi 2-K11-Y1
Ni 5-K11-Y0

**12 mm Diameter, Sensing Range 2-5 mm**

Bi 2-S12-YOX-H1141	Bi 2-P12-Y0	Bi 2-P12SK-Y1X
Ni 5-S12-YOX-H1141	Bi 2-P12-Y0/S100	Ni 5-P12SK-Y0X
	Bi 2-P12-Y0X	
	Bi 2-P12-Y1X/S97	
	Ni 5-P12-Y0/S100	
	Ni 5-P12-Y0X	
	Ni 5-P12-Y1	

**18 mm Diameter, Sensing Range 5-10 mm**

Ni10-K18-Y1	Bi 5-P18-Y0	Bi 5-P18SK-Y1X
	Bi 5-P18-Y0X	Ni10-P18SK-Y1X
	Bi 5-P18-Y0/S100	
	Ni10-P18-Y0X	
	Ni10-P18-Y1	
	Ni10-P18-Y0/S100	

**20 mm Diameter, Sensing Range 10 mm**

Ni10-K20-Y1

**20 mm Diameter, Sensing Range 10 mm**

Bi10-P30-YOX
Bi10-P30-Y1
Ni15-P30-YOX
Ni15-P30-Y1

**20 mm Diameter, Sensing Range 10 mm**

Ni20-K40-Y1

See TURCK Sensor Catalog for detailed individual specifications for all NAMUR sensors.

## NAMUR Rectangular Style Sensors



6-20 mm with Integral Cable



20-26 mm with Quick Disconnect

**6 mm , Sensing Range 3 mm**

Bi 2-Q5.5-Y1X

**8 mm , Sensing Range 5 mm**

Bi 2-Q08-Y1X

**10 mm , Sensing Range 2 mm**

Bi 2-Q10S-Y1X

**11 mm , Sensing Range 2 mm**

Bi 2-Q11S-Y1X

**14 mm , Sensing Range 10 mm**

Bi10-Q14-Y0X

**20 mm , Sensing Range 15 mm**

Bi15-Q20-Y0X

Bi15-Q20-Y0X-H1141

**26 mm , Sensing Range 10 mm**

Bi15-Q20-Y0X-H1141



40 mm CP40



80 mm CP80



80 mm Q40



90 mm K90

**6 mm , Sensing Range 3 mm**

Bi 5-CP40-Y1X

**8 mm , Sensing Range 5 mm**

Ni20-CP40-Y1X

Ni40-CP40-Y1

**10 mm , Sensing Range 2 mm**

Ni50-CP40-Y1

Ni50-K90SR-Y1/M20

**11 mm , Sensing Range 2 mm**

**14 mm , Sensing Range 10 mm**

Ni60-Q80-Y0X

## Class I, Division 2 Hazardous Area Sensors

TURCK 3-wire DC proximity sensors without code AN6., AP6., RN6., or RP6. with threaded barrels are approved by FM Approvals for installation in Class I, Division 2 hazardous locations. The sensors must be installed using a Division 2 wiring method, which, for all practical purposes, means that the sensor must be either installed in an enclosure that requires the use of a tool to open, or they must be adapted to a raceway or conduit product. TURCK TMF conduit adapters or other suitable thread adapters may be used for this purpose.



## Conduit Adapters

When installed in this fashion and powered from a supply not exceeding 30 VDC, there are no further energy limiting or protective enclosure requirements for installation in Class I, Division 2. The sensors have no arcing or sparking components and will not dissipate heat under normal operating conditions.


Part Number	ID Number	Barrel Diameter	Dimensions					
			A	B	C	D	E	F
TMF 12-G	A3310	12 mm	1.15 [29.2]	1.00 [25.4]	1.00 [25.4]	0.50 [12.7]	0.50 [12.7]	M12x1
TMF 18-G	A3320	18 mm	1.15 [29.2]	1.00 [25.4]	1.00 [25.4]	0.50 [12.7]	0.50 [12.7]	M18x1
TMF 30-G	A3345	30 mm	1.73 [44.0]	1.50 [38.1]	1.00 [25.4]	0.60 [15.2]	0.40 [10.2]	M30x1.5

Use above Conduit Adapters with G and P Barrel sensors.

TMF 18-MS	A3330	18 mm	1.15 [29.2]	1.00 [25.4]	2.00 [50.8]	1.50 [38.1]	0.50 [12.7]	M18x1
TMF 30-MS	A3355	30 mm	1.73 [44.0]	1.50 [38.1]	2.00 [50.8]	0.60 [15.2]	1.40 [35.6]	M30x1.5

Use above Conduit Adapters with M and S Barrel sensors.

Material: Aluminum  
Inches [mm]

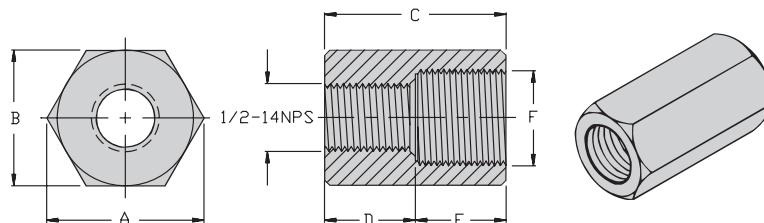

## Class I, Division 2 Hazardous Area Metal Barrel Sensors Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

**B I 5 - M 18 - A N 6 X**

### Mounting

B = Embeddable  
N = Nonembeddable

### Principle of Operation

I = Inductive

### Rated Operating Distance (mm)

### Housing Material Modifier

E = Stainless Steel

### Housing Style

#### Barrel - Metal

G = Full Threading  
M = Partial Threading

#### Barrel - Plastic

P = Full Threading  
S = Partial Threading

### Number of LEDs

Blank = No LED  
X2 = 2 LEDs

### Voltage Range

6 = 10-30 VDC, Polarity Protected, Pulsed SCP

### Output

N = NPN Transistor (Current Sinking)  
P = PNP Transistor (Current Sourcing)

### Output Function

A = Normally Open  
R = Normally Closed

### Barrel Modifier

K = Short Barrel  
T = Barb Fitting at Cable Entry

### Housing Diameter

## Class I, Division 2 Hazardous Area Sensors

## Metal Barrel



12 - 18 mm



30 mm

## Plastic Barrel



30 mm

## Embeddable

Bi 2-EG12-AN6X	Bi 4-EM12-AN6X	Bi 5-G18K-AN6X	Bi10-G30-AN6
Bi 2-EG12-AP6X	Bi 4-G12-AN6	Bi 5-G18K-AP6	Bi10-G30-AN6X
Bi 2-EG12-RP6X	Bi 4-G12-AN6X	Bi 5-G18K-AP6X	Bi10-G30-AP6
Bi 2-G08-AN6	Bi 4-G12-AP6X	Bi 5-G18K-RN6X	Bi10-G30-AP6X
Bi 2-G12-AN6	Bi 4-G12K-AN6X	Bi 5-G18-RP6X	Bi10-G30K-AN6
Bi 2-G12-AN6X	Bi 4-G12K-AN6X	Bi 5-M18-AN6X	Bi10-G30K-AN6X
Bi 2-G12-AP6	Bi 4-G12K-AP6X	Bi 5-M18-AP6X	Bi10-G30K-AP6X
Bi 2-G12-AP6X	Bi 4-G12K-RP6X	Bi 5-M18T-AN6X	Bi10-G30K-RP6X
Bi 2-G12K-AN6X	Bi 4-M12-AN6X	Bi 5-M18T-AP6X	Bi10-G30-RN6X
Bi 2-G12K-AP6	Bi 4-M12-AP6X	Bi 5-M18T-RP6X	Bi10-G30-RP6X
Bi 2-G12K-AP6X	Bi 4-M12-RN6X	Bi 8-G18-AN6X	Bi10-M30-AP6
Bi 2-G12K-RN6X	Bi 4-M12-RP6X	Bi 8-G18-AP6X	Bi10-M30T-AN6X
Bi 2-G12K-RP6X	Bi 4-M12T-AN6X	Bi 8-G18-RN6X	Bi10-M30T-AP6X
Bi 2-G12-RN6X	Bi 4-M12T-AP6X	Bi 8-M18-AN6X	Bi15-G30K-AP6X
Bi 2-G12-RP6X	Bi 5-EG18-AN6X	Bi 8-M18-AP6X	Bi15-M30-AN6X
Bi 2-M12-AN6X	Bi 5-EG18-AP6X	Bi 8-M18-RN6X	Bi15-M30-AP6X
Bi 2-M12-AP6X	Bi 5-G18-AN6	Bi 8-M18-RP6X	Bi15-M30-RP6X
Bi 2-M12-RP6X	Bi 5-G18-AN6X	Bi 8-M18T-AN6X	Bi15-M30T-AN6X
Bi 2-M12T-AN6X	Bi 5-G18-AP6	Bi 8-M18T-AP6X	Bi15-M30T-AP6X
Bi 2-M12T-AP6X	Bi 5-G18-AP6X		
Bi 4-EG12-AN6X	Bi 5-G18K-AN6		

## Embeddable

Bi 2-S12-AN6X	Bi10-S30-AN6X
Bi 2-S12-AP6X	Bi10-S30-AP6X
Bi 2-S12-RN6X	
Bi 5-S18-AN6X	
Bi 5-S18-AP6X	
Bi 5-S18-RN6X	
Bi 5-S18-RP6X	

## Nonembeddable

Ni 4-S12-AN6X	Ni15-S30-AN6X
Ni 4-S12-AP6	
Ni 4-S12-AP6X	
Ni 8-S18-AN6X	
Ni 8-S18-AP6	
Ni 8-S18-AP6X	
Ni 8-S18-RN6X	

## Nonembeddable

Ni 4-M12-AP6X	Ni 5-G12K-AP6X	Ni10-G18-AN6X	Ni15-M30T-AN6X
Ni 4-M12T-AN6X	Ni 5-G12K-RN6X	Ni10-G18-AP6	Ni15-M30T-AP6X
Ni 4-M12T-AP6X	Ni 5-G12K-RP6X	Ni10-G18-AP6X	
Ni 5-G12-AN6	Ni 5-G12-RN6X	Ni10-G18K-AN6X	
Ni 5-G12-AN6X	Ni 5-G12-RP6X	Ni10-G18K-AP6X	
Ni 5-G12-AP6	Ni 8-M18-AP6X	Ni10-G18K-RP6X	
Ni 5-G12-AP6X	Ni 8-M18T-AN6X	Ni10-G18-RN6X	
Ni 5-G12K-AN6X	Ni 8-M18T-AP6X	Ni10-G18-RP6X	
Ni 5-G12K-AP6	Ni10-G18-AN6		

See TURCK Sensor Catalog for detailed individual specifications for all NAMUR sensors.

# Process Automation



**Notes:**

**TURCK**

**Process Automation – Instrumentation**

**Notes:**

# INSTRUMENTATION



## Pressure Selection Guide



Type	High Accuracy Pressure Sensors	Programmable Flush Mount Pressure Sensors
Pages	M13 - M20	M21 - M22



Type	Transmitters (scaled in psi)	Transmitters (scaled in bar)
Pages	M23 - M24	M25 - M28

## Pressure Sensors with Diaphragm Seals\*



Type	Sanitary	General Purpose	Chemical Resistant	Flush Mount	Accessories
Pages	M29 - M30	M31 - M32	M32	M33	M34 - M35

\* Sold as a complete unit with pressure sensors and pressure transmitters only

## TURCK Pressure Controls Offer a Flexible Solution to Any Pressure Application

### Designed with Features to Meet your Needs

The complete line of **TURCK** pressure controls present a wide range of pressure-sensing products that have been designed for versatility and efficiency in a variety of pressure monitoring applications. Our electronic pressure controls are well suited for use in pneumatic and hydraulic systems where there is a need to monitor, measure or control the pressure of both liquids and gases. If your application requires pressure monitoring, **TURCK** pressure controls are the right choice for you.

### Solid State Reliability

The piezo-resistive measuring cells offer an extremely high overpressure resistance, which in turn produces a pressure control that is remarkably stable. The robust housings and ceramic piezo-resistive measuring cells combined with solid-state reliability give these controls a 10 million-cycle rating. The high shock and vibration resistance allow these devices to function safely and reliably even in the harshest of environmental conditions.

### Pressure Controls from **TURCK** for Multiple Applications

**TURCK** pressure controls can be used in a wide variety of applications with either liquids or gases. Whether it's control in hydraulic systems or monitoring of pressure in welding guns, **TURCK** pressure controls are designed to provide reliable data in your harshest application.

Some common applications include:

- Air Compressors
- Hydraulic Clamping Systems
- Bad Filter Detection
- Vacuum for Pick-up and Transfer of Product
- Pneumatic Systems
- Hydraulic Accumulators
- Injection Molding Machines
- Press Machines
- Automotive Welding Pressure
- Machine Coolant
- Pump Run Dry



Implementing process control into your system should not require a redesign of your process. Why not choose a sensor that can be modified to meet your unique specifications? Robust, solid state, and available in several programmable styles - the **TURCK** Pressure Controls have the flexibility to adapt and perform in many applications.

## A Pressure Sensor Designed with the Customer Applications in Mind

- **High Accuracy**

The PS400 and PS500 provide an accuracy rating of  $\pm 0.5$  percent of full scale.

- **Flexible Mounting Options**

Multiple threaded connections and a unique coupling (PS500) make them easy to mount in a variety of applications.

- **Easy to Operate**

Push buttons and enter keys for quick and easy programming.

- **Robust Design**

An environmental rating of IP 67 provide operational durability in harsh applications.



### Simple Programming

The new high accuracy programmable pressure sensors combine high accuracy and performance with simple programming, resulting in an extremely user friendly sensor. The sensor is easily programmed via three controls: two push buttons for scrolling through programming features, and one recessed enter key. The push buttons are finger operated, and used to make value selections in the menu or to scroll through the various menu options. The recessed button is used to store selected values, and prevents programmed values from being inadvertently altered.

The menu is clear and concise to allow parameters such as set points, reset points, output functions, analog ranges, and a range of special options to be programmed with ease. The menu also includes an optional electronic lockout that disables the push buttons from functioning until the lockout is removed.

## Stock Reduction

The PS400 and PS500 sensors are specified with an accuracy of 0.5 percent exceeding what is required by the machine engineering sector. The combination of high accuracy and flexible programming often allows a single sensor to replace several conventional sensors (with varying sensing ranges) resulting in a significant reduction in inventory. The LI2UPN8X output version allows the user to select current analog output with 1 set point or 2 set points. This allows 1 sensor to replace two part numbers.



## Flexible Mounting Options

The high accuracy programmable pressure sensors feature a large, bright, 4-digit, 7-segment LCD display with a constant indication of pressure in either psi (pounds per square inch), bar, kPa (kilopascals), or MPa (megapascals). This display is tilted at a 45° angle, and can be inverted electronically for easy reading in a variety of applications. IO user selectable units include: millibar, millimeters or mercury, inches of water, feet of water, inch of #g Mercury, meter of water and kilograms per square centimeter.

The PS400 and PS500 pressure sensors are encased in a compact, 34 mm diameter housing with various threaded connections for simple, versatile installation. This allows several sensors to be mounted in close proximity to one another, and is advantageous when space is at a premium. The PS500 series also features a process connection that allows the housing to rotate 360 degrees for optimal viewing prior to locking the sensor in place. These features allow the PS400 and PS500 pressure sensors to be utilized in a wide variety of applications.



## Robust Design

The innovative PS400 and PS500 pressure sensors were designed to tolerate tough applications. Stainless steel housing with an integrated stainless steel M12 **europress**® connector enables fast and reliable installation. The sensors also offer a variety of stainless steel pressure connections including G1/4 and 1/4-18 NPT threads.

The sensors are highly resistant to overpressure and burst pressure, yet they also incorporate a patented medium stop system that prevents leakage when these levels are exceeded. The media stop system immediately seals the sensor if the pressure cell has been damaged, and can prevent liquid leakage if burst pressure is exceeded.

## Noise Immune

The PS400 and PS500 programmable sensors offer a high level of protection against interference from sources that produce high levels of EMI (such as frequency converters and stepper motors) and other plant noise. These features were incorporated to create a pressure sensor ideal for use virtually anywhere.



## Tough Industrial Pressure Transmitters

**TURCK's** industrial pressure transmitters combine the reliability of solid-state design with the durability of Stainless Steel. The result is a pressure transmitter that provides accurate and dependable pressure measurement in demanding applications. At the heart of the transmitter is a proven ceramic component technology that provides long-term stability and a high tolerance to overpressure conditions. A patented media stop, included with devices rated over 600 bar, contains the process media in the event that the burst pressure is exceeded. The housing is constructed of Stainless Steel and provides an IP 67 level of protection. The fluid connection is a standard G 1/4 or 1/4 NPT thread that works with all of **TURCK's** existing pressure accessories. All of the transmitters include an M12x1 **eurofast**® quick disconnect, making them compatible with **TURCK's** extensive line of cordsets and junction boxes.

## TURCK Pressure Sensors and Transmitters with Diaphragms Installed

### Operation

In many pressure applications, there is a need to separate the pressure sensor from the media it is sensing via an isolation device. **TURCK** offers a variety of diaphragm seals that are attached either directly or remotely to the pressure device to provide this isolation. The diaphragms that **TURCK** offers are all manufactured and installed by PI Components, and are not available as a separate item. This insures that the quality of the assembly is maintained for optimum accuracy.

The **TURCK** pressure sensor is attached into the top of the diaphragm housing, which is then filled with fluid. The sensor receives the pressure hydraulically via this internal medium. The lower half of the diaphragm housing adapts to the process connection, and is designed to contain the process medium as it acts against the thin membrane located between the two housings.

### Applications

**TURCK** offers the diaphragms in numerous wetted material options, as well as with many different fill fluids to solve any application. Typical process applications that require the use of a diaphragm include:

- Sanitary Applications
- Corrosive Processes
- Viscous Applications
- Applications Where Freezing Media Can Clog The Sensor



Pressure Transmitter with  
S1605 Sanitary Diaphragm

## Innovative Pressure Sensor and Diaphragm Solutions

**TURCK** is the market leader in providing innovative sensor solutions for industrial automation applications. **TURCK's** high quality, high performance pressure sensors and pressure transmitters can be combined with multiple styles of diaphragms to give our customers an infinite selection of unique pressure sensing solutions.

**TURCK** offers diaphragms in numerous wetted material options, as well as with many different fill fluids. This broad selection provides custom sensing solutions for the most diverse pressure applications. Parts numbers should be developed through your **TURCK** representative or application support. In general, the formula below illustrates how to configure a custom sensor and diaphragm assembly.



**Pressure Transmitter**



**Diaphragm Modifier**



**New Part Number:**

**PT010R-11-LI3-H1131**

**+**

**S1693**

**=**

**PT010R-11-LI3-H1131/S1693**

## Pressure Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

### Pressure Transmitter (scaled in psi)



#### Style

PT = Pressure Transmitter

#### Pressure Range

-30HG	= -30 to 0 in. Hg (vacuum)
15psig	= 0 to 15 psig (0 to 1 bar)
30psig	= 0 to 30 psig (0 to 2 bar)
60psig	= 0 to 60 psig (0 to 4 bar)
100psig	= 0 to 100 psig (0 to 6.8 bar)
200psig	= 0 to 200 psig (0 to 13.7 bar)
300psig	= 0 to 300 psig (0 to 20.6 bar)
500psig	= 0 to 500 psig (0 to 34.4 bar)
750psig	= 0 to 750 psig (0 to 51.7 bar)
1000psig	= 0 to 1000 psig (0 to 68.9 bar)
2000psig	= 0 to 2000 psig (0 to 137.8 bar)
3000psig	= 0 to 3000 psig (0 to 206.8 bar)
5000psig	= 0 to 5000 psig (0 to 344.7 bar)
7500psig	= 0 to 7500 psig (0 to 517 bar)

#### Electrical Connection

H1131 = 3-pin, M12 *eurofast*

#### Output Circuitry

LI3 = 8-33 VDC / 4-20 mA Loop Powered

LU2 = 11.4-33 VDC / 0-10 V

#### Fluid Connection

13 = 1/4 Male NPT

## Pressure Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

### Pressure Transmitter (scaled in bar)

PT 010 R - 11 - LI3 - H1131

#### Style

PT = Pressure Transmitter

#### Pressure Range

- 01V = -1 to 0 bar (-14.5 to 0 psi) (vacuum)
- 0.5 = 0 to 0.5 bar (0 to 7.25 psi)
- 001 = 0 to 1 bar (0 to 14.5 psi)
- 002 = 0 to 1.6 bar (0 to 23.2 psi)
- 003 = 0 to 2.5 bar (0 to 36.25 psi)
- 004 = 0 to 4 bar (0 to 58 psi)
- 006 = 0 to 6 bar (0 to 87 psi)
- 010 = 0 to 10 bar (0 to 145 psi)
- 016 = 0 to 16 bar (0 to 232 psi)
- 025 = 0 to 25 bar (0 to 362.5 psi)
- 040 = 0 to 40 bar (0 to 580 psi)
- 060 = 0 to 60 bar (0 to 860 psi)
- 100 = 0 to 100 bar (0 to 1450 psi)
- 160 = 0 to 160 bar (0 to 2320 psi)
- 250 = 0 to 250 bar (0 to 3625 psi)
- 400 = 0 to 400 bar (0 to 5800 psi)
- 600 = 0 to 600 bar (0 to 8700 psi)

#### Electrical Connection

H1131 = 3-pin, M12 **eurofast**®

#### Output Circuitry

- LI3 = 8-33 VDC / 4-20 mA Loop Powered
- LU2 = 11.4-33 VDC / 0-10 V

#### Fluid Connection

- 11 = G1/4 BSPP
- 13 = 1/4 NPT

#### Measurement Type

- A = Absolute
- R = Relative

## High Accuracy Programmable Pressure Sensor Part Number Key

PS 010 R - 4 01 - 2UP8X - H1141

#### Style

PS = Pressure Sensor

#### Pressure Range

- 01V = -1 to 0 bar (-14.5 to 0 psi) (vacuum)
- 001 = 0 to 1 bar (0 to 14.5 psi)
- 003 = 0 to 3 bar (0 to 43.5 psi)
- 010 = 0 to 10 bar (0 to 145 psi)
- 016 = 0 to 16 bar (0 to 232 psi)
- 025 = 0 to 25 bar (0 to 362.5 psi)
- 040 = 0 to 40 bar (0 to 580 psi)
- 100 = 0 to 100 bar (0 to 1450 psi)
- 250 = 0 to 250 bar (0 to 3625 psi)
- 400 = 0 to 400 bar (0 to 5800 psi)

#### Electrical Connection

H1141 = 4-pin, M12x1, **eurofast**

#### Output Circuitry

- 2UP8X = 15-30 VDC/(2) N.O./N.C. PNP
- LIUP8X = 18-30 VDC/Analog Current and (1) N.O./N.C. PNP
- LUUP8X = 18-30 VDC/Analog Voltage and (1) N.O./N.C. PNP
- LIUPN8X = 18-30 VDC/Analog Current and (1) N.O./N.C. PNP/NPN or (2) N.O./N.C. PNP/NPN

#### Fluid Connection

- 01 = G1/4 female thread 1/4 BSPP with DIN 3845 seal
- 03 = 1/4-18 NPT male threads

#### Pressure Connection Style

- 4 = Fixed pressure connection
- 5 = Rotatable pressure connection

#### Type of Pressure

R = Relative (Gauge)

## High Accuracy Programmable Pressure Sensor Specifications

<b>Current Consumption</b>	≤50 mA
<b>Switching Frequency (Discrete)</b>	≤180 Hz
<b>Minimum Hysteresis</b>	±0.5%

### Display Reaction Time:

<b>3 Selectable Modes</b>	Slow 600 ms update Normal 200 ms update Fast 50 ms update
<b>Wetted Parts</b>	Stainless Steel, Viton $\text{Al}_2\text{O}_3$ Ceramic

## Programmable Analog:

**Analog Start Point** . . . . . Programmable from 0-75% of measuring range  
**Analog End Point** . . . . . Programmable from 25-100% of measuring range

## Time Delays:

<b>Switching Delay</b>	Switch-on and switch-off delay adjustable from 0 to 50 seconds in steps of 0.1 second
<b>Power-On Effect</b>	Per IEC 947-5-2
<b>Reverse Polarity Protection</b>	Yes
<b>Transient Protection</b>	EN 60947-5-2
<b>Short-Circuit Protection</b>	Yes

## Temperature Ranges:

**Ambient Temperature** . . . . . -40° to +80°C (-40° to +176°F)

<b>Medium Temperature</b>	.....	-25° to +85°C (-40° to +185°F)
<b>Enclosure Rating</b>	.....	Meets NEMA 4, 6, 12, 13 and IP 67
<b>Shock</b>	.....	50 g per IEC 68-2-27
<b>Vibration</b>	.....	20 g (10-200 Hz) per IEC 68-2-6
<b>Burst Protection</b>	.....	patented media stop

## Accuracy:

**Repeatability** . . . . .  $\leq \pm 0.5\%$  of measuring range  
**Zero Shift/Span Shift** . . . . .  $\leq \pm 0.15\%$  of measuring range/ $^{\circ}\text{C}$

### **LED Function/Display:**

**Measuring Value/Programming** . . . . . 4-digit 7-segment display  
**Status Display** . . . . . LEDs indicate output status and selected measuring units

## **EMC Information:**

<b>EN 61000-4-2</b>	ESD: 4 KD CK / 8 KV AD
<b>EN 61000-4-3</b>	HF irradiated: 15 V/m
<b>EN 61000-4-4</b>	Burst: 2 KV
<b>EN 61000-4-5</b>	Surge: 500 V, 12 Ω
<b>EN 61000-4-6</b>	HF conducted: 10 V

## Programmable Pressure Specifications (Flush Mount)

<b>Current Consumption</b>	≤50 mA
<b>Short-Circuit Protection</b>	Yes
<b>Reverse Polarity Protection</b>	Yes
<b>Hysteresis (Set-Point Models)</b>	≤2% of measuring range
<b>Enclosure Rating</b>	IP 65

### Analog Adjustment:

#### PC001

4 mA	0-12.6 psi
20 mA	2.4-15 psi

#### PC016

4 mA	0-198 psi
20 mA	32-230 psi

### Accuracy:

<b>Linearity</b>	≤0.5% of measuring range
<b>Repeatability</b>	≤1% of measuring range
<b>Temperature Drift</b>	≤0.02% of measuring range / °C

### Temperature Range:

<b>Ambient</b>	-20° to +70°C (-4° to +158°F)
<b>Medium</b>	-20° to +80°C (-4° to +176°F)

### LED Function / Display:

<b>Measuring Value / Programming</b>	Rotatable, 3-digit, 7 segment display (psi)
<b>Status Display</b>	LED's indicate output status

## Pressure Transmitter Specifications


<b>Medium Temperature</b>	-40°C to +150°C (-40°F to +302°F)
<b>Current Consumption</b>	≤20 mA
<b>Dynamic Response</b>	<2 ms
<b>Short-Circuit Protection</b>	Yes
<b>Reverse Polarity Protection</b>	Yes
<b>Enclosure Rating</b>	IP 67
<b>Housing Material</b>	Stainless Steel 1.430 (AISI 303) / PBT
<b>Shock Resistance</b>	75 G, 11 ms per IEC 68-2-27
<b>Vibration Resistance</b>	20 G, 15 mm per IEC 68-2-6
<b>Wetted Parts</b>	303 Stainless Steel (connection) Al <sub>2</sub> O <sub>3</sub> Ceramic (element) Viton (seal)
<b>Zero Shift</b>	<±0.015% of measuring range / °C
<b>Span Shift</b>	<±0.015% of measuring range / °C
<b>Voltage Output</b>	>10 k Ω/ <100 nF
<b>Current Output</b>	≤ $\frac{\text{supply voltage}}{0.02 \text{ A}} = \text{Ohm}$



Housing	Part Number	ID Number	Pressure Range (psig)	Allowable Over Pressure (psig)	Output
<b>4-Wire DC, G1/4 Female Connection</b>					
	PS01VR-401-LI2UPN8X-H1141 PS001R-401-LI2UPN8X-H1141 PS003R-401-LI2UPN8X-H1141 PS010R-401-LI2UPN8X-H1141 PS016R-401-LI2UPN8X-H1141 PS025R-401-LI2UPN8X-H1141 PS040R-401-LI2UPN8X-H1141 PS100R-401-LI2UPN8X-H1141 PS250R-401-LI2UPN8X-H1141 PS400R-401-LI2UPN8X-H1141	M6832100 M6832101 M6832102 M6832103 M6832104 M6832105 M6832106 M6832107 M6832108 M6832109	-14.5 to 0 0 to 14.5 0 to 43.5 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 108.7 362.5 580 942 1450 3625 9064 13,053	<b>Programmable Current:</b> 4-20 mA, 20-4 mA, 0-20 mA, 20 mA and <b>1 PNP/NPN N.O./N.C.</b> or <b>2 PNP/NPN N.O./N.C.</b>
<b>4-Wire DC, 1/4-18 NPT Male Connection</b>					
	PS01VR-403-LI2UPN8X-H1141 PS001R-403-LI2UPN8X-H1141 PS003R-403-LI2UPN8X-H1141 PS010R-403-LI2UPN8X-H1141 PS016R-403-LI2UPN8X-H1141 PS025R-403-LI2UPN8X-H1141 PS040R-403-LI2UPN8X-H1141 PS100R-403-LI2UPN8X-H1141 PS250R-403-LI2UPN8X-H1141 PS400R-403-LI2UPN8X-H1141	M6832180 M6832181 M6832182 M6832183 M6832184 M6832185 M6832186 M6832187 M6832188 M6832189	-14.5 to 0 0 to 14.5 0 to 43.5 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 108.7 362.5 580 942 1450 3625 9064 13,053	<b>Programmable Current:</b> 4-20 mA, 20-4 mA, 0-20 mA, 20 mA and <b>1 PNP/NPN N.O./N.C.</b> or <b>2 PNP/NPN N.O./N.C.</b>
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>					
	PS01VR-503-LI2UPN8X-H1141 PS001R-503-LI2UPN8X-H1141 PS003R-503-LI2UPN8X-H1141 PS010R-503-LI2UPN8X-H1141 PS016R-503-LI2UPN8X-H1141 PS025R-503-LI2UPN8X-H1141 PS040R-503-LI2UPN8X-H1141 PS100R-503-LI2UPN8X-H1141 PS250R-503-LI2UPN8X-H1141 PS400R-503-LI2UPN8X-H1141	M6832280 M6832281 M6832282 M6832283 M6832284 M6832285 M6832286 M6832287 M6832288 M6832289	-14.5 to 0 0 to 14.5 0 to 43.5 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 108.7 362.5 580 942 1450 3625 9064 13,053	<b>Programmable Current:</b> 4-20 mA, 20-4 mA, 0-20 mA, 20 mA and <b>1 PNP/NPN N.O./N.C.</b> or <b>2 PNP/NPN N.O./N.C.</b>

# Process Automation



Voltage	Set point Range (psig)	Re-Set point Range (psig)	Switching Current	Analog Load	Set point Accuracy (of full scale)	Analog Accuracy ** (of full scale)	Mating Cordset	Wiring Diagram #	Wiring Diagrams
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	<b>Diagram 1</b> 
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	2.17 to 43.5	0.87 to 42.2	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	7.25 to 145	2.90 to 140	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	11.6 to 232	4.64 to 225	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	18.13 to 362.5	7.25 to 351	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	29 to 580	11.6 to 562	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	72.5 to 1450	29 to 1406	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	181 to 3625	72.5 to 3516	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	290 to 5800	116 to 5626	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	2.17 to 43.5	0.87 to 42.2	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	7.25 to 145	2.9 to 140	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	11.6 to 232	4.64 to 225	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	18.13 to 362.5	7.25 to 351	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	29 to 580	11.6 to 562	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	72.5 to 1450	29 to 1406	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	181 to 3625	72.5 to 3516	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	290 to 5800	116 to 5626	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	2.17 to 43.5	0.87 to 42.2	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	7.25 to 145	2.90 to 140	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	11.60 to 232	4.64 to 225	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	18.13 to 362.5	7.25 to 351	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	29 to 580	11.6 to 562	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	72.5 to 1450	29 to 1406	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	181 to 3625	72.5 to 3516	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	
	290 to 5800	116 to 5626	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	1	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Accuracy includes linearity, repeatability and hysteresis.



Housing	Part Number	ID Number	Pressure Range (psig)	Allowable Over Pressure (psig)	Output
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>	PS01VR-503-2UP8X-H1141 PS001R-503-2UP8X-H1141 PS003R-503-2UP8X-H1141 PS010R-503-2UP8X-H1141 PS016R-503-2UP8X-H1141 PS025R-503-2UP8X-H1141 PS040R-503-2UP8X-H1141 PS100R-503-2UP8X-H1141 PS250R-503-2UP8X-H1141 PS400R-503-2UP8X-H1141	M6831202 M6831205 M6831208 M6831211 M6831900 M6831901 M6831902 M6831220 M6831223 M6831903	-14.5 to 0 0 to 14.5 0 to 36.26 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 101.5 362.5 580 942 1450 3625 9064 13,053	Dual PNP N.O. or N.C.
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>	PS01VR-503-LIUP8X-H1141 PS001R-503-LIUP8X-H1141 PS003R-503-LIUP8X-H1141 PS010R-503-LIUP8X-H1141 PS016R-503-LIUP8X-H1141 PS025R-503-LIUP8X-H1141 PS040R-503-LIUP8X-H1141 PS100R-503-LIUP8X-H1141 PS250R-503-LIUP8X-H1141 PS400R-503-LIUP8X-H1141	M6831246 M6831228 M6831233 M6831239 M6831914 M6831915 M6831916 M6831255 M6831260 M6831917	-14.5 to 0 0 to 14.5 0 to 36.26 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 101.5 362.5 580 942 1450 3625 9064 13,053	PNP N.O. or N.C and Programmable Current: 0-20 mA, 4-20 mA, 20-0 mA, 20-4 mA
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>	PS01VR-503-LUUP8X-H1141 PS001R-503-LUUP8X-H1141 PS003R-503-LUUP8X-H1141 PS010R-503-LUUP8X-H1141 PS016R-503-LUUP8X-H1141 PS025R-503-LUUP8X-H1141 PS040R-503-LUUP8X-H1141 PS100R-503-LUUP8X-H1141 PS250R-503-LUUP8X-H1141 PS400R-503-LUUP8X-H1141	M6831247 M6831229 M6831234 M6831240 M6831928 M6831929 M6831930 M6831256 M6831261 M6831931	-14.5 to 0 0 to 14.5 0 to 36.26 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 101.5 362.5 580 942 1450 3625 9064 13,053	PNP N.O. or N.C. and Programmable Voltage: 0-10 V, 0-5 V, 1-6 V, 10-0 V, 5-0 V, 6-1 V

# Process Automation



Voltage	Set point Range (psig)	Re-Set point Range (psig)	Switching Current	Analog Load	Set point Accuracy (of full scale)	Analog Accuracy ** (of full scale)	Mating Cordset	Wiring Diagram #	Wiring Diagrams
15-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	7.25 to 145	2.90 to 140	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	11.6 to 232	4.64 to 225	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	18.13 to 362.5	7.25 to 351	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	29 to 580	11.6 to 562	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	72.5 to 1450	29 to 1406	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	181 to 3625	72.5 to 3516	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	290 to 5800	116 to 5626	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	7.25 to 145	2.9 to 140	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	11.6 to 232	4.64 to 225	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	18.13 to 362.5	7.25 to 351	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	29 to 580	11.6 to 562	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	72.5 to 1450	29 to 1406	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	181 to 3625	72.5 to 3516	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	290 to 5800	116 to 5626	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	7.25 to 145	2.90 to 140	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	11.60 to 232	4.64 to 225	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	18.13 to 362.5	7.25 to 351	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	29 to 580	11.6 to 562	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	72.5 to 1450	29 to 1406	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	181 to 3625	72.5 to 3516	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	290 to 5800	116 to 5626	≤200 mA	≥2 KΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Accuracy includes linearity, repeatability and hysteresis.



Housing	Part Number	ID Number	Pressure Range (psig)	Allowable Over Pressure (psig)	Output
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>	PS01VR-403-2UP8X-H1141	M6831962	-14.5 to 0	43.5	Dual PNP N.O. or N.C.
	PS001R-403-2UP8X-H1141	M6831963	0 to 14.5	43.5	
	PS003R-403-2UP8X-H1141	M6831964	0 to 36.26	101.5	
	PS010R-403-2UP8X-H1141	M6831965	0 to 145	362.5	
	PS016R-403-2UP8X-H1141	M6831966	0 to 232	580	
	PS025R-403-2UP8X-H1141	M6831967	0 to 362	942	
	PS040R-403-2UP8X-H1141	M6831968	0 to 580	1450	
	PS100R-403-2UP8X-H1141	M6831969	0 to 1450	3625	
	PS250R-403-2UP8X-H1141	M6831970	0 to 3625	9064	
	PS400R-403-2UP8X-H1141	M6831971	0 to 5800	13,053	
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>	PS01VR-403-LIUP8X-H1141	M6831942	-14.5 to 0	43.5	PNP N.O. or N.C. and Programmable Current: 0-20 mA, 4-20 mA, 20-0 mA, 20-4 mA
	PS001R-403-LIUP8X-H1141	M6831943	0 to 14.5	43.5	
	PS003R-403-LIUP8X-H1141	M6831944	0 to 36.26	101.5	
	PS010R-403-LIUP8X-H1141	M6831945	0 to 145	362.5	
	PS016R-403-LIUP8X-H1141	M6831946	0 to 232	580	
	PS025R-403-LIUP8X-H1141	M6831947	0 to 362	942	
	PS040R-403-LIUP8X-H1141	M6831948	0 to 580	1450	
	PS100R-403-LIUP8X-H1141	M6831949	0 to 1450	3625	
	PS250R-403-LIUP8X-H1141	M6831950	0 to 3625	9064	
	PS400R-403-LIUP8X-H1141	M6831951	0 to 5800	13,053	
<b>4-Wire DC, 1/4-18 NPT Male Connection, Rotatable Housing</b>	PS01VR-403-LUUP8X-H1141	M6831952	-14.5 to 0	43.5	PNP N.O. or N.C. and Programmable Voltage: 0-10 V, 0-5 V, 1-6 V, 10-0 V, 5-0 V, 6-1 V
	PS001R-403-LUUP8X-H1141	M6831953	0 to 14.5	43.5	
	PS003R-403-LUUP8X-H1141	M6831954	0 to 36.26	101.5	
	PS010R-403-LUUP8X-H1141	M6831955	0 to 145	362.5	
	PS016R-403-LUUP8X-H1141	M6831956	0 to 232	580	
	PS025R-403-LUUP8X-H1141	M6831957	0 to 362	942	
	PS040R-403-LUUP8X-H1141	M6831958	0 to 580	1450	
	PS100R-403-LUUP8X-H1141	M6831959	0 to 1450	3625	
	PS250R-403-LUUP8X-H1141	M6831960	0 to 3625	9064	
	PS400R-403-LUUP8X-H1141	M6831961	0 to 5800	13,053	

# Process Automation



Voltage	Set Point Range (psig)	Re-Set Point Range (psig)	Switching Current	Analog Load	Set Point Accuracy (of full scale)	Analog Accuracy ** (of full scale)	Mating Cordset	Wiring Diagram #	Wiring Diagrams
15-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	7.25 to 145	2.9 to 140	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	11.60 to 232	4.64 to 225	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	18.13 to 362.5	7.25 to 351	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	29 to 580	11.6 to 562	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	72.5 to 1450	29 to 1406	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	181 to 3625	72.5 to 3516	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	290 to 5800	116 to 5626	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	7.25 to 145	2.9 to 140	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	11.6 to 232	4.64 to 225	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	18.13 to 362.5	7.25 to 351	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	29 to 580	11.6 to 562	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	72.5 to 1450	29 to 1406	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	181 to 3625	72.5 to 3516	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	290 to 5800	116 to 5626	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	  
	0.73 to 14.50	0.29 to 14.07	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	7.25 to 145	2.9 to 140	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	11.6 to 232	4.64 to 225	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	18.13 to 362.5	7.25 to 351	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	29 to 580	11.6 to 562	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	72.5 to 1450	29 to 1406	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	181 to 3625	72.5 to 3516	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	290 to 5800	116 to 5626	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Accuracy includes linearity, repeatability and hysteresis.



Housing	Part Number	ID Number	Pressure Range (psig)	Allowable Over Pressure (psig)	Output
<b>4-Wire DC, G1/4 Female Connection</b>					
	PS01VR-401-2UP8X-H1141 PS001R-401-2UP8X-H1141 PS003R-401-2UP8X-H1141 PS010R-401-2UP8X-H1141 PS016R-401-2UP8X-H1141 PS025R-401-2UP8X-H1141 PS040R-401-2UP8X-H1141 PS100R-401-2UP8X-H1141 PS250R-401-2UP8X-H1141 PS400R-401-2UP8X-H1141	M6831201 M6831204 M6831207 M6831210 M6831213 M6831215 M6831217 M6831219 M6831222 M6831225	-14.5 to 0 0 to 14.5 0 to 36.26 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 101.5 362.5 580 942 1450 3625 9064 13,053	Dual PNP N.O. or N.C.
<b>4-Wire DC, G1/4 Female Connection</b>					
	PS01VR-401-LIUP8X-H1141 PS001R-401-LIUP8X-H1141 PS003R-401-LIUP8X-H1141 PS010R-401-LIUP8X-H1141 PS016R-401-LIUP8X-H1141 PS025R-401-LIUP8X-H1141 PS040R-401-LIUP8X-H1141 PS100R-401-LIUP8X-H1141 PS250R-401-LIUP8X-H1141 PS400R-401-LIUP8X-H1141	M6831245 M6831227 M6831231 M6831237 M6831243 M6831249 M6831251 M6831253 M6831259 M6831263	-14.5 to 0 0 to 14.5 0 to 36.26 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 101.5 362.5 580 942 1450 3625 9064 13,053	PNP N.O. or N.C. and Programmable Current: 0-20 mA, 4-20 mA, 20-0 mA, 20-4 mA
<b>4-Wire DC, G1/4 Female Connection</b>					
	PS01VR-401-LUUP8X-H1141 PS001R-401-LUUP8X-H1141 PS003R-401-LUUP8X-H1141 PS010R-401-LUUP8X-H1141 PS016R-401-LUUP8X-H1141 PS025R-401-LUUP8X-H1141 PS040R-401-LUUP8X-H1141 PS100R-401-LUUP8X-H1141 PS250R-401-LUUP8X-H1141 PS400R-401-LUUP8X-H1141	M6831828 M6831800 M6831232 M6831238 M6831820 M6831836 M6831844 M6831254 M6831858 M6831264	-14.5 to 0 0 to 14.5 0 to 36.26 0 to 145 0 to 232 0 to 362 0 to 580 0 to 1450 0 to 3625 0 to 5800	43.5 43.5 101.5 362.5 580 942 1450 3625 9064 13,053	PNP N.O. or N.C. and Programmable Voltage: 0-10 V, 0-5 V, 1-6 V, 10-0 V, 5-0 V, 6-1 V

# Process Automation



Voltage	Set Point Range (psig)	Re-Set Point Range (psig)	Switching Current	Analog Load	Set Point Accuracy (of full scale)	Analog Accuracy ** (of full scale)	Mating Cordset	Wiring Diagram #	Wiring Diagrams
15-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	7.25 to 145	2.9 to 140	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	11.6 to 232	4.64 to 225	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	18.13 to 362.5	7.25 to 351	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	29 to 580	11.6 to 562	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	72.5 to 1450	29 to 1406	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	181 to 3625	72.5 to 3516	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
	290 to 5800	116 to 5626	≤200 mA	N/A	±0.5%	N/A	RK 4.4T-*	1	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	7.25 to 145	2.9 to 140	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	11.6 to 232	4.64 to 225	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	18.13 to 362.5	7.25 to 351	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	29 to 580	11.6 to 562	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	72.5 to 1450	29 to 1406	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	181 to 3625	72.5 to 3516	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
	290 to 5800	116 to 5626	≤200 mA	≤500 Ω	±0.5%	≤±0.5%	RK 4.4T-*	2	
18-30 VDC	-14.5 to -0.73	-14.07 to -0.29	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	  
	0.73 to 14.5	0.29 to 14.07	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	2.17 to 36.26	0.87 to 42.2	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	7.25 to 145	2.9 to 140	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	11.6 to 232	4.64 to 225	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	18.13 to 362.5	7.25 to 351	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	29 to 580	11.6 to 562	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	72.5 to 1450	29 to 1406	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	181 to 3625	72.5 to 3516	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	
	290 to 5800	116 to 5626	≤200 mA	≥2 kΩ	±0.5%	≤±0.5%	RK 4.4T-*	3	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Accuracy includes linearity, repeatability and hysteresis.



Housing Style	Part Number	ID Number	Pressure Range (psi)	Allowable Overpressure (psi)	Minimum Burst Pressure (psi)	Output
<b>4-Wire DC, Flush Mount</b>	PC001-N3/4A4P-2AP8X-H1141 PC016-N3/4A4P-2AP8X-H1141	M6831391 M6831393	0 to 14.5 0 to 232	72.5 696	72.5 696	Dual PNP N.O./N.C.
<b>3-Wire DC, Flush Mount</b>	PC001-N3/4A4P-LIX-H1141 PC016-N3/4A4P-LIX-H1141	M6831392 M6831390	0 to 14.5 0 to 232	72.5 696	72.5 696	4-20 mA

Conversion: 1 bar = 14.5038 psi

## Material

<b>Housing</b>	PBT
<b>Sensing Element</b>	Ceramic
<b>Cable Connector</b>	303 Stainless Steel
<b>Pressure Connection</b>	316 Stainless Steel (No. 1.4305)
<b>O-ring Seal</b>	Viton

# Process Automation



Voltage	Set point	Switching Current	Analog Load	Display Accuracy**	Set point Accuracy**	Analog Accuracy**	Mating Cordset	Wiring Diagram #	Wiring Diagrams
19.2-28.8 VDC	0.2 to 15	≤200 mA	N/A	≤3	≤3	N/A	RK 4.4T-*	1	 <b>Diagram 1</b>
	2 to 230	≤200 mA	N/A	≤3	≤3	N/A	RK 4.4T-*	1	
19.2-28.8 VDC	N/A	N/A	≤500 Ω	≤3	N/A	≤0.5	RK 4.4T-*	2	 <b>Diagram 2</b>
	N/A	N/A	≤500 Ω	≤3	N/A	≤0.5	RK 4.4T-*	2	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* % of rated overall range.



Housing Style	Part Number	ID Number	Scaled Pressure Range	Output
<b>Gauge Pressure Transmitter, 1/4 Male NPT Connection</b>	PT-30HG-13-LI3-H1131	H6831455	0 to -30 in. HG	<b>4-20 mA Loop Powered</b>
	PT15psig-13-LI3-H1131	H6831456	0 to 15 psi	
	PT30psig-13-LI3-H1131	H6831457	0 to 30 psi	
	PT60psig-13-LI3-H1131	H6831458	0 to 60 psi	
	PT100psig-13-LI3-H1131	H6831459	0 to 100 psi	
	PT200psig-13-LI3-H1131	H6831460	0 to 200 psi	
	PT300psig-13-LI3-H1131	H6831461	0 to 300 psi	
	PT500psig-13-LI3-H1131	H6831462	0 to 500 psi	
	PT750psig-13-LI3-H1131	H6831463	0 to 750 psi	
	PT1000psig-13-LI3-H1131	H6831464	0 to 1000 psi	
	PT2000psig-13-LI3-H1131	H6831465	0 to 2000 psi	
	PT3000psig-13-LI3-H1131	H6831466	0 to 3000 psi	
	PT5000psig-13-LI3-H1131	H6831467	0 to 5000 psi	
	PT7500psig-13-LI3-H1131	H6831468	0 to 7500 psi	
<b>Gauge Pressure Transmitter, 1/4 Male NPT Connection</b>	PT-30HG-13-LU2-H1131	H6831469	0 to 30 in. HG	<b>0-10 VDC</b>
	PT15psig-13-LU2-H1131	H6831470	0 to 15 psi	
	PT30psig-13-LU2-H1131	H6831471	0 to 30 psi	
	PT60psig-13-LU2-H1131	H6831472	0 to 60 psi	
	PT100psig-13-LU2-H1131	H6831473	0 to 100 psi	
	PT200psig-13-LU2-H1131	H6831474	0 to 200 psi	
	PT300psig-13-LU2-H1131	H6831475	0 to 300 psi	
	PT500psig-13-LU2-H1131	H6831476	0 to 500 psi	
	PT750psig-13-LU2-H1131	H6831477	0 to 750 psi	
	PT1000psig-13-LU2-H1131	H6831478	0 to 1000 psi	
	PT2000psig-13-LU2-H1131	H6831479	0 to 2000 psi	
	PT3000psig-13-LU2-H1131	H6831480	0 to 3000 psi	
	PT5000psig-13-LU2-H1131	H6831481	0 to 5000 psi	
	PT7500psig-13-LU2-H1131	H6831482	0 to 7500 psi	

Conversion: 1 bar = 14.5038 psi

## Material

Housing	303 Stainless Steel
Sensing Element	Al <sub>2</sub> O <sub>3</sub> , Ceramic
Media Stop	PPS
Cable Connector	303 Stainless Steel / PBT
Pressure Connection	303 Stainless Steel
O-ring Seal	Viton

# Process Automation



Voltage	Allowable Over Pressure	Accuracy*	Fluid Connection Type	Mating Cordset	Wiring Diagram #	Wiring Diagrams
8-33 VDC	60 in HG	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	 
	45 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	90 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	150 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	250 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	750 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	1250 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	1875 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	2500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	5000 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	7500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	12,500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	15,000 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	1	
11.4-33 VDC	60 in HG	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	 
	45 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	90 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	150 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	250 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	750 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	1250 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	1875 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	2500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	5000 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	7500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	12,500 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	15,000 psi	≤0.5% Full Scale	1/4 NPT	RK 4T-* /S618	2	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Total of linearity, hysteresis and repeatability.



Housing Style	Part Number	ID Number	Scaled Pressure Range (bar)	Output
Gauge Pressure Transmitter, 4-20 mA Output, 1/4 Male NPT Connection	PT01VR-13-LI3-H1131 PT001R-13-LI3-H1131 PT002R-13-LI3-H1131 PT003R-13-LI3-H1131 PT004R-13-LI3-H1131 PT006R-13-LI3-H1131 PT010R-13-LI3-H1131 PT016R-13-LI3-H1131 PT025R-13-LI3-H1131 PT040R-13-LI3-H1131 PT060R-13-LI3-H1131 PT100R-13-LI3-H1131 PT160R-13-LI3-H1131 PT250R-13-LI3-H1131 PT400R-13-LI3-H1131 PT600R-13-LI3-H1131	H6831496 H6831497 H6831498 H6831499 H6831500 H6831501 H6831502 H6831503 H6831504 H6831505 H6831506 H6831507 H6831508 H6831509 H6831510 H6831511	-1 to 0 0 to 1 0 to 2 0 to 3 0 to 4 0 to 6 0 to 10 0 to 16 0 to 25 0 to 40 0 to 60 0 to 100 0 to 160 0 to 250 0 to 400 0 to 600	4-20 mA Loop Powered
Gauge Pressure Transmitter, 0-10 V Output, 1/4 Male NPT Connection	PT01VR-13-LU2-H1131 PT001R-13-LU2-H1131 PT002R-13-LU2-H1131 PT003R-13-LU2-H1131 PT004R-13-LU2-H1131 PT006R-13-LU2-H1131 PT010R-13-LU2-H1131 PT016R-13-LU2-H1131 PT025R-13-LU2-H1131 PT040R-13-LU2-H1131 PT060R-13-LU2-H1131 PT100R-13-LU2-H1131 PT160R-13-LU2-H1131 PT250R-13-LU2-H1131 PT400R-13-LU2-H1131 PT600R-13-LU2-H1131	H6831512 H6831513 H6831514 H6831515 H6831516 H6831517 H6831518 H6831519 H6831520 H6831521 H6831522 H6831523 H6831524 H6831525 H6831526 H6831527	-1 to 0 0 to 1 0 to 2 0 to 3 0 to 4 0 to 6 0 to 10 0 to 16 0 to 25 0 to 40 0 to 60 0 to 100 0 to 160 0 to 250 0 to 400 0 to 600	0-10 VDC

Conversion: 1 bar = 14.50377 psi

## Material

Housing	303 Stainless Steel
Sensing Element	Al <sub>2</sub> O <sub>3</sub> , Ceramic
Media Stop	PPS
Cable Connector	303 Stainless Steel / PBT
Pressure Connection	303 Stainless Steel
O-ring Seal	Viton

# Process Automation



Voltage	Allowable Over Pressure (bar)	Accuracy*	Fluid Connection Type	Mating Cordset	Wiring Diagram #	Wiring Diagrams
8-33 VDC	3	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	 <b>Diagram 1</b>  <b>Diagram 2</b>
	3	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	5	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	7	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	12	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	15	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	25	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	40	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	62	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	100	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	150	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	250	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	400	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	625	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	1000	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
	1200	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	1	
11.4-33 VDC	3	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	 <b>Diagram 1</b>  <b>Diagram 2</b>
	3	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	5	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	7	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	12	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	15	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	25	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	40	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	62	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	100	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	150	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	250	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	400	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	625	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	1000	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	
	1200	≤0.3% Full Scale	1/4 NPT	RK 4T-* /S618	2	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Total of linearity, hysteresis and repeatability.



Housing Style	Part Number	ID Number	Scaled Pressure Range (bar)	Output
Gauge Pressure Transmitter, G 1/4 Female Connection	PT01VR-11-LI3-H1131 PT0.5R-11-LI3-H1131 PT001R-11-LI3-H1131 PT002R-11-LI3-H1131 PT003R-11-LI3-H1131 PT004R-11-LI3-H1131 PT006R-11-LI3-H1131 PT010R-11-LI3-H1131 PT016R-11-LI3-H1131 PT025R-11-LI3-H1131 PT040R-11-LI3-H1131 PT060R-11-LI3-H1131 PT100R-11-LI3-H1131 PT160R-11-LI3-H1131 PT250R-11-LI3-H1131 PT400R-11-LI3-H1131 PT600R-11-LI3-H1131	H6831433 H6831495 H6831434 H6831435 H6831436 H6831437 H6831438 H6831432 H6831439 H6831440 H6831441 H6831442 H6831443 H6831444 H6831445 H6831446 H6831447	-1 to 0 0 to 0.5 0 to 1 0 to 2 0 to 3 0 to 4 0 to 6 0 to 10 0 to 16 0 to 25 0 to 40 0 to 60 0 to 100 0 to 160 0 to 250 0 to 400 0 to 600	4-20 mA Loop Powered
Gauge Pressure Transmitter, G 1/4 Female Connection	PT01VR-11-LU2-H1131 PT001R-11-LU2-H1131 PT002R-11-LU2-H1131 PT003R-11-LU2-H1131 PT004R-11-LU2-H1131 PT006R-11-LU2-H1131 PT010R-11-LU2-H1131 PT016R-11-LU2-H1131 PT025R-11-LU2-H1131 PT040R-11-LU2-H1131 PT060R-11-LU2-H1131 PT100R-11-LU2-H1131 PT160R-11-LU2-H1131 PT250R-11-LU2-H1131 PT400R-11-LU2-H1131 PT600R-11-LU2-H1131	H6831454 H6831483 H6831483 H6831484 H6831485 H6831486 H6831452 H6831487 H6831488 H6831489 H6831490 H6831491 H6831492 H6831453 H6831451 H6831493 H6831494	-1 to 0 0 to 1 0 to 2 0 to 3 0 to 4 0 to 6 0 to 10 0 to 16 0 to 25 0 to 40 0 to 60 0 to 100 0 to 160 0 to 250 0 to 400 0 to 600	0-10 VDC
Absolute Pressure Transmitter, G 1/4 Female Connection	PT001A-11-LI3-H1131 PT002A-11-LI3-H1131 PT003A-11-LI3-H1131	H6831449 H6831450 H6831448	0 to 1 0 to 2 0 to 3	4-20 mA Loop Powered

Conversion: 1 bar = 14.5038 psi

## Material

Housing	303 Stainless Steel
Sensing Element	Al <sub>2</sub> O <sub>3</sub> Ceramic
Media Stop	PPS
Cable Connector	303 Stainless Steel / PBT
Pressure Connection	303 Stainless Steel
O-ring Seal	Viton

# Process Automation



Voltage	Allowable Over Pressure (bar)	Accuracy*	Fluid Connection Type	Mating Cordset	Wiring Diagram #	Wiring Diagrams
8-33 VDC	3	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	 
	1.5	≤0.5% Full Scale	G 1/4	RK 4T-*/S618	1	
	3	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	5	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	7	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	12	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	15	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	25	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	40	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	62	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	100	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	150	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	250	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	400	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	625	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	1000	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	1200	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
11.4-33 VDC	3	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	 
	3	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	5	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	7	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	12	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	15	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	25	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	40	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	62	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	100	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	150	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	250	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	400	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	625	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	1000	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
	1200	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	2	
8-33 VDC	3	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	 
	5	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	
	7	≤0.3% Full Scale	G 1/4	RK 4T-*/S618	1	

See page M10 - M12 for additional pressure specifications.

See pages M29 - M33 for diaphragm seals.

See pages M34 - M35 for pressure accessories.

\* Length in meters.

\*\* Total of linearity, hysteresis and repeatability.



Housing Style	Part Number	Process Connection	Lower Housing	Diaphragm	Upper Housing	Fill Fluid	Maximum Working Pressure at 100°F	Standards
Sanitary Diaphragm	PC.../S1604 PT.../S1604 PS.../S1604	1.5 in. Tri-clamp	316 L	316 L	316 L	Neobe M20	600 psi	3A 37-01
Sanitary Diaphragm	PC.../S1605 PT.../S1605 PS.../S1605	2.0 in. Tri-clamp	316 L	316 L	316 L	Neobe M20	600 psi	3A 37-01
Sanitary Diaphragm	PC.../S1691 PT.../S1691 PS.../S1691	1.5 in. Cherry-Burrel	316 L	316 L	316 L	Neobe M20	250 psi	3A 37-01
Sanitary Diaphragm	PC.../S1692 PT.../S1692 PS.../S1692	2.0 in. Cherry-Burrel	316 L	316 L	316 L	Neobe M20	250 psi	3A 37-01

Diaphragm seals must be ordered factory assembled with any **TURCK** pressure sensor or pressure transmitter.  
For optional fill fluids and materials see page M36 at the end of this section.

# Process Automation



Housing Style	Part Number	Process Connection	Lower Housing	Diaphragm	Upper Housing	Fill Fluid	Maximum Working Pressure at 100°F	Standards
<b>Sanitary Diaphragm</b> 	PC.../S1693 PT.../S1693 PS.../S1693	1.5 in. Bevel Seat	316 L	316 L	316 L	Neobe M20	250 psi	3A 37-01
<b>Sanitary Diaphragm</b> 	PC.../S1694 PT.../S1694 PS.../S1694	2.0 in. Bevel Seat	316 L	316 L	316 L	Neobe M20	250 psi	3A 37-01
<b>Sanitary Diaphragm</b> 	PC.../S1689 PT.../S1689 PS.../S1689	Anderson Long Shell	316 L	316 L	316 L	Neobe M20	200 psi	3A 37-01
<b>Sanitary Diaphragm</b> 	PC.../S1695 PT.../S1695 PS.../S1695	Anderson Short Shell	316 L	316 L	316 L	Neobe M20	200 psi	3A 37-01

Diaphragm seals must be ordered factory assembled with any **TURCK** pressure sensor or pressure transmitter.  
For optional fill fluids and materials see page M36 at the end of this section.



Housing Style	Part Number	Process Connection	Lower Housing	Diaphragm	Upper Housing	Fill Fluid	Maximum Working Pressure at 100°F
<b>Fully Welded Diaphragm Seal</b>	PC.../S1685 PT.../S1685 PS.../S1685	1/4 NPT Female	316 L	316 L	316 L	Silicone DC200	2500 psi
<b>Fully Welded Diaphragm Seal, Clean Out Port</b>	PC.../S1593 PT.../S1593 PS.../S1593	1/4 NPT Female	316 L	316 L	316 L	Silicone DC200	2500 psi
<b>General Purpose, Welded Diaphragm</b>	PC.../S1049 PT.../S1049 PS.../S1049	1/2 NPT Female	316 L	316 L	316 L	Silicone DC200	2500 psi
<b>General Purpose, Welded Diaphragm, Flush Port</b>	PC.../S1700 PT.../S1700 PS.../S1700	1/2 NPT Female	316 L	316 L	Carbon Steel	Silicone DC200	2500 psi

Diaphragm seals must be ordered factory assembled with any **TURCK** pressure sensor or pressure transmitter.  
For optional fill fluids and materials see page M36 at the end of this section.

# Process Automation



Housing Style	Part Number	Process Connection	Lower Housing	Diaphragm	Upper Housing	Fill Fluid	Maximum Working Pressure at 100°F
<b>General Purpose, Welded Diaphragm</b>	PC.../S1701 PT.../S1701 PS.../S1701	1/2 NPT Female	316 L	316 L	Carbon Steel	Silicone DC200	2500 psi
<b>General Purpose, Welded Diaphragm, Flush Port</b>	PC.../S1702 PT.../S1702 PS.../S1702	1/2 NPT Female	316 L	316 L	Carbon Steel	Silicone DC200	2500 psi
<b>Chemical Resistant, Welded Diaphragm</b>	PC.../S1731 PT.../S1731 PS.../S1731	1/2 NPT Female	PVC	Hastelloy C276	316 L	Silicone DC200	200 psi
<b>Chemical Resistant, Welded Diaphragm</b>	PC.../S1733 PT.../S1733 PS.../S1733	1/2 NPT Female	PVC	Hastelloy C276	Carbon Steel	Silicone DC200	200 psi


Diaphragm seals must be ordered factory assembled with any TURCK pressure sensor or pressure transmitter.  
For optional fill fluids and materials see page M36 at the end of this section.



Housing Style	Part Number	Process Connection	Lower Housing	Diaphragm	Upper Housing	Fill Fluid	Maximum Working Pressure at 100°F
<b>Flush Mount Diaphragm</b>	PC.../S1704 PT.../S1704 PS.../S1704	1-1/2 NPT Male	316 L	316 L	316 L	Silicone DC200	5000 psi
<b>Flush Mount Diaphragm</b>	PC.../S1705 PT.../S1705 PS.../S1705	2 NPT Male	316 L	316 L	316 L	Silicone DC200	3000 psi


Diaphragm seals must be ordered factory assembled with any **TURCK** pressure sensor or pressure transmitter.  
For optional fill fluids and materials see page M36 at the end of this section.

**Adapter, G1/4 to G1/2  
(316 Stainless Steel)**  
.945 [24.0] across flats

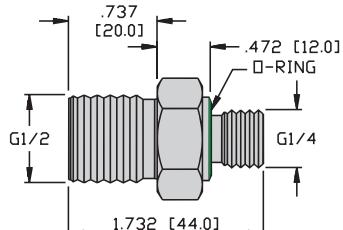


**PCV-G1/2A4**  
(M6835012)

**Adapter, G1/4 to 1/2NPT  
(316 Stainless Steel)**  
.748 [19.0] across flats

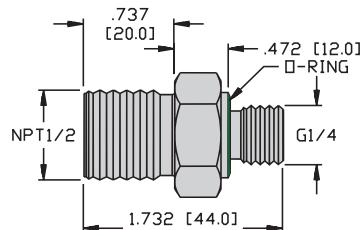


**PCV-N1/2A4**  
(M6835013)

**Adapter, G1/4 to 3/8NPT  
(316 Stainless Steel)**  
.945 [24.0] across flats

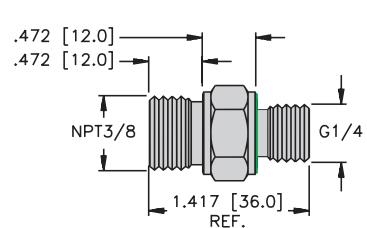


**PCV-N3/8A4**  
(M6835020)

**Adapter, G1/4 to G1/4  
(316 Stainless Steel)**  
.748 [19.0] across flats

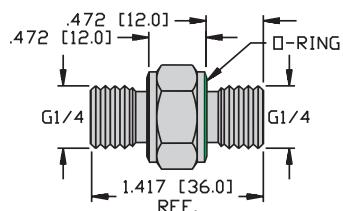


**PCV-G1/4A4**  
(M6835011)

**Adapter, G1/4 to 1/4 NPT  
(316 Stainless Steel)**  
.748 [19.0] across flats

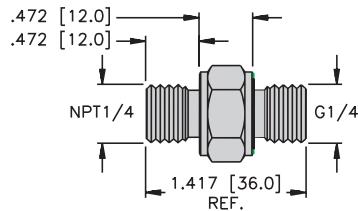


**PCV-N1/4A4**  
(M6835022)

**Adapter, G1/4 to G1/8  
(316 Stainless Steel)**  
.748 [19.0] across flats

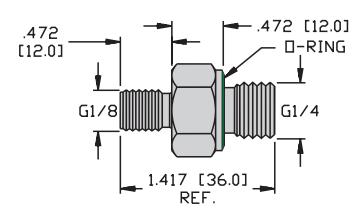


**PCV-G1/8A4**  
(M6835014)

**Adapter, G1/4 to 1/8NPT(316  
Stainless Steel)**  
.748 [19.0] across flats

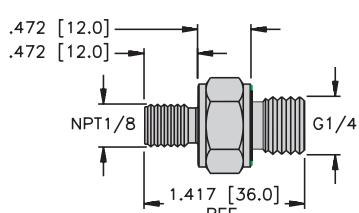

**PCV-N1/8A4**  
(M6835021)


**Adapter, G1/4 to 7/16 SAE  
(316 Stainless Steel)**  
.748 [19.0] across flats

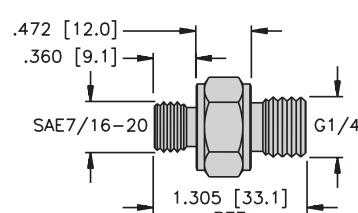


**PCV-S7/16A4**  
(A9136)

## Accessories


Mounting Bracket Kit (Aluminum)

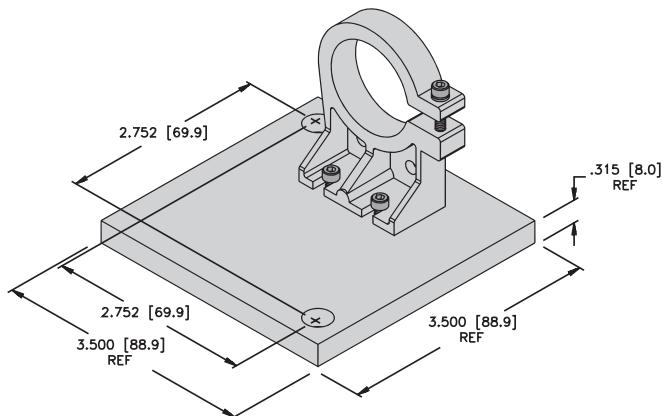PCS-AB-KIT  
(A5121)


Mounting Bracket (Aluminum)

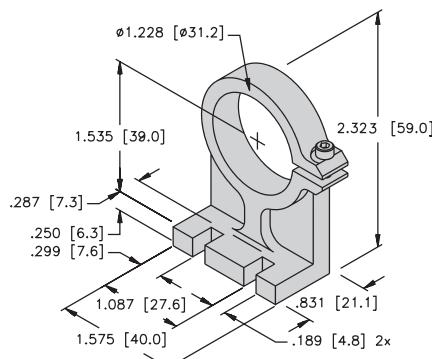PCS-MBT  
(A5120)

Heat Sink (316 Stainless Steel)

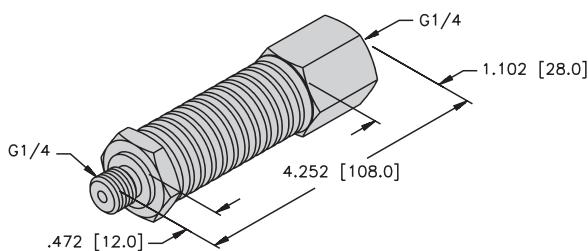PCS-G1/4A4  
(M6835015)

Clear Cap

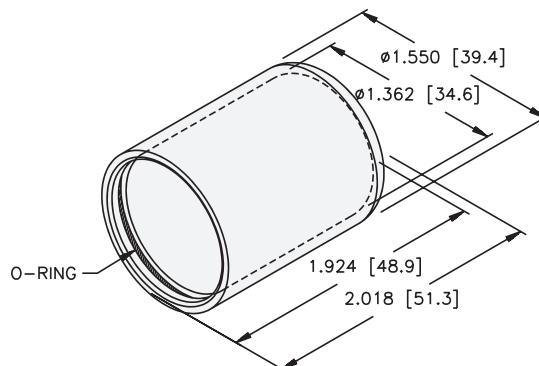PS-COVER  
(A9232)

## Diaphragm Seal Optional Materials

### Optional Fill Fluids

Diaphragm Fill Fluids	Application Range (°C)	Specific Gravity at 25°C	Viscosity at 25°C
Silicone DC200-10CS	-45 to 205	0.93	10
Silicone DC 704	0 to 315	1.07	39
Silicone DC 710	5 to 345	1.11	500
Flurolube FS-5	-40 to 150	1.88	7.8
Halocarbon Oil 6.3	-40 to 235	1.88	10.6
Halocarbon Oil 4.2	-45 to 175	1.85	6.5
Neobee-20	-15 to 205	0.92	9.8

### Optional Materials

Housing Material			
Wetted		Non-Wetted	
304 SS (304)	Hast-C22 (HAS2)	Nickel 200 (NICK)	
304L SS (304L)	Hastelloy B-2 (HASB)	PVC	304 SS (304)
316 SS (316)	Hastelloy C-276 (HASC)	Tantalum (TANT)	316 SS (316)
316Ti SS	Inconel 600 (INC)	Teflon-25%GF (TFGF) (+1500°F max.)	Carbon Steel (STL)
Carbon Steel (STL)	Inconel 625 (I625)	Titanium GR.4 (TIT)	Monel 400 (MON)
Carpenter 20 (C20)	Monel 400 (MON)	Zirconium 702 (ZIRC)	

Diaphragm Material			
Wetted			
304L SS (304L)	Hastelloy B-2 (HASB)	Silver (SILV)	
316L SS (316L)	Hastelloy C-276 (HASC)	Tantalum (TANT)	
321 SS (321)	Inconel 600 (INC)	Teflon Coated Metal	
Buna N (NBR) (1250 psi; +2500°F)	Kalrez 1050LF (KALR)	Teflon (TFE) (1250 psi; +3500°F)	
Carpenter 20 (C20) (for anti-stick purposes only)	Kel-F (KELF) (1250 psi; +4000°F)	Titanium GR4 (TIT)	
Gold (GOLD)	Monel 400 (MON)	Viton A (VIT) (1250 psi; +3500°F)	
Hast - C22 (HAS2)	Nickel 200 (NICK)	Zirconium 702 (ZIRC)	
	Nickel 201 (N201)		

Gasket Material			
Wetted			
Grafoil (GRAF)		PTFE (3510) (-400°F to +2000°F)	
Non-Asbestos (4401)		PTFE (K2) (-500°F to +4500°F)	

O-Ring Material			
Wetted			
Buna N (NBR) (-100°F to +2500°F)		Teflon (TFE) (-400°F to +3500°F)	
Kalrez (KALR)		Viton A (VIT) (-100°F to +3500°F)	

**Pressure Conversion<sup>(1)</sup>**

From / To	PSI	KPA	inches <sup>(2)</sup> inH <sub>2</sub> O	mmH <sub>2</sub> O	inches <sup>(3)</sup> inHg	mm Hg	Bars	m Bars	Kg/cm <sup>2</sup>	gm/cm <sup>2</sup>
<b>PSI</b>	1	6.8948	27.7620	705.1500	2.0360	51.7149	0.0689	68.9470	0.0703	70.3070
<b>KPA</b>	0.1450	1	4.0266	102.2742	0.2953	7.5006	0.0100	10.0000	0.0102	10.197
<b>inH<sub>2</sub>O</b>	0.0361	0.2483	1	25.4210	0.0734	1.8650	0.0025	2.4864	0.0025	2.5355
<b>mmH<sub>2</sub>O</b>	0.0014	0.0098	0.0394	1	0.0028	0.0734	0.0001	0.0979	0.00001	0.0982
<b>inHg</b>	0.4912	3.3867	13.6195	345.936	1	25.4000	0.0339	33.8639	0.0345	34.532
<b>mm Hg</b>	0.0193	0.1331	0.5362	13.6195	0.0394	1	0.0013	1.3332	0.0014	1.3595
<b>Bars</b>	14.5040	100.000	402.180	10215.0	29.5300	750.060	1	1000	1.0197	1019.72
<b>m Bars</b>	0.0145	0.1000	0.4022	10.2150	0.0295	0.7501	0.001	1	0.0010	1.0197
<b>Kg/cm<sup>2</sup></b>	14.2233	97.9047	394.408	10018.0	28.9590	735.559	0.9000	980.700	1	1000
<b>gm/cm<sup>2</sup></b>	0.0142	0.0979	0.3944	10.0180	0.0290	0.7356	0.0009	0.9807	0.001	1

(1) Example:

$$1 \text{ mm Hg} = 0.5362 \text{ inH}_2\text{O} = 1.3332 \text{ mBars}$$

$$97 \text{ mm Hg} = 97(0.5362) = 52.0114 \text{ inH}_2\text{O}$$

$$97 \text{ mm Hg} = 97(1.332) = 129.3204 \text{ mBars}$$

(2) at 60°F

(3) at 32°F

**Notes:**

## Flow Monitor Selection Guide



Type	Digital Readout Flow Monitor	Plastic Self Contained	Stainless Steel Self Contained
Pages	M53 - M60	M61 - M62	M63 - M64



Type	Self Contained Inline	Remote Probe	Remote Amplifier/ Signal Processors	Accessories
Pages	M65 - M66	M67 - M70	M71 - M74	M75 - M76



## A Variety of Flow Sensors for All of Your Flow Applications

The rugged design and high repeatability of **TURCK** flow sensors bring a new level of reliability to flow monitoring. Many sensors have an enclosure rating of IP 67, in addition to a pressure resistance of 1450 psi, while other models are able to withstand aggressive materials such as acids and caustics. **TURCK** flow sensors are available as in-line models, self-contained devices, or probe styles (with a separate signal processor), and are able to perform in many different media, such as liquids, gases and airflow. **TURCK** flow monitors have a temperature gradient of 250°C/minute, which allows them to respond rapidly to changes in temperature and makes them especially suited to applications such as monitoring coolant flow to weld tips. Our wide range of flow products offer a solution to many flow applications.

### Solid State with No Moving Parts

All **TURCK** flow sensors are solid-state devices that operate on the calorimetric principle. With this technology there are no moving parts that may break off or become lodged in the pipeline. Often in impure or "dirty" flow applications, mechanical devices tend to become frozen or stuck in the "open" position making **TURCK** electronic sensors a much better choice in these applications. No matter how demanding your application, you now have a solution that installs easily, performs dependably, and does not require expensive downtime.

### Product Features

- All wetted parts are made of Stainless Steel, Titanium, Hastelloy or Teflon
- Omni-directional monitoring allows you to monitor the flow in any direction
- Automatic temperature compensation allows for sudden shifts in flow temperature within specified extremes



**TURCK** offers longer probe lengths for use in applications where there is a larger pipe, or long standoff, in many different probe style flow sensors. These probes are available in 20 millimeter increments with a maximum length of 220 millimeters. Consult factory for more information.

## TURCK: Delivering Advanced Automation Products

As the market for automation components continues to evolve and requires smarter, smaller, more robust sensing and productivity products, **TURCK** is rising to meet these challenges with a complete offering of automation components. Established as the industry's leading brand in proximity sensors, the **TURCK** name is synonymous with high-quality, rugged sensing products. Now users can expect that same quality in an expanded offering of automation products that will help improve their processes and profits.

### A Digital Read Out Flow Sensor for Your Flow Monitoring Applications

The rugged design and high repeatability of **TURCK**'s Digital Read Out (DRO) flow sensor brings a new level of reliability to flow monitoring. This self-contained, fully programmable sensor allows for both flow and temperature monitoring, and features a highly visible three-digit display that can alternate between flow rate and media temperature when required.

The DRO flow monitor allows the user to program set points specific to an application, and can be programmed to perform in many different media, such as water, glycol and Galden HT110. If the fluid is a glycol/water mix, the percentage of glycol can be selected so that the monitor can adjust to each unique application without the need for factory calibration. The DRO flow monitor has an adjustable filter to smooth out a variety of erratic flow conditions, and is able to monitor changes in flow as low as 0.2 gallons per minute (GPM) or as fast as 12 GPM.

This unique flow monitor can be programmed with two different set points to reflect flow rate. It can be programmed to have one set point monitor flow and one point monitor temperature. A model with 4 set points is also available, where two points monitor flow and two points monitor temperature. And an analog current monitor is available with one set point.

The DRO flow monitor also features programmable on and off time delay functions, and allows the user to define hysteresis for both the flow and temperature set points. It is manufactured with a standard **eurofast®** M12 connector, has a pressure rating of 145 psi, and can be ordered with a number of different fluid connections; making the DRO flow monitor an economical solution for your demanding flow applications.



#### Typical Applications:

- Weld Tip Protection
- Transformer Cooling
- Semiconductor Chamber Cooling
- Hot Roller Coolant


## Solid-State with No Intrusive or Moving Parts

The DRO flow monitor is an in-line device that approximates flow rate without disrupting the flow. Typical flow monitors often need to be installed by a specialist so that the monitor is precisely oriented to the direction of flow. These devices are also prone to material build up, which can affect the accuracy of the monitor.

The DRO flow monitor is a solid-state device that operates on the calorimetric principle, resulting in a sensor with no moving parts that can break or become lodged in the pipeline. This technology, combined with the in-line mounting of the sensor, allows the DRO flow monitor to perform dependably in a variety of demanding applications without concern for flow restriction or expensive downtime.

## Product Features

- Selectable Media Inputs
- Flow/Temperature Readout
- User Programmable Set Points
- User Programmable Keypad
- Mounts Directly Into Pipeline
- 3 Digit - Highly Visible Display
- Adjustable On and Off Delay
- Adjustable Filtering
- Low Pressure Drop
- Solid-State Device
- Stainless Steel Wetted Parts
- Password Protected Programming

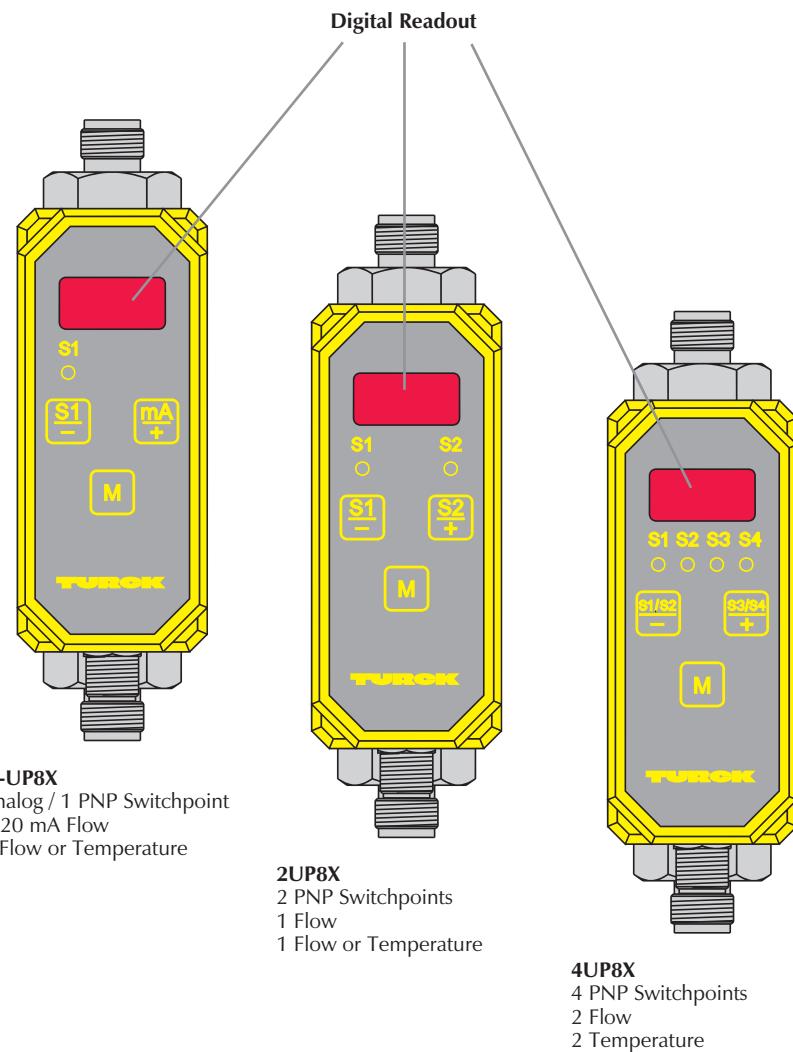

## Selectable Media

- Water
- Deionized Water
- Ethylene Glycol (0-70%)
- Galden® HT110
- Galden® HT135

**Flow Monitor Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

**Insertion Probe Sensor**

**FCS - N1/2 A4P - AP8X - H1141 Special Option Codes**

**Sensor Type**

FCS = Insertion Probe Flow Sensor

FCTS = Flow Sensor with  
Temperature Alarm

**Fluid Connection**

N1/2 = 1/2 NPT

N3/4 = 3/4 NPT

G1/4 = G1/4 (1/4 BSPP)

G1/2 = G1/2 (1/2 BSPP)

GL1/2 = G1/2 (1/2 BSPP with additional threading)

50 = 1.5 inch Tri-clamp

**Housing**

A4 = 316 Stainless Steel Housing and Probe

A2P = 303 Stainless Steel Probe with PBT Housing

A4P = 316 Stainless Steel Probe with PBT Housing

AL = 303 Stainless Steel Probe

HB = Hastelloy B

HC22 = Hastelloy C22

T = Dyflor (PVDF)

TN = Titanium w/B3 Coating

**Electrical Connection**

H1141 = *eurofast* ®

H1140 = *eurofast*

B1151 = *minifast* ®

B3141 = *microfast* ®

B3151 = *microfast*

**Circuitry**

2AP8X = Dual N.O. PNP

AP8X = N.O. PNP

AN8X = N.O. NPN

ARX = N.O. Relay

RRX = N.C. Relay

LIX = 4-20 mA

NA = Remote (requires MK or MS 96)

NAEX = Intrinsically Safe

**Special Option Codes**

**/A**

**Modifier**

/A = Airflow

**/L**

**Probe Length**

/L = Probe Length in mm

**/D..**

**D Number**

/D100 = +120°C (+248°F)

/D500 = 500 Bar Rating

## Flow Monitor Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

### Inline Flow Sensor

**FCI - TC D04 A4P - AP8X - H1141 Special Option Codes**

#### Sensor Type

FCI = Inline Flow Sensor

#### Fluid Connection

TC = Tubing Connection

N1/8 = 1/8 NPT

N1/4 = 1/4 NPT

N3/4 = 3/4 NPT

Blank = G1/4

#### Inline Diameter (millimeters)

D03 = 3 mm

D04 = 4 mm

D06 = 6 mm

D08 = 8 mm

D09 = 9 mm

D10 = 10 mm

D11 = 11 mm

D20 = 20 mm

#### Electrical Connection

H1141 = **eurofast**®, 4-pin

H1140 = **eurofast**, 4-pin

H1160 = **eurofast**, 6-pin

#### Circuitry

AP8X = N.O. PNP

AN8X = N.O. NPN

ARX = N.O. Relay

RRX = N.C. Relay

LIX = 4-20 mA

NA = Remote (requires MK or MS 96)

NAEX = Intrinsically Safe

2ARX = Dual N.O. Relay

#### Housing

A4 = 316 Stainless Steel

A4P = 316 Stainless Steel with PBT Housing

CTP = Ceramic / PTFE / PBT

HC22 = Hastelloy C22

### Special Option Codes

**/D..**

#### D Number

/D038 = 3/8 in. Tubing Connection

/D201 = 3/8 in. Tubing Connection, Digital Readout, water or water/glycol mix

/D203 = 3/8 in. Tubing Connection, Digital Readout, water only

/D205 = 1/2 in. Tubing Connection, Digital Readout, water or water/glycol mix

/D209 = 3/4 in. Tubing Connection, Digital Readout, water or water/glycol mix

**Flow Monitor Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

**FTCI - 3/8 D10 A4P - 2UP8X - [ ] Special Option Codes**

**Sensor Type**

FTCI = Inline Flow and Temperature Sensor

**Fluid Connection**

3/8 = 3/8" swage  
1/2 = 1/2" swage  
3/4 = 3/4" swage

**Inline Diameter**

D10 = 10 mm  
D15 = 15 mm

**Housing**

A4P = 316 Stainless Steel with PBT

**Electrical Connection**

H1141 = *eurofast*®  
H1160 = *eurofast*

**Circuitry**

2UP8X = Dual PNP N.O./N.C.  
4UP8X = 4 PNP N.O./N.C.  
LI-UP8X = 1 PNP N.O./N.C. and 4-20 mA



## DRO Flow - DC

Time Delay Before Availability . . . . . 2-15 seconds (8 seconds typical)  
Response Time . . . . . 0.5-3 seconds  
Maximum Temperature Gradient . . . . . 250°C / min.



## Plastic Self Contained Insertion Probe - DC

Time Delay Before Availability . . . . . 2-15 seconds (8 seconds typical)  
Response Time . . . . . 1-15 seconds (2 seconds typical)  
Maximum Temperature Gradient . . . . . 250°C / min.



## Stainless Steel Self Contained Insertion Probe - DC

Time Delay Before Availability . . . . . 2-15 seconds (8 seconds typical)  
Response Time . . . . . 1-15 seconds (2 seconds typical)  
Maximum Temperature Gradient . . . . . 250°C / min.



## Self Contained Inline - DC

Time Delay Before Availability . . . . . 5-15 seconds (8 seconds typical)  
Response Time . . . . . 0.5-3 seconds  
Maximum Temperature Gradient . . . . . 400°C / min.



## Remote Insertion Probe - DC

Time Delay Before Availability . . . . . 2-15 seconds (8 seconds typical)  
Response Time . . . . . 1-13 seconds (2 seconds typical)  
Maximum Temperature Gradient . . . . . 250°C / min.

## Set-up – Operating and Display Functions

**Self Contained Insertion Probe****6 LEDs for flow rate status indication:**

-  4 x green: degree of set point overrange  
(1, 2, 3, or 4 green LEDs are lit)
-  1 x yellow: flow is at/above set point  
1 x red: flow is below set point
-   $\geq 20$  mA  
 $> 16$  mA  
 $> 12$  mA  
 $> 8$  mA  
 $> 4$  mA  
 $\leq 4$  mA



Sealing screw (on front of device) covers the potentiometer for switch point adjustment



Potentiometer for adjustment of flow switch point  
(with analog devices the potentiometer is used to set the measuring range)

**Processor MK96****LED display for flow rate status indication:**

-  4 x green: degree of set point overrange  
(1, 2, 3, or 4 green LEDs are lit)
-  1 x yellow: flow is at/above set point  
1 x red: flow is below set point
-   $\geq 20$  mA  
 $> 16$  mA  
 $> 12$  mA  
 $> 8$  mA  
 $> 4$  mA  
 $\leq 4$  mA



Potentiometer (coarse) for operating range adjustment



Potentiometer for fine adjustment of switch point value

**Analog versions**

Potentiometer for adjusting the 4 mA to the medium



Potentiometer for adjusting the span to 20 mA  
(not all applications may reach 20 mA)

## Set-up – Operating and Display Functions

**Processor MS96**



### 6 LEDs for flow rate status indication:



4 x green: degree of set point overrange  
(1, 2, 3, or 4 green LEDs are lit)

1 x yellow: flow is at/above set point  
1 x red: flow is below set point




Potentiometer (coarse) for operating range adjustment




Potentiometer for fine adjustment of switch point value



Red LED illuminates when flow is at or above preset temperature



Potentiometer for temperature set-point adjustment (from -20°C to +100°C)



Potentiometer to set switch-off delay time which affects the flow monitoring output (terminals 6 - 8)

**Self Contained Inline**



### 6 LEDs for flow rate status indication:



4 x green: degree of set point overrange  
(1, 2, 3, or 4 green LEDs are lit)

1 x yellow: flow is at/above set point  
1 x red: flow is below set point



$\geq 20$  mA  
 $> 16$  mA  
 $> 12$  mA  
 $> 8$  mA  
 $> 4$  mA  
 $\leq 4$  mA



Potentiometer for adjustment of flow switch point

### Analog versions



Potentiometer for adjusting the 4 mA to the medium




Potentiometer for adjusting the span to 20 mA  
(not all applications may reach 20 mA)

## Principles of Operation

**TURCK** flow controls use no mechanical parts to monitor the flow speed of liquids and gasses. These solid state flow switches operate on the calorimetric principle: the measure of heat transfer from an object to a fluid.

The **TURCK** solid state flow monitors use two temperature dependent resistors similar to RTDs. One of the resistors (R1) monitors the temperature of the surrounding fluid. The other resistor (R2) is connected to a heating element. The heating element heats R2 to a temperature that is slightly above the surrounding fluid temperature. When there is no fluid flow, the difference in resistance between R1 and R2 is a fixed value. As fluid moves over the flow monitor probe, heat is conducted away from the heating element causing the temperature on R2 to decrease. This heat loss changes the difference in resistance between R1 and R2.

The resistance difference is measured by a Wheatstone bridge circuit. A change in resistance difference causes a change in the bridge voltage. The flow set point is determined by comparing the bridge voltage to a reference voltage.

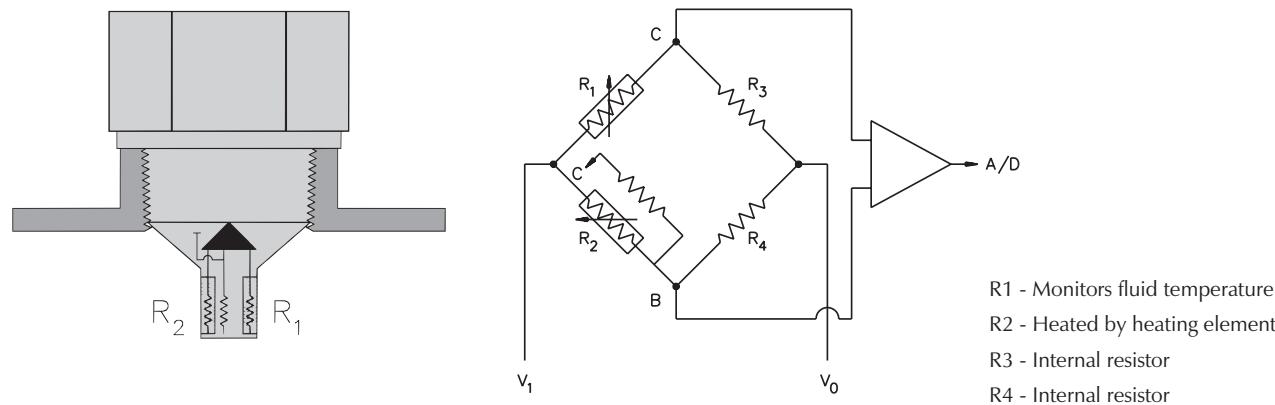

## Operating Range

Heat loss on the heating element will likewise determine the sensitivity of the monitor. The heat loss becomes a function of flow velocity and thermal conductivity of the fluid. The lower the thermal conductivity of the fluid, the faster the fluid has to flow to be detected.

Flow monitor operating ranges vary from one type of fluid to the other. These operating ranges are proportional to the speed of the fluid that the monitor can detect.

At the same flow rate compared to water, air can conduct away from the heating element only a fraction of the heat. For example, for A2/A4 stainless steel insertion type monitors the operating range for air flow is from 2 to 30 m/s, and for water from 1 to 150 cm/s. For oil, the range is between the 3 to 300 cm/sec.

## Response Time

### Temperature Gradient

The temperature gradient of a fluid indicates the change in fluid temperature within a specified time (unit of measure: °C (°F)/min). The temperature gradient of a device defines the maximum temperature rise that can be compensated by the monitor without malfunction.

The monitor has the ability to compensate for sudden thermal shifts within the specified extremes. Sudden temperature changes exceeding the specified tolerances (temperature error) may cause the device to malfunction. Only when the monitor has adapted to the new temperature, will it provide an accurate measurement.

The temperature gradient for **TURCK** flow controls is 250°C/min. - 15 times higher than standard flow devices which makes for a particularly accurate switch-point stability during variations in temperature.

The sensitivity to temperature rise of **TURCK** flow monitors has been reduced to a minimum (<12 s) and can accurately be determined in advance. This characteristic is the result of the optimum calorimetric principle and special monitors construction.

### Time Delay Before Availability

The availability is the time required, after power has been applied, for the flow monitor to reach a stable operating condition. The availability provides for the time needed to energize the flow monitor and the time needed for the flow monitor to stabilize at the fluid's temperature.

### Response Time

The switch on time is the time required for the flow monitor to detect and indicate that the flow speed is increasing. The switch off time is the time required for the flow monitor to detect and indicate that the flow speed is decreasing.


### Effects of Housing Material

The switch on time, the switch off time and the temperature gradient of the flow monitor is dependent on the housing material. The Teflon® flow monitors have a low thermal conductivity causing a slower response time to fluid temperature changes and to changes in the flow speed.

### Mounting Instructions


Areas of turbulent flow occur whenever there is a change in the pipe construction (e.g. pipe inlets, pipe outlets, pipe elbows). To avoid an inaccurate output, the following guidelines should be observed:

- A) Pay special attention to the minimum distance ( $a^34xd$ ) to tube bend and intersections.
- B) Flow monitor must be mounted from below in applications where medium does not completely fill the pipe.
- C) If a possibility of deposit build-up exists, mount the flow monitor at the side of the pipe.

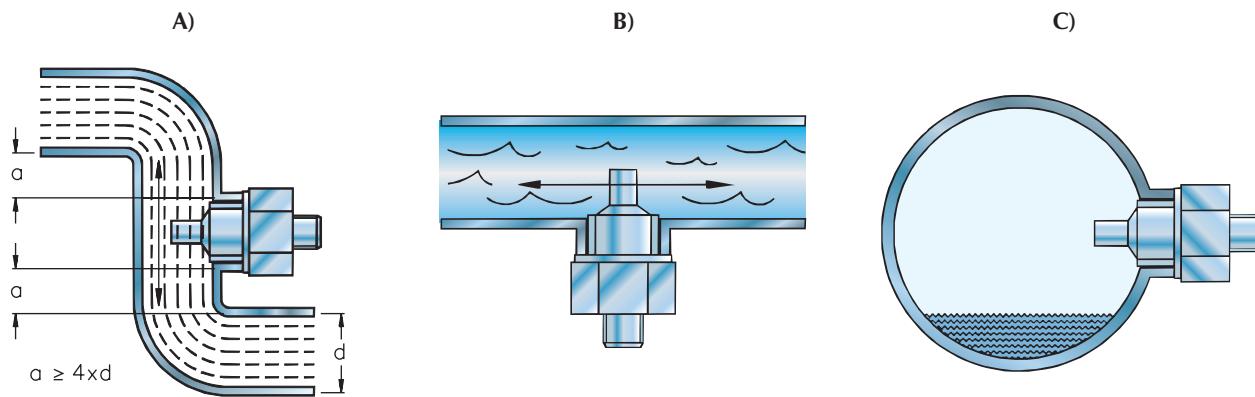


### Proper Orientation for TURCK Flow Monitors

Airflow

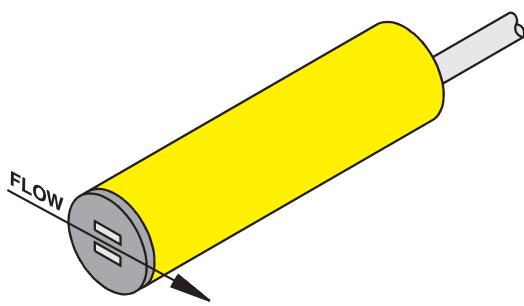


Self Contained Inline

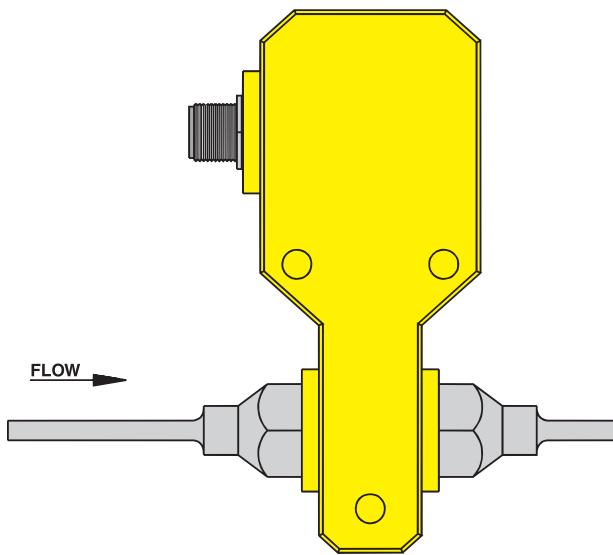


## Proper Orientation for TURCK Flow Monitors


**Self-Contained Metal Housing**

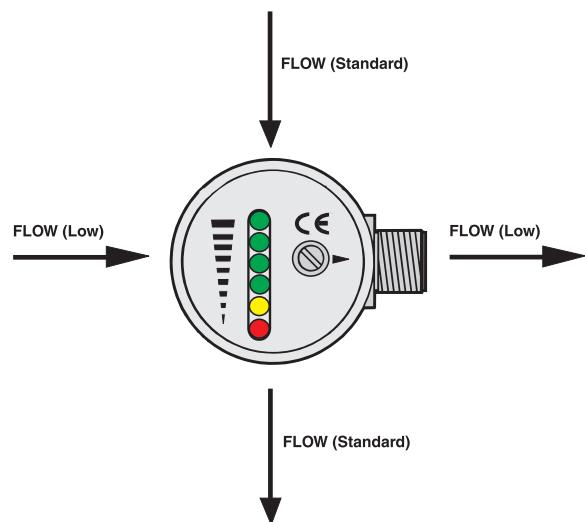


**Self-Contained Plastic Housing**

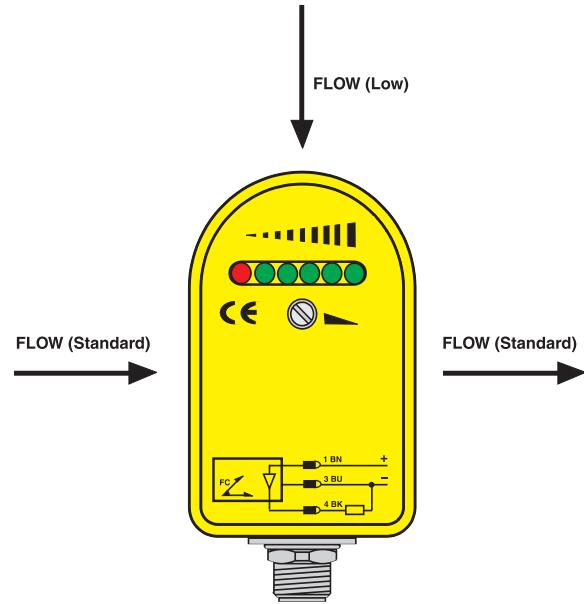




**Dual Tipped**

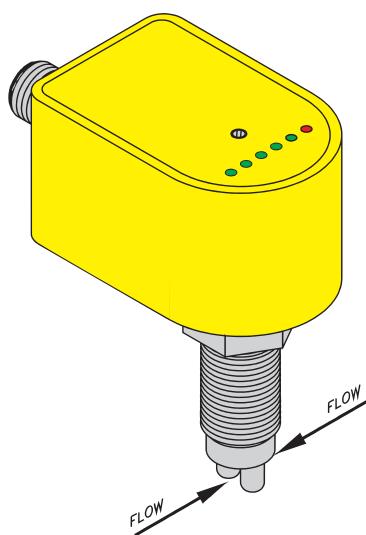

**Remote Insertion Probe**

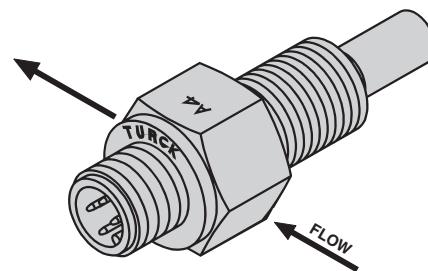

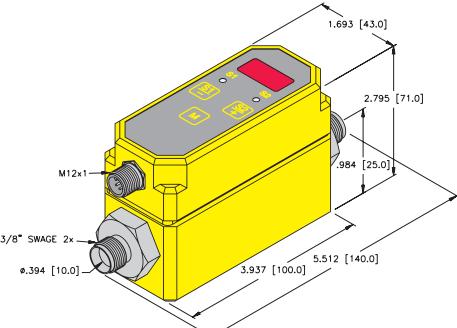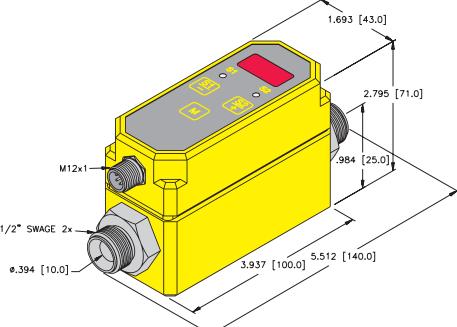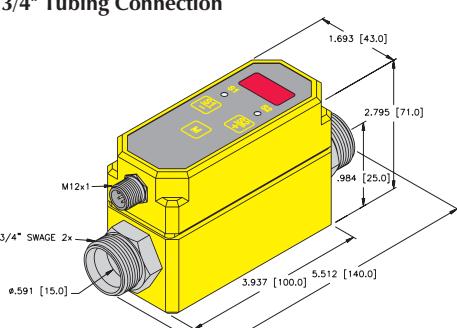

Housing Style	Part Number	ID Number	Flow Detection Range (GPM)	Temperature Monitoring Range (°F)	Output 1: Flow	Output 2: Temperature or Flow
<b>Inline Flow Monitor, Digital Readout, 3/8" Tubing Connection</b>	FTCI-3/8D10A4P-2UP8X-H1141	M6870806	0.2 to 4	+14 to +194	PNP N.O./N.C.	PNP N.O./N.C.
						
<b>Inline Flow Monitor, Digital Readout, 1/2" Tubing Connection</b>	FTCI-1/2D10A4P-2UP8X-H1141	M6870807	0.2 to 5	+14 to +194	PNP N.O./N.C.	PNP N.O./N.C.
						
<b>Inline Flow Monitor, Digital Readout, 3/4" Tubing Connection</b>	FTCI-3/4D15A4P-2UP8X-H1141	M6870808	1 to 12	+14 to +194	PNP N.O./N.C.	PNP N.O./N.C.
						

**Compatible Fluids:** Water, Deionized Water, Ethylene Glycol (0-70%), Galden® HT110, Galden® HT135

## Material

<b>Housing</b>	PBT
<b>Wetted Parts</b>	316 Ti Stainless Steel
<b>O-Ring</b>	FKM

# Process Automation



<i>Voltage</i>	<i>Current Consumption (mA)</i>	<i>Switching Current</i>	<i>Pressure Rating (psi)</i>	<i>Fluid Connection</i>	<i>Operating Temp. (°C)</i>	<i>Protection</i>	<i>Mating Cordset</i>	<i>Wiring Diagram #</i>	<i>Wiring Diagrams</i>
21.6-26.4 VDC	≤100	200	290	3/8" swage	0 to +60	IP 65	RK 4.4T-*	1	<b>Diagram 1</b> <pre>     graph LR         P(( )) --- S1[ ]         P --- S2[ ]         S1 --- L1[LOAD]         S2 --- L2[LOAD]         L1 --- N(( ))         L2 --- N     </pre>
21.6-26.4 VDC	≤100	200	290	1/2" swage	0 to +60	IP 65	RK 4.4T-*	1	
21.6-26.4 VDC	≤100	200	290	3/4" swage	0 to +60	IP 65	RK 4.4T-*	1	

\* Length in Meters.



Housing Style	Part Number	ID Number	Flow Detection Range (GPM)	Temperature Monitoring Range (°F)	Output 1&2: Flow	Output 3 & 4: Temperature
Inline Flow Monitor, Digital Readout, 3/8" Tubing Connection	FTCI-3/8D10A4P-4UP8X-H1160	M6870814	0.2 to 4	+14 to +194	PNP N.O./N.C.	PNP N.O./N.C.
Inline Flow Monitor, Digital Readout, 1/2" Tubing Connection	FTCI-1/2D10A4P-4UP8X-H1160	M6870815	0.2 to 5	+14 to +194	PNP N.O./N.C.	PNP N.O./N.C.
Inline Flow Monitor, Digital Readout, 3/4" Tubing Connection	FTCI-3/4D15A4P-4UP8X-H1160	M6870813	1 to 12	+14 to +194	PNP N.O./N.C.	PNP N.O./N.C.

**Compatible Fluids:** Water, Deionized Water, Ethylene Glycol (0-70%), Galden® HT110, Galden® HT135

## Material

<b>Housing</b>	PBT
<b>Wetted Parts</b>	316 Ti Stainless Steel
<b>O-Ring</b>	FKM

# Process Automation



<i>Voltage</i>	<i>Current Consumption (mA)</i>	<i>Switching Current</i>	<i>Pressure Rating (psi)</i>	<i>Fluid Connection</i>	<i>Operating Temp. (°C)</i>	<i>Protection</i>	<i>Mating Cordset</i>	<i>Wiring Diagram #</i>	<i>Wiring Diagrams</i>
21.6-26.4 VDC	≤100	200	290	3/8" swage	0 to +60	IP 65	RKC 6T-*	1	<b>Diagram 1</b> 
21.6-26.4 VDC	≤100	200	290	1/2" swage	0 to +60	IP 65	RKC 6T-*	1	
21.6-26.4 VDC	≤100	200	290	3/4" swage	0 to +60	IP 65	RKC 6T-*	1	

\* Length in Meters.



Housing Style	Part Number	ID Number	Flow Detection Range (GPM)	Temperature Monitoring Range (°F)	Output 1: Temperature	Output 2: Flow
<b>Inline Flow Monitor, Digital Readout, 3/8" Tubing Connection</b>	FTCI-3/8D10A4P-LI-UP8X-H1141	M6870809	0.2 to 4	+14 to +194	PNP N.O./N.C.	Analog 4-20 mA
<b>Inline Flow Monitor, Digital Readout, 1/2" Tubing Connection</b>	FTCI-1/2D10A4P-LI-UP8X-H1141	M6870810	0.2 to 5	+14 to +194	PNP N.O./N.C.	Analog 4-20 mA
<b>Inline Flow Monitor, Digital Readout, 3/4" Tubing Connection</b>	FTCI-3/4D15A4P-LI-UP8X-H1141	M6870811	1 to 12	+14 to +194	PNP N.O./N.C.	Analog 4-20 mA

**Compatible Fluids:** Water, Deionized Water, Ethylene Glycol (0-70%), Galden® HT110, Galden® HT135

## Material

<b>Housing</b>	PBT
<b>Wetted Parts</b>	316 Ti Stainless Steel
<b>O-Ring</b>	FKM

# Process Automation



<i>Voltage</i>	<i>Current Consumption (mA)</i>	<i>Switching Current</i>	<i>Pressure Rating (psi)</i>	<i>Fluid Connection</i>	<i>Operating Temp. (°C)</i>	<i>Protection</i>	<i>Mating Cordset</i>	<i>Wiring Diagram #</i>	<i>Wiring Diagrams</i>
21.6-26.4 VDC	≤100	200	290	3/8" swage	0 to +60	IP 65	RK 4.4T-*	1	<b>Diagram 1</b> 
21.6-26.4 VDC	≤100	200	290	1/2" swage	0 to +60	IP 65	RK 4.4T-*	1	
21.6-26.4 VDC	≤100	200	290	3/4" swage	0 to +60	IP 65	RK 4.4T-*	1	

\* Length in Meters.



Housing Style	Part Number	ID Number	Flow Detection Range (Water)	Flow Detection Range (glycol/water)	Temperature Monitoring Range (°F)	Output
<b>Inline Flow Monitor, Digital Readout, 3/8" Tubing Connection</b>	FCI-D10A4P-2ARX-H1160/D201	M6870679	0.2 - 4 GPM	0.2 - 4 GPM	0 to +212	Dual Relay N.O.
	FCI-D10A4P-2ARX-H1160/D203	M6870680	0.2 - 4 GPM	N/A (Water only)	0 to +212	
<b>Inline Flow Monitor, Digital Readout, 1/2" Tubing Connection</b>	FCI-D10A4P-2ARX-H1160/D205	M6870681	0.2 - 5 GPM	0.2 - 5 GPM	0 to +212	Dual Relay N.O.
<b>Inline Flow Monitor, Digital Readout, 3/4" Tubing Connection</b>	FCI-D15A4P-2ARX-H1160/D209	M6870684	1 - 12 GPM	1 - 12 GPM	0 to +212	Dual Relay N.O.

## Material

Wetted Parts:	316 Stainless Steel
Housing:	PBT
O-ring:	FKM

# Process Automation



Voltage	Load Current/ Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (°C) (ambient)	Operating Temp. (°C) (fluid)	Protection	Mating Cordset	Wiring Diagram #	Wiring Diagrams
21.6-26.4 VDC	≤0.5 A at 30 VDC ≤1 A at 36 VAC	290	3/8" swage	0 to +60	-10 to +95	IP 65	RKC 6T-*	1	<div style="background-color: #2e7131; color: white; padding: 2px 5px; border-radius: 5px;"> <b>Diagram 1</b> </div>
21.6-26.4 VDC	≤0.5 A at 30 VDC ≤1 A at 36 VAC	290	3/8" swage	0 to +60	0 to +80	IP 65	RKC 6T-*	1	
21.6-26.4 VDC	≤0.5 A at 30 VDC ≤1 A at 36 VAC	290	1/2" swage	0 to +60	-10 to +95	IP 65	RKC 6T-*	1	
21.6-26.4 VDC	≤0.5 A at 30 VDC ≤1 A at 36 VAC	290	3/4" swage	0 to +60	-10 to +95	IP 65	RKC 6T-*	1	

\* Length in Meters.



Housing Style	Part Number	ID Number	Flow Detection Range (water)	Flow Detection Range (oil)	Output
<b>Self-Contained Plastic Housing</b>	FCS-N1/2A4P-AP8X-H1141	M6871032	1-150 cm/sec.	3-300 cm/sec.	PNP N.O.
<b>Self-Contained Plastic Housing, Dual Set points</b>	FCS-N1/2A4P-2AP8X-H1140	M6871009	1-150 cm/sec.	3-300 cm/sec.	Dual PNP N.O.
<b>Self-Contained Plastic Housing, Flow and Temperature Set points</b>	FTCS-N1/2A4P-2AP8X-H1140	M6871036	1-150 cm/sec. Temperature 0 to +80°C	3-300 cm/sec. Temperature 0 to +80°C	Dual PNP N.O.

Additional specifications on pages M46.

Accessories on page M75 - M76.

Technical data on pages M77 - M79.

## Material

<b>Housing</b>	PBT
<b>Cable Connector</b>	303 Stainless Steel
<b>Wetted Parts</b>	316 Ti Stainless Steel

# Process Automation



Voltage	Current Consumption (mA)	Switching Current/ Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (ambient) °C	Operating Temp. (fluid) °C	Protection	Mating Cordset	Wiring Diagram #	Wiring Diagrams
19.2-28.8 VDC	≤60 mA	≤400 mA	1450	1/2 NPT	-25 to +70	-20 to +80	IP 65	RK 4T-*	1	<p><b>Diagram 1</b></p> <p><b>Diagram 2</b></p> <p><b>Diagram 3</b></p>
19.2-28.8 VDC	≤60 mA	≤400 mA	1450	1/2 NPT	-25 to +70	-20 to +80	IP 65	RK 4.4T-*	2	
19.2-28.8 VDC	≤60 mA	≤400 mA	1450	1/2 NPT	-25 to +70	-20 to +80	IP 65	RK 4.4T-*	3	

\* Length in meters.



Housing Style	Part Number	ID Number	Flow Detection Range (water)	Flow Detection Range (oil)	Output
<b>Self-Contained 316 Stainless Steel Housing</b>	FCS-N1/2A4-AP8X-H1141	M6871004	1-150 cm/sec.	3-300 cm/sec.	PNP N.O.
	FCS-N1/2A4-AN8X-H1141	M6871010	1-150 cm/sec.	3-300 cm/sec.	NPN N.O.
	FCS-N1/2A4-ARX-H1140	M6871035	1-150 cm/sec.	3-300 cm/sec.	Relay N.O.
<b>Self-Contained 316 Stainless Steel Housing</b>	FCS-G1/2A4-AP8X-H1141	M6870004	3-300 cm/sec.	3-300 cm/sec.	PNP N.O.
<b>Self-Contained 316 Stainless Steel Housing</b>	FCS-G1/4A4-ARX-H1140	M6870102	3-300 cm/sec.	3-300 cm/sec.	Relay N.O.
<b>DC Self Contained Sanitary, 316L Stainless Steel Housing</b>	FCS-50A4-AP8X-H1141/D014	M6872025	1-150 cm/sec.	3-300 cm/sec.	PNP N.O.

Additional specifications on pages M46.

Accessories on page M75 - M76.

Technical data on pages M77 - M79.

## Material

Cable Connector  
Wetted Parts

303 Stainless Steel  
316 Ti Stainless Steel

# Process Automation



Voltage	Current Consumption (mA)	Switching Current /Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (ambient) °C	Operating Temp. (fluid) °C	Protection	Mating Cordset	Wiring Diagram #	Wiring Diagrams
19.2-28.8 VDC	≤70 mA	≤400 mA	1450	1/2 NPT	-25 to +80	-20 to +80	IP 67	RK 4T-*	1	Diagram 1
19.2-28.8 VDC	≤70 mA	≤400 mA	1450	1/2 NPT	-25 to +80	-20 to +80	IP 67	RK 4T-*	2	Diagram 2
19.2-28.8 VDC	≤70 mA	≤1 A at 60 VDC	1450	1/2 NPT	-25 to +80	-20 to +80	IP 67	RK 4.4T-*	3	Diagram 3
19.2-28.8 VDC	≤70 mA	≤400 mA	1450	G 1/2	-25 to +80	-20 to +80	IP 67	RK 4T-*	1	
19.2-28.8 VDC	≤70 mA	≤1 A at 60 VDC	1450	G 1/4	-25 to +80	-20 to +80	IP 67	RK 4.4T-*	3	
21.6-26.4 VDC	≤70 mA	≤400 mA	1450	1.5 in. Tri-clamp	-20 to +80 **(+100)	20 to +80	IP 67	RKV 4T-*	1	

\* Length in meters.

\*\* Sensor may be heated to 100°C for 10 minutes without damage.



Housing Style	Part Number	ID Number	Flow Detection Range (water)	Flow Detection Range (oil)	Output
<b>Inline Flow Monitor, PBT Housing</b>	FCI-TCD04A4P-ARX-H1140	M6870626	1-200 ml/min.	Consult Factory	Relay N.O.
	FCI-TCD04A4P-AP8X-H1141	M6870656	1-200 ml/min.	Consult Factory	PNP N.O.
<b>Inline Flow Monitor, PBT Housing</b>	FCI-D04A4P-AP8X-H1141	M6870640	15-1000 ml/min.	Consult Factory	PNP N.O.
<b>Inline Flow Monitor, PBT Housing</b>	FCI-D08A4P-ARX-H1140/D038	M6870647	100-6000 ml/min.	Consult Factory	Relay N.O.
<b>Inline Flow Monitor, PBT Housing</b>	FCI-D10A4P-AP8X-H1141	M6870642	100-6000 ml/min.	Consult Factory	PNP N.O.
	FCI-D10A4P-ARX-H1140	M6870644	100-6000 ml/min.	Consult Factory	Relay N.O.

Additional specifications on pages M46.

Accessories on page M75 - M76.

Technical data on pages M77 - M79.

## Material

**Housing**  
**Cable Connector**  
**Wetted Parts**

PBT  
303 Stainless Steel  
316 Ti Stainless Steel

# Process Automation



Voltage	Current Consumption (mA)	Switching Current/Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (ambient) °C	Operating Temp. (fluid) °C	Protection	Mating Cordset	Wiring Diagram #	Wiring Diagrams
21.6-26.4 VDC	≤50 mA	≤1 A at 30 VDC ≤1 A at 36 VAC	14.5	4 mm Tube	0 to +60	0 to +60	IP 67	RK 4.4T-*	1	<div style="background-color: #00AEEF; color: white; padding: 5px;"> <b>Diagram 1</b> </div>
21.6-26.4 VDC	≤50 mA	≤200 mA	14.5	4 mm Tube	0 to +60	0 to +60	IP 67	RK 4T-*	2	<div style="background-color: #00AEEF; color: white; padding: 5px;"> <b>Diagram 2</b> </div>
21.6-26.4 VDC	≤50 mA	≤200 mA	290	G 1/4	0 to +60	0 to +80	IP 67	RK 4T-*	2	
21.6-26.4 VDC	≤50 mA	≤1 A at 30 VDC ≤1 A at 36 VAC	290	3/8 Compression	0 to +60	0 to +80	IP 67	RK 4.4T-*	1	
21.6-26.4 VDC	≤50 mA	≤200 mA	290	G 1/4	0 to +60	0 to +80	IP 67	RK 4T-*	2	
21.6-26.4 VDC	≤50 mA	≤1 A at 30 VDC ≤1 A at 36 VAC	290	G 1/4	0 to +60	0 to +80	IP 67	RK 4.4T-*	1	

\* Length in meters.



Housing Style	Part Number	ID Number	Flow Detection Range (water)	Flow Detection Range (oil)	Output
<b>Remote Insertion Probe, Stainless Steel Housing</b>	FCS-N1/2A4-NA	M6871309	1-150 cm/sec.	3-300 cm/sec.	Remote Amplifier
<b>Remote Insertion Probe, Stainless Steel Housing</b>	FCS-N1/2A4-NA-H1141	M6871303	1-150 cm/sec.	3-300 cm/sec.	Remote Amplifier
<b>Remote Insertion Probe, Stainless Steel Housing</b>	FCS-N3/4A4-NA-H1141	M6871304	1-150 cm/sec.	3-300 cm/sec.	Remote Amplifier

Additional specifications on pages M46.

Accessories on page M75 - M76.

Technical data on pages M77 - M79.

## Material

**Housing**  
**Cable Connector**  
**Wetted Parts**

316 Ti Stainless Steel  
303 Stainless Steel  
316 Ti Stainless Steel

# Process Automation



	Voltage	Switching Current /Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (ambient)	Operating Temp. (fluid)	Protection	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
Remote Amplifier	Remote Amplifier	1450	1/2 NPT	-25 to +80	-25 to +80	IP 67	2M/PVC	1		<b>Diagram 1</b> 
Remote Amplifier	Remote Amplifier	1450	1/2 NPT	-25 to +80	-25 to +80	IP 67	RK 4.4T-*	2		<b>Diagram 2</b> 
Remote Amplifier	Remote Amplifier	1450	3/4 NPT	-25 to +80	-25 to +80	IP 67	RK 4.4T-*	2		

\* Length in meters.



Housing Style	Part Number	ID Number	Flow Detection Range (water)	Flow Detection Range (oil)	Output
Remote Insertion Probe, Intrinsically Safe, Stainless Steel Housing	FCS-N1/2A4-NAEX-H1141	M6871322	1-100 cm/min.	3-200 cm/min.	Remote Amplifier
Remote Insertion Probe, Intrinsically Safe, Stainless Steel Housing	FCS-N1/2A4-NAEX	M6871423	1-100 cm/min.	3-200 cm/min.	Remote Amplifier
Remote Insertion Probe, Intrinsically Safe, Stainless Steel Housing	FCS-G1/4A4-NAEX	M6870315	1-100 cm/min.	3-200 cm/min.	Remote Amplifier
Remote Insertion Probe, Intrinsically Safe, Stainless Steel Housing	FCS-GL1/2A4-NAEX/D500	M6870431	1-100 cm/min.	3-200 cm/min.	Remote Amplifier

Additional specifications on pages M46.

Accessories on page M75 - M76.

Technical data on pages M77 - M79.

## Material

Housing  
Cable Connector  
Wetted Parts

316 Ti Stainless Steel  
303 Stainless Steel  
316 Ti Stainless Steel

# Process Automation



	Voltage	Switching Current /Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (ambient)	Operating Temp. (fluid)	Protection	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
Remote Amplifier	Remote Amplifier	1450	1/2 NPT	-25 to +85	-25 to +85	IP 67	RK 4.41T-*	1		<p><b>Diagram 1</b></p> <p><b>Diagram 2</b></p>
Remote Amplifier	Remote Amplifier	1450	1/2 NPT	-25 to +85	-25 to +85	IP 68	2M/PUR	2		
Remote Amplifier	Remote Amplifier	1450	G 1/4	-25 to +85	-25 to +85	IP 68	2M/PUR	2		
Remote Amplifier	Remote Amplifier	7250	GL 1/2	-25 to +85	-25 to +85	IP 68	2M/PUR	2		

\* Length in meters.



Housing Style	Part Number	ID Number	Features	Output
Remote Amplifiers	MK96-11-R/24VDC	M7525090	<i>N.O. Relay Outputs</i>	Relay N.O.
	MK96-VP01	M7525002	<i>Complimentary PNP Outputs Short-Circuit and Reverse Polarity Protection Dual Potentiometer</i>	Complementary PNP
	MK96-VN01	M7525003	<i>Complimentary NPN Outputs Short-Circuit and Reverse Polarity Protection Dual Potentiometer</i>	Complementary NPN
	MK96-LI01	M7525004	<i>Non-Linear 4-20 mA Dual Potentiometer</i>	4-20 mA Non-linear

## Material

Housing

PC/ABS

# Process Automation



Voltage	Mounting	Current Consumption	Protection	Switching Current /Analog Load	Wiring Diagram #	Wiring Diagrams
19.2-28.8 VDC	DIN 50022 or 50035	$\leq 70$ mA	IP 20	2 A at 60 VDC	1	
19.2-28.8 VDC	DIN 50022 or 50035	$\leq 65$ mA	IP 20	400 mA	2	
19.2-28.8 VDC	DIN 50022 or 50035	$\leq 65$ mA	IP 20	400 mA	3	
19.2-28.8 VDC	DIN 50022 or 50035	$\leq 100$ mA	IP 20	$\leq 500$ Ω	4	



Housing Style	Part Number	ID Number	Features	Output
<b>Signal Processors</b>	MS96-11Ex-R/115VAC	M5231202	<i>Intrinsically Safe Zone 1 [EExib] 11C Wire-break Dual Potentiometer Off Delay</i>	Relay N.O./N.C.
	MS96-11Ex-R/24VDC	M5231207	<i>Intrinsically Safe Zone 1 [EExib] 11C Wire-break Dual Potentiometer Off Delay</i>	Relay N.O./N.C.
<b>Signal Processors</b>	MS96-12R/115VAC	M5231000	<i>Flow and Temp. Control Wire-break Dual Potentiometer Off Delay</i>	Dual Relay N.O./N.C.
	MS96-12R/24VDC	M5231007	<i>Flow and Temp. Control Wire-break Dual Potentiometer Off Delay</i>	Dual Relay N.O./N.C.

## Material

Housing










PC/ABS

# Process Automation




Voltage	Mounting	Current Consumption	Protection	Switching Current	Wiring Diagram #	Wiring Diagrams
103.5-126.5 VAC	DIN 50022	≤75 mA	IP 20	≤4 A at 250 VAC	1	<p><b>Diagram 1</b></p> <p>Output: 0...25 Off-delay (S)</p> <p>GN YE RD</p> <p>Supply: 2~(+) 1~(-)</p>
21.6-26.4 VDC	DIN 50022	≤125 mA	IP 20	≤4 A at 250 VAC	1	<p><b>Diagram 2</b></p> <p>Output: 0...25 Off-delay (S) Temp Flow</p> <p>GN YE RD</p> <p>Supply: 2~(+) 1~(-)</p>
103.5-126.5 VAC	DIN 50022	≤90 mA	IP 20	≤2 A at 60 VDC	2	
21.6-26.4 VDC	DIN 50022	≤120 mA	IP 20	≤2 A at 60 VDC	2	













## Flow Accessories

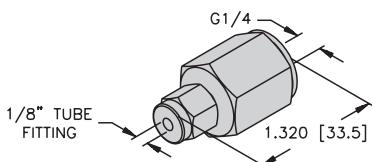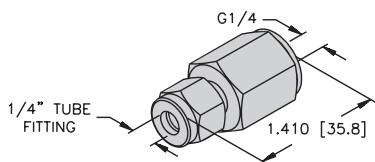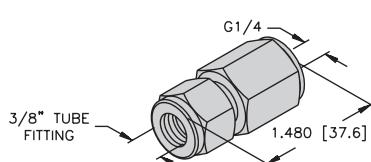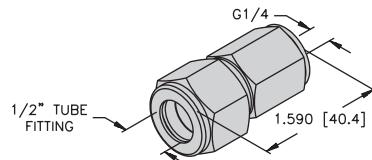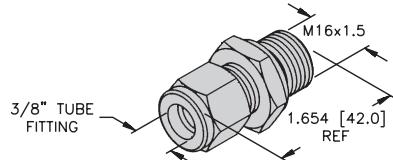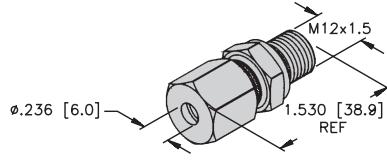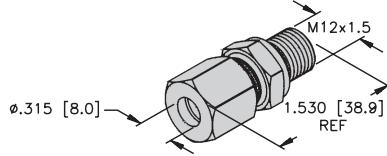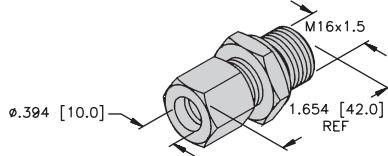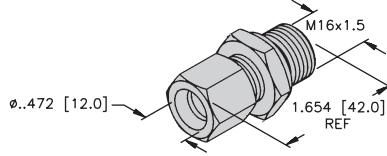Adapter G1/4 to 1/8 in. Tubing  
(316 Stainless Steel)FSV-SS-1/8X1/4  
(A2535)Adapter G1/4 to 1/4 in. Tubing  
(316 Stainless Steel)FSV-SS-1/4X1/4  
(A2534)Adapter G 1/4 to 3/8 in. Tubing  
(316 Stainless Steel)FSV-SS-3/8X1/4  
(A2533)Adapter G1/4 to 1/2 in. Tubing  
(316 Stainless Steel)FSV-SS-1/2X1/4  
(A2536)Adapter M16 to 3/8 in. Tubing  
(316 Stainless Steel)FSV-D3/8-M16  
(M6873005)Adapter M12 to 6 mm Tubing  
(316 Stainless Steel)FSV-D06/M12  
(M6873002)Adapter M12 to 8 mm Tubing  
(316 Stainless Steel)FSV-D08/M12  
(M6873004)Adapter M16 to 10 mm Tubing  
(316 Stainless Steel)FSV-D10/M16  
(M6873001)Adapter M16 to 12 mm Tubing  
(316 Stainless Steel)FSV-D12/M16  
(M6873003)

## Mounting Bracket

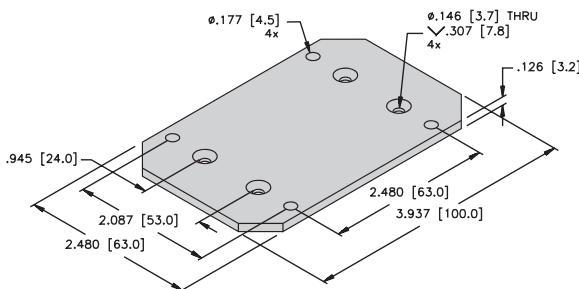
FCI-BP  
(A9181)

## Flow Accessories

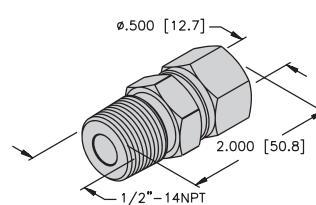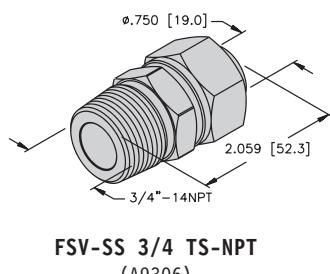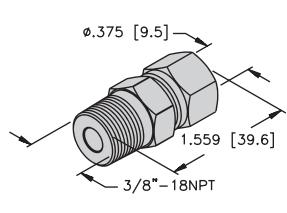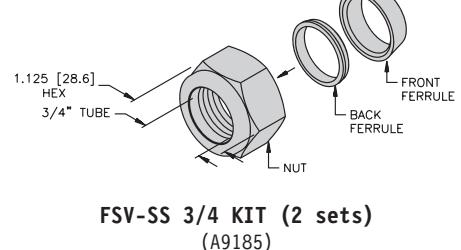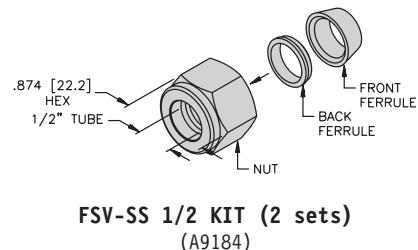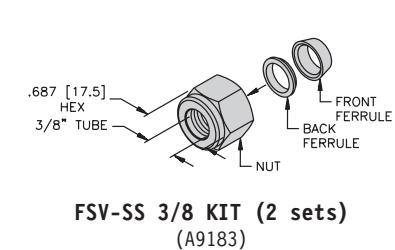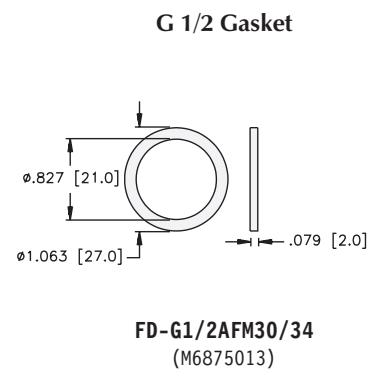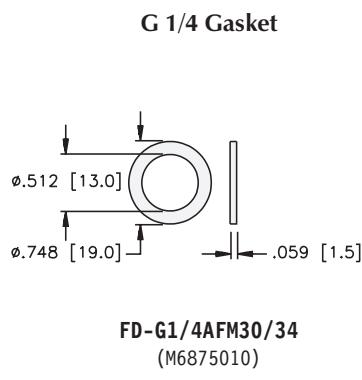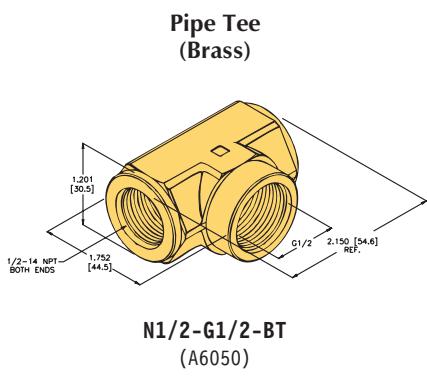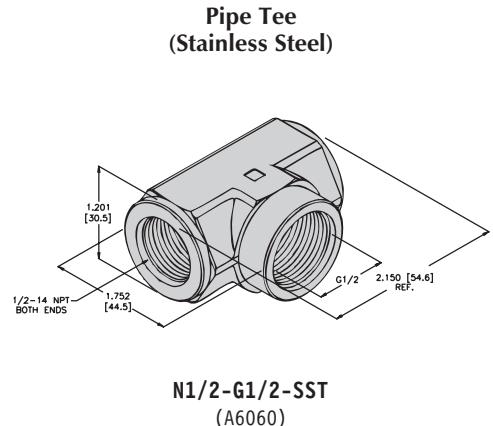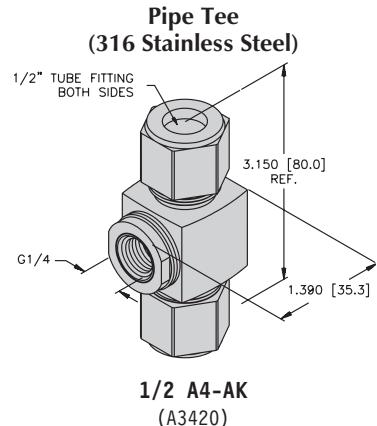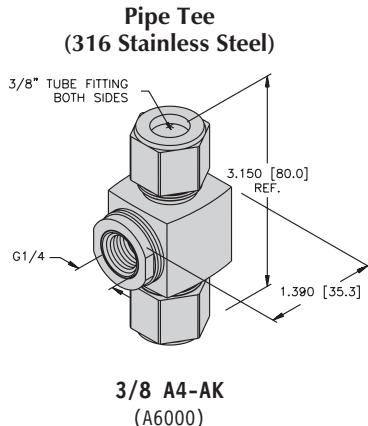


**Liquid Flow Conversion Chart (Water)**

Flow velocity to flow volume for schedule 40 pipes of various sizes.

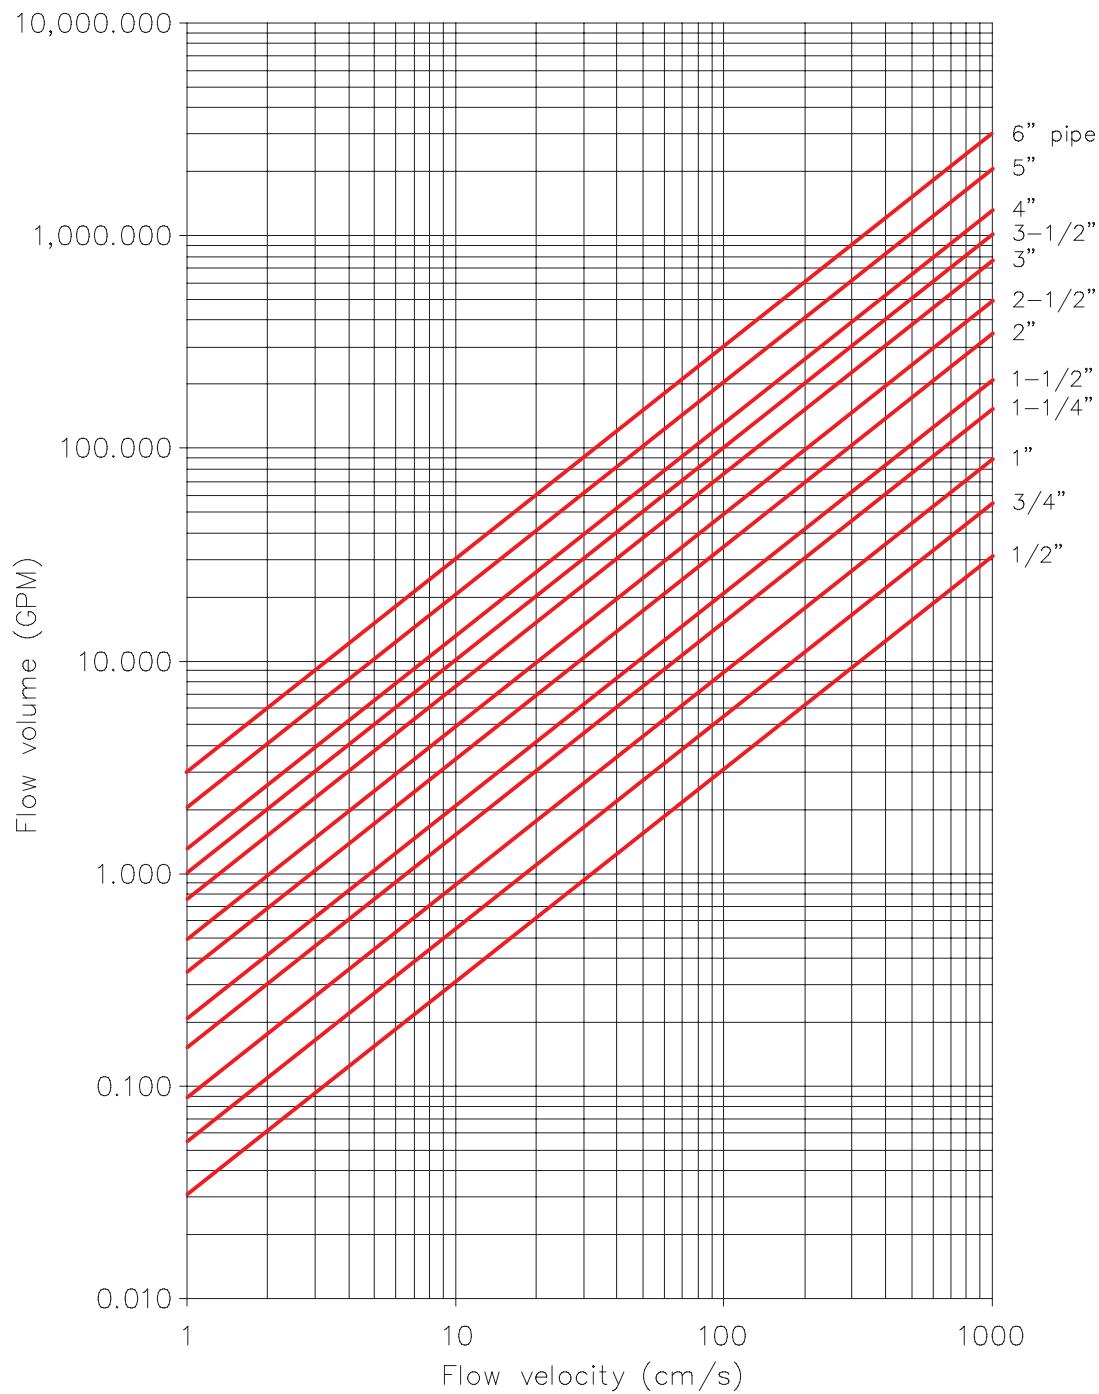


**Gas Flow Conversion Chart**

Flow velocity to flow volume for schedule 40 pipes of various sizes.

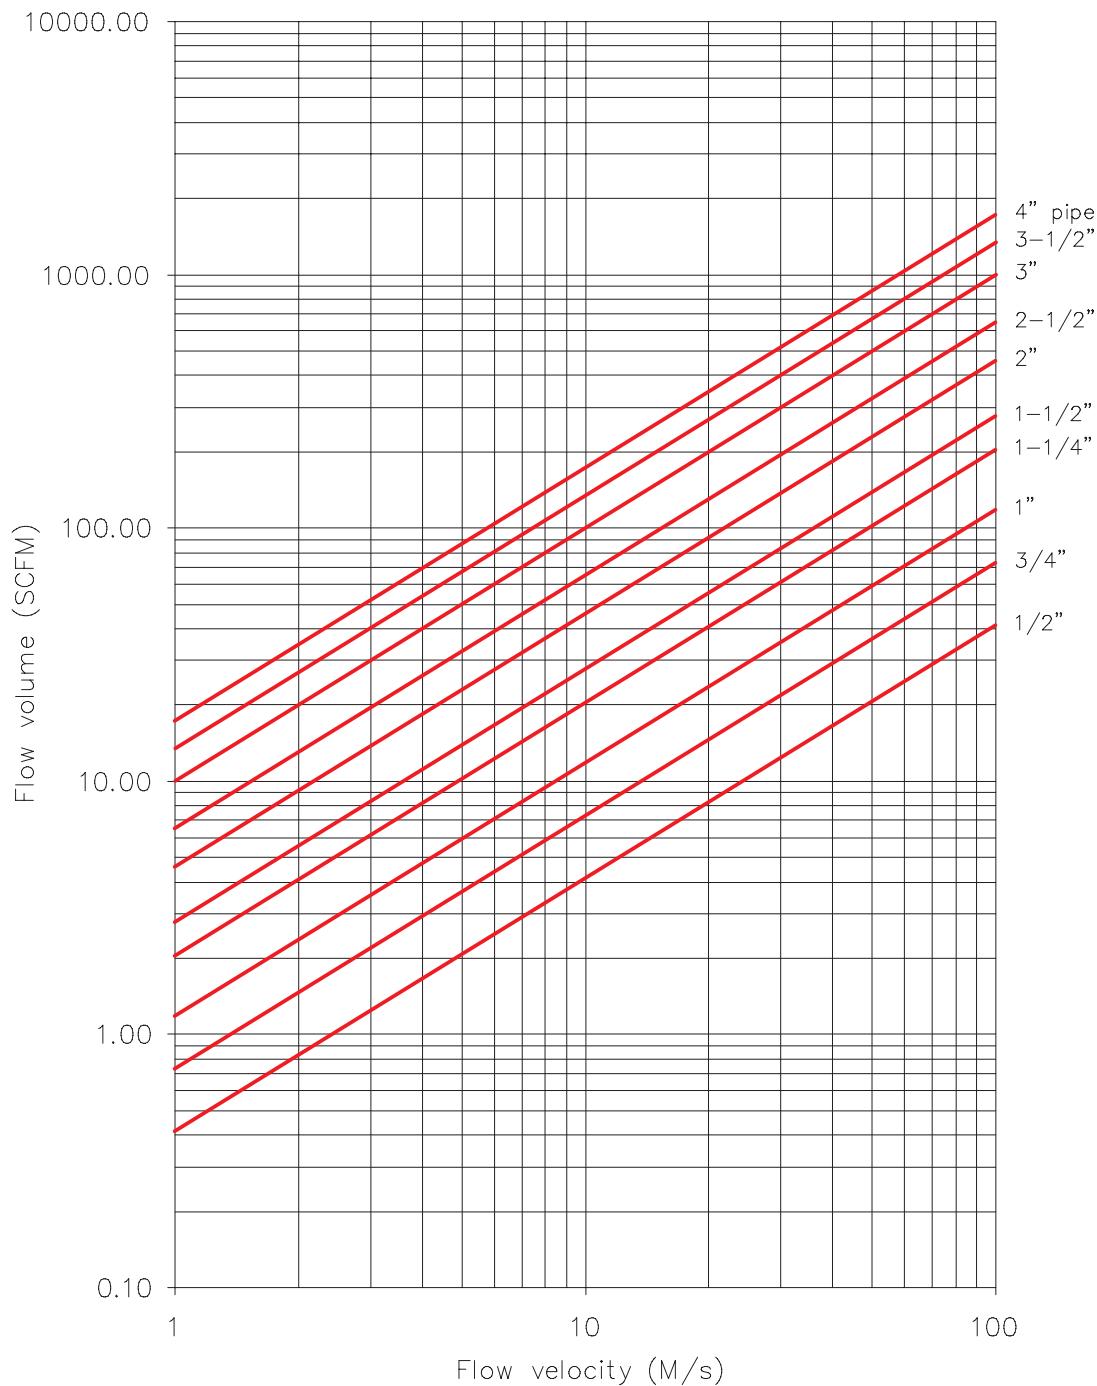

## Response Time

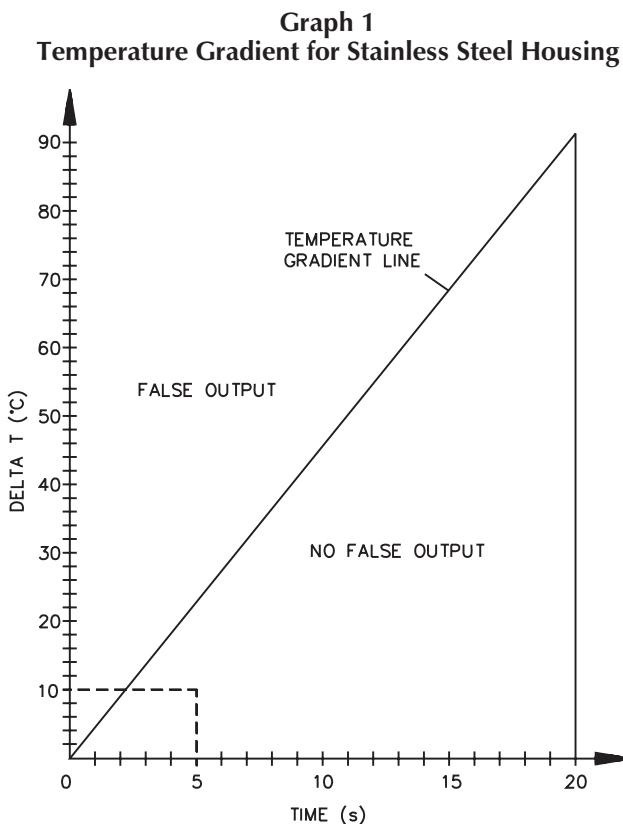

**Graph 1** can be used to determine if the **TURCK** flow monitor can compensate for a temperature change to a sensed medium. The dotted line in the graph indicates that a 10°C change has occurred in a time period of 5 seconds. Points (5,10) intersect in the "No False Output" region of the graph. This example illustrates an acceptable degree of temperature change in the application. As a result, the flow monitor can compensate for the fluid temperature change.

$$\text{Fahrenheit} = (1.8X^{\circ}\text{C}) + 32$$

## Flow Conversions

The calorimetric principle is dependent on the fluid speed, and not the volumetric flow rate. On the following pages are conversion charts from flow speed to volumetric flow rate.

$$\text{SCFM} = 1.0737 \times \text{ID}^2 \times \text{FSM}$$

$$\text{GPM} = 0.0803 \times \text{ID}^2 \times \text{FS}$$

$$\text{FT/S} = 0.0328 \times \text{FS}$$

$$\text{FT/S} = 3.2808 \times \text{FSM}$$

GPM: Gallons per minute

FT/S: Feet per second

ID: Inner Diameter of pipe in inches

FS: Flow Speed of fluid in cm/s

FSM: Flow Speed of fluid in m/s

# Process Automation



**Notes:**

## Temperature Sensors Selection Guide



Type	TS400/TS500 Temp Sensors	Temperature Probes	Thermowells	Compression Fittings
Pages	M87 - M88	M91 - M92	M94 - M95	M96




Type	TS400/TS500 Accessories	Self Contained Temperature Monitors
Pages	M97 - M98	M101 - M102

## Precise, Reliable Temperature Sensors for Process Automation

Accurately determining temperature is one of the most important tasks in processing and manufacturing industries. Precision, reliability and interface flexibility are just some of the characteristics that make a great temperature sensor. TURCK's new TS400 and TS500 temperature sensor series provide all these traits and more, and adhere to the high standards consistent with all TURCK products.

TS400 and TS500 temperature sensors incorporate design elements that equate to real advantages in your applications. The TS400 and TS500 sensor series are platinum resistance temperature detectors (RTDs), commonly referred to as a Pt-100. Pt-100's are known to be highly precise, repeatable, and provide extremely short response times.

Pt-100's contain a platinum wire that is wrapped around a core or patterned as a thin film on a substrate so that it experiences minimal differential expansion or other strains. As the temperature changes, the controller measures the change in the electrical resistance of the platinum wire. Specifically, the hotter the wire becomes, the higher the value of electrical resistance. Pt-100 RTDs have a nominal resistance of 100 ohms at 0°C with an accuracy of 0.4°C at 50°C. The sensor's operating range varies from -50 to 500°C (-58 to 932°F).

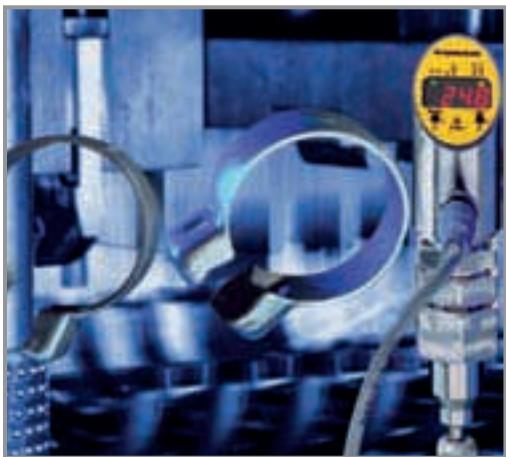

### Quality

TS400 and TS500 sensors were designed to handle harsh manufacturing environments.

- High immunity to electromagnetic interference
- Reliable and accurate
- Compact design
- Robust stainless steel housing
- IP 67 environmental protection to increase operational durability



### User-Friendly

TS400 and TS500 sensors were designed with the user in mind.

- Simple push-button programming
- Recessed button stores selected values and helps prevent unintentional operational errors
- The entire display can be inverted electronically
- The TS500 version can be rotated 320 degrees
- Does not require regular maintenance calibration
- M12 **eurofast®** connection promotes easy integration in existing applications

**Flexible**

TS400 and TS500 use state of the art technology to bring you a sensor that facilitates operational efficiency.

- Remote or direct mountable
- Compact, robust housing
- 4-pin M12 **eurofast®** connection
- Compatible with 4-wire probes
- Displays output in °C, °F, K and ohms

**Benefits**

TS400 and TS500 temperature sensors allow you to realize immediate benefits in your application.

- May be implemented in nearly all factory or process automation applications
- Housing design permits sensors to be mounted directly next to each other or in restrictive places
- Large, bright LED display
- Versions with multiple outputs available; all are easy to program and use

**How to Order TS400 and TS500 Sensors and Accessories**

1. Determine your desired output and select the TS model that meets your needs.
2. Select the appropriate probe for your application.
  - a) Questions? Call 1-800-554-7769.
3. Choose remote or direct mounting.
  - a) For direct mounting with TP 203 and TP 206, order the stabilizer (STA-3 or STA-6).
  - b) For remote mounting, order a mating cordset (RK 4.4T-\*RS 4.4T).
4. Select a process connection.
  - a) For thermowells, order one length shorter than the length of probe you selected in step 2.
  - b) If no thermowell is selected, a compression fitting is needed for mounting the probe. (Note: The TP 104A does not require a process connection.)

\* Length in meters.




**Direct Mounting**



**Remote Mounting**

## Direct Mounting Sensor

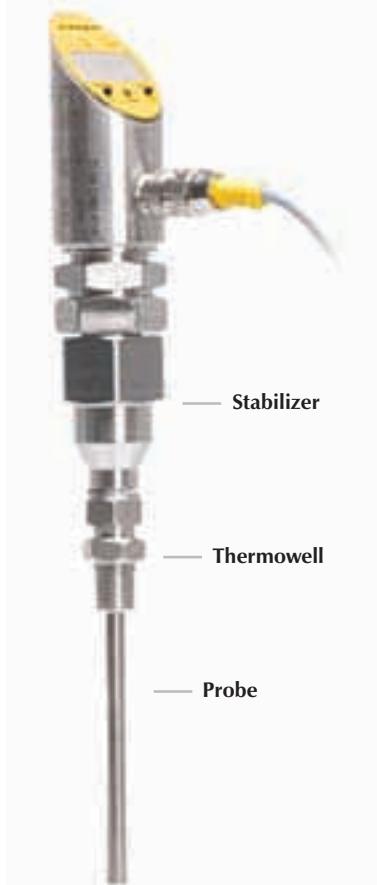

## Remote Mounting Sensor



## Accessories



Stabilizer  
(use with TP 203A .. & TP 206A ..)



Remote Cordset  
(RK 4.4T-\* - RS 4.4T)

## Probe Options



TP 104A ..



TP 306A ..



TP 203A ..  
or TP 206A ..

## Process Connection Options



Compression Fitting  
(CF)



Thermowell  
THW ... TRI



Thermowell  
THW ... N

**TS400/TS500 Temperature Sensor Part Number Key**

TS - 400 - LI 2U PN 8 X - H1141

**Style**

TS = Temperature Sensor

**Housing**

400 = Adjustable, with display, non-rotatable

500 = Adjustable, with display, rotatable

**Analog Output**

LI = Current analog output

LU = Voltage analog output

**Switching Output**

2U = 2 x programmable N.O./N.C. mode

U = 1 x programmable N.O./N.C. mode

**Connection**

H1141 = 4-pin, M12x1, *eurofast*® connector

**With LED Display****Operational Voltage**

8 = 15-30 VDC (switching outputs)

8 = 18-30 VDC (switching and analog outputs)

**Output Logic**

PN = PNP/NPN configurable transistor switching output

P = PNP transistor switching output

N = NPN transistor switching output

## TS400/TS500 Technical Data






<b>Operating Voltage</b>	15-30 VDC (switching outputs) 18-30 VDC (switching and analog output)
<b>No-Load Current</b>	≤50 mA
<b>SELV, PELV</b>	According to EN 50178
<b>Short-Circuit Protection</b>	Yes
<b>Reverse Polarity Protection</b>	Yes
<b>Insulation Class</b>	III
<b>Switching Output</b>	
<b>Switching Frequency</b>	≤180 Hz
<b>Output Function</b>	2 x PNP or NPN, N.C./N.O. programmable
<b>Voltage Drop at I<sub>e</sub></b>	≤2 V
<b>Rated Operational Current</b>	0.2 A
<b>Switching Point Distance</b>	0.2 K
<b>Reset Points</b>	-49.8° to +500°C (-58° to +932°F) -50° to +499.8°C (-58° to +932°F)
<b>Analog Current Output</b>	
<b>Current Output</b>	4-20 mA, 0-20 mA, 20-4 mA, 20-0 mA programmable
<b>Response Time</b>	<100 ms
<b>Load</b>	≥0.5 kΩ
<b>Analog Voltage Output</b>	
<b>Voltage Output</b>	0-10 V, 0-5 V, 1-6 V, 10-0 V, 5-0 V, 6-1 V programmable
<b>Response Time</b>	<100 ms
<b>Load</b>	≥2 kΩ
<b>Temperature Sensor Accuracy</b>	
<b>Switching Output</b>	
<b>Switching Point Accuracy</b>	≤ ± 0.2 K
<b>Repetition Accuracy</b>	≤ ± 0.1 K
<b>Analog Output Accuracy (Lin.+Hys.+Rep.)</b>	≤ ± 0.2 K
<b>Temperature Sensor Housing</b>	
<b>Housing Material</b>	Stainless steel/plastic 1.4404 (AISI 316L)/PC
<b>Electrical Connection</b>	Connector M12x1 ( <b>eurofast</b> ®), 4-pin with integrated high-speed connection technology.
<b>Sensor Connection</b>	Connector M12x1 ( <b>eurofast</b> ), 4-pin
<b>Coupling Nut Size (with tightening torque)</b>	SW 30 (max. 35 Nm)
<b>Display</b>	
<b>Temperature Display</b>	4-digit 7-segment display can be rotated by 180° and switched off
<b>Switch State Display</b>	2 x LED yellow
<b>Measured Value/Programming</b>	Switch/release points; hysteresis/window mode; N.O./N.C.; unit of display; peak value memory
<b>Display of Temperature Unit</b>	4 x LED green (°C, °F, K, Ω)
<b>EMC</b>	
<b>EN 61000-4-2</b>	ESD 4 kV CD / 8 kV AD
<b>EN 61000-4-3</b>	HF radiated: 15 V/m <sup>2</sup>
<b>EN 61000-4-4</b>	Burst 2 kV
<b>EN 61000-4-5</b>	Surge 1 kV, 42 Ω
<b>EN 61000-4-6</b>	HF conducted: 10 V
<b>Ambient Conditions</b>	
<b>Medium Temperature</b>	Directly connected -50° to 150°C (otherwise see temperature probes)
<b>Ambient Temperature</b>	-40° to +80°C (-40° to +176°F)
<b>Storage Temperature</b>	-40° to +80°C (-40° to +176°F)
<b>Degree of Protection</b>	IP 67
<b>Vibration Resistance</b>	20 g (10-2000 Hz) according to IEC 68-2-6



Housing	Part Number	ID Number	Temperature Range – Remote	Temperature Range – Direct	Output
<b>Temperature Sensor for 4-wire PT100</b>	TS-400-2UP8X-H1141	M6840001	-50° to 500°C (-58° to 932°F)	-50° to 150°C (-58° to 302°F)	Dual PNP N.O./N.C.
	TS-400-LIUP8X-H1141	M6840002			Dual NPN N.O./N.C.
	TS-400-LUUP8X-H1141	M6840003			1 PNP N.O./N.C. and Programmable Current
	TS-400-2UN8X-H1141	M6840004			1 NPN N.O./N.C. and Programmable Current
	TS-400-LIUN8X-H1141	M6840005			1 PNP N.O./N.C. and Programmable Voltage
	TS-400-LUUN8X-H1141	M6840006			1 NPN N.O./N.C. and Programmable Voltage
	TS-400-LI2UPN8X-H1141	M6840007			1 PNP/NPN N.O./N.C. and Programmable Current or 1 PNP/NPN N.O./N.C.
<b>Temperature Sensor for 4-wire PT100, 320° Rotatable Housing</b>	TS-500-2UP8X-H1141	M6840009	-50° to 500°C (-58° to 932°F)	-50° to 150°C (-58° to 302°F)	Dual PNP N.O./N.C.
	TS-500-LIUP8X-H1141	M6840010			Dual NPN N.O./N.C.
	TS-500-LUUP8X-H1141	M6840011			1 PNP N.O./N.C. and Programmable Current
	TS-500-2UN8X-H1141	M6840012			1 NPN N.O./N.C. and Programmable Current
	TS-500-LIUN8X-H1141	M6840013			1 PNP N.O./N.C. and Programmable Voltage
	TS-500-LUUN8X-H1141	M6840014			1 NPN N.O./N.C. and Programmable Voltage
	TS-500-LI2UPN8X-H1141	M6840015			1 PNP/NPN N.O./N.C. and Programmable Current or 1 PNP/NPN N.O./N.C.

For remote probes use cordset RK 4.4T-\* -RS 4.4T. \* Length in meters.

See page M98 for additional cordset information.

Voltage	Switching Current (mA)	Analog Load	Mating Cordset	Wiring Diagram #	Wiring Diagrams
15-30 VDC	≤200	N/A	RK 4.4T-*	1	
15-30 VDC	≤200	N/A	RK 4.4T-*	1	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	2	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	2	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	3	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	3	
15-30 VDC	≤200	N/A	RK 4.4T-*	1	
15-30 VDC	≤200	N/A	RK 4.4T-*	1	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-	2	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	2	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	3	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	3	
18-30 VDC	≤200	≤500 Ω	RK 4.4T-*	4	

\* Length in meters.

### Simple Mounting

After the sensor is mounted, the actual processor unit is attached and fixed using a coupling nut. The sensor can still be rotated and aligned in all directions.

TS500 shown.



## Temperature Probes Part Number Key

TP - 1 - 03A - G1/8 - H1141 - L013

## Style

TP = Temperature Probe

## Probe Type

- 1 = Probe with process connection
- 2 = Probe for compression fitting or thermowell
- 3 = Cable sensor

## Probe Diameter

- 03A = 3 mm outer probe diameter
- 04A = 4 mm outer probe diameter

## Insertion Depth

## Connection

H1141 = 4-pin, M12x1, **eurofast** connector

## Process Connection

- G1/8 = G1/8" male thread
- TRI3/4 = 3/4" tri-clamp
- DN25K = DN25 hygienic fitting DIN11851
- CF = Compression fitting

## Temperature Probes Technical Data

## Probe (TP-104A ..)

<b>Temperature Operating Range</b>	-50° to 120°C (-58° to +248°F)
<b>Ambient Temperature</b>	-20° to 90°C (-4° to +194°F)
<b>Measuring Element</b>	Pt100, DIN EN 60751, Class A
<b>Response Time</b>	$t_{0.5} = 3 \text{ s}$ ; $t_{0.9} = 10 \text{ s}$ in water at 0.2 m/s
<b>Output Function</b>	4-wire
<b>Reverse Polarity Protection</b>	Yes
<b>Degree of Protection</b>	IP 67
<b>Housing Material</b>	Plastic/Stainless steel
<b>Housing Quality</b>	1.4404 (AISI 316L)
<b>Sensor Material</b>	Stainless steel
<b>Sensor Quality</b>	1.4404 (AISI 316L)
<b>Pressure Rating (psi)</b>	580.15
<b>Connection</b>	Connector, M12x1 ( <b>eurofast</b> ®)
<b>Mechanical Connection</b>	Tri-Clamp 3/4"; DN25 hygienic fitting according to DIN 11851

## Temperature Probes Technical Data

### Probe (TP-203 .. / TP-206 ..)

<b>Temperature Operating Range</b>	-30° to +500°C (-22° to 932°F) ≤350°C accuracy class A (662°F) ≥350°C accuracy class B (662°F)
<b>Ambient Temperature</b>	-20° to 90°C (-4° to +194°F)
<b>Measuring Element</b>	Pt100, DIN EN 60751, Class A
<b>Response Time</b>	203: $t_{0.5} = 1.5$ s; $t_{0.9} = 6$ s 206: $t_{0.5} = 6$ s; $t_{0.9} = 15$ s 306: $t_{0.5} = 8$ s; $t_{0.9} = 20$ s
<b>Output Function</b>	4-wire
<b>Reverse Polarity Protection</b>	Yes
<b>Degree of Protection</b>	IP 67
<b>Housing Material</b>	Stainless steel/plastic
<b>Housing Quality</b>	1.4404 (AISI 316L) mineral insulated
<b>Sensor Material</b>	Stainless steel
<b>Sensor Quality</b>	1.4404 (AISI 316L)
<b>Pressure Rating (psi)</b>	1450.38
<b>Connection</b>	Connector, M12x1 ( <b>eurofast</b> ®)
<b>Mechanical Connection</b>	For compression fittings or thermowells

### Probe (TP-306A ..)

<b>Temperature Operating Range</b>	-50° to +105°C (-58° to +221°F)
<b>Ambient Temperature</b>	-20° to +90°C (-4° to +194°F)
<b>Measuring Element</b>	Pt100, DIN EN 60751, Class A
<b>Response Time</b>	$t_{0.5} = 8$ s; $t_{0.9} = 20$ s in water at 0.2 m/s
<b>Output Function</b>	4-wire
<b>Reverse Polarity Protection</b>	Yes
<b>Degree of Protection</b>	IP 67
<b>Housing Material</b>	Plastic/Stainless steel
<b>Housing Quality</b>	TPE (thermoplastic elastomer)
<b>Sensor Material</b>	Stainless steel
<b>Sensor Quality</b>	1.4404 (AISI 316L)
<b>Pressure Rating (psi)</b>	217.56
<b>Connection</b>	Connector, M12x1 ( <b>eurofast</b> )
<b>Mechanical Connection</b>	For compression fittings or thermowells or for direct mounting



## Temperature Probes

Housing Style	Part Number	ID Number	Temperature Range	Length (mm)
Pt100 Temperature Probe, 3/4" Tri-Clamp, Ø8 mm	TP-104A-TRI3/4-H1141-L035	M9910429	-50° to +120°C (-58° to +248°F)	35
	TP-104A-TRI3/4-H1141-L100	M9910430		100
Pt100 Temperature Probe, Ø3 m	TP-203A-CF-H1141-L100	M9910402	-30° to +350°C (-22° to +662°F)	100
	TP-203A-CF-H1141-L150	M9910403		150
	TP-203A-CF-H1141-L200	M9910482		200
	TP-203A-CF-H1141-L250	M9910404		250
	TP-203A-CF-H1141-L300	M9910474		300
Pt100 Temperature Probe, Ø6 mm	TP-206A-CF-H1141-L100	M9910475		100
	TP-206A-CF-H1141-L150	M9910476		150
	TP-206A-CF-H1141-L200	M9910477		200
	TP-206A-CF-H1141-L300	M9910478		300

For technical data see page M89 - M90.

Mating cordset for remote connections; RK 4.4T-\* - RS 4.4T. \* Length in meters.

See page M97 for additional cordset information.



## Temperature Probes

Housing Style	Part Number	ID Number	Temperature Range	Length (m)
Pt100 Cable Probe, 4-Pin M12x1 eurofast®, Ø8 mm	TP-306A-CF-H1141-L1000	M9910479	-50° to 105°C (-58° to 221°F)	1
	TP-306A-CF-H1141-L2000	M9910480		2
	TP-306A-CF-H1141-L5000	M9910481		5

For technical data see page M90.

### Rotatable Display

TS400 and TS500 sensors may also be installed horizontally. The display may be electronically inverted 180 degrees by software incorporated within the sensor.



## Thermowell Part Number Key

**THW** - **3** - **G1/8** - **A4** - **L013**

**Thermowell****Probe Diameter**

3 = 3 mm outer diameter  
6 = 6 mm outer diameter

**Process Connection**

G1/8 = G1/8" male thread  
N1/8 = 1/8" NPT male thread  
G1/4 = G1/4" male thread  
N1/4 = 1/4" NPT male thread  
G1/2 = G1/2" male thread  
N1/2 = 1/2" NPT male thread  
TRI3/4 = 3/4" tri-clamp  
DN25K = DN25 hygienic fitting thread DIN 11851

**Insertion Depth****Material**

A4 = Stainless steel AISI316L

## Compression Fittings Part Number Key

**CF** - **M** - **3** - **G1/8** - **A4**

**Compression Fitting****Compression Ring Material**

M = AISI316L  
P = PTFE

**Probe Diameter**

3 = 3 mm outer diameter  
6 = 6 mm outer diameter

**Material**

A4 = Stainless steel AISI316L

**Operational Voltage**

G1/8 = G1/8" male thread  
N1/8 = 1/8" NPT male thread  
G1/4 = G1/4" male thread  
N1/4 = 1/4" NPT male thread



**Thermowells**

Housing Style	Part Number	ID Number	Process Connection	Length (mm)	Compatible Probe	Pressure Rating (psi)
<b>Thermowell, 1/2" Male NPT</b>	THW-3-N1/2-A4-L050	M9910447	1/2" NPT	50	3 mm	5800
	THW-3-N1/2-A4-L100	M9910448	1/2" NPT	100	3 mm	5800
	THW-3-N1/2-A4-L150	M9910449	1/2" NPT	150	3 mm	5800
	THW-3-N1/2-A4-L250	M9910450	1/2" NPT	250	3 mm	5800
<b>Thermowell, 1/4" Male NPT</b>	THW-3-N1/4-A4-L050	M9910416	1/4" NPT	50	3 mm	5800
	THW-3-N1/4-A4-L100	M9910420	1/4" NPT	100	3 mm	5800
	THW-3-N1/4-A4-L150	M9910424	1/4" NPT	150	3 mm	5800
	THW-3-N1/4-A4-L200	M9910428	1/4" NPT	200	3 mm	5800
<b>Thermowell, 1/8" Male NPT</b>	THW-3-N1/8-A4-L050	M9910414	1/8" NPT	50	3 mm	5800
	THW-3-N1/8-A4-L100	M9910418	1/8" NPT	100	3 mm	5800
	THW-3-N1/8-A4-L150	M9910422	1/8" NPT	150	3 mm	5800
	THW-3-N1/8-A4-L200	M9910426	1/8" NPT	200	3 mm	5800
<b>Thermowell, 3/4" Tri-Clamp</b>	THW-3-TRI3/4-A4-L035	M9910433	3/4" Tri-Clamp	35	3 mm	5800
	THW-3-TRI3/4-A4-L050	M9910451	3/4" Tri-Clamp	50	3 mm	580
	THW-3-TRI3/4-A4-L100	M9910452	3/4" Tri-Clamp	100	3 mm	580
	THW-3-TRI3/4-A4-L150	M9910453	3/4" Tri-Clamp	150	3 mm	580
	THW-3-TRI3/4-A4-L250	M9910454	3/4" Tri-Clamp	250	3 mm	580

Note: Material is AISI 316L/1.4404



## Thermowells

Housing Style	Part Number	ID Number	Process Connection	Length (mm)	Compatible Probe	Pressure Rating (psi)
<b>Thermowell, 1/2" Male NPT</b>	THW-6-N1/2-A4-L050	M9910463	1/2" NPT	50	6 mm	5800
	THW-6-N1/2-A4-L100	M9910464	1/2" NPT	100	6 mm	5800
	THW-6-N1/2-A4-L150	M9910465	1/2" NPT	150	6 mm	5800
	THW-6-N1/2-A4-L250	M9910466	1/2" NPT	250	6 mm	5800
<b>Thermowell, 3/4" Tri-Clamp</b>	THW-6-TRI3/4-A4-L050	M9910467	3/4" Tri-Clamp	50	6 mm	5800
	THW-6-TRI3/4-A4-L100	M9910468	3/4" Tri-Clamp	100	6 mm	580
	THW-6-TRI3/4-A4-L150	M9910469	3/4" Tri-Clamp	150	6 mm	580
	THW-6-TRI3/4-A4-L250	M9910470	3/4" Tri-Clamp	200	6 mm	580

Note: Material is AISI 316L/1.4404



## Compression Fittings

Housing Style	Part Number	ID Number	Compatible Probe Diameter	Compression Fitting	Temperature Range	Pressure Rating (psi)
<b>Compression Fitting, 1/4" Male NPT</b>	CF-M-3-N1/4-A4	M9910408	Ø3 mm	Metal	350°C (662°F)	580
	CF-P-3-N1/4-A4	M9910412	Ø3 mm	PTFE	100°C (212°F)	87
<b>Compression Fitting, 1/8" Male NPT</b>	CF-M-3-N1/8-A4	M9910406	Ø3 mm	Metal	350°C (662°F)	580
	CF-P-3-N1/8-A4	M9910410	Ø3 mm	PTFE	100°C (212°F)	87
<b>Compression Fitting, 1/4" Male NPT</b>	CF-M-6-N1/4-A4	M9910484	Ø3 mm	Metal	350°C (662°F)	580
	CF-P-6-N1/4-A4	M9910486	Ø6 mm	PTFE	100°C (212°F)	87
<b>Compression Fitting, 1/2" Male NPT</b>	CF-M-6-N1/2-A4	A0950	Ø6 mm	Metal	350°C (662°F)	580

Note: Material is AISI 316L/1.4404

### Mounts in Compact Spaces


With a housing diameter of 34 mm, multiple temperature sensors can fit in tight spaces.






## Stabilizer Accessories for Direct Mounting

**Stabilizer for 3 mm Temperature Probe**

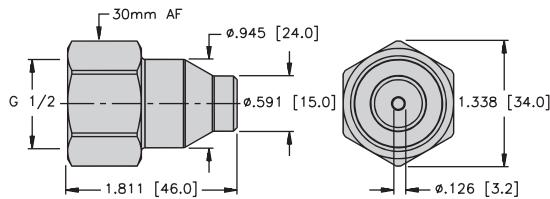

**STA-3**  
(M6835024)

**Stabilizer for 6 mm Temperature Probe**

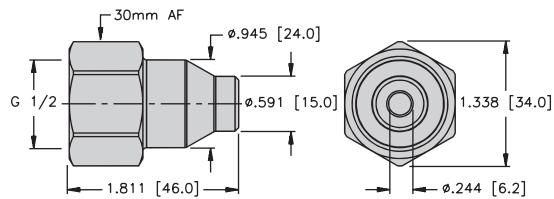

**STA-6**  
(M6830523)

## 4-Wire eurofast® Cordsets, Standard Plug Body

- Straight Male and Female Connectors
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection
- 250 VAC/300 VDC, 4 A




Housing Style	Part Number	Cable	Features	Pinout
RK ..** 	RK 4.4T-*	AWM PVC Grey 4x22 AWG 105°C 5.2 mm OD Cable #RF50516-*M	flexlife®	 
RS ..** 	RK 4.4T-* - RS 4.4T			

\* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.

\*\* Standard coupling nut material is nickel plated brass "RK .."; "RKK .." indicates nylon and "RKV .." indicates 316 stainless steel.

Extension Example:

**RK 4.4T - 2 - RS 4.4T**



RK .. - RS ..

## Self-Contained Temperature Monitors

The TURCK temperature monitor with digital readout is a fully programmable device that is easy to set up for a wide variety of applications. The self-contained temperature-monitoring device has two independently adjustable switching points or a single switch point with a separate analog output. The monitor can be used for limit-value monitoring or window functions. The TC01 sensor has an adjustable hysteresis, and can also be programmed to measure temperature in degrees Fahrenheit or degrees Celsius. These devices feature a highly visible digital display and a sensor housing that can be rotated to allow the viewing of temperature data from any direction. The 24 VDC devices include integral circuitry that protects against Short-Circuit damage, and a G1/2 threaded fitting for easy installation. They operate in temperatures from -40° to +120°C (-40° to +248°F).

### Principles of Operation

The temperature sensors employ a calorimetric principle to provide continuous and accurate temperature analysis of liquid or paste-like media. They are ideal for temperature analysis in many industries including automotive, welding, hydraulic power units, beverage/brewery, plastics, pumps, pulp/paper, and semiconductor.



### Operating Modes

If an over-range of a certain temperature is to be monitored, select the Hysteresis-function. In this mode, a limit value must be set. If the temperature exceeds this value, the output either activates or de-activates, depending on the selected output function. A Hysteresis value is assigned to the limit value, which determines the differential between the switch-on or switch-off value. It is also possible to delay the switch-on and switch-off times. If the window-function is selected as the operating mode, the switching output activates when the adjusted limit temperature is reached (beginning of window range) and de-activates when the end value (defined by the window width value) is reached. The switch-on and switch-off delay may also be used in this operating mode.

## Temperature Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

<b>TC01</b>	<b>N 1/2</b>	<b>A4P</b>	<b>2AP8X</b>	<b>H1140</b>
-------------	--------------	------------	--------------	--------------

**Style**

TC01 = Temperature

**Connection**

G 1/2 = British parallel 1/2

N 1/2 = 1/2 inch NPT

**Material**

A4P = 316 stainless steel probe with PBT housing

**Connection**

H1140 = **eurofast®**

**Output Function**

2AP8X = (2) PNP discrete outputs

LIAP8X = 4-20 mA Analog w/PNP discrete output

## Temperature General Specifications

<b>Operating Voltage</b>	21.6 - 26.4 VDC (including ripple)
<b>Current Consumption</b>	≤70 mA
<b>Voltage Drop at <math>I_{max}</math></b>	≤2.5 VDC
<b>Temperature Range</b>	-20 to +60°C (-4 to +140°F)
<b>Medium Temperature Range</b>	-40 to +120°C (-40 to +248°F)
<b>Measuring Range</b>	-40 to +120°C (-40 to +248°F)
<b>Tolerance Range</b>	±2.5°C (0° to +80°C: ±1°C) ±36.5°F (+32° to +176°F: ±33.8°F)
<b>Switch Point Accuracy</b>	±3% of full scale
<b>Display Resolution</b>	0.1°C (-9.9° to +99.9°C; 0.1°C) ±36.5°F (+33.8°F +14°F to +210°F: +32°F)
<b>Programmable Ranges</b>	-39° to +120°C (-38° to +248°F), 0.5°C/step
<b>Hysteresis Range</b>	+0.5° to +99.5°C (+32.9° to +211.1°F), 0.5°C/step (0.9°F/step)
<b>Window Range</b>	+0.5° to +99.5°C (+32.9° to +211.1°F), 0.5°C/step (0.9°F/step)
<b>Switch-on and Switch-off Delay Time</b>	0 to 50 s (0.5 s/step)
<b>LED Indications/ Display</b>	3-digit 7-segment display
<b>at Limit Value S1/S2</b>	Yellow (2x)
<b>Display Resolution (3-digit)</b>	+0.1°C (+32.1°F)
<b>Protection</b>	IP 65



Housing Style	Part Number	ID Number	Output
Self-Contained Temperature Controls, PBT Housing	TC01-G1/2A4P-2AP8X-H1140	M6877001	Dual PNP N.O./N.C.
	TC01-G1/2A4P-LIAP8X-H1140	M6877002	PNP N.O./N.C. and 4-20 mA
Self-Contained Temperature Controls, PBT Housing	TC01-N1/2A4P-2AP8X-H1140	M68777005	Dual PNP N.O./N.C.
	TC01-N1/2A4P-LIAP8X-H1140	M68777004	PNP N.O./N.C. and 4-20 mA

## Material

Housing  
Probe

PBT  
316 Ti Stainless Steel

# Process Automation



Voltage	Pressure Rating (psi)	Switching Current /Analog Load	Operating Temperature (°C)	Temperature Measuring Range (°C)	Process Connection	Mating Cordset	Wiring Diagram #	Wiring Diagrams
21.6-26.4 VDC	1450	200 mA	-20 to +60	-40 to +120	G 1/2	RK 4.4T-*	1	 
21.6-26.4 VDC	1450	200 mA/<500 Ω	-20 to +60	-40 to +120	G 1/2	RK 4.4T-*	2	
21.6-26.4 VDC	1450	200 mA	-20 to +60	-40 to +120	1/2 NPT	RK 4.4T-*	1	
21.6-26.4 VDC	1450	200 mA/<500 Ω	-20 to +60	-40 to +120	1/2 NPT	RK 4.4T-*	2	

\* Length in meters.

## Level Selection Guide



Type	<i>levelprox</i> ®	<i>levelprox</i> Mounting Accessories
Pages	M107 - M108	M109



Type	<i>EZ-track</i> ® Level Probe	Level Probe Accessories	Probe Holder	Level Control Monitor
Pages	M113 - M116	M117 - M118	M123 - M124	M125 - M128

## levelprox®

**levelprox** is a unique, non-invasive ultrasonic sensing solution that provides accurate media detection through metal container walls. **levelprox** mounts to the outside of a container with no compromise to structural integrity, and is ideal for high pressure, hazardous or sterile applications.


All it takes to reliably detect the presence of liquid through a metal container is to program the empty and full conditions into the **levelprox** using a simple teach button. The sensor generates a high frequency ultrasonic pulse that is transferred into the container wall through a coupling gel. As the pulse enters the container wall it is influenced by the containers contents. **levelprox** analyzes this pulse and compares it to the conditions that were programmed into the memory of the sensor.





**With Dual Operating Modes, levelprox Provides Reliable Detection in Even the Toughest Applications:**



**Reverb Mode:** evaluates the ultrasonic pulse as it reverberates within the container wall. This pulse travels through the container wall until it reaches the inner wall. The reverb mode works great when the liquid to be detected has a low viscosity, leaving little or no coating on the container wall. The reverb mode should also be utilized when stirring devices are used inside the container.

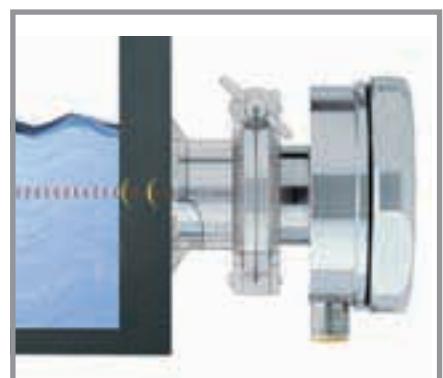

**Echo mode:** evaluates the ultrasonic pulse as it travels through the liquid and echoes off of the opposite container wall. Highly viscous liquids can be reliably detected with the echo mode. The mode looks past the layers of product that can coat the inside of a container to give the true level of the product.

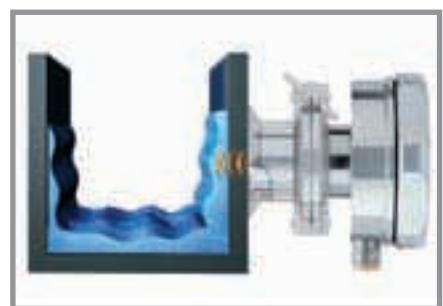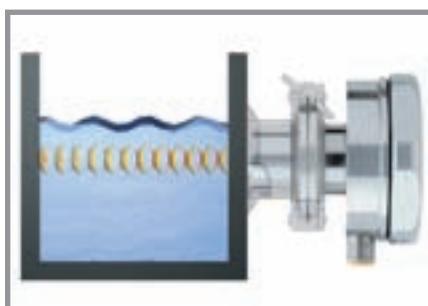



Dual Mode T50



Dual Mode M30



Mounting Accessories

### *levelprox*®

The T50 dual-mode *levelprox* features a robust 316L stainless steel housing with an integrated sanitary connection. The sensors construction and non-invasive operation make it the perfect choice for applications in food, beverage and pharmaceutical industries. The integrated Tri-Clamp mounting flange maintains proper orientation to the tank wall and also protects the coupling during washdown operations.

The M30 dual-mode *levelprox* is ideal for level detection applications where stainless steel sanitary fittings are not required. The M30 delivers non-invasive detection without the additional expense of a sanitary housing. Its 30 mm barrel can be easily mounted using a welding adapter or a metal strap kit.

Mounting accessories are available for the T50 and M30 sensors for welding, bonding and strapping *levelprox* sensors to most common containers.

### Recommended Operating Mode

Application	Reverb	Echo
Liquids contaminated with solids	Yes	No
Liquids that leave a film on container wall	No	Yes
Liquid with internal mixing devices	Yes	No
Containers with internal coating	No	Yes
Containers greater than 6 ft. across	Yes	No
Aerated liquid	Yes	No

### *levelprox* Specifications

<b>Switching Delay</b>	1-10 second (adjustable via DIP-switches)
<b>Rated Operational Current (DC) <math>I_e</math></b>	$\leq 200 \text{ mA}$
<b>No-load Current <math>I_o</math></b>	$\leq 60 \text{ mA}$
<b>Overload Trip Point</b>	$> 270 \text{ mA}$
<b>Max. Voltage Drop at 200 mA</b>	$\leq 2.5 \text{ V}$
<b>Switching Frequency</b>	1 Hz
<b>Time Delay Before Availability</b>	$\leq 2 \text{ s}$
<b>Protection Class</b>	IP 68
<b>Housing Material</b>	T50: 316L stainless (A41.4404) M30: Chrome plated brass
<b>Operation Temperature</b>	-25° to +70°C (-13° to +158°F)
<b>Supply Voltage Indication</b>	Green LED
<b>Switching status indication</b>	Yellow LED
<b>Error Indication</b>	Red LED flashing and alarm output on
<b>Alarm Indication</b>	Red LED Flashing Green LED indicates alarm off
<b>Approvals</b>	Class I, Division 2

## Mounting the T50 *levelprox*®

### Mounting

One of the most critical procedures in any *levelprox* application is the mounting of the sensor. Reliable operation of the sensor requires a mount that is rigidly fixed and properly oriented to the container wall. Below you will find some important tips for mounting a *levelprox*.

### Surface Preparation


The surface of the tank plays an important role ensuring proper operation of the sensor. The surface finish and structural integrity of the container wall need to be evaluated when selecting a mounting location for the sensor. The surface finish should be smooth and free of rust, paint, and coatings that could affect the sound transmission of the sensor. The area of the tank where the sensor will mount should be in good condition, i.e. no pitting, dents, welded joints, internal structures etc. If you are using a weld-on mount, be aware that excessive heat from the welder can distort thin walled containers.

### Mounting the Sensor

The *levelprox* needs to make solid contact with the container wall for proper operation. Ideally the clamping adapter should be mounted perpendicular to the container wall. In the case of a round container, the sensor should be mounted so that the transducer is pointing at the center axis. **TURCK** offers several mounting options designed to keep the sensor optimally coupled with the wall of the container.

### Installation

Included with every **TURCK** *levelprox* is a small container of coupling gel. This gel is required for the sensor to efficiently pass the ultrasonic pulses into the container wall. Before installing the sensor on the container, remember to apply a generous amount of the gel to the sensors transducer surface.

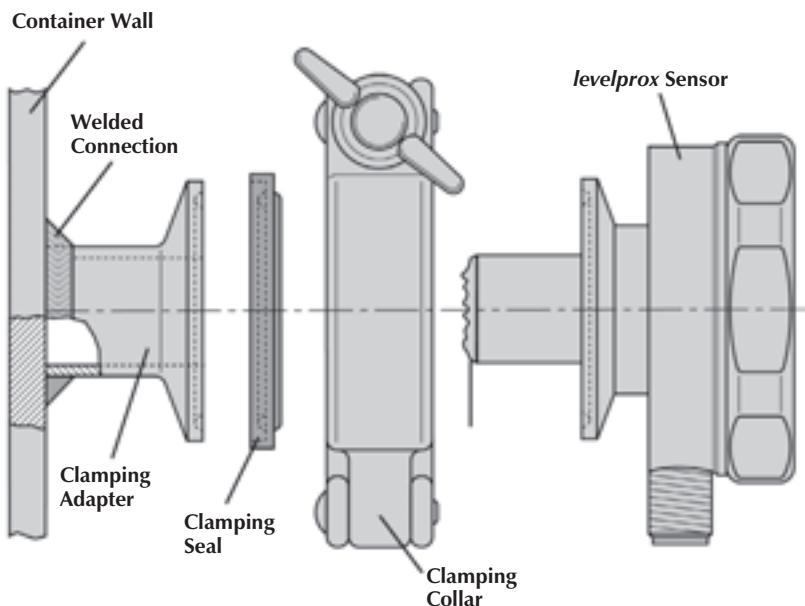



Housing Style	Part Number	ID Number	Container Wall Thickness	Min/Max Container Diameter	Programming	Output
<b>Smooth Cylindrical T50 Style</b> 	LPRE-T50-UP6X3-H1151	M1606201	1-15 mm	100-2000 mm** Stainless Steel	Push button or external teach wire	<b>5-Wire DC PNP</b>
<b>Standard M30 Style</b> 	LPRE-M30-AP6X2-H1141	M1606203	1-15 mm	100-2000 mm** Nickel Brass	VB2-SP1	<b>4-Wire DC PNP</b>

Additional specifications on page M105.

Accessories on page M109.

\*\* 2000 mm (echo mode), no limit (reverberation mode).



TURCK **levelprox** sensors are FM approved for installation in Class I, Division 2 hazardous locations when installed per **TURCK** control drawing Ni-1.005 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

Voltage	Switching Current (mA)	Min. Repeat Accuracy (mm)	Operating Temp. (°C)	Protection Class	Housing	Short-Circuit Protection	Rev. Polarity Protection	Wire Break Protection	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
15-30 VDC	≤200	≤±5 mm	-25 to +70	IP 67	SS	Yes	Yes	Yes	RK 4.5T-*	1	<b>Diagram 1</b> 
15-30 VDC	≤200	≤±5 mm	-25 to +70	IP 67	CPB	Yes	Yes	Yes	RK 4.4T-*	2	<b>Diagram 2</b> 

\* Length in meters.

## Mounting Accessories for T50

Part Number	ID Number	T50 Weld Kit	
LP-MS-T50-S	M6900253		
<p>Designed to mount the T50 sensor to flat sided containers. Can also be used for mounting to large diameter round containers.</p> <p><b>Includes:</b> Clamping Adapter, Clamp, and Gasket</p>			

Part Number	ID Number	T50 Epoxy Mounting Kit	
LP-MS-T50-K	M6900255		
<p>Designed for mounting the T50 sensor to flat sided containers. Kit is ideal for applications where welding is not possible.</p> <p><b>Includes:</b> Clamping Adapter, General Purpose Epoxy, Clamp, Gasket, and Locator Buttons</p>			

Part Number	Clamping Adapter		
LP-Clamping Adapter-*			
Custom machined weld-on clamping adapter to fit round containers.			
<p><b>Note:</b> Clamp and gasket need to be purchased separately, see table on right.</p> <p>* Indicates the container diameter in meters.</p>			

Individual Pieces		
Part Number	ID Number	Description
LP-OKS1110**	M6900296	Coupling Gel
LP-MZ-T50-SR**	A5316	Sanitary Clamp
LPMZ-T50-CS	M6900365	Clamping Adapter
LP-MZ-T50-D**	A5315	Gasket

## Mounting Accessories for M30

Part Number	ID Number	Push Button	
VB2-SP1	A3501-29		
<p>The VB2-SP1 is used for programming and mode selection of the M30 <b>levelprox</b></p>			

Part Number	ID Number	M30 Weld Mount	
LP-MZ-M30-SB	A5321		
<p>Mounting Bracket can be strapped or welded to container. Perfect for applications that don't require washdown.</p>			

Part Number	ID Number	M30 Sanitary Adapter	
LP-MZ-M30-T50	A5317		
<p>Allows the M30 to be mounted using T50 Accessories. Use with <b>LP-Clamping Adapter-*</b> in applications that are subjected to washdown.</p> <p>* Indicates the container diameter in meters.</p>			
<p>** Accessories that can also be used on M30 style <b>levelprox</b>.</p>			

Part Number	ID Number	M30 Straps	
LP-MZ-M30-B250	A5320		
LP-MZ-M30-B500	A5319		
LP-MZ-M30-B1000	A5322		
<p>Use with LP-MZ-M30-SB to mount the M30 using straps. Constructed of stainless steel with lengths available: 250 cm, 500 cm, and 1000 cm</p> <p><b>Includes:</b> Two stainless steel straps</p>			

## EZ-track® Liquid Level Probe

The **EZ-track** line from **TURCK** is a line of magnetostrictive linear displacement transducers. These devices detect the position of an external magnet along the active stroke of the sensor without causing any wear on the sensor parts. Because there are no parts to wear or break, the sensors can offer better performance over a longer life than competing technologies. They also offer an alternative when a continuous, absolute reading is necessary in the application.


The **EZ-track** R16 Liquid Level Sensor is a programmable, two-wire loop powered intrinsically safe probe that is ideal for continuous level monitoring in a variety of liquids and tank designs. The R16 sensor uses magnetostrictive technology to monitor the position of a magnetic float along the active stroke of the sensing tube, which is then converted into a configurable 4-20 mA output. The IP 68 rated R16 liquid level sensors are available in a rigid 316 stainless steel housing or a flexible PVDF design. The probe lengths vary between 18 and 288 inches. The stainless steel version is also available in an optional Food Grade or 3A Rated Sanitary finish probe for use in an array of food service, dairy and beverage applications. A variety of floats, fittings, and accessories are available to fit virtually any application requirement.

All of the electronics for the R16 sensor are incorporated within the 5/8 inch sensing rod, which eliminates the need for an electronics enclosure at the top of the sensor. This feature when ordered with the standard 4-pin **minifast**® quick disconnect, offers greater mounting options, and a faster, more reliable installation. The R16 liquid level sensor has a resolution of 0.02 inches of full scale, and an accuracy of 0.1% over the programmable monitoring span, making it the ideal sensor for applications where continuous level position is required.



**R16 Level Probe Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

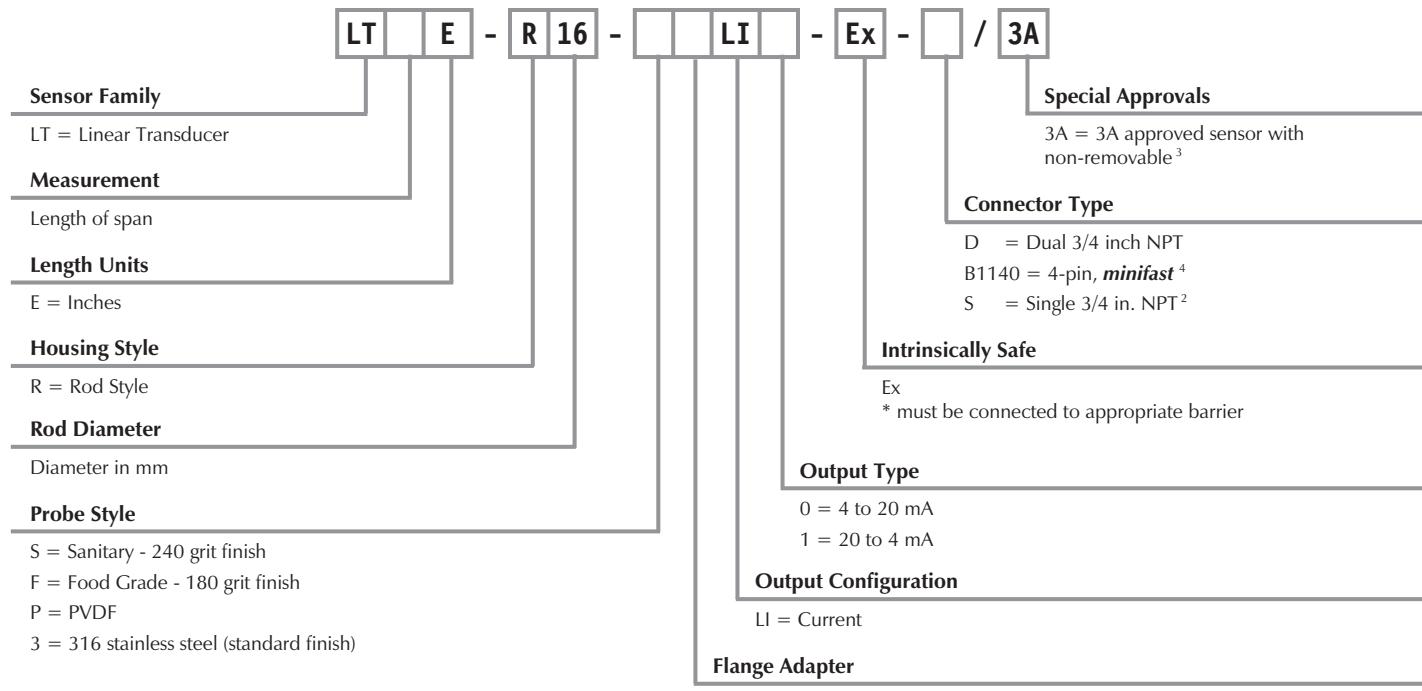

<sup>1</sup> Available on probe styles 3 or P only.

<sup>2</sup> Available on probe styles P only.

<sup>3</sup> Available on probe styles S only.

<sup>4</sup> Not available on probe style P.

## PVDF Probe Specifications

<b>Output</b>	4 to 20 mA, 20 to 4 mA
<b>Span</b>	7 to 288 in.
<b>Repeatability</b>	0.014 in. + 0.5% of programmable span typical; max 0.014 in. + 0.4% of programmable span
<b>Resolution</b>	0.25% of programmable span or 0.02 in., whichever is greater
<b>Operating Temperature</b>	-20° to +70°C (-4° to +158°F)
<b>Null Zone</b>	12 in.
<b>Dead Zone</b>	6 to 8 in. (span 7 in. to 126 in.: 6 in.; span 127 in. to 288 in.: 8 in.)
<b>Operational Voltage</b>	13.5-30 VDC
<b>Current Consumption</b>	Loop Powered
<b>Enclosure Rating</b>	IP 69
<b>Non-linearity</b>	0.1% of programmable span
<b>Reading Rate</b>	40 ms
<b>Rod Diameter</b>	0.625 in. (15.9 mm)
<b>Pressure</b>	145 psi
<b>Electronics</b>	PVDF
<b>Rod</b>	PVDF
<b>Agency Approvals</b>	FM
<b>FM-Approval</b>	Class I, Div 1, Group C and D Class II, Div 1, Group E, F, and G Class I, Zone 0 or 1, Groups IIA or IIB

## Stainless Steel Probe Specifications

<b>Output</b>	4 to 20 mA, 20 to 4 mA
<b>Span</b>	10 to 288 inches
<b>Repeatability</b>	0.014 in. + 0.5% of programmable span typical; max 0.014 in. + 0.4% of span
<b>Resolution</b>	0.25% of programmable span / 0.02 in., whichever is greater
<b>Operating Temperature</b>	-20° to +70°C (-4° to +158°F)
<b>Null Zone</b>	8 in.
<b>Dead Zone</b>	2 in.
<b>Operational Voltage</b>	13.5 to 30 VDC
<b>Current Consumption</b>	Loop Powered
<b>Enclosure Rating</b>	IP 69
<b>Non-linearity</b>	0.1% of programmable span
<b>Reading Rate</b>	40 ms
<b>Rod Diameter</b>	0.625 in. (15.9 mm)
<b>Pressure</b>	1015 psi
<b>Electronics</b>	Stainless Steel 316L
<b>Rod</b>	Stainless Steel 316L
<b>Agency Approvals</b>	FM
<b>FM-Approval</b>	Class I, Div 1, Group C and D Class II, Div 1, Group E, F, and G Class I, Zone 0 or 1, Groups IIA or IIB



Housing Style	Part Number	Output Current
<b>Stainless Steel Level Probe, minifast® Connection</b>	LT***E-R16-3LI0-EX-B1140 LT***E-R16-3LI1-EX-B1140	4-20 mA Loop Powered 20-4 mA Loop Powered
<b>Stainless Steel Level Probe, Dual 3/4 NPT Connection</b>	LT***E-R16-3LI0-EX-D LT***E-R16-3LI1-EX-D	4-20 mA Loop Powered 20-4 mA Loop Powered
<b>Stainless Steel Level Probe, minifast Connection, Tri-clamp Adapter</b>	LT***E-R16-3**LI0-EX-B1140 LT***E-R16-S**LI0-EX-B1140 LT***E-R16-F**LI0-EX-B1140 LT***E-R16-3**LI1-EX-B1140 LT***E-R16-S**LI1-EX-B1140 LT***E-R16-F**LI1-EX-B1140	4-20 mA Loop Powered 20-4 mA Loop Powered
<b>Stainless Steel Level Probe, Dual 3/4 NPT Connection, Tri-clamp Adapter</b>	LT***E-R16-3**LI0-EX-D LT***E-R16-3**LI1-EX-D	4-20 mA Loop Powered 20-4 mA Loop Powered

\* Float ordered separately, see page M118.





\*\* For flange dimensions, see page M117.



TURCK 'R16' level probes are FM approved as intrinsically safe for installation in Class I, Division 1 hazardous locations when installed per TURCK control drawing IS-1.111 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



Voltage	Probe Style (Finish)	Pressure Rating (psi)	Connection Type	Agency Approval	Mating Cord/Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
13.5-30 VDC	316 Stainless Steel	1015	4-pin <i>minifast</i>	FM	RKM 46-*M	1	<b>Diagram 1</b>  <b>Diagram 2</b> 
	316 Stainless Steel	1015	4-pin <i>minifast</i>	FM	RKM 46-*M	1	
13.5-30 VDC	316 Stainless Steel	1015	Dual 3/4 NPT	FM	2M/PVC	2	
	316 Stainless Steel	1015	Dual 3/4 NPT	FM	2M/PVC	2	
13.5-30 VDC	316 Stainless Steel Sanitary (316 SS w/240 grit) Food Grade (316 SS w/180 grit)	1015 1015 1015	4-pin <i>minifast</i> 4-pin <i>minifast</i> 4-pin <i>minifast</i>	FM FM FM	RKM 46-*M RKM 46-*M RKM 46-*M	1 1 1	
	316 Stainless Steel Sanitary (316 SS w/240 grit) Food Grade (316 SS w/180 grit)	1015 1015 1015	4-pin <i>minifast</i> 4-pin <i>minifast</i> 4-pin <i>minifast</i>	FM FM FM	RKM 46-*M RKM 46-*M RKM 46-*M	1 1 1	
	316 Stainless Steel	1015	Dual 3/4 NPT	FM	2M/PVC	2	
	316 Stainless Steel	1015	Dual 3/4 NPT	FM	2M/PVC	2	
	316 Stainless Steel	1015	Dual 3/4 NPT	FM	2M/PVC	2	
	316 Stainless Steel	1015	Dual 3/4 NPT	FM	2M/PVC	2	

\* Length in meters.



Housing Style	Part Number	Output
<b>Stainless Steel Level Probe, minifast® Connection, Tri-clamp Adapter, Non-removable Float</b>	LT***E-R16-S**LI0-EX-B1140/3A	4-20 mA Loop Powered
	LT***E-R16-S**LI1-EX-B1140/3A	20-4 mA Loop Powered
<b>PVDF Level Probe, Dual 3/4 NPT Connection</b>	LT***E-R16-PLI0-EX-D	4-20 mA Loop Powered
	LT***E-R16-PLI1-EX-D	20-4 mA Loop Powered
<b>PVDF Level Probe, Single 3/4 NPT Connection</b>	LT***E-R16-PLI0-EX-S LT***E-R16-PCLI0-EX-S	4-20 mA Loop Powered
	LT***E-R16-PLI1-EX-S LT***E-R16-PCLI1-EX-S	20-4 mA Loop Powered

\* Float ordered separately, see page M118.

\*\* For flange dimensions, see page M117.



TURCK 'R16' level probes are FM approved as intrinsically safe for installation in Class I, Division 1 hazardous locations when installed per TURCK control drawing IS-1.111 ([www.turck.com/fmcd](http://www.turck.com/fmcd)).

# Process Automation



<i>Voltage</i>	<i>Probe Style (Finish)</i>	<i>Pressure Rating (psi)</i>	<i>Connection Type</i>	<i>Agency Approval</i>	<i>Mating Cord, Cable Length/Jacket</i>	<i>Wiring Diagram #</i>	<i>Wiring Diagrams</i>
<b>13.5-30 VDC</b>	Sanitary (316 SS w/240 grit)	1015	4-pin <b>minifast</b>	3A, FM	RKV 46-*M	1	<b>Diagram 1</b> 
	Sanitary (316 SS w/240 grit)	1015	4-pin <b>minifast</b>	3A, FM	RKV 46-*M	1	
<b>13.5-30 VDC</b>	PVDF	145	Dual 3/4 NPT	FM	2M/PVC	2	<b>Diagram 2</b> 
	PVDF	145	Dual 3/4 NPT	FM	2M/PVC	2	
<b>13.5-30 VDC</b>	PVDF	145	Single 3/4 NPT	FM	2M/PVC	2	
	PVDF	145	Single 3/4 NPT	FM	2M/PVC	2	
	PVDF	145	Single 3/4 NPT	FM	2M/PVC	2	
	PVDF	145	Single 3/4 NPT	FM	2M/PVC	2	


\* Length in meters.

# TURCK


## Process Automation – Instrumentation

All dimensions shown as: Inches [mm]


### Flange Options

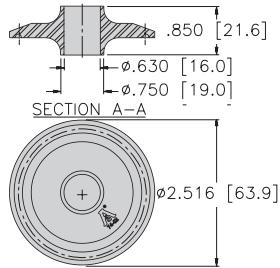


Flange, 2 inch Tri-clamp

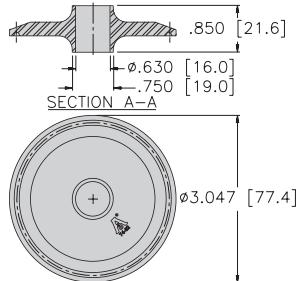

Flange, 2.5 inch Tri-clamp

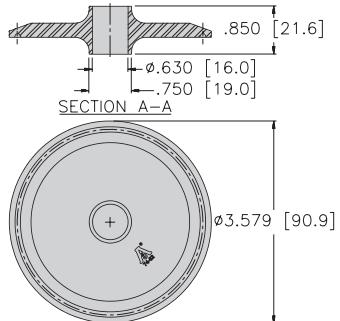


Flange, 3 inch Tri-clamp

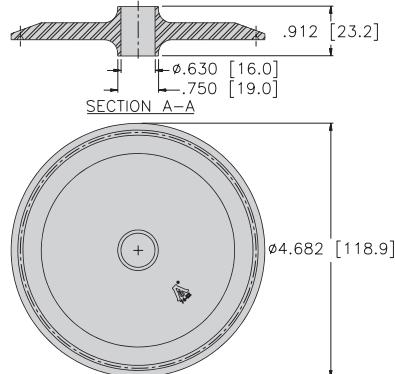


Flange, 4 inch Tri-clamp

### Level Probe Accessories

Junction Box

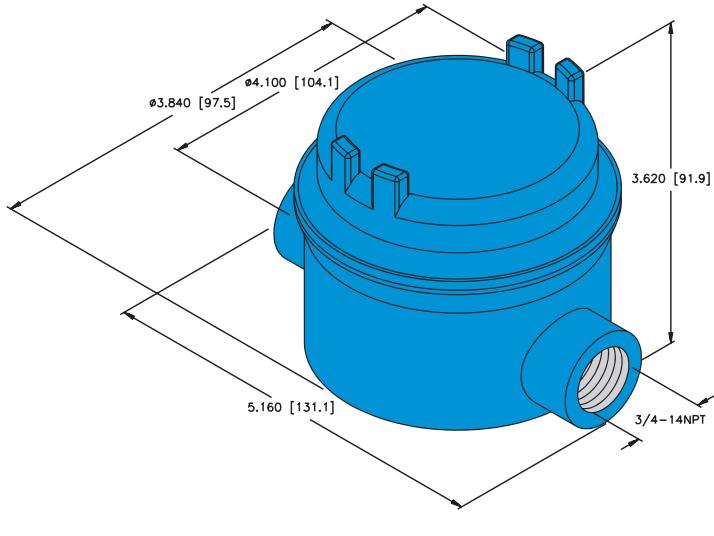


Tube Coupling

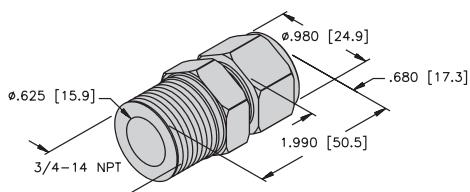

TC-R16-SS  
(LT0305)


## Level Probe Accessories

**Bushing (316 Stainless Steel)**

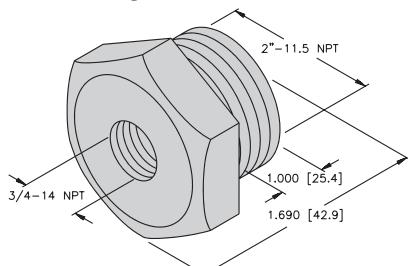


**BU-R16-2x3/4 NPT-SS (LT0306)**

**Float Kit (316 Stainless Steel)**

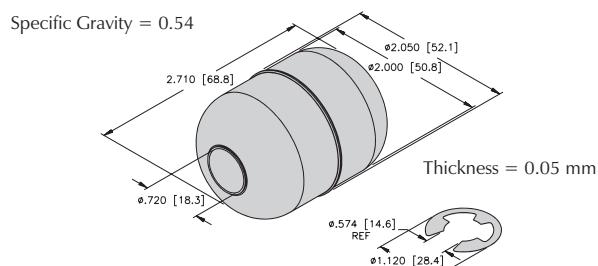


**FK-R16-205-SSES (LT0299)**

**Float Kit (316 Stainless Steel)**

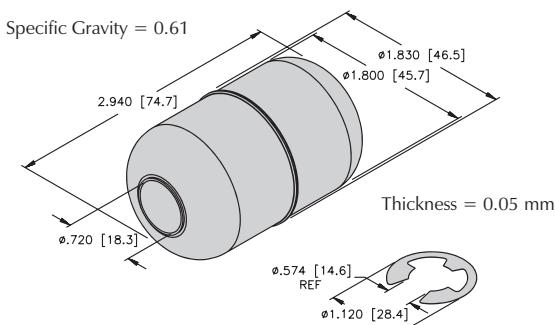


**FK-R16-183-SSES (LT0296)**

**Float Kit (Nitrophyl)**

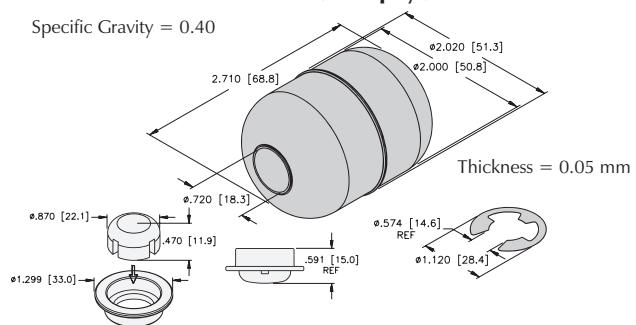


**FK-R16-202-NSH (LT0297)**

**Float Kit (PVDF)**

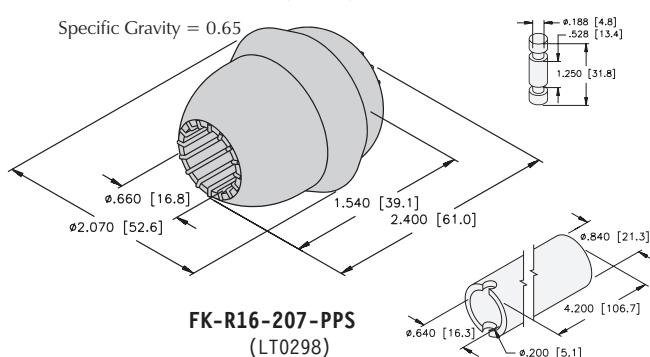


**FK-R16-207-PPS (LT0298)**

**Float Kit (316 Polished Stainless Steel)**

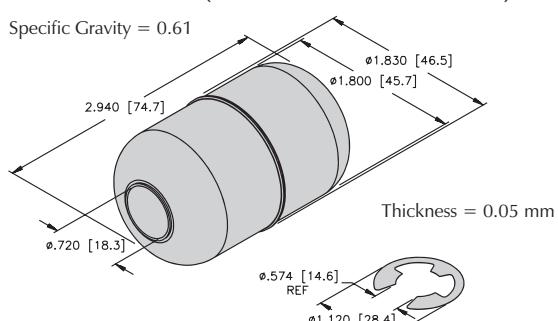

**FK-R16-183-SSF (LT0302)**


**Weight Kit (316 Stainless Steel)**

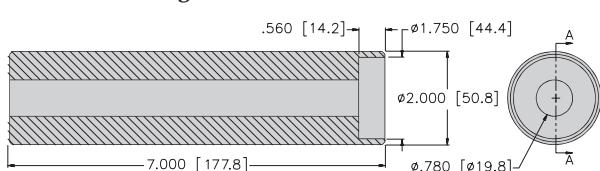

For use on PVDF probes 145-288 inches long.

**WK-R16 Weight Kit (LT0295)**

**Probe Foot (ECTFE)**

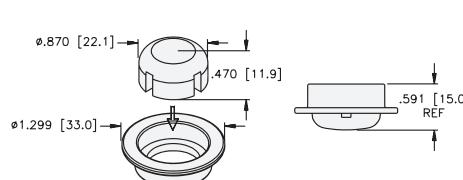

**PF-R16  
(LT0292)**

**R16 Level Probe Worksheet**

Liquid to be measured \_\_\_\_\_

Fluid Properties (check all that apply)

 Turbulent Foam SolidsProduct Build-Up Yes  No 

Temperature Range \_\_\_\_\_ °F to \_\_\_\_\_ °F

Pressure Range \_\_\_\_\_ to \_\_\_\_\_

Viscosity Range \_\_\_\_\_ to \_\_\_\_\_

Specific Gravity \_\_\_\_\_

4 mA Starting Point Top  Bottom 



Approvals Required

UL  CSA  FM  3A  Food Grade Tank Location Indoors  Outdoors 

Tank Material \_\_\_\_\_

Additional Comments \_\_\_\_\_

\*Allow overhead clearance for installation and removal of sensor.

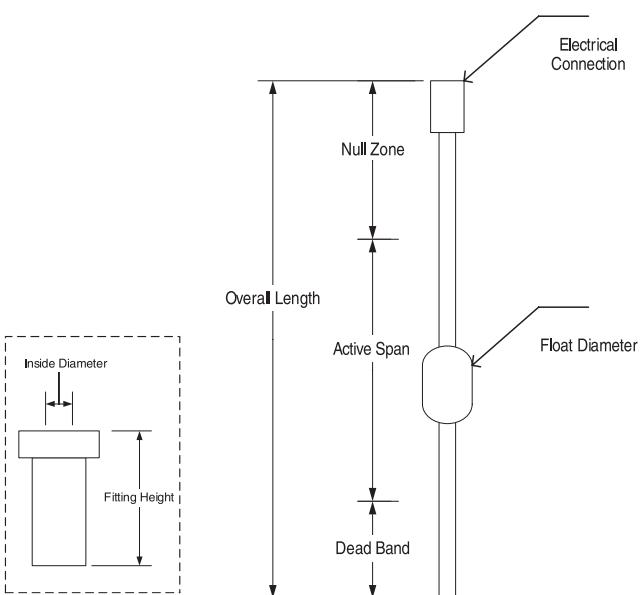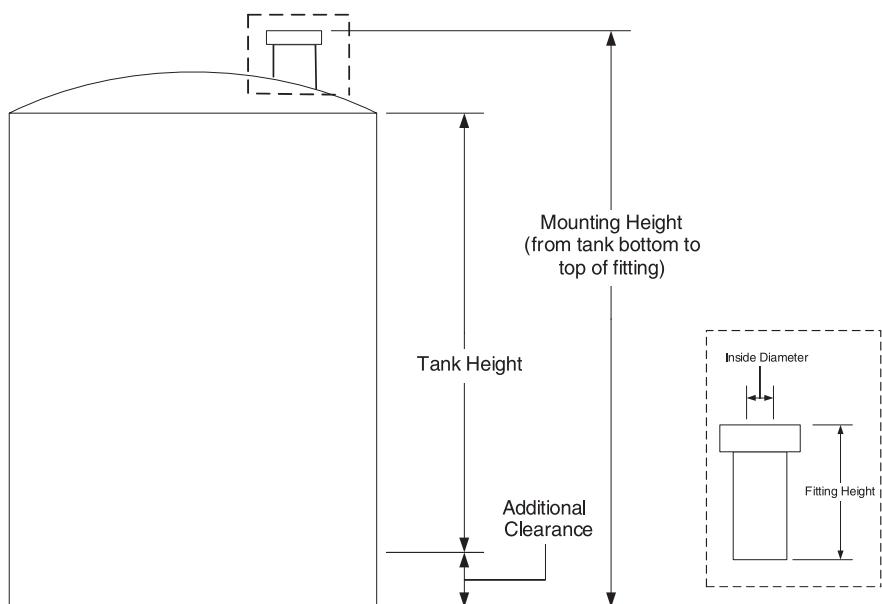**Customer****Phone Number****Date****Project****Quantity**

# Conductive Level Probes and Controllers

**TURCK** offers liquid level probes for use in conjunction with our Level control Monitors to provide a simple solution for liquid level applications. The resistance between the terminals is measured to determine the level of the medium in the tank.

## Level Controllers

The level control logic is built in to the controller which offers a variety of options to fit any application.

- Adjustable Sensitivity
  - Single Set-points
  - Multiple Inputs
  - On/Off Delay
  - Programmable Outputs

These devices can be used in applications to control the filling and draining of a tank or as high and low level alarms. The level controller is able to differentiate between a variety of liquids, as well as distinguishing between liquid and foam. Many of the monitors have adjustable on and off-delays for use in turbulent liquid level applications, as well as the necessary logic to control overflow monitoring.

## Level Probes and Probe Holders

**TURCK** also offers stainless steel probes, and stainless steel holders with ceramic insulators. The probes are used to provide single-point level control, while the holders are sealed to withstand applications up to 2500 psi at +70°F (+21°C). These parts provide reliable liquid level control in a wide variety of applications.



**MK91-121-R.. and MK91-12-R.. Specifications**

<b>Galvanic Isolation</b>	between input, output and supply circuits, test voltage 2.5 kVrms
<b>Probe Voltage</b>	0.02-5 V <sub>pp</sub> /150 Hz (delta)
<b>Sensitivity Ranges (Switching Thresholds)</b>	
- Range 1	0.2-1 kΩ
- Range 2	0.8-4 kΩ
- Range 3	2.5-15 kΩ
- Range 4	10-100 kΩ
<b>Hysteresis</b>	approx. 10%
<b>Switch-on Delay</b>	0-20 s (adj.)
<b>Switch-off Delay</b>	0-20 s (adj.)
<b>Contact Material</b>	silver alloy + 3 μ Au
<b>Switching Capacity</b>	≤500 VA / 60 W
<b>Protection</b>	IP 20
<b>Mounting</b>	DIN 50022 or pull-out tabs
<b>Operating Temperature</b>	-25° to +60°C (-13° to +140°F)
<b>Line Frequency (AC)</b>	48-62 Hz
<b>Ripple (DC)</b>	≤10%

**MK91-R11.. Specifications**

<b>Galvanic Isolation</b>	between input and output circuit, insulation test voltage 4 kV/8 mm input circuit and supply voltage galvanically connected
<b>Switching Point Deviation in</b>	
<b>Supply Voltage Range</b>	≤1%
<b>Operating Characteristics at:</b>	V = 24 V, R <sub>M</sub> = 40 k
- <b>Rectangular Signal</b>	f = 1 Hz
- <b>Amplitude of Electrode Voltage</b>	±2 V
- <b>Amplitude of Electrode Current</b>	±50 μA
<b>Contact Material</b>	silver alloy + 3μ Au
<b>Switching Capacity</b>	≤500 VA / 60 W
<b>Protection</b>	IP 20
<b>Mounting</b>	DIN 50022 or pull-out tabs
<b>Operating Temperature</b>	-25° to +60°C (-13° to +140°F)
<b>Line Frequency (AC)</b>	48-62 Hz
<b>Ripple (DC)</b>	≤10%

## MS91-12-R.. Specifications

<b>Galvanic Isolation</b>	.....	.....	between input, output and supply circuits
<b>Probe Voltage</b>	.....	.....	typ. 5 V <sub>pp</sub> /100 Hz (delta)
<b>Sensitivity Ranges (Switching Thresholds)</b>			
- Range 1	.....	.....	0.1-1 kΩ
- Range 2	.....	.....	0.5-5 kΩ
- Range 3	.....	.....	2-20 kΩ
- Range 4	.....	.....	10-100 kΩ
<b>Hysteresis</b>	.....	.....	10%
<b>Switch-on /Switch-off Delay</b>	.....	.....	0.1-15 s (adj.)
<b>Contact Material</b>	.....	.....	AgCdO
<b>Switching Capacity</b>	.....	.....	≤500 Va/60 W
<b>Protection</b>	.....	.....	IP 20
<b>Mounting</b>	.....	.....	DIN 50022 or pull-out tabs
<b>Operating Temperature</b>	.....	.....	-25° to +60°C (-13° to +140°F)
<b>Line Frequency (AC)</b>	.....	.....	48-62 Hz
<b>Ripple (DC)</b>	.....	.....	≤10%



Housing Style	Part Number	ID Number	Number of Probes	Maximum Pressure (psi)	Fluid Connection
<b>Probe Holder</b> 	WCC-1138	A3365	1	2500	3/8 NPT
<b>Probe Holder</b> 	WCT-2	A3375	2	2500	1 in. NPT


For use with Amplifiers on pages M125 - M128.

## Material

**Probe Holders**  
**Insulators**  
**Probes**

303/304 Stainless Steel  
Ceramic  
304 Stainless Steel

Housing Style	Part Number	ID Number	Material
<b>Stainless Steel Probes</b>	91-SSP 1 Ft.	A3000	304 Stainless Steel
	91-SSP 2 Ft.	A3002	304 Stainless Steel
	91-SSP 3 Ft.	A3004	304 Stainless Steel
	91-SSP 4 Ft.	A3006	304 Stainless Steel
	91-SSP 5 Ft.	A3008	304 Stainless Steel
	91-SSP 6 Ft.	A3010	304 Stainless Steel

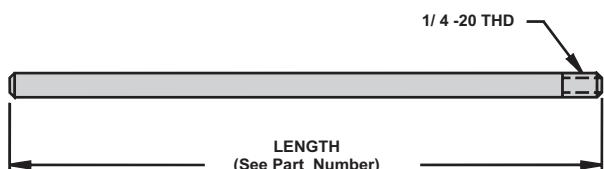

For use with Amplifiers on pages M125 - M128.



Housing Style	Part Number	ID Number	Features	Output
Level Control Monitor with Fixed Switch Point	MK91-R11/24VDC	M7525202	<i>Single Level Controller 10 second delay</i>	(1) SPDT Relay
Level Control Monitor, Potentiometer/Jumper Programmable	MK91-121-R/24VDC	M7545087	<i>Dual Level Controller, Adjustable Delay</i>	(2) SPDT Relays/Parallel
	MK91-121-R/115VAC	M7545082		
	MK91-121-R/230VAC	M7545080		

Additional specifications on pages M121.

## Material


Housing

PC/ABS

# Process Automation



Voltage	Switching Current	Switch Point	Current Consumption	Hysteresis	Power LED	Output LED	Wiring Diagram #	Wiring Diagrams
19-29 VDC	≤3 A	40 kΩ Fixed	≤20 mA at 24 VDC	Approx. 5%	GN	YE	1	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><b>Diagram 1</b></p> </div> <div style="width: 45%;"> <p><b>Diagram 2</b></p> </div> </div>
20-28 VDC	≤3 A	0.2-100 kΩ	≤1.5 W	Approx. 10%	GN	YE	2	
98-126 VAC	≤3 A	0.2-100 kΩ	3 VA/<15 mARMS	Approx. 10%	GN	YE	2	
184-264 VAC	≤3 A	0.2-100 kΩ	3 VA/<15 mARMS	Approx. 10%	GN	YE	2	



Housing Style	Part Number	ID Number	Features	Output
Level Control Monitor 24 VDC, Dip-Switch Programmable	MK91-12-R/24VDC	M7545077	<i>Dual Level Controller, Adjustable Time Delay</i>	(2) SPDT Relays/Parallel
	MK91-12-R/115VAC	M7545072		
	MK91-12-R/230VAC	M7545070		
Level Control Monitor, Potentiometer/Jumper Programmable	MS91-12-R/24VDC	M5220700	<i>Dual Level Controller, Adjustable Time Delay</i>	(2) SPDT Relays
	MS91-12-R/115VAC	M5221000		
	MS91-12-R/230VAC	M5220000		

Additional specifications on page M122.

## Material

**Housing**


PC/ABS

# Process Automation



## Level Detection Application Examples


### Control for Pump-in "Filling" a Tank

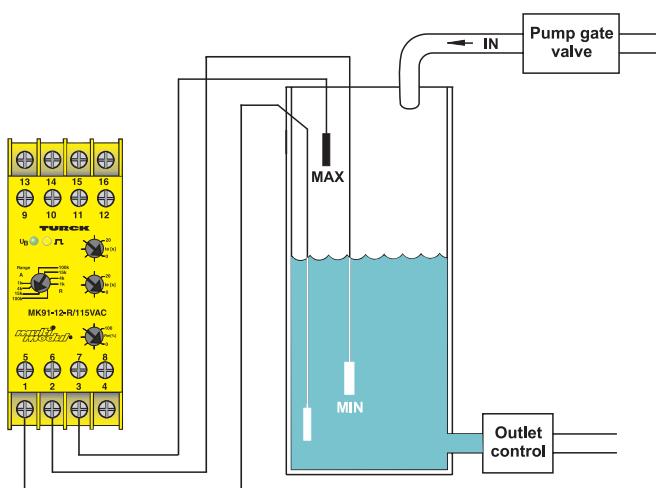


Example Application using MK91-12-R/...

The MK91-12-R will start a pump or open a fill valve when the liquid drops below the MIN level probe and will remain on until the MAX level probe is reached.

The relay then de-energizes and stays off until the MIN level is reached. The pump or valve does not cycle constantly, as would be the case if only one sensor were used.

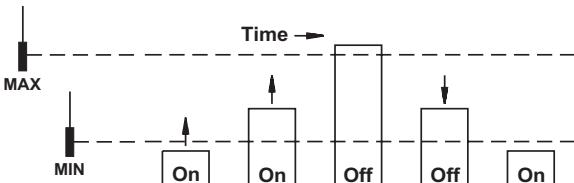


### Control for Pump-out "Draining" a Tank

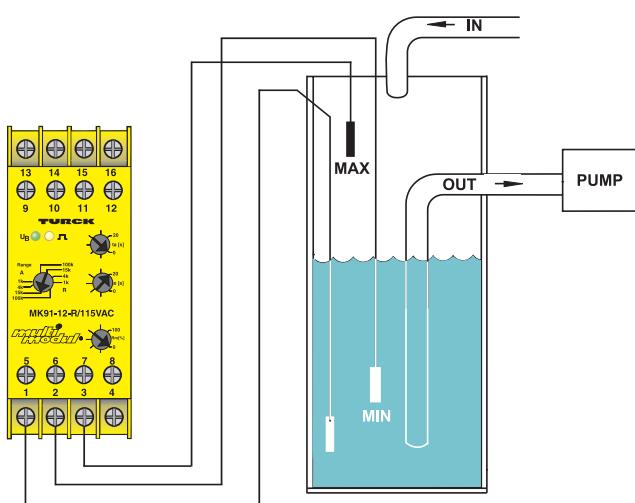

Example Application using MK91-12-R/...

The MK91-12-R will start a pump when the liquid reaches the MAX level probe and remain on until the MIN level probe is reached.

The relay then de-energizes and stays off until the MAX level is reached. The pump or valve does not cycle constantly, as would be the case if only one sensor were used.

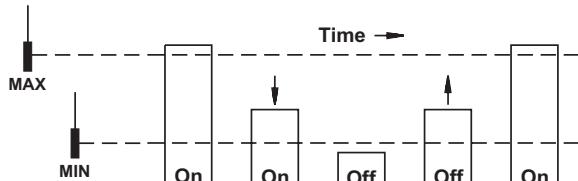

**Notes:**

# TURCK

## Process Automation Products

### Glossary

#### Abrasion Resistance

Ability of wire, cable or material to resist surface wear.

#### ABS

American Bureau of Shipping. Establishes and administers standards for the design, construction, and operational maintenance of marine vessels and structures.

#### AC Alternating Current

Current in which the charge-flow periodically reverses and is represented by:  $I = I_0 \cos(2\pi f t)$  [ $I = I_m \cos(\omega t + \phi)$ ] where  $I$  is the current,  $I_0$  is the amplitude,  $f$  the frequency,  $\phi$  the phase angle.

#### Active Hub

A multiple port repeater or amplifier that lengthens the branching ability of a bus.

#### Address

A unique logical point on the bus.

#### Ambient Temperature

The temperature of a medium (gas or liquid) surrounding an object.

#### Ampere (A)

The unit of current. One ampere is the current flowing through one ohm of resistance at one volt potential.

#### Amplifier

A product that strengthens a signal in real time, precisely copying the old signal. Links two portions of the same bus together when the signal is weakened by electrical losses as it travels down a wire. An amplifier is used when the signal is weak, but not distorted.

#### Analog I/O

Variable 2-wire continuous low level current or voltage signal.

#### ANSI

Abbreviation for American National Standards Institute.

#### Armored Cable

A cable provided with a wrapping of metal for mechanical protection.

#### armorfast®

TURCK's brand name for a cordset with metal clad cable  
(NEC type MC)

#### AWG (American Wire Gauge)

The standard system used for designating wire diameter. The lower the AWG number, the larger the diameter. Also called the Brown and Sharpe (B&S) wire gauge.

#### AWM (Appliance Wiring Material)

A UL designation covering insulated wire and cable for internal wiring of appliances and equipment.

#### Axial Approach

The approach of the target with its center maintained on the sensor reference axis.

#### Axially Polarized Ring Magnet

A ring magnet whose poles are the two flat sides of the disk. Mounted on pistons for **permaprox®** cylinder position sensing through nonmagnetic cylinder walls.

#### BA - Bitwise Arbitration

A form of collision detection on a network. All senders must also be receivers. Bus line must be a specific length or less so all nodes hear the bit at the same time.

#### Barrier Box

Limits current voltage to an area.

#### Binder

A spirally served tape or thread used for holding assembled cable components in place awaiting subsequent manufacturing operations.

#### Bit Encoding

A time reference placed on an electrical or light signal to distinguish high and low bits.

#### Bit

One piece of data that means either 'High-Low' or 'ON-OFF'.

#### Braid

A fibrous or metallic group of filaments interwoven in cylindrical form to form a covering over one or more wires.

#### Branch

One type is a double-sided node that connects two segments together that are the same protocol but different transmission speeds. The other is a smart repeater that only repeats the data between two bus segments when the source and destination are in different protocols.

#### Bus Junction

TURCK's designation for a Connectorized passive hub.

#### Bus Module

TURCK's designation for any field node, whether it uses terminal screws, connectors, or a combination of connecting means.

#### Bus Occupant

Any active or passive device on a network.

#### Bus Station

TURCK's designation for a fully Connectorized field node, but not a master or gateway.

#### Bus

A simple straight-line topology.

#### Busline

Any group of wires that carries data from node to node.

#### Byte

8 bits of information.

#### Cable

A stranded conductor with or without insulation and other coverings (single-conductor cable), or a combination of conductors (multiple-conductor cable).

#### Capacitive Proximity Sensor

A proximity sensor producing an electrostatic field that senses conductive targets and nonconductive materials having a dielectric constant of >1 within its sensing zone.

#### Carrier

The bit encoded signal carrying the data can ride on top of an AC or DC carrier. Advantages to using a carrier are that both power and data can be sent on just 2 wires and longer transmission capabilities without distortion.

#### CD - Collision Detection

A form of collision detection on a network. All senders must also be receivers. If two nodes start talking at the same time they will hear a collision. Both stop talking, wait a random amount of time, then look for a clear line to start talking again.

#### Checksum

A numerical representation of all the bits that is prepared by the sender and included in the message. The receiver performs the same calculation and compares the results. If they are not equal the data is considered bad and not used.

#### Client/Server

Upload/download information, set point changes, alarm management, remote diagnostics and one-to-one communications.

#### Color Code

Wire or circuit identification by color, utilizing solid colors, tracers, braids, surface printing, etc.

#### Complementary Output

Two outputs, one N.O. and one N.C., that can be used simultaneously. **The sum of both load currents cannot exceed the sensor's rated Continuous Load Current.**

#### Conductivity

The ability of a material to allow electrons to flow, measured by the current per unit of voltage applied. It is the reciprocal of resistivity.

#### Conductor

A wire (or combination of wires not insulated from one another) suitable for carrying electric current.

#### Conduit

A tube or trough in which insulated wires and cables are run.

#### Connector

A device used to provide rapid connect / disconnect service for electrical cable and wire terminations.

#### Contact Holder

Insulating device that holds the contacts in their proper position

#### Contact

The parts of a connector that actually carry the electrical current and that are touched together or separated to control the flow.

#### Continuous Load Current

The maximum current allowed to continuously flow through the sensor output in the ON state.

#### Cord

A small, flexible insulated cable.

#### Cordset

Portable cord fitted with a wiring device at one or both ends.

#### Correction Factors

Percentage of the rated operating distance ( $S_n$ ) that represents the operating distance for targets constructed from materials other than mild steel (mild steel's correction factor is 1.0).

#### CPE (Chlorinated Polyethylene)

A flexible material with high tear strength and good resistance to most inorganic chemicals. It is inherently difficult to ignite. A Thermoset plastic.

#### Creepage

The conduction of electricity across the surface of a dielectric.

#### Crimp Termination

A connection in which a metal sleeve is secured to a conductor by mechanically crimping the sleeve with pliers, presses or automated crimping machines.

#### Current (I)

The rate of transfer of electricity. Practical unit is the ampere, which represents the transfer of one coulomb per second. In a simple circuit, current ( $I$ ) produced by a cell or electromotive force ( $E$ ) when there is an external resistance ( $R$ ) and internal resistance ( $r$ ) is:  $I = E / (R + r)$

#### Current Carrying Capacity

The maximum current an insulated conductor can safely carry without exceeding its insulation and jacket temperature limitations.

#### Cut-Through Resistance

The ability of a material to withstand mechanical pressure, usually a sharp edge or small bending radius, without separation.

#### Dielectric Strength

The voltage that an insulator can withstand before breakdown occurs. Usually expressed as a voltage gradient (such as volts per mil).

#### Differential Travel (Hysteresis)

The difference between the operating point as the target approaches the sensor face, and the release point as the target moves away. Given as a percentage of the operating distance ( $S_n$ ).

#### Direct Current (DC)

An electric current that flows in only one direction.

# Process Automation



## Glossary

### Discrete I/O

Signaling where the supply is typically switched to designate a change of state.

### DNV

Det Norske Veritas. Management system certification body.

### Drain Wire

In a cable, the bare wire laid over the component or components and used as a ground connection.

### Dropline

A reduced branch (spur) from a trunk line.

### Dynamic Output

A sensor output that stays energized for a set duration of time, independent of the time the target is present (one-shot).

### Earth

British terminology for zero-reference ground.

### EDS - Electronic Data Sheet

Electronically readable ASCII text files that contain both general and device-specific parameters for communication and network configuration (DeviceNet™).

### EIA RS-485

A standard that defines the number of signal generators (the components that create the signal), the receiver and a combination of the called a transceiver. It also defines the electrical signal.

### Embeddable (Shielded) Proximity Sensor

A sensor that can be flush-mounted in any material without that material influencing the sensing characteristics.

### End of Message

Lets other occupants of the bus know the transmission is over and other messages can be sent.

### EPDM

Ethylene-propylene-diene monomer rubber. A material with good electrical insulating properties. A Thermoset plastic.

### eurofast®

M12x1 threads, single key, 2 - 6, 8, 10, 12-pin

### Explicit Message

A command from another node.

### Exposed Run/Direct Burial

Cable construction meeting the crush and impact requirements of metal clad cables without metal clad. For use as exposed wiring between cable tray and equipment.

### extremelife™

Heavy duty cable for extreme temperature environments. These cables provide excellent resistance to extreme cold temperatures and oilfield drilling muds.

### Extruded Cable

Cable with conductors that are uniformly insulated and formed by applying a homogeneous insulation material in a continuous extrusion process.

### Fillers

Non-conducting components cabled with the insulated conductors or optical fibers to impart roundness, flexibility, tensile strength, or a combination of all three, to the cable.

### firefast®

High temperature protective sleeving.

### FKS - Frequency Shift Key

A common bit encoding method for modulated signals.

### flexlife-10®

Unique cable designed for robotic and other continuous motion applications.

### Free Zone

The space around a proximity sensor that must be kept free of any material capable of affecting the sensing characteristics.

### Gateway

A node on two different buses that serves as a signal and data translator between the buses.

### Ground Loop

A completed circuit between shielded pairs of a multiple pair created by random contact between shields. An undesirable circuit condition in which interference is created by ground currents when grounds are connected at more than one point.

### Ground Potential

The potential of the earth. A circuit, terminal or chassis is said to be at ground potential when it is used as a reference point for other potentials in the system.

### Ground

An electrical connection to the earth, generally through a ground rod. Also a common return to a point of zero potential, such as the metal chassis of equipment.

### GSD - General Station Description

Electronically readable ASCII text files that contain both general and device-specific parameters for communication and network configuration (PROFIBUS).

### HART

Two-way digital communication protocol for process measurement.

### Hygroscopic

Capable of absorbing moisture from the air.

### IEC

European Standardization agency; International Electrotechnical Commission.

### IEEE

Institute of Electrical and Electronics Engineers

### Inductive Magnet Operated Sensor (*permaprox*®)

A solid-state sensor consisting of a sensing element susceptible to magnetic field strengths of 20-350 Gauss, and switching circuitry similar to that of an inductive proximity sensor.

### Inductive Proximity Sensor

A proximity sensor producing an electromagnetic field that senses only metal targets within its sensing zone.

### Input

A signal (or power) which is applied to a piece of electrical apparatus or the terminals on the apparatus to which a signal or power is applied.

### Inrush Current

The maximum short-term load current that the output of a sensor can tolerate.

### Insulation

A material having good dielectric properties that is used to separate close electrical components, such as cable conductors and circuit components.

### IP Rating

Ingress Protection rating per IEC 529.

### Irradiation

In insulation, the exposure of the material to high-energy emissions for the purpose of favorably altering the molecular structure.

### ITC

Instrument Tray Cable. NEC classification for cable resistant to the spread of fire and suitable for use in cable trays. 150 V rating.

### Jacket

Pertaining to wire and cable, the outer protective covering, may also provide additional insulation.

### LAS - Link Active Scheduler

Controls communication on the bus. Creates a token circulation list that defines access on the bus. Multiple devices may have LAS but only one can communicate at a time.

### Lateral Approach

The approach of a target perpendicular to the sensor reference axis.

### LED

Light Emitting Diode used to indicate device status.

### Limited Peer-to-Peer

An exclusive one-to-one relationship between the input node and the output node. Also called exclusive peer-to-peer.

### Line Voltage

The value of the potential existing on a supply or power line.

### Load

A device that consumes power from a source and uses that power to perform a function.

### lokfast™ Guard

Guards for minifast and eurofast connections in hazardous locations. The guard requires a tool to remove.

### M Threading

ISO 68 Metric straight threading, designated as "Nominal Size" X "Pitch", in mm. (Ex. M5X0.5)

### Manchester

A common bit encoding for digital signals.

### MC

Metal Clad Cable. NEC classification for cable resistant to crush and impact based on an outer covering of metal.

### Media Access

The "right-of-way" for talking on the bus.

### Message Collision Avoidance

A process for eliminating communication collisions on a network. The two major ways to handle a potential collision are CD (Collision Detection) and BA (Bitwise Arbitration).

### Messaging

Ways to communicate on the network. The three major types in the run mode are Solicited, Unsolicited and Explicit.

### microfast®

1/2"-20UNF threads, dual key, 2 - 6-pin

### microfast®

1/2"-20UNF threads, dual key, 2 - 6 pin

### minifast®

7/8"-16UN threads, 2 - 6-pin

### minifast B size

1"-16UN threads, 6 - 8 pin

### minifast C size

1 1/8"-16UN threads, 9, 10, 12-pin

### Minimum Load Current

The minimum amount of current that is required by the sensor for reliable operation.

### Moisture Resistance

The ability of a material to resist absorbing moisture from the air or from water when immersed.

### Molded Plug

A connector molded onto either end of a cord or cable.

### MOV

Acronym for Metal Oxide Varistor. A solid state device used to suppress voltage surges \ spikes

### MSHA

Mine Safety and Health Administration

### multibox®

Junction boxes, 4, 6, 8 and 16 port

# TURCK

## Process Automation Products

### Glossary

***multifast***

M23x1 threads, 12, 16 and 19-pin or M27 threads, 26 and 28-pin

***Mylar***

DuPont trademark for polyester film.

***NAMUR Sensor***

A 2-wire variable-resistance DC sensor whose operating characteristics conform to DIN 19 234. Requires a remote amplifier for operation. Typically used for intrinsically safe applications.

***NAMUR***

The acronym for a European standards organization.

***National Electrical Code (NEC)***

A set of regulations governing construction and installation of electrical wiring and apparatus in the United States, established by the American National Board of Fire Underwriters.

***NEMA Rating***

An enclosure rating per NEMA Standard 250.

***NEMA***

National Electrical Manufacturers Association.

***Neoprene***

A synthetic rubber with good resistance to oil, chemical, and flame. Also called polychloroprene. A Thermoset plastic.

***Node***

An addressable device on the bus.

***Noise***

In a cable or circuit, any extraneous signal that tends to interfere with the signal normally present in or passing through the system.

***No-Load Current***

The current drawn by a DC proximity sensor from the power supply when the outputs are not connected to a load.

***Nonembeddable (Nonshielded) Proximity Sensor***

A sensor is nonembeddable when a specified free zone must be maintained around its sensing face in order not to influence the sensing characteristics.

***Normally Closed (N.C.)***

The output is OFF when the target is detected by the sensor.

***Normally Open (N.O.)***

The output is ON when the target is detected by the sensor.

***NPN Output (Current Sinking)***

A transistor output that switches the common or negative voltage to the load. Load is between sensor and positive supply voltage.

***NPN Output***

Transistor output that switches the common or negative voltage to the load (current sinking). Load connected between output and positive supply.

***NPSM Threading***

American National Standard Straight Pipe Thread for Free-Fitting Mechanical Parts.

***NPT Threading***

American National Standard Taper Pipe Thread.

***NRZ - Non Return to Zero***

An encoding method on differential signals such as RS-485 and CANbus.

***Off-State (Leakage) Current***

The current that flows through the load circuit when the sensor is in the OFF-state. Also known as leakage or residual current.

***Ohm ( $\Omega$ )***

The electrical unit of resistance. The value of resistance through which a potential difference of one volt will maintain a current of one ampere.

***Ohm's Law***

$E = I \times R$ . Voltage (E) is directly proportional to the product of current (I) and resistance (R) of circuit.

***Operating Distance***

A distance at which the target approaching the sensing face along the reference axis causes the output signal to change.

***Output***

The useful power or signal delivered by a circuit or device.

***Overload Protection***

The ability of a sensor to withstand load currents between continuous load rating and short-circuit condition with no damage.

***PA (Polyamide, Nylon)***

An abrasion-resistant thermoplastic with good chemical resistance, also known as polyamide.

***Passive Hub***

A multi-port tee.

***pentafast* ®**

M5 threads, 3 and 4-pin

***PG Threading***

Steel conduit threading per German standard DIN 430.

***picofast* ®**

Snap lock or M8x1 threads, 3, 4 and 6-pin

***Plastic***

High-polymeric substances, including both natural and synthetic products, but excluding the rubbers, that are capable of flowing under heat and pressure.

***PLTC***

Power Limited Tray Cable. NEC classification for cable resistant to the spread of fire and suitable for use in cable trays. 300 V rating.

***Plug***

A connector associated with being attached to a cable.

***PNP Output (Current Sourcing)***

Transistor output that switches the positive voltage to the load. Load is between sensor and common.

***PNP Output***

Transistor output that switches the positive voltage to the load (current sourcing). Load connected between output and common.

***POM (Polyoxymethylene, Acetal, Delrin)***

Polyoxymethylene - a crystalline thermoplastic polymer with a high melting point. It is suitable for mechanical parts or electrical insulators that require structural strength at above normal temperatures.

***Potting***

The sealing of a cable termination or other component with a liquid that thermosets into an elastomer.

***Power Conditioner***

Device used to condition the power to be used for a bus segment. Allows power and data to exist on the same wires.

***Power Tap***

A tee which provides power to the network.

***powerfast* ®**

1 3/8"-16 threads, 2, 3 and 4 pin or M23 threads, 6, 7 and 9 pins.

***Programmable Output***

Sensor output whose N.O. or N.C. function can be selected by means of a jumper or specific terminal connection.

***Protocol***

A small program that is embedded in sending and listening devices to organize the meaning of bits. DeviceNet, AS-interface, PROFIBUS, Ethernet, etc. are all examples of different protocols.

***Publisher / Subscriber***

Scheduled distribution of data to nodes on the subscriber list.

***PUR (Polyurethane)***

Broad class of polymers noted for good abrasion and solvent resistance.

***PVC (Polyvinyl Chloride)***

A general-purpose thermoplastic widely used for wire and cable insulation and jackets.

***Radially Polarized Ring Magnet***

A ring magnet whose poles are the inner and outer diameter rings.

***Rated Operating Distance (Sn)***

A conventional quantity used to designate the operating distance. It does not take into account either manufacturing tolerances or variations due to external conditions such as voltage and temperature.

***Reference Axis***

An axis perpendicular to the sensing face and passing through its center.

***Repeatability***

The difference between actual operating distances measured at a constant temperature and voltage over an 8-hour period. It is expressed as a percentage (%) of rated operating distance (Sn).

***Repeater***

Strengthens the bus signal by producing a fresh signal without distortions. It also links two portions of the same bus together. A repeater is used when the signal is weak or distorted.

***Resistance (R)***

A measure of the difficulty in moving electrical current through a medium when voltage is applied. It is measured in ohms.

***Response frequency***

The maximum rate that the output can change in response to the input and still maintain linearity.

***Response Time***

The time required for the device switching element to respond after the target enters or exits the sensing zone.

***Retractile Cord***

A cord having a specially treated jacket or insulation so that it will retract like a spring. Retractility may be added to all or part of a cord's length.

***Reverse Polarity Protection***

Internal components that keep the sensor from being damaged by incorrect polarity connection to the power supply.

***Ring***

A network topology where every node is also a repeater. Information comes into a node, information that pertains to that node is read, new information is added and the message is sent on to the next node.

***Ripple***

The alternating component remaining on a DC signal after rectifying, expressed in percentage of rated voltage.

***RoHS***

Restriction of Hazardous Substances

***Router***

A higher level bridge for connection of wide area networks.

***RTD***

Resistance Temperature Detector

***Rubber***

A general term used to describe wire insulation made of thermosetting elastomers, such as natural or synthetic rubbers, neoprene, Hypalon, CPE butyl rubber and others.

# Process Automation



## Glossary

### Scanner Module

Allen-Bradley's designation for the gateway that plugs into their PLC and interfaces the PLCs bus to the network.

### Sensing Face

The surface of the proximity sensor through which the electromagnetic (or electrostatic) field emerges.

### Serial Data Communication

"ON-OFF" or "HIGH-LOW" electrical signals.

### Serial Data Transfer

Information transmitted one piece at a time in a specific order.

### Serve

A filament or group of filaments such as fibers or wires, wound around a central core.

### Shield

In cables, a metallic layer placed around a conductor or group of conductors to prevent electrostatic or electromagnetic interference between the enclosed wires and external fields.

### Shielded twisted pair

Two conductors twisted together with a metallic covering.

### Short-Circuit Protection

The ability of a sensor to withstand a shorted condition (no current-limiting load connected) without damage.

### Signal

Any visible or audible indication that can convey information. Also, the information conveyed through a communication system.

### Simple Device

Anything that does not have LAS capabilities.

### SJOW

Junior hard service, rubber insulated, portable cord with oil resistant rubber outer jacket. Stranded copper conductors with separator and individual oil and water resistant rubber insulation. Two or more color coded conductors cabled with filler, wrapped with separator and rubber jacketed overall. 300 V.

### Slew Rate

The rate of change of the output voltage with respect to a step change in input. A change in output of 0 to 10 volts at a slew rate of 1.25 V/ms would take 8 ms to slew to the new value.

### Solicited Message

A response to another node or a response when it is the node's predetermined time to speak.

### Solid Conductor

A conductor consisting of a single wire.

### Solid State

Pertains to circuits and components using semiconductors without moving parts. Example: transistors, diodes, SCR, etc.

### SOOW

Heavy duty, rubber-insulated portable cord with oil resistant rubber outer jacket. Stranded copper conductors with separator and individual oil and rubber insulation. Two or more color-coded conductors cabled with filler, wrapped with separator and rubber jacketed overall. 600 V.

### Spanner

TURCK's designation for a double-sided slave node. Unit has bi-directional data from one control area segment to another in a free form format.

### Star

Bus lines radiate from a single point.

### Start of Message

A certain number of high bits that start a message. These consecutive bits allow the listener time to prepare to receive the data.

### Static Output

A sensor output that stays energized as long as the target is present.

### STOW

Heavy duty, PVC insulated, portable cord with oil resistant PVC outer jacket. Stranded copper conductors, PVC insulation. Two or more color coded conductors cabled with filler, wrapped with separator and PVC jacketed overall. Approved for outdoor use. 600 V.

### Stranded Conductor

A conductor composed of groups of wires twisted together.

### Switching Frequency

The maximum number of times per second that the sensor can change state (ON and OFF) under ideal conditions, usually expressed in Hertz (Hz).

### System Tee

A field wireable tee.

### Tee

Creates a branch or drop from a bus.

### Temperature Rating

The maximum temperature at which a material may be used in continuous operation without loss of its basic properties.

### Terminating Resistor

A resistor that is put at the beginning and end of the main bus line to stabilize and minimize reflections.

### Thermoplastic

A material that will soften, flow or distort appreciably when subjected to heat and pressure.

### Thermoset

A material that hardens or sets when heat is applied, and which, once set, cannot be re-softened by heating. The application of heat is called "curing".

### Time-Delay Before Availability

The length of time after power is applied to the sensor before it is ready to operate correctly, expressed in milliseconds (ms).

### Topology

A bus term that describes how the data lines connect the nodes together.

### TPE

Thermo Plastic Elastomer. Broad class of polymers noted for flexibility and weld slag resistance.

### TPR

Thermo Plastic Rubber. Another name for TPE.

### Trunk line

The main bus line.

### Twisted Pairs

A cable composed of two small, insulated conductors twisted together without a common covering.

### Unlimited Peer-to-Peer

Output node gets information from several input nodes.

### Unsolicited Message

A response to a change-of-state at the node.

### Uprox Sensor ®

An inductive proximity sensor that detects all metals at the same range. Uprox sensors are inherently weld-field immune, operate over a wider temperature range and have a higher switching frequency than standard inductive sensors.

### V\*fast ®

DIN 43650, type A, B, I and C

### VDE

German approval agency.

### versafast™

M16 threads, 5, 6, 7, 8, 12, 14 and 19 pin

### Versafast™

M16 threads, 5, 6, 7, 8, 12, 14 and 19 pin

### Volt (V)

A unit of electrical pressure. One volt is the electrical pressure that will cause one ampere of current to flow through one ohm of resistance.

### Voltage Rating

The highest voltage that may be continuously applied to a wire in conformance with standards or specifications.

### Voltage

The term most often used in place of electromotive force, potential difference, or voltage drop. Designates the electric pressure existing between two points that is capable of producing a current when a closed circuit is connected between these points.

### VW-1

A flammability rating established by Underwriters Laboratories for wires and cables that pass a specially designed vertical flame test, formerly designated FR-1.

### Weld-Field Immunity (WFI)

The ability of a sensor not to false-trigger in the presence of strong magnetic fields typically produced by resistance welders.

### Wicking

The longitudinal flow of a liquid in a wire or cable due to capillary action.

### Wire-Break Protection

Results in the output being OFF on a DC sensor if either supply wire is broken.

### Word

2 bytes.

## Index

1/2 A4-AK . . . . .	M76	ASI-BM BW1181 . . . . .	G109	ASI-EIPG-SS BW1828 . . . . .	F13	
3/8 A4-AK . . . . .	M76	ASI-BM BW1182 . . . . .	G110	ASI-EIPG-SS BW1828 . . . . .	G17	
91-SSP 1 Ft. . . . .	M124	ASI-BM BW1183 . . . . .	G110	ASI-EIPG-SS BW1829 . . . . .	F13	
91-SSP 2 Ft. . . . .	M124	ASI-BM BW1438 . . . . .	G109	ASI-EIPG-SS BW1829 . . . . .	G17	
91-SSP 3 Ft. . . . .	M124	ASI-CCG BW1435 . . . . .	G31, G32	ASI-EIPG-SS BW1833 . . . . .	F13	
91-SSP 4 Ft. . . . .	M124	ASI-CODEBLK BW1527 . . . . .	G73	ASI-EIPG-SS BW1833 . . . . .	G17	
91-SSP 5 Ft. . . . .	M124	ASI-COG-SS BW1821 . . . . .	G25	ASI-EIPG-SS-C1D2 BW1834 . . . . .	F13	
91-SSP 6 Ft. . . . .	M124	ASI-COG-SS BW1822 . . . . .	G25	ASI-EIPG-SS-C1D2 BW1834 . . . . .	G17	
AI40EX . . . . .	D11	ASI-COG-SS BW1823 . . . . .	G25	ASI-EIPG-SS-C1D2 BW1835 . . . . .	F13	
AI41EX . . . . .	D11	ASI-CPL BW1187 . . . . .	G103	ASI-EIPG-SS-C1D2 BW1835 . . . . .	G17	
AIH40EX . . . . .	D11	ASI-CPL BW1280 . . . . .	G103	ASI-EIPG-SS-C1D2 BW1836 . . . . .	F13	
AIH41EX . . . . .	D11	ASI-CT BW1203 . . . . .	G108	ASI-EIPG-SS-C1D2 BW1836 . . . . .	G17	
A040EX . . . . .	D13	ASI-CT-AB BW1563 . . . . .	G108	ASI-ENG-SS BW1650 . . . . .	F11	
AOH40EX . . . . .	D13	ASI-CT-SS BW1602 . . . . .	G108	ASI-ENG-SS BW1650 . . . . .	G15	
ASI-AI/D0-2RTD/2R	BW1552 . . . . .	G55	ASI-DNG-SS BW1818 . . . . .	J81	ASI-ENG-SS BW1651 . . . . .	F11
ASI-AI-02-M12	BW1894 . . . . .	G65	ASI-DNG-SS BW1818 . . . . .	G13	ASI-ENG-SS BW1651 . . . . .	G15
ASI-AI-02-M12-V3	BW1893 . . . . .	G65	ASI-DNG-SS BW1819 . . . . .	J81	ASI-ENG-SS BW1652 . . . . .	F11
ASI-AI-02RTD-M12-V3	BW1895 . . . . .	G65	ASI-DNG-SS BW1819 . . . . .	G13	ASI-ENG-SS BW1652 . . . . .	G15
ASI-AI-1C	BW1711 . . . . .	G71	ASI-DNG-SS BW1820 . . . . .	J81	ASI-ENG-SS-C1D2 BW1659 . . . . .	F11
ASI-AI-1C	BW1723 . . . . .	G71	ASI-DNG-SS BW1820 . . . . .	G13	ASI-ENG-SS-C1D2 BW1659 . . . . .	G15
ASI-AI-1SCALE	BW1465 . . . . .	G63	ASI-DNG-SS-C1D2 BW1824 . . . . .	J81	ASI-ENG-SS-C1D2 BW1660 . . . . .	F11
ASI-AI-2	BW1232 . . . . .	G51	ASI-DNG-SS-C1D2 BW1824 . . . . .	G13	ASI-ENG-SS-C1D2 BW1660 . . . . .	G15
ASI-AI-2	BW1233 . . . . .	G51	ASI-DNG-SS-C1D2 BW1825 . . . . .	J81	ASI-ENG-SS-C1D2 BW1661 . . . . .	F11
ASI-AI-2	BW1345 . . . . .	G49	ASI-DNG-SS-C1D2 BW1825 . . . . .	G13	ASI-ENG-SS-C1D2 BW1661 . . . . .	G15
ASI-AI-2	BW1447 . . . . .	G49	ASI-DNG-SS-C1D2 BW1826 . . . . .	J81	ASI-EVAL-KIT BW1565 . . . . .	G108
ASI-AI-2A	BW1726 . . . . .	G49	ASI-DNG-SS-C1D2 BW1826 . . . . .	G13	ASI-IOM-0006-PCB BW1627 . . . . .	G84
ASI-AI-2C	BW1574 . . . . .	G71	ASI-DPG BW1253 . . . . .	H45, H46	ASI-IOM-0202-PCB BW1421 . . . . .	G84
ASI-AI-4	BW1364 . . . . .	G53	ASI-DPG BW1253 . . . . .	G31, G32	ASI-IOM-0202-PCB BW1443 . . . . .	G84
ASI-AI-4	BW1365 . . . . .	G53	ASI-DPG BW1371 . . . . .	H45, H46	ASI-IOM-0202-PCB BW1444 . . . . .	G84
ASI-AI-4C	BW1710 . . . . .	G71	ASI-DPG BW1371 . . . . .	G31, G32	ASI-IOM-0202R-PCB BW1101 . . . . .	G89, G90
ASI-AI-4-M12	BW1359 . . . . .	G67	ASI-DPG-SS BW1567 . . . . .	H41	ASI-IOM-0403-PCB BW1386 . . . . .	G84
ASI-AI-4-M12	BW1360 . . . . .	G67	ASI-DPG-SS BW1567 . . . . .	G21	ASI-IOM-0403-PCB BW1387 . . . . .	G84
ASI-AI-4-M12	BW1742 . . . . .	G67	ASI-DPG-SS BW1568 . . . . .	H41	ASI-IOM-0404A-PCB-BW1388 . . . . .	G86
ASI-AI-4PT100	BW1254 . . . . .	G55	ASI-DPG-SS BW1568 . . . . .	G21	ASI-IOM-0404A-PCB-BW1389 . . . . .	G86
ASI-AI-4PT100	BW1368 . . . . .	G53	ASI-DPG-SS BW1569 . . . . .	H41	ASI-IOM-0404A-PCB-L-BW1628 . . . . .	G86
ASI-AI-4PT100-M12	BW1363 . . . . .	G67	ASI-DPG-SS BW1569 . . . . .	G21	ASI-IOM-0404-PCB BW1218 . . . . .	G84
ASI-ANALYSER	BW1415 . . . . .	G107	ASI-DPG-SS-B BW1746 . . . . .	H43	ASI-IOM-0404-PCB BW1219 . . . . .	G84
ASI-AO-2	BW1234 . . . . .	G59	ASI-DPG-SS-B BW1746 . . . . .	G23	ASI-IOM-0404-PCB-L BW1470 . . . . .	G84
ASI-AO-2	BW1235 . . . . .	G59	ASI-DPG-SS-C1D2 BW1653 . . . . .	H41	ASI-IOM-0800-PCB BW1351 . . . . .	G84
ASI-AO-2	BW1412 . . . . .	G57	ASI-DPG-SS-C1D2 BW1653 . . . . .	G21	ASI-IOM-0800-PCB BW1352 . . . . .	G84
ASI-AO-2A	BW1727 . . . . .	G57	ASI-DPG-SS-C1D2 BW1654 . . . . .	H41	ASI-IOM-0808-PCB -BW1898 . . . . .	G87
ASI-AO-4	BW1366 . . . . .	G61	ASI-DPG-SS-C1D2 BW1654 . . . . .	G21	ASI-IOM-0808-PCB-V3-BW1899 . . . . .	G87
ASI-AO-4	BW1367 . . . . .	G61	ASI-DPG-SS-C1D2 BW1655 . . . . .	H41	ASI-IOM-1616-PCB-BW1900 . . . . .	G87
ASI-AO-4-M12	BW1361 . . . . .	G69	ASI-DPG-SS-C1D2 BW1655 . . . . .	G21	ASI-IOM-1616-PCB-V3-BW1901 . . . . .	G87
ASI-AO-4-M12	BW1362 . . . . .	G69	ASI-DPG-SS-SE BW1773 . . . . .	H41	ASI-IOM-E0202A-PCB-ES BW1751 . . . . .	G101
ASI-AO-4-M12	BW1722 . . . . .	G69	ASI-DPG-SS-SE BW1773 . . . . .	G21	ASI-IOM-E0202A-PCB-ES BW1801 . . . . .	G101
ASI-AO-4-M12	BW1736 . . . . .	G69	ASI-DPG-SS-SE BW1774 . . . . .	H41	ASI-IOM-E0202A-PCB-ES BW1896 . . . . .	G101
ASI-BM	BW1180 . . . . .	G109	ASI-DPG-SS-SE BW1774 . . . . .	G21	ASI-MBG-SS BW1641 . . . . .	G27

# Process Automation



## Index

ASI-MBG-SS BW1642 . . . . .	G27	B 4141-0/13.5 . . . . .	K215	BCA 49SC-M123 . . . . .	E51
ASI-MBG-SS BW1643 . . . . .	G27	B 4141-0/9 . . . . .	K215	BCA 49SC-M223 . . . . .	E51
ASI-MBG-SS-C1D2 BW1656 . . . . .	G27	B 4148-0/13.5 . . . . .	H103	BCA 57-E123 . . . . .	J122
ASI-MBG-SS-C1D2 BW1657 . . . . .	G27	B 4148-0/9 . . . . .	H103	BCA 57-E223 . . . . .	J122
ASI-MBG-SS-C1D2 BW1658 . . . . .	G27	B 4151-0/13.5 . . . . .	K215	BCA 57-M123 . . . . .	J121
ASI-MBPG BW 1583 . . . . .	G30	B 4151-0/13.5/DNET . . . . .	J143	BCA 57-M223 . . . . .	J121
ASI-MBPG BW1583 . . . . .	G29	B 4151-0/16 . . . . .	K215	BCA 84-E124 . . . . .	F25
ASI-MM232-SS BW1944 . . . . .	G33	B 4151-0/9 . . . . .	K215	BCA 84-E224 . . . . .	F25
ASI-MM232-SS BW1955 . . . . .	G33	B 4151-0/9/DNET . . . . .	J143	BCS-ASI-CSG22 . . . . .	G47
ASI-MM232-SS-CTL BW1986 . . . . .	G33	B 4231-0/9 . . . . .	K216	Bi 1.5-EG08K-Y1 . . . . .	L49
ASI-MMISA BW1228 . . . . .	G35	B 4241-0/9 . . . . .	K216	Bi 1.5-EG08K-Y1-H1341 . . . . .	L49
ASI-MMPIC104 BW1229 . . . . .	G35	B 4251-0/9 . . . . .	K216	Bi 1.5-EG08K-Y1X-H1341 . . . . .	L49
ASI-MMPCB BW1554 . . . . .	G81	B 8141-0 . . . . .	K219	Bi 1.5-EG08-Y1 . . . . .	L49
ASI-MM-PCB BW1588 . . . . .	G81	B 8141-0/PG 9 . . . . .	K219	Bi 1.5-EG08-Y1-H1341 . . . . .	L49
ASI-MM-PCB BW1670 . . . . .	G81	B 8141-0/PG9 . . . . .	H104	Bi 1.5-G08-Y1 . . . . .	L49
ASI-MMPCI BW1195 . . . . .	G35	B 8141-0/PG9 . . . . .	E68	Bi 1.5-GS880-Y0 . . . . .	L49
ASI-MMPCI-V3 BW1911 . . . . .	G35	B 8141-0/PG9 . . . . .	G152	Bi 2.5-EG16CA-FDZ32X2 . . . . .	L21
ASI-MMPCI-V3 BW1922 . . . . .	G35	B 8151-0/PG 9 . . . . .	K219	Bi 2.5-EG16CA-FDZ32X2-B1151 . . . . .	L21
ASI-MON BW1770 . . . . .	G108	B 8151-0/PG9/DNET . . . . .	J144	Bi 2-EG12-AN6X . . . . .	L53
ASI-OEM-PWR BW1485 . . . . .	G91	B 8181-0 . . . . .	K219	Bi 2-EG12-AP6X . . . . .	L53
ASI-PCB-CARRIER BW1484 . . . . .	G91	B 8241-0 . . . . .	K220	Bi 2-EG12-RP6X . . . . .	L53
ASI-PD BW1646 . . . . .	G107	B 8241-0/PG 9 . . . . .	K220	Bi 2-EG12-YOX . . . . .	L49
ASI-PE BW1197 . . . . .	G97	B 8241-0/PG9 . . . . .	H104	Bi 2-EM12-YOX-H1141 . . . . .	L49
ASI-PE BW1477 . . . . .	G97	B 8241-0/PG9 . . . . .	E68	Bi 2-G08-AN6 . . . . .	L53
ASI-PE-2 BW1943 . . . . .	G98	B 8241-0/PG9 . . . . .	G152	Bi 2-G12-AN6 . . . . .	L53
ASI-PE-2.8A-C1D2 BW1713 . . . . .	G97	B 8251-0/PG 9 . . . . .	K220	Bi 2-G12-AN6X . . . . .	L53
ASI-PE-4A-C1D2 BW1714 . . . . .	G97	B 8251-0/PG9/DNET . . . . .	J144	Bi 2-G12-AP6 . . . . .	L53
ASI-PM 41 . . . . .	G142	B3.0/2-PKZO . . . . .	C55	Bi 2-G12-AP6X . . . . .	L53
ASI-PM-1 BW1238 . . . . .	G142	B3.0/4-PKZO . . . . .	C55	Bi 2-G12K-AN6X . . . . .	L53
ASI-PM-1 BW1239 . . . . .	G142	B3.0/5-PKZO . . . . .	C55	Bi 2-G12K-AP6 . . . . .	L53
ASI-PNG-SS BW1912 . . . . .	F15	B6S-SBCSBC . . . . .	C59	Bi 2-G12K-AP6X . . . . .	L53
ASI-PNG-SS BW1912 . . . . .	G19	B6T-SBCSBC . . . . .	C59	Bi 2-G12K-RN6X . . . . .	L53
ASI-PS BW1649 . . . . .	G93	BCA 25-E123 . . . . .	G138	Bi 2-G12K-RP6X . . . . .	L53
ASI-PS-24/30VDC-2A BW1760 . . . . .	G94	BCA 25-E223 . . . . .	G138	Bi 2-G12-RN6X . . . . .	L53
ASI-PS-8A BW1997 . . . . .	G93	BCA 25-M123 . . . . .	G137	Bi 2-G12-RP6X . . . . .	L53
ASI-SCAN-AB BW1416 . . . . .	G11	BCA 25-M223 . . . . .	G137	Bi 2-G12-YO . . . . .	L49
ASI-SCAN-AB/ACT BW1610 . . . . .	G11	BCA 25SC-E123 . . . . .	G138	Bi 2-G12-YOX . . . . .	L49
ASI-SCAN-AB/ACT BW1611 . . . . .	G11	BCA 25SC-E223 . . . . .	G138	Bi 2-K11-Y1 . . . . .	L49
ASI-SCAN-AB-BW1488 . . . . .	G11	BCA 44-E123 . . . . .	F43	Bi 2-M12-AN6X . . . . .	L53
ASI-SIM-SW BW1902 . . . . .	G108	BCA 44-E223 . . . . .	F43	Bi 2-M12-AP6X . . . . .	L53
ASI-SM-1 BW1764 . . . . .	G99	BCA 48-E123 . . . . .	H90	Bi 2-M12E-YOX-H1141 . . . . .	L49
ASI-SM-2 BW1765 . . . . .	G99	BCA 48-E223 . . . . .	H90	Bi 2-M12-RP6X . . . . .	L53
ASI-TERM BW1644 . . . . .	G108	BCA 48-M123 . . . . .	H89	Bi 2-M12T-AN6X . . . . .	L53
ASI-TUNER BW1648 . . . . .	G79	BCA 48-M223 . . . . .	H89	Bi 2-M12T-AP6X . . . . .	L53
ASI-TUNER-C1D2 BW1715 . . . . .	G79	BCA 49-E123 . . . . .	E52	Bi 2-M12-Y1X-H1141 . . . . .	L49
ASI-TUNER-DIAG BW1843 . . . . .	G79	BCA 49-E223 . . . . .	E52	Bi 2-MT12-YOX-H1141 . . . . .	L49
B 4131-0/13.5 . . . . .	K215	BCA 49-M123 . . . . .	E51	Bi 2-P12SK-Y1X . . . . .	L49
B 4131-0/9 . . . . .	K215	BCA 49-M223 . . . . .	E51	Bi 2-P12-YO . . . . .	L49

# TURCK

## Process Automation Products

### Index

Bi 2-P12-Y0/S100 . . . . .	L49	Bi 5-P18-Y0 . . . . .	L49	Bid2-G18-Y0-H1141/S212 . . . . .	L49
Bi 2-P12-YOX . . . . .	L49	Bi 5-P18-Y0/S100 . . . . .	L49	BK25/3-PKZ0 . . . . .	C55
Bi 2-P12-Y1X/S97 . . . . .	L49	Bi 5-P18-YOX . . . . .	L49	BK52C 57x-*M . . . . .	J89
Bi 2-Q08-Y1X . . . . .	L50	Bi 5-S18-AN6X . . . . .	L53	BL20-16DI-24VDC-P . . . . .	C27
Bi 2-Q10S-Y1X . . . . .	L50	Bi 5-S18-AP6X . . . . .	L53	BL20-16D0-24VDC-0.5A-P . . . . .	C29
Bi 2-Q11S-Y1X . . . . .	L50	Bi 5-S18-RN6X . . . . .	L53	BL20-1AI-I(0/4...20MA) . . . . .	C31
Bi 2-Q5.5-Y1X . . . . .	L50	Bi 5-S18-RP6X . . . . .	L53	BL20-1AI-U(-10/0...+10VDC) . . . . .	C31
Bi 2-S12-AN6X . . . . .	L53	Bi 8-G18-AN6X . . . . .	L53	BL20-1AO-I(0/4...20MA) . . . . .	C37
Bi 2-S12-AP6X . . . . .	L53	Bi 8-G18-AP6X . . . . .	L53	BL20-1CNT-24VDC . . . . .	C41
Bi 2-S12-RN6X . . . . .	L53	Bi 8-G18-RN6X . . . . .	L53	BL20-1RS232 . . . . .	C39
Bi 2-S12-YOX-H1141 . . . . .	L49	Bi 8-M18-AN6X . . . . .	L53	BL20-1RS485/422 . . . . .	C39
Bi 4-EG12-AN6X . . . . .	L53	Bi 8-M18-AP6X . . . . .	L53	BL20-1SSI . . . . .	C39
Bi 4-EM12-AN6X . . . . .	L53	Bi 8-M18-RN6X . . . . .	L53	BL20-2AI-I(0/4...20MA) . . . . .	C31
Bi 4-G12-AN6 . . . . .	L53	Bi 8-M18-RP6X . . . . .	L53	BL20-2AI-PT/NI-2/3 . . . . .	C35
Bi 4-G12-AN6X . . . . .	L53	Bi 8-M18T-AN6X . . . . .	L53	BL20-2AI-THERMO-PI . . . . .	C35
Bi 4-G12-AP6X . . . . .	L53	Bi 8-M18T-AP6X . . . . .	L53	BL20-2AI-U(-10/0...+10VDC) . . . . .	C31
Bi 4-G12K-AN6X . . . . .	L53	Bi10-G30-AN6 . . . . .	L53	BL20-2AO-I(0/4...20MA) . . . . .	C37
Bi 4-G12K-AP6X . . . . .	L53	Bi10-G30-AN6X . . . . .	L53	BL20-2AO-U(-10/0...+10VDC) . . . . .	C37
Bi 4-G12K-RP6X . . . . .	L53	Bi10-G30-AP6 . . . . .	L53	BL20-2DI-120/230VAC-P . . . . .	C23
Bi 4-M12-AN6X . . . . .	L53	Bi10-G30-AP6X . . . . .	L53	BL20-2DI-24VDC-N . . . . .	C11
Bi 4-M12-AP6X . . . . .	L53	Bi10-G30K-AN6 . . . . .	L53	BL20-2DI-24VDC-P . . . . .	C11
Bi 4-M12-RN6X . . . . .	L53	Bi10-G30K-AN6X . . . . .	L53	BL20-2D0-120/230VAC-0.5A . . . . .	C25
Bi 4-M12-RP6X . . . . .	L53	Bi10-G30K-AP6X . . . . .	L53	BL20-2D0-24VDC-0.5A-N . . . . .	C17
Bi 4-M12T-AN6X . . . . .	L53	Bi10-G30K-RP6X . . . . .	L53	BL20-2D0-24VDC-0.5A-P . . . . .	C17
Bi 4-M12T-AP6X . . . . .	L53	Bi10-G30-RN6X . . . . .	L53	BL20-2D0-24VDC-2A-P . . . . .	C17
Bi 5-CP40-Y1X . . . . .	L50	Bi10-G30-RP6X . . . . .	L53	BL20-2D0-R-C0 . . . . .	C21
Bi 5-EG18-AN6X . . . . .	L53	Bi10-G30-Y0 . . . . .	L49	BL20-2D0-R-NC . . . . .	C21
Bi 5-EG18-AP6X . . . . .	L53	Bi10-G30-Y0/S90 . . . . .	L49	BL20-2D0-R-No . . . . .	C21
Bi 5-EG18-Y0 . . . . .	L49	Bi10-G30-Y0X . . . . .	L49	BL20-32DI-24VDC-P . . . . .	C27
Bi 5-EG18-YOX . . . . .	L49	Bi10-M30-RP6 . . . . .	L53	BL20-32D0-24VDC-0.5A-P . . . . .	C29
Bi 5-G18-AN6 . . . . .	L53	Bi10-M30T-AN6X . . . . .	L53	BL20-4AI-U/I . . . . .	C33
Bi 5-G18-AN6X . . . . .	L53	Bi10-M30T-AP6X . . . . .	L53	BL20-4DI-24VDC-N . . . . .	C11
Bi 5-G18-AP6 . . . . .	L53	Bi10-M30-Y1X-H1141 . . . . .	L49	BL20-4DI-24VDC-P . . . . .	C11
Bi 5-G18-AP6X . . . . .	L53	Bi10-P30-Y0X . . . . .	L49	BL20-4DI-NAMUR . . . . .	C15
Bi 5-G18K-AN6 . . . . .	L53	Bi10-P30-Y1 . . . . .	L49	BL20-4DO-24VDC-0.5A-P . . . . .	C17
Bi 5-G18K-AN6X . . . . .	L53	Bi10-Q14-Y0X . . . . .	L50	BL20-B3S-SBB . . . . .	C58
Bi 5-G18K-AP6 . . . . .	L53	Bi10-S30-AN6X . . . . .	L53	BL20-B3S-SBC . . . . .	C58
Bi 5-G18K-AP6X . . . . .	L53	Bi10-S30-AP6X . . . . .	L53	BL20-B3T-SBB . . . . .	C58
Bi 5-G18K-RN6X . . . . .	L53	Bi15-G30K-AP6X . . . . .	L53	BL20-B3T-SBC . . . . .	C58
Bi 5-G18-RP6X . . . . .	L53	Bi15-M30-AN6X . . . . .	L53	BL20-B4S-SBBC . . . . .	C58
Bi 5-G18-Y0 . . . . .	L49	Bi15-M30-AP6X . . . . .	L53	BL20-B4T-SBBC . . . . .	C58
Bi 5-M18-AN6X . . . . .	L53	Bi15-M30-RP6X . . . . .	L53	BL20-B6S-SBBSBB . . . . .	C58
Bi 5-M18-AP6X . . . . .	L53	Bi15-M30T-AN6X . . . . .	L53	BL20-B6T-SBBSBB . . . . .	C58
Bi 5-M18T-AN6X . . . . .	L53	Bi15-M30T-AP6X . . . . .	L53	BL20-BR-24VDC-D . . . . .	C45
Bi 5-M18T-AP6X . . . . .	L53	Bi15-Q20-Y0X . . . . .	L50	BL20-E-16DI-24VDC-P . . . . .	C13
Bi 5-M18T-RP6X . . . . .	L53	Bi15-Q20-Y0X-H1141 . . . . .	L50	BL20-E-16D0-24VDC-0.5A-P . . . . .	C19
Bi 5-M18-Y1X-H1141 . . . . .	L49	BIC 84-E424 . . . . .	F26, F45	BL20-E-1SWIRE . . . . .	C51
Bi 5-P18SK-Y1X . . . . .	L49	BiD2-G180-Y1/S212 . . . . .	L49	BL20-E-8DI-24VDC-P . . . . .	C13

BL20-E-8D0-24VDC-0.5A-P . . . . .	C19	BMSWS 8151-8.5 . . . . .	H63	BTS-DSC26-EB1 . . . . .	L26
BL20-GWBR-DNET . . . . .	C7	BMSWS 8251-8.5 . . . . .	H63	BTS-DSC26-EB2 . . . . .	L26
BL20-GWBR-DNET . . . . .	J78	BMWS 8151-8.5 . . . . .	H63	BTS-DSC26-EB3 . . . . .	L26
BL20-GWBR-PBPD . . . . .	H50	BMWS 8251-8.5 . . . . .	H63	BTS-DSU35-EB1 . . . . .	L25
BL20-GW-DPV1 . . . . .	C8	BPA-44-E113 . . . . .	F44	BTS-DSU35-EBE1 . . . . .	L25
BL20-GW-EN . . . . .	C9	BPA-45-E113 . . . . .	H66	BTS-DSU35-EBE2 . . . . .	L26
BL20-GW-EN-IP . . . . .	C10	BPA-57-E113 . . . . .	J123	BTS-DSU35-EU1 . . . . .	L25
BL20-LABEL/BLOCK . . . . .	C62	BPA-57-M113 . . . . .	J123	BTS-DSU35-Z01 . . . . .	L25
BL20-LABEL/SCHEIBE . . . . .	C62	BPA-84-E113 . . . . .	F44	BTS-DSU35-Z02 . . . . .	L25
BL20-P3S-SBB . . . . .	C60	BRPC-49-M213 . . . . .	E53	BTS-DSU35-Z03 . . . . .	L24
BL20-P3S-SBB-B . . . . .	C60	BS 4131-0/13.5 . . . . .	K217	BTS-DSU35-Z04 . . . . .	L25
BL20-P3T-SBB . . . . .	C60	BS 4131-0/9 . . . . .	K217	BTS-DSU35-Z05 . . . . .	L25
BL20-P3T-SBB-B . . . . .	C60	BS 4141-0/13.5 . . . . .	K217	BTS-DSU35-Z06 . . . . .	L25
BL20-P4S-SBBC . . . . .	C60	BS 4141-0/9 . . . . .	K217	BTS-DSU35-Z07 . . . . .	L24
BL20-P4S-SBBC-B . . . . .	C60	BS 4148-0/13.5 . . . . .	H103	BU-R16-2x3/4 NPT-SS . . . . .	M118
BL20-P4T-SBBC . . . . .	C60	BS 4148-0/9 . . . . .	H103	BV 4149-0/16 . . . . .	E67
BL20-P4T-SBBC-B . . . . .	C60	BS 4151-0/13.5 . . . . .	K217	BV 4149-0/9 . . . . .	E67
BL20-PF-120/230VAC-D . . . . .	C43	BS 4151-0/13.5/DNET . . . . .	J143	BWS 8141-0 . . . . .	K219
BL20-PF-24VDC-D . . . . .	C43	BS 4151-0/16 . . . . .	K217	BWS 8151-0 . . . . .	K219
BL20-PG-EN . . . . .	C9	BS 4151-0/9 . . . . .	K217	BWS 8251-0/PG 9 . . . . .	K220
BL20-PG-EN-IP . . . . .	C10	BS 4151-0/9/DNET . . . . .	J143	CA GROUND RING - EURO FEMALE . . . . .	K213
BL20-S3S-SBB . . . . .	C56	BS 4231-0/9 . . . . .	K218	CA GROUND RING - MINI FEMALE . . . . .	K213
BL20-S3S-SBC . . . . .	C56	BS 4241-0/9 . . . . .	K218	CA*E-Q21 . . . . .	L45
BL20-S3T-SBB . . . . .	C56	BS 4251-0/9 . . . . .	K218	CA-1/CK 12 . . . . .	K212
BL20-S3T-SBC . . . . .	C56	BS 8141-0 . . . . .	K221	CA-1/CK 19 . . . . .	K212
BL20-S4S-SBBC . . . . .	C57	BS 8141-0/PG 9 . . . . .	K221	CA-1/CKV 12 . . . . .	K212
BL20-S4S-SBBS . . . . .	C56	BS 8141-0/PG9 . . . . .	H104	CA-1/CKV 19 . . . . .	K212
BL20-S4S-SBBS-CJ . . . . .	C56	BS 8141-0/PG9 . . . . .	E68	CA-1/FK 4.5 . . . . .	K211
BL20-S4S-SBCS . . . . .	C57	BS 8141-0/PG9 . . . . .	G152	CA-1/RKF 30 . . . . .	K209
BL20-S4T-SBBC . . . . .	C57	BS 8151-0/PG 9 . . . . .	K221	CA-1/RKF 40 . . . . .	K209
BL20-S4T-SBBS . . . . .	C56	BS 8151-0/PG9/DNET . . . . .	J144	CA-1/RKF 50 . . . . .	K209
BL20-S4T-SBBS-CJ . . . . .	C56	BS 8181-0 . . . . .	K221	CA-2/FK 4.5 . . . . .	K211
BL20-S4T-SBCS . . . . .	C57	BS 8241-0 . . . . .	K222	CA-2/RKF 30 . . . . .	K210
BL20-S6S-SBBSBB . . . . .	C57	BS 8241-0/PG 9 . . . . .	K222	CA-2/RKF 30/S651 . . . . .	K210
BL20-S6S-SBCSBC . . . . .	C57	BS 8241-0/PG9 . . . . .	H104	CA-2/RKF 40 . . . . .	K210
BL20-S6T-SBBSBB . . . . .	C57	BS 8241-0/PG9 . . . . .	E68	CA-2/RKF 40/S651 . . . . .	K210
BL20-S6T-SBCSBC . . . . .	C57	BS 8241-0/PG9 . . . . .	G152	CA-2/RKF 50 . . . . .	K210
BL20-SWIRE-DIL . . . . .	C54	BS 8251-0/PG 9 . . . . .	K222	CA-2/RKF 50/S651 . . . . .	K210
BL20-SWIRE-PF . . . . .	C55	BS 8251-0/PG9/DNET . . . . .	J144	CBC5 57x-*M . . . . .	J89
BL67-GW-DN . . . . .	J76	BSV 4149-0/16 . . . . .	E67	CF-M-3-N1/4-A4 . . . . .	M96
BL67-GW-DP . . . . .	H48	BSV 4149-0/9 . . . . .	E67	CF-M-3-N1/8-A4 . . . . .	M96
BL67-GW-EN . . . . .	F6	BSWS 8141-0 . . . . .	K221	CF-M-6-N1/2-A4 . . . . .	M96
BL67-GW-EN-IP . . . . .	F7	BSWS 8151-0 . . . . .	K221	CF-M-6-N1/4-A4 . . . . .	M96
BL67-GW-EN-PN . . . . .	F8	BSWS 8241-0 . . . . .	K222	CF-P-3-N1/4-A4 . . . . .	M96
BL67-PG-EN . . . . .	F6	BSWS 8251-0 . . . . .	K222	CF-P-3-N1/8-A4 . . . . .	M96
BL67-PG-EN-IP . . . . .	F7	BTS-DS20-KEY . . . . .	L24	CF-P-6-N1/4-A4 . . . . .	M96
BM 8151-0 . . . . .	K219	BTS-DS20-TK1 . . . . .	L25	CK 12-0 . . . . .	K223
BM1 . . . . .	D21	BTS-DS20-TP1 . . . . .	L25	CK 125-0 . . . . .	K223

## Index

CK 16-0 . . . . .	K223	D9S/T 45x-*M . . . . .	H55	FDN20-32SN . . . . .	J65
CK 19-0 . . . . .	K223	D9SM/T 45x-*M . . . . .	H55	FDN20-4DR . . . . .	J67
CK-CC . . . . .	K234	D9T-RS485 . . . . .	D22	FDN20-4S-4XSG . . . . .	J59
CKF 12-0 . . . . .	K226	D9T-RS485IS . . . . .	D22	FDN20-4S-4XSG-0189 . . . . .	J61
CKF 16-0 . . . . .	K226	D9T-RS485PG . . . . .	D22	FDN20-4S-4XSG-DIN . . . . .	J59
CKF 19-0 . . . . .	K226	DF20EX . . . . .	D15	FDN20-4S-4XSG-E . . . . .	J59
CKFD 12-0 . . . . .	K228	DI40EX . . . . .	D5	FDN20-S0404G-0220 . . . . .	J61
CKFD 16-0 . . . . .	K228	DILM* . . . . .	C49, C54	FDN-DN1 . . . . .	J53
CKFD 19-0 . . . . .	K228	DM80EX . . . . .	D9	FDNL-CPG88-T . . . . .	J15
CKFL 12-0 . . . . .	K227	D040EX . . . . .	D7	FDNL-CSG88-T . . . . .	J17
CKFL 16-0 . . . . .	K227	FAS4-CSG43 . . . . .	G39	FDNL-CSG88-T-V . . . . .	J17
CKFL 19-0 . . . . .	K227	FAS4-CSG43-A . . . . .	G41	FDNL-L0800-C . . . . .	J11
CKF-TOOL . . . . .	K234	FAS4-CSG44 . . . . .	G39	FDNL-L0800-T . . . . .	J11
CKNM 12-9-* . . . . .	K191	FAS4-CSG44-A . . . . .	G41	FDNL-L0800-T-V . . . . .	J11
CKNM 16-16-* . . . . .	K191	FAS4-S0003G-A . . . . .	G45	FDNL-L1600-C . . . . .	J11
CKNWM 12-9-* . . . . .	K192	FAS4-S0202G-A . . . . .	G43	FDNL-L1600-T . . . . .	J11
CKNWM 16-16-* . . . . .	K192	FAS4-S0400 . . . . .	G37	FDNL-N0800-T . . . . .	J13
CK-TOOL . . . . .	K234	FCI-BP . . . . .	M75	FDNL-N1600-T . . . . .	J13
CMBSD 8141-0/PG9 . . . . .	F48	FCI-D04A4P-AP8X-H1141 . . . . .	M65	FDNL-S0800-T . . . . .	J13
CMBSD 8241-0/PG9 . . . . .	F48	FCI-D08A4P-ARX-H1140/D038 . . . . .	M65	FDNL-S1204H-0142 . . . . .	J21
Connector, RJ45S IDC . . . . .	F47	FCI-D10A4P-2ARX-H1160/D201 . . . . .	M59	FDNL-S1204H-0153 . . . . .	J21
CORD-DSUB BW1058 . . . . .	G107	FCI-D10A4P-2ARX-H1160/D203 . . . . .	M59	FDNL-S1600-E . . . . .	J13
CORD-DSUB BW1097 . . . . .	G106	FCI-D10A4P-2ARX-H1160/D205 . . . . .	M59	FDNL-S1600-T . . . . .	J13
CORD-DSUB BW1226 . . . . .	G107	FCI-D10A4P-AP8X-H1141 . . . . .	M65	FDNL-S1600-T-V . . . . .	J13
CS 12-0 . . . . .	K225	FCI-D10A4P-ARX-H1140 . . . . .	M65	FDNL-SN0808N-C . . . . .	J19
CS 125-0 . . . . .	K225	FCI-D15A4P-2ARX-H1160/D209 . . . . .	M59	FDN-MSTR-1220 . . . . .	J49
CS 16-0 . . . . .	K225	FCI-TCD04A4P-AP8X-H1141 . . . . .	M65	FDN-PCB-22 . . . . .	J69
CS 19-0 . . . . .	K225	FCI-TCD04A4P-ARX-H1140 . . . . .	M65	FDN-PCB-22-1003-BKT . . . . .	J71
CS-CC . . . . .	K234	FCS-50A4-AP8X-H1141/D014 . . . . .	M63	FDN-PCB-22-OEM . . . . .	J69
CSF 12-0 . . . . .	K226	FCS-G1/2A4-AP8X-H1141 . . . . .	M63	FDNP-CPG88-TT . . . . .	J25
CSF 16-0 . . . . .	K226	FCS-G1/4A4-ARX-H1140 . . . . .	M63	FDNP-CSG88-TT . . . . .	J31
CSF 19-0 . . . . .	K226	FCS-G1/4A4-NAEX . . . . .	M69	FDNP-L0404G-TT . . . . .	J23
CSFL 12-0 . . . . .	K227	FCS-GL1/2A4-NAEX/D500 . . . . .	M69	FDNP-L0808G-TT . . . . .	J23
CSFL 16-0 . . . . .	K227	FCS-N1/2A4-AN8X-H1141 . . . . .	M63	FDNP-L0808H-TT . . . . .	J23
CSFL 19-0 . . . . .	K227	FCS-N1/2A4-AP8X-H1141 . . . . .	M63	FDNP-N1600-TT-0197 . . . . .	J29
CSNM 12-9-* . . . . .	K191	FCS-N1/2A4-ARX-H1140 . . . . .	M63	FDNP-P0808H-TT . . . . .	J23
CSNM 16-16-* . . . . .	K191	FCS-N1/2A4-NA . . . . .	M67	FDNP-P1204G-TT move . . . . .	J33
CSNWM 12-9-* . . . . .	K192	FCS-N1/2A4-NAEX . . . . .	M69	FDNP-S0008G-TT . . . . .	J27
CSNWM 16-16-* . . . . .	K192	FCS-N1/2A4-NAEX-H1141 . . . . .	M69	FDNP-S0008G-TT-V . . . . .	J27
CSS 12-0 . . . . .	K224	FCS-N1/2A4-NA-H1141 . . . . .	M67	FDNP-S0008H-TT . . . . .	J27
CSS 125-0 . . . . .	K224	FCS-N1/2A4P-2AP8X-H1140 . . . . .	M61	FDNP-S0016N-TT-0200 . . . . .	J27
CSS 16-0 . . . . .	K224	FCS-N1/2A4P-AP8X-H1141 . . . . .	M61	FDNP-S0404G-TT . . . . .	J31
CSS 19-0 . . . . .	K224	FCS-N3/4A4-NA-H1141 . . . . .	M67	FDNP-S0808G-ST . . . . .	J35
CSSNM 12-9-* . . . . .	K193	FD-G1/2AFM30/34 . . . . .	M76	FDNP-S0808G-TT . . . . .	J31
CSSNM 16-16-* . . . . .	K193	FD-G1/4AFM30/34 . . . . .	M76	FDNP-S1204H-TT-0149 . . . . .	J31
CSSNWM 12-9-* . . . . .	K193	FDN20-16S . . . . .	J63	FDNP-XSG16-ST . . . . .	J35
CSSNWM 16-16-* . . . . .	K193	FDN20-16SN-16XSG . . . . .	J65	FDNP-XSG16-TT . . . . .	J31
D9S 45x-*M . . . . .	H56	FDN20-16XSG . . . . .	J63	FDNQ-4AI-I-T . . . . .	J45

# Process Automation



## Index

FDNQ-4AI-V/I-T . . . . .	J47	FK-R16-183-SSFE . . . . .	M118	FS 25-*M/14.75 . . . . .	G145
FDNQ-CSG44-E . . . . .	J41	FK-R16-202-NSH . . . . .	M118	FS 25-*M/M20 . . . . .	G145
FDNQ-CSG44-T . . . . .	J41	FK-R16-205-SSES . . . . .	M118	FS 25-*M/NPT . . . . .	G145
FDNQ-S0002G-T . . . . .	J39	FK-R16-207-PPS . . . . .	M118	FS 57 PCB . . . . .	J135
FDNQ-S0200-T . . . . .	J37	FKSDD RJ45SF 44 . . . . .	F46	FS 57 PCB KIT . . . . .	J135
FDNQ-S0201G-T . . . . .	J41	FKSDE 84x-*M . . . . .	F19	FS 57-*M . . . . .	J132
FDNQ-S0400-C . . . . .	J37	FKSDED 44x-*M . . . . .	F33	FS 57-*M/14.5 . . . . .	J132
FDNQ-S0400-T . . . . .	J37	FKSDWE D9S FKSDWE 45x-*M-*M . . . . .	H56	FS 57-*M/14.75 . . . . .	J132
FDNQ-S0404G-MM . . . . .	J43	FKSDWE D9S/T 45x-*M . . . . .	H55	FS 57-*M/M20 . . . . .	J132
FDNQ-S0404G-T . . . . .	J41	FKSDWE D9SM/T 45x-*M . . . . .	H55	FS 57-*M/NPT . . . . .	J132
FDNQ-S0800-T . . . . .	J37	FKSDWE SD9S FKSDWE 45x-*M-*M . . . . .	H56	FS 84 PCB . . . . .	F27
FDNQ-XSG08-T . . . . .	J41	FKV 48-*M . . . . .	H98	FS 84 PCB KIT . . . . .	F27
FDP20-16S . . . . .	H35	FKV 48-*M/14.5 . . . . .	H98	FS-CC . . . . .	K232
FDP20-16XSG . . . . .	H35	FKV 48-*M/14.75 . . . . .	H98	FSFD 25x-*M . . . . .	G114
FK 25-*M . . . . .	G146	FKV 48-*M/M20 . . . . .	H98	FSFD 57 PCB . . . . .	J136
FK 25-*M/14.5 . . . . .	G146	FKV 48-*M/NPT . . . . .	H98	FSFD 57x-*M . . . . .	J88
FK 25-*M/14.75 . . . . .	G146	FKV 49-*M . . . . .	E62	FSFD 84 PCB . . . . .	F28
FK 25-*M/M20 . . . . .	G146	FKV 49-*M/14.5 . . . . .	E62	FSFD 84x-*M . . . . .	F18
FK 25-*M/NPT . . . . .	G146	FKV 49-*M/14.75 . . . . .	E62	FSFD BK52C 57x-*M . . . . .	J90
FK 57 PCB . . . . .	J135	FKV 49-*M/M20 . . . . .	E62	FSFD CBC5 57x-*M . . . . .	J90
FK 57 PCB KIT . . . . .	J135	FKV 49-*M/NPT . . . . .	E62	FSFDD 44x-*M . . . . .	F32
FK 57-*M . . . . .	J133	FKV FSV 48/M12 . . . . .	H74	FSFDL 57 . . . . .	J136
FK 57-*M/14.5 . . . . .	J133	FKV FSV 49/M12 . . . . .	E23	FSFDL 84 . . . . .	F28
FK 57-*M/14.75 . . . . .	J133	FKV-CC . . . . .	K232	FSFDLW 45 . . . . .	H64
FK 57-*M/M20 . . . . .	J133	FKW FSW 45/M12 . . . . .	H61	FSFDV 48x-*M . . . . .	H70
FK 57-*M/NPT . . . . .	J133	Flange, 2 inch Tri-clamp . . . . .	M117	FSFDV 49x-*M . . . . .	E18
FK 57-IDC . . . . .	J94	Flange, 2.5 inch Tri-clamp . . . . .	M117	FSFDW 45 PCB . . . . .	H64
FK 57-IDC ET . . . . .	J94	Flange, 3 inch Tri-clamp . . . . .	M117	FSK-CC . . . . .	K232
FK 84 PCB . . . . .	F27	Flange, 4 inch Tri-clamp . . . . .	M117	FSSDE 84x-*M . . . . .	F19
FK 84 PCB KIT . . . . .	F27	FLDP-IM 16-0001 . . . . .	H11	FSSDED 44x-*M . . . . .	F33
FK-CC . . . . .	K232	FLDP-IM 32-0001 . . . . .	H13	FSSDWE D9S FKSDWE 45x-*M-*M . . . . .	H56
FKFD 25x-*M . . . . .	G114	FLDP-IM 8-0001 . . . . .	H11	FSSDWE D9S FSSDWE 45x-*M-*M . . . . .	H56
FKFD 57 PCB . . . . .	J136	FLDP-IOM 1616-0001 . . . . .	H25	FSSDWE D9S/T 45x-*M . . . . .	H55
FKFD 57x-*M . . . . .	J88	FLDP-IOM 2012-0001 . . . . .	H27	FSSDWE D9SM/T 45x-*M . . . . .	H55
FKFD 84 PCB . . . . .	F28	FLDP-IOM 248-0001 . . . . .	H25	FSSDWE SD9S FKSDWE 45x-*M-*M . . . . .	H56
FKFD 84x-*M . . . . .	F18	FLDP-IOM 84-0001 . . . . .	H21	FSSDWE SD9S FSSDWE 45x-*M-*M . . . . .	H56
FKFD BK52C 57x-*M . . . . .	J90	FLDP-IOM 88-0001 . . . . .	H21	FSSDWE SD9S/T 45x-*M-*M . . . . .	H56
FKFD CBC5 57x-*M . . . . .	J90	FLDP-IOM 88-0002 . . . . .	H21	FSV 48-*M . . . . .	H97
FKFDD 44x-*M . . . . .	F32	FLDP-IOM 88-0002-ST . . . . .	H23	FSV 48-*M/14.5 . . . . .	H97
FKFDL 57 . . . . .	J136	FLDP-IOM 88-0004 . . . . .	H21	FSV 48-*M/14.75 . . . . .	H97
FKFDL 84 . . . . .	F28	FLDP-IOM124-0001 . . . . .	H29	FSV 48-*M/M20 . . . . .	H97
FKFDLW 45 . . . . .	H64	FLDP-IOM124-0002 . . . . .	H29	FSV 48-*M/NPT . . . . .	H97
FKFDV 48x-*M . . . . .	H70	FLDP-OM 16-0001 . . . . .	H17	FSV 49-*M . . . . .	E61
FKFDV 49x-*M . . . . .	E18	FLDP-OM 8-0001 . . . . .	H17	FSV 49-*M/14.5 . . . . .	E61
FKFDW 45 PCB . . . . .	H64	FLDP-OM 8-0002 . . . . .	H17	FSV 49-*M/14.75 . . . . .	E61
FKK-CC . . . . .	K232	FM-Q21 . . . . .	L45	FSV 49-*M/M20 . . . . .	E61
FKM FS 57/M12 . . . . .	J96	FS 25-*M . . . . .	G145	FSV 49-*M/NPT . . . . .	E61
FK-R16-183-SSES . . . . .	M118	FS 25-*M/14.5 . . . . .	G145	FSV-CC . . . . .	K232

# TURCK

## Process Automation Products

### Index

FSV-D06/M12 . . . . .	M75	IM1-22Ex-T . . . . .	B17	JBBS-48SC-M613 . . . . .	H75
FSV-D08/M12 . . . . .	M75	IM1-451Ex-R . . . . .	B27	JBBS-48SC-M813 . . . . .	H75
FSV-D10/M16 . . . . .	M75	IM1-451Ex-T . . . . .	B29	JBBS-49-E413 . . . . .	E41
FSV-D12/M16 . . . . .	M75	IM31-11Ex-i . . . . .	B33	JBBS-49-E414 . . . . .	E41
FSV-D3/8-M16 . . . . .	M75	IM31-11Ex-U . . . . .	B35	JBBS-49-E423 . . . . .	E47
FSV-SS 1/2 KIT (2 sets) . . . . .	M76	IM31-12Ex-i . . . . .	B37	JBBS-49-E424 . . . . .	E47
FSV-SS 1/2 TS-NPT . . . . .	M76	IM31-22Ex-i . . . . .	B39	JBBS-49-E613/3GD . . . . .	E41
FSV-SS 3/4 KIT (2 sets) . . . . .	M76	IM31-22Ex-U . . . . .	B41	JBBS-49-E614 . . . . .	E41
FSV-SS 3/4 TS-NPT . . . . .	M76	IM33-11Ex-Hi/24 VDC . . . . .	B47	JBBS-49-E623 . . . . .	E47
FSV-SS 3/8 KIT (2 sets) . . . . .	M76	IM33-12Ex-Hi/24 VDC . . . . .	B49	JBBS-49-E624 . . . . .	E47
FSV-SS 3/8 TS-NPT . . . . .	M76	IM33-22Ex-Hi/24 VDC . . . . .	B51	JBBS-49-E813 . . . . .	E41
FSV-SS-1/2X1/4 . . . . .	M75	IM34-11Ex-Ci . . . . .	B59	JBBS-49-E814 . . . . .	E41
FSV-SS-1/4X1/4 . . . . .	M75	IM34-11Ex-I . . . . .	B55	JBBS-49-E823 . . . . .	E49
FSV-SS-1/8X1/4 . . . . .	M75	IM34-12Ex-CRi . . . . .	B61	JBBS-49-E824 . . . . .	E49
FSV-SS-3/8X1/4 . . . . .	M75	IM34-12Ex-Ri . . . . .	B57	JBBS-49-M413 . . . . .	E29
FTCI-1/2D10A4P-2UP8X-H1141 . . . . .	M53	IM35-11Ex-Hi/24 VDC . . . . .	B73	JBBS-49-M414 . . . . .	E29
FTCI-1/2D10A4P-4UP8X-H1160 . . . . .	M55	IM35-22Ex-Hi/24 VDC . . . . .	B75	JBBS-49-M423 . . . . .	E33
FTCI-1/2D10A4P-LI-UP8X-H1141 . . . . .	M57	IM72-11Ex/L . . . . .	B79	JBBS-49-M424 . . . . .	E33
FTCI-3/4D15A4P-2UP8X-H1141 . . . . .	M53	IM72-22Ex/L . . . . .	B81	JBBS-49-M613 . . . . .	E29
FTCI-3/4D15A4P-4UP8X-H1160 . . . . .	M55	JBBS-25-E413 . . . . .	G125	JBBS-49-M613/EX . . . . .	E35
FTCI-3/4D15A4P-LI-UP8X-H1141 . . . . .	M57	JBBS-25-E613 . . . . .	G127	JBBS-49-M614 . . . . .	E29
FTCI-3/8D10A4P-2UP8X-H1141 . . . . .	M53	JBBS-25-E623 . . . . .	G131	JBBS-49-M623 . . . . .	E33
FTCI-3/8D10A4P-4UP8X-H1160 . . . . .	M55	JBBS-25-E812 . . . . .	G117	JBBS-49-M624 . . . . .	E33
FTCI-3/8D10A4P-LI-UP8X-H1141 . . . . .	M57	JBBS-25-E813 . . . . .	G129	JBBS-49-M813 . . . . .	E29
FTCS-N1/2A4P-2AP8X-H1140 . . . . .	M61	JBBS-25-M414 . . . . .	G119	JBBS-49-M814 . . . . .	E29
FW5/101-150 . . . . .	C62	JBBS-25-M613 . . . . .	G119	JBBS-49-M823 . . . . .	E33
FW5/1-50 . . . . .	C62	JBBS-25-M614 . . . . .	G119	JBBS-49-M824 . . . . .	E33
FW5/151-200 . . . . .	C62	JBBS-25-M814 . . . . .	G119	JBBS-49SC-E413 . . . . .	E43
FW5/51-100 . . . . .	C62	JBBS-25SC-E413 . . . . .	G133	JBBS-49SC-E613 . . . . .	E43
FXDP-CSG 88-0001 . . . . .	H31	JBBS-25SC-E613 . . . . .	G135	JBBS-49SC-E813 . . . . .	E45
FXDP-IM 16-0001 . . . . .	H15	JBBS-25SC-M413 . . . . .	G121	JBBS-49SC-M413 . . . . .	E31
FXDP-IM 8-0001 . . . . .	H15	JBBS-25SC-M613 . . . . .	G123	JBBS-49SC-M413/EX . . . . .	E37
FXDP-IOM 88-0001 . . . . .	H31	JBBS-48-E413 . . . . .	H79	JBBS-49SC-M613 . . . . .	E31
FXDP-OM 16-0001 . . . . .	H19	JBBS-48-E414 . . . . .	H85	JBBS-49SC-M613/EX . . . . .	E37
FXDP-OM 8-0001 . . . . .	H19	JBBS-48-E613 . . . . .	H79	JBBS-49SC-M813 . . . . .	E31
FXDP-XSG 16-0001 . . . . .	H31	JBBS-48-E614 . . . . .	H85	JBBS-49SC-T415B/EX . . . . .	E39
GDP1.5 . . . . .	D4	JBBS-48-E813 . . . . .	H81	JBBS-49SC-T615B/EX . . . . .	E39
GUARD-DSU35-AD . . . . .	L27	JBBS-48-E814 . . . . .	H87	JBBS-57-DGM . . . . .	J115
GUARD-DSU35-DC . . . . .	L27	JBBS-48-M413 . . . . .	H75	JBBS-57-E1001 . . . . .	J113
GUARD-DSU35-DCS . . . . .	L27	JBBS-48-M423 . . . . .	H77	JBBS-57-E401 . . . . .	J107
IC-232-485 BW1094 . . . . .	G105	JBBS-48-M613 . . . . .	H75	JBBS-57-E403 . . . . .	J107
IM1-121Ex-R . . . . .	B11	JBBS-48-M623 . . . . .	H77	JBBS-57-E411 . . . . .	J107
IM1-121Ex-T . . . . .	B13	JBBS-48-M813 . . . . .	H75	JBBS-57-E421 . . . . .	J107
IM1-12Ex-MT . . . . .	B25	JBBS-48SC-E413 . . . . .	H79	JBBS-57-E601 . . . . .	J109
IM1-12Ex-R . . . . .	B21	JBBS-48SC-E613 . . . . .	H79	JBBS-57-E621 . . . . .	J109
IM1-12Ex-T . . . . .	B23	JBBS-48SC-E613/EX . . . . .	H83	JBBS-57-E801 . . . . .	J111
IM1-22Ex-MT . . . . .	B19	JBBS-48SC-E813 . . . . .	H81	JBBS-57-E803 . . . . .	J111
IM1-22Ex-R . . . . .	B15	JBBS-48SC-M413 . . . . .	H75	JBBS-57-E811 . . . . .	J99

## Index

JBBS-57-E812 . . . . .	J99	LPRE-M30-AP6X2-H1141 . . . . .	M107	MK91-12-R/24VDC . . . . .	M127
JBBS-57-E821 . . . . .	J111	LPRE-T50-UP6X3-H1151 . . . . .	M107	MK91-R11/24VDC . . . . .	M125
JBBS-57-M401 . . . . .	J101	LT*E-Q21-DQL*N*X2-H11121 . . . . .	L43	MK96-11-R/24VDC . . . . .	M71
JBBS-57-M413 . . . . .	J101	LT*E-Q21-DQR*N*X2-H11121 . . . . .	L43	MK96-LI01 . . . . .	M71
JBBS-57-M601 . . . . .	J101	LT*E-Q21-DQR*V*X2-H11121 . . . . .	L43	MK96-VN01 . . . . .	M71
JBBS-57-M613 . . . . .	J101	LT*E-Q21D-RS-X3-H1161 . . . . .	L43	MK96-VP01 . . . . .	M71
JBBS-57-M623 . . . . .	J105	LT*E-Q21D-VPE-X3-H1161 . . . . .	L43	MODEX-FILTER . . . . .	D22
JBBS-57-M801 . . . . .	J103	LT*E-Q21D-VPI*-X3-H1161 . . . . .	L43	MS91-12-R/115VAC . . . . .	M127
JBBS-57-M813 . . . . .	J103	LT*E-Q21-LI0X3-H1141 . . . . .	L41	MS91-12-R/230VAC . . . . .	M127
JBBS-57-SM01 . . . . .	J117	LT*E-Q21-LI1X3-H1141 . . . . .	L41	MS91-12-R/24VDC . . . . .	M127
JRBS-40-4/EX . . . . .	E25	LT*E-Q21-LU0X3-H1141 . . . . .	L41	MS96-11Ex-R/115VAC . . . . .	M73
JRBS-40-6/EX . . . . .	E25	LT*E-Q21-LU1X3-H1141 . . . . .	L41	MS96-11Ex-R/24VDC . . . . .	M73
JRBS-40-8/EX . . . . .	E25	LT*E-Q21-LU2X3-H1141 . . . . .	L41	MS96-12R/115VAC . . . . .	M73
JRBS-40SC-4/EX . . . . .	E25	LT*E-Q21-LU3X3-H1141 . . . . .	L41	MS96-12R/24VDC . . . . .	M73
JRBS-40SC-6/EX . . . . .	E25	LT*E-Q21-LU4X3-H1141 . . . . .	L41	MS-CO BW1453 . . . . .	G106
JRBS-40SC-8/EX . . . . .	E25	LT*E-Q21-LU5X3-H1141 . . . . .	L41	MS-DN BW1420 . . . . .	G106
JRBS-49SC-8 . . . . .	E27	LT*E-Q21-LU6X3-H1141 . . . . .	L41	MS-DN BW1625 . . . . .	G106
JRBS-57-4 . . . . .	J97	LT*E-Q21-LU7X3-H1141 . . . . .	L41	MS-DP BW1131 . . . . .	G105
JRBS-57-6 . . . . .	J97	LT*E-Q21R-LI0X3-H1151 . . . . .	L41, L49	MS-DP BW1257 . . . . .	G105
JRBS-57-8 . . . . .	J97	LT*E-Q21R-LI1X3-H1151 . . . . .	L41	MS-DP BW1258 . . . . .	G105
LOCK-EURO-FW . . . . .	K208	LT*E-Q21R-LU0X3-H1151 . . . . .	L41	MT18-R024 . . . . .	D19
LOCK-EURO-FW (10/BAG) . . . . .	K208	LT*E-Q21R-LU1X3-H1151 . . . . .	L41	MT9/FM . . . . .	D19
LOCK-EURO-G . . . . .	K208	LT*E-R16-3*LIO-EX-B1140 . . . . .	M113	N1/2-G1/2-BT . . . . .	M76
LOCK-EURO-G (10/BAG) . . . . .	K208	LT*E-R16-3*LIO-EX-D . . . . .	M113	N1/2-G1/2-SST . . . . .	M76
LOCK-EURO-R . . . . .	K208	LT*E-R16-3*LI1-EX-B1140 . . . . .	M113	NHI-E-10L-PL20 . . . . .	C54
LOCK-EURO-R (10/BAG) . . . . .	K208	LT*E-R16-3*LI1-EX-D . . . . .	M113	Ni 1.5-EG08K-Y1-H1341 . . . . .	L49
LOCK-MINI . . . . .	K207	LT*E-R16-3LIO-EX-B1140 . . . . .	M113	Ni 1.5-EG08K-Y1X-H1341 . . . . .	L49
LOCK-MINI (10/BAG) . . . . .	K207	LT*E-R16-3LIO-EX-D . . . . .	M113	Ni 1.5-EG08-Y1-H1341 . . . . .	L49
LOCK-MINI-ANGLE . . . . .	K207	LT*E-R16-3LI1-EX-B1140 . . . . .	M113	Ni 2-G08-Y1 . . . . .	L49
LOCK-MINI-ANGLE (10/BAG) . . . . .	K207	LT*E-R16-3LI1-EX-D . . . . .	M113	Ni 3-EG08K-Y1 . . . . .	L49
LOCK-MINI-B&C . . . . .	K207	LT*E-R16-F*LIO-EX-B1140 . . . . .	M113	Ni 4-DS20-2AP6X2 . . . . .	L19
LOCK-MINI-B&C (10/BAG) . . . . .	K207	LT*E-R16-F*LI1-EX-B1140 . . . . .	M113	Ni 4-DS20-2AP6X2-H1141 . . . . .	L19
LOCK-MINI-B&C-ANGLE . . . . .	K207	LT*E-R16-PCLI0-EX-S . . . . .	M115	Ni 4-DS20-2AZ31X2-B3151 . . . . .	L19
LOCK-MINI-B&C-ANGLE (10/BAG) . . . . .	K207	LT*E-R16-PCLI1-EX-S . . . . .	M115	Ni 4-DS20-2Y1X2 . . . . .	L19
LOCK-MINI-FW . . . . .	K207	LT*E-R16-PLIO-EX-D . . . . .	M115	Ni 4-DS20-2Y1X2-H1140 . . . . .	L19
LOCK-MINI-FW (10/BAG) . . . . .	K207	LT*E-R16-PLIO-EX-S . . . . .	M115	Ni 4-DSC26-2AP6X2-H1141 . . . . .	L15
LP-Clamping Adapter . . . . .	M109	LT*E-R16-PLI1-EX-D . . . . .	M115	Ni 4-DSU26-2ADZ30X2 . . . . .	L17
LP-MS-T50-K . . . . .	M109	LT*E-R16-PLI1-EX-S . . . . .	M115	Ni 4-DSU26-2AP4X2-H1141 . . . . .	L15
LP-MS-T50-S . . . . .	M109	LT*E-R16-S*LIO-EX-B1140 . . . . .	M113	Ni 4-DSU26-2ASIX4-H1140 . . . . .	L15
LP-MZ-M30-B1000 . . . . .	M109	LT*E-R16-S*LIO-EX-B1140/3A . . . . .	M115	Ni 4-DSU26-2Y1X2-H1140 . . . . .	L15
LP-MZ-M30-B250 . . . . .	M109	LT*E-R16-S*LI1-EX-B1140 . . . . .	M113	Ni 4-DSU26TC-2ADZ30X2 . . . . .	L17
LP-MZ-M30-B500 . . . . .	M109	LT*E-R16-S*LI1-EX-B1140/3A . . . . .	M115	Ni 4-DSU35-2ADZ30X2 . . . . .	L9
LP-MZ-M30-SB . . . . .	M109	MB-Q21 . . . . .	L45	Ni 4-DSU35-2ADZ30X2-B1151 . . . . .	L13
LP-MZ-M30-T50 . . . . .	M109	MK91-121-R/115VAC . . . . .	M125	Ni 4-DSU35-2ADZ35X2-B1151 . . . . .	L13
LPMZ-T50-CS . . . . .	M109	MK91-121-R/230VAC . . . . .	M125	Ni 4-DSU35-2AN4X2 . . . . .	L9
LP-MZ-T50-D . . . . .	M109	MK91-121-R/24VDC . . . . .	M125	Ni 4-DSU35-2AN4X2-H1141 . . . . .	L13
LP-MZ-T50-SR . . . . .	M109	MK91-12-R/115VAC . . . . .	M127	Ni 4-DSU35-2AP4X2 . . . . .	L9
LP-OKS1110 . . . . .	M109	MK91-12-R/230VAC . . . . .	M127	Ni 4-DSU35-2AP4X2-B1160-FKE4.5 . . . . .	L13

## Index

Ni 4-DTU35-2AP4X2-B1160-FKE45 . . . . L13	Ni10-G18K-AN6X . . . . . L53	P-4 RKF 40-415-* /C . . . . . K79
Ni 4-DTU35-2AP4X2-H1141 . . . . . L13	Ni10-G18K-AP6X . . . . . L53	P-4 RKF 40-960-* . . . . . K79
Ni 4-DTU35-2ASIX4-H1140 . . . . . L13	Ni10-G18K-RP6X . . . . . L53	P-4 RKF 40-978-* . . . . . K81
Ni 4-DTU35-2DNETX5-H1150 . . . . . L13	Ni10-G18-RN6X . . . . . L53	P-4 RKF 40-978-* /C . . . . . K81
Ni 4-DTU35-2Y0X2-H1140 . . . . . L13	Ni10-G18-RP6X . . . . . L53	P-4 RKF 40-CS12 . . . . . K83
Ni 4-DTU35-2Y1X2 . . . . . L9	Ni10-G18-Y0 . . . . . L49	P-4 RKF 40-CS12/C . . . . . K83
Ni 4-DTU35TC-2ADZ30X2 . . . . . L11	Ni10-G18-Y0X . . . . . L49	P-4 RKF 56-CS19 . . . . . K171
Ni 4-DTU35TC-2AP4X2 . . . . . L11	Ni10-K18-Y1 . . . . . L49	P-4 RKF 66-CS19 . . . . . K171
Ni 4-DTU35TC-2ASIX4 . . . . . L11	Ni10-K20-Y1 . . . . . L49	P-4 RKFV 40-415-* /C . . . . . K79
Ni 4-DTU35TC-2Y1X2 . . . . . L11	Ni10-M18-Y1X-H1141 . . . . . L49	P-4 RKFV 40-960-* . . . . . K79
Ni 4-M12-AP6X . . . . . L53	Ni10-P18SK-Y1X . . . . . L49	P-4 RKFV 40-978-* . . . . . K81
Ni 4-M12T-AN6X . . . . . L53	Ni10-P18-Y0/S100 . . . . . L49	P-4 RKFV 40-978-* /C . . . . . K81
Ni 4-M12T-AP6X . . . . . L53	Ni10-P18-Y0X . . . . . L49	P-4 RKFV 40-CSV12 . . . . . K83
Ni 4-S12-AN6X . . . . . L53	Ni10-P18-Y1 . . . . . L49	P-4 RKFV 40-CSV12/C . . . . . K83
Ni 4-S12-AP6 . . . . . L53	Ni15-G30-Y0 . . . . . L49	P-4 RKFV 56-CSV19 . . . . . K171
Ni 4-S12-AP6X . . . . . L53	Ni15-G30-Y0X . . . . . L49	P-4 RKFV 66-CSV19 . . . . . K171
Ni 5-G12-AN6 . . . . . L53	Ni15-M30T-AN6X . . . . . L53	P-4MB12-4-415-* /C . . . . . K33
Ni 5-G12-AN6X . . . . . L53	Ni15-M30T-AP6X . . . . . L53	P-4MB12-4-960-* . . . . . K33
Ni 5-G12-AP6 . . . . . L53	Ni15-P30-Y0X . . . . . L49	P-4MB12-4-978-* . . . . . K35
Ni 5-G12-AP6X . . . . . L53	Ni15-P30-Y1 . . . . . L49	P-4MB12-4-978-* /C . . . . . K35
Ni 5-G12K-AN6X . . . . . L53	Ni15-S30-AN6X . . . . . L53	P-4MB12-4-CS12 . . . . . K39
Ni 5-G12K-AP6 . . . . . L53	Ni20-CP40-Y1X . . . . . L50	P-4MB12-4-CS12/C . . . . . K39
Ni 5-G12K-AP6X . . . . . L53	Ni20-K40-Y1 . . . . . L49	P-4MBV12-4-415-* /C . . . . . K33
Ni 5-G12K-RN6X . . . . . L53	Ni40-CP40-Y1 . . . . . L50	P-4MBV12-4-960-* . . . . . K33
Ni 5-G12K-RP6X . . . . . L53	Ni50-CP40-Y1 . . . . . L50	P-4MBV12-4-978-* . . . . . K35
Ni 5-G12-RN6X . . . . . L53	Ni50-K90SR-Y1/M20 . . . . . L50	P-4MBV12-4-978-* /C . . . . . K35
Ni 5-G12-RP6X . . . . . L53	Ni60-Q80-Y0X . . . . . L50	P-4MBV12-4-CSV12 . . . . . K39
Ni 5-G12-Y0 . . . . . L49	OC11EX/2G . . . . . D23	P-4MBV12-4-CSV12/C . . . . . K39
Ni 5-G12-Y0-H1141 . . . . . L49	OC11EX/3G . . . . . D23	P-8 RKF 40-416-* /C . . . . . K79
Ni 5-G12-Y0X . . . . . L49	ODNA-4S-4XSG-E . . . . . J73	P-8 RKF 40-959-* . . . . . K79
Ni 5-K11-Y0 . . . . . L49	P-2RKFV-40BEX-* /14.5/NPT . . . . . K77	P-8 RKF 40-977-* . . . . . K81
Ni 5-M12-Y1X-H1141 . . . . . L49	P-2RKFV-40BEX-* /14.75/NPT . . . . . K77	P-8 RKF 40-977-* /C . . . . . K81
Ni 5-P12SK-Y0X . . . . . L49	P-2RKFV-40BEX-* /M20 . . . . . K78	P-8 RKF 40-CS19 . . . . . K83
Ni 5-P12-Y0/S100 . . . . . L49	P-2RKFV-40EX-* /14.5/NPT . . . . . K77	P-8 RKF 40-CS19/C . . . . . K83
Ni 5-P12-Y0X . . . . . L49	P-2RKFV-40EX-* /14.75/NPT . . . . . K77	P-8 RKFV 40-416-* /C . . . . . K79
Ni 5-P12-Y1 . . . . . L49	P-2RKFV-40EX-* /M20 . . . . . K78	P-8 RKFV 40-959-* . . . . . K79
Ni 5-S12-Y0X-H1141 . . . . . L49	P-2RKFV-44EX-* /14.5/NPT . . . . . K169	P-8 RKFV 40-977-* . . . . . K81
Ni 8-M18-AP6X . . . . . L53	P-2RKFV-44EX-* /14.75/NPT . . . . . K169	P-8 RKFV 40-977-* /C . . . . . K81
Ni 8-M18T-AN6X . . . . . L53	P-2RKFV-44EX-* /M20 . . . . . K170	P-8 RKFV 40-CSV19 . . . . . K83
Ni 8-M18T-AP6X . . . . . L53	P-2RSFV-40BEX-* /14.5/NPT . . . . . K77	P-8 RKFV 40-CSV19/C . . . . . K83
Ni 8-S18-AN6X . . . . . L53	P-2RSFV-40BEX-* /14.75/NPT . . . . . K78	P-8MB12-4-416-* /C . . . . . K33
Ni 8-S18-AP6 . . . . . L53	P-2RSFV-40BEX-* /M20 . . . . . K78	P-8MB12-4-959-* . . . . . K33
Ni 8-S18-AP6X . . . . . L53	P-2RSFV-40EX-* /14.5/NPT . . . . . K77	P-8MB12-4-977-* . . . . . K35
Ni 8-S18-RN6X . . . . . L53	P-2RSFV-40EX-* /14.75/NPT . . . . . K78	P-8MB12-4-977-* /C . . . . . K35
Ni10-G18-AN6 . . . . . L53	P-2RSFV-40EX-* /M20 . . . . . K78	P-8MB12-4-CS19 . . . . . K39
Ni10-G18-AN6X . . . . . L53	P-2RSFV-44EX-* /14.5/NPT . . . . . K169	P-8MB12-4-CS19/C . . . . . K39
Ni10-G18-AP6 . . . . . L53	P-2RSFV-44EX-* /14.75/NPT . . . . . K170	P-8MBV12-4-416-* /C . . . . . K33
Ni10-G18-AP6X . . . . . L53	P-2RSFV-44EX-* /M20 . . . . . K170	P-8MBV12-4-959-* . . . . . K33

# Process Automation



## Index

P-8MBV12-4-977-* . . . . .	K35	P-CKWM 19-959-* . . . . .	K87	P-FK 4.4-698-* /M20 . . . . .	K107
P-8MBV12-4-977-* /C . . . . .	K35	P-CKWM 19-977-* . . . . .	K91	P-FK 4.61-124-* /14.5/NPT . . . . .	K21
P-8MBV12-4-CSV19 . . . . .	K39	PCS-AB-KIT . . . . .	M35	P-FK 4.61-124-* /14.75/NPT . . . . .	K23
P-8MBV12-4-CSV19/C . . . . .	K39	P-CSFL 12-* . . . . .	K96	P-FK 4.61-124-* /M20 . . . . .	K25
PC.../S1049 . . . . .	M31	P-CSFL 12-229-* . . . . .	K94	P-FK 4.6-124-* /14.5/NPT . . . . .	K21
PC.../S1593 . . . . .	M31	P-CSFL 12-960-* . . . . .	K94	P-FK 4.6-124-* /14.75/NPT . . . . .	K23
PC.../S160 . . . . .	M29	P-CSFL 19-* . . . . .	K96	P-FK 4.6-124-* /M20 . . . . .	K25
PC.../S1605 . . . . .	M29	P-CSFL 19-230-* . . . . .	K94	P-FK 4.60-* /14.5/NPT . . . . .	K31
PC.../S1685 . . . . .	M31	P-CSFL 19-959-* . . . . .	K94	P-FK 4.162-* /14.5/NPT . . . . .	K21
PC.../S1689 . . . . .	M30	PCS-G1/4A4 . . . . .	M35	P-FK 4.162-* /14.75/NPT . . . . .	K23
PC.../S1691 . . . . .	M29	P-CSM 12-088-* . . . . .	K174	P-FK 4.162-* /M20 . . . . .	K25
PC.../S1692 . . . . .	M29	P-CSM 12-229-* . . . . .	K86	P-FK 4.330-* /14.5/NPT . . . . .	K21
PC.../S1693 . . . . .	M30	P-CSM 12-415-* . . . . .	K86	P-FK 4.330-* /14.75/NPT . . . . .	K23
PC.../S1694 . . . . .	M30	P-CSM 12-960-* . . . . .	K86	P-FK 4.330-* /M20 . . . . .	K25
PC.../S1695 . . . . .	M30	P-CSM 12-978-* . . . . .	K90	P-FK 4.949-* /14.5/NPT . . . . .	K21
PC.../S1700 . . . . .	M31	P-CSM 19-230-* . . . . .	K86	P-FK 4.949-* /14.75/NPT . . . . .	K23
PC.../S1701 . . . . .	M32	P-CSM 19-416-* . . . . .	K86	P-FK 4.949-* /M20 . . . . .	K25
PC.../S1702 . . . . .	M32	P-CSM 19-959-* . . . . .	K86	P-FK 4.950-* /14.5/NPT . . . . .	K21
PC.../S1704 . . . . .	M33	P-CSM 19-977-* . . . . .	K90	P-FK 4.950-* /14.75/NPT . . . . .	K23
PC.../S1705 . . . . .	M33	PCS-MBT . . . . .	M35	P-FK 4.950-* /M20 . . . . .	K25
PC.../S1731 . . . . .	M32	P-CSWM 12-088-* . . . . .	K174	P-FK 4D-* . . . . .	K29
PC.../S1733 . . . . .	M32	P-CSWM 12-229-* . . . . .	K88	P-FK 4D-* /14.5/NPT . . . . .	K31
PC001-N3/4A4P-2AP8X-H1141 . . . . .	M21	P-CSWM 12-415-* . . . . .	K88	P-FK 4D-* /14.75/NPT . . . . .	K31
PC001-N3/4A4P-LIX-H1141 . . . . .	M21	P-CSWM 12-960-* . . . . .	K88	P-FK 4D-* /M20 . . . . .	K31
PC016-N3/4A4P-2AP8X-H1141 . . . . .	M21	P-CSWM 12-978-* . . . . .	K92	P-FK 5.1-* /14.5/NPT . . . . .	K110
PC016-N3/4A4P-LIX-H1141 . . . . .	M21	P-CSWM 19-230-* . . . . .	K88	P-FK 5.1-* /14.75/NPT . . . . .	K110
P-CKFL 12-* . . . . .	K95	P-CSWM 19-416-* . . . . .	K88	P-FK 5.1-* /M20 . . . . .	K110
P-CKFL 12-229-* . . . . .	K93	P-CSWM 19-959-* . . . . .	K88	P-FK 5.1-108-* /14.5/NPT . . . . .	K106
P-CKFL 12-960-* . . . . .	K93	P-CSWM 19-977-* . . . . .	K92	P-FK 5.1-108-* /14.75/NPT . . . . .	K106
P-CKFL 19-* . . . . .	K95	PCV-G1/2A4 . . . . .	M34	P-FK 5.1-108-* /M20 . . . . .	K106
P-CKFL 19-230-* . . . . .	K93	PCV-G1/4A4 . . . . .	M34	P-FK 5.3-* /14.5/NPT . . . . .	K112
P-CKFL 19-959-* . . . . .	K93	PCV-G1/8A4 . . . . .	M34	P-FK 5.3-* /14.75/NPT . . . . .	K112
P-CKM 12-088-* . . . . .	K173	PCV-N1/2A4 . . . . .	M34	P-FK 5.3-* /M20 . . . . .	K112
P-CKM 12-229-* . . . . .	K85	PCV-N1/4A4 . . . . .	M34	P-FK 5.3-095-* /14.5/NPT . . . . .	K108
P-CKM 12-415-* . . . . .	K85	PCV-N1/8A4 . . . . .	M34	P-FK 5.3-095-* /14.75/NPT . . . . .	K108
P-CKM 12-960-* . . . . .	K85	PCV-N3/8A4 . . . . .	M34	P-FK 5.3-095-* /M20 . . . . .	K108
P-CKM 12-978-* . . . . .	K89	PCV-S7/16A4 . . . . .	M34	P-FKP 4-* . . . . .	K29
P-CKM 19-230-* . . . . .	K85	PDP-Connector/SD9S . . . . .	H58	P-FKP 4D-* . . . . .	K29
P-CKM 19-416-* . . . . .	K85	PDP-TRA . . . . .	H60	PF-R16 . . . . .	M118
P-CKM 19-959-* . . . . .	K85	P-FK 4-* . . . . .	K29	P-FS 4-* . . . . .	K30
P-CKM 19-977-* . . . . .	K89	P-FK 4-* /14.5/NPT . . . . .	K31	P-FS 4-* /14.5/NPT . . . . .	K32
P-CKWM 12-088-* . . . . .	K173	P-FK 4-* /14.75/NPT . . . . .	K31	P-FS 4-* /14.75/NPT . . . . .	K32
P-CKWM 12-229-* . . . . .	K87	P-FK 4-* /M20 . . . . .	K31	P-FS 4-* /M20 . . . . .	K32
P-CKWM 12-415-* . . . . .	K87	P-FK 4.4-* /14.5/NPT . . . . .	K31, K111	P-FS 4.4-* /14.5/NPT . . . . .	K32, K111
P-CKWM 12-960-* . . . . .	K87	P-FK 4.4-* /14.75/NPT . . . . .	K111	P-FS 4.4-* /14.75/NPT . . . . .	K111
P-CKWM 12-978-* . . . . .	K91	P-FK 4.4-* /M20 . . . . .	K111	P-FS 4.4-* /M20 . . . . .	K111
P-CKWM 19-230-* . . . . .	K87	P-FK 4.4-698-* /14.5/NPT . . . . .	K107	P-FS 4.4-698-* /14.5/NPT . . . . .	K107
P-CKWM 19-416-* . . . . .	K87	P-FK 4.4-698-* /14.75/NPT . . . . .	K107	P-FS 4.4-698-* /14.75/NPT . . . . .	K107

# TURCK

## Process Automation Products

### Index

P-FS 4.4-698-*/M20 . . . . .	K107	P-RKF 30-026-*/14.75/NPT . . . . .	K58	P-RKF 45-098-*/14.5/NPT . . . . .	K56
P-FS 4.61-124-*/14.5/NPT . . . . .	K22	P-RKF 30-026-*/M20 . . . . .	K60	P-RKF 45-098-*/14.75/NPT . . . . .	K58
P-FS 4.61-124-*/14.75/NPT . . . . .	K24	P-RKF 30D-* . . . . .	K65	P-RKF 45-098-*/M20 . . . . .	K60
P-FS 4.61-124-*/M20 . . . . .	K26	P-RKF 30D-*/*14.5/NPT . . . . .	K67	P-RKF 461-124-*/14.5/NPT . . . . .	K56
P-FS 4.6-124-*/14.5/NPT . . . . .	K22	P-RKF 30D-*/*14.75/NPT . . . . .	K69	P-RKF 461-124-*/14.75/NPT . . . . .	K58
P-FS 4.6-124-*/14.75/NPT . . . . .	K24	P-RKF 30D-*/*M20 . . . . .	K71	P-RKF 461-124-*/M20 . . . . .	K60
P-FS 4.6-124-*/M20 . . . . .	K26	P-RKF 321-* . . . . .	K65	P-RKF 46-124-*/14.5/NPT . . . . .	K56
P-FS 4.6D-*/*14.5/NPT . . . . .	K32	P-RKF 321-*/*14.5/NPT . . . . .	K67	P-RKF 46-124-*/14.75/NPT . . . . .	K58
P-FS 4-162-*/14.5/NPT . . . . .	K22	P-RKF 321-*/*14.75/NPT . . . . .	K69	P-RKF 46-124-*/M20 . . . . .	K60
P-FS 4-162-*/14.75/NPT . . . . .	K24	P-RKF 321-*/*M20 . . . . .	K71	P-RKF 51-108-*/14.5/NPT . . . . .	K131
P-FS 4-162-*/M20 . . . . .	K26	P-RKF 321-880-*/14.5/NPT . . . . .	K131	P-RKF 51-108-*/14.75/NPT . . . . .	K135
P-FS 4-330-*/14.5/NPT . . . . .	K22	P-RKF 321-880-*/14.75/NPT . . . . .	K135	P-RKF 51-108-*/M20 . . . . .	K139
P-FS 4-330-*/14.75/NPT . . . . .	K24	P-RKF 321-880-*/M20 . . . . .	K139	P-RKF 52-* . . . . .	K147
P-FS 4-330-*/M20 . . . . .	K26	P-RKF 33-187-*/14.5/NPT . . . . .	K131	P-RKF 52-*/*14.5/NPT . . . . .	K149
P-FS 4-949-*/14.5/NPT . . . . .	K22	P-RKF 33-187-*/14.75/NPT . . . . .	K135	P-RKF 52-*/*14.75/NPT . . . . .	K153
P-FS 4-949-*/14.75/NPT . . . . .	K24	P-RKF 33-187-*/M20 . . . . .	K139	P-RKF 52-*/*M20 . . . . .	K157
P-FS 4-949-*/M20 . . . . .	K26	P-RKF 40-* . . . . .	K65	P-RKF 52-972-*/14.5/NPT . . . . .	K131
P-FS 4-950-*/14.5/NPT . . . . .	K22	P-RKF 40-*/*14.5/NPT . . . . .	K67	P-RKF 52-972-*/14.75/NPT . . . . .	K135
P-FS 4-950-*/14.75/NPT . . . . .	K24	P-RKF 40-*/*14.75/NPT . . . . .	K69	P-RKF 52-972-*/M20 . . . . .	K139
P-FS 4-950-*/M20 . . . . .	K26	P-RKF 40-*/*M20 . . . . .	K71	P-RKF 55-099-*/14.5/NPT . . . . .	K131
P-FS 4D-* . . . . .	K30	P-RKF 40-162-*/14.5/NPT . . . . .	K56	P-RKF 55-099-*/14.75/NPT . . . . .	K135
P-FS 4D-*/*14.5/NPT . . . . .	K32	P-RKF 40-162-*/14.75/NPT . . . . .	K58	P-RKF 55-099-*/M20 . . . . .	K139
P-FS 4D-*/*14.75/NPT . . . . .	K32	P-RKF 40-162-*/M20 . . . . .	K60	P-RKF 55-328-*/14.5/NPT . . . . .	K131
P-FS 4D-*/*M20 . . . . .	K32	P-RKF 40-330-*/14.5/NPT . . . . .	K56	P-RKF 55-328-*/14.75/NPT . . . . .	K135
P-FS 5.1-*/*14.5/NPT . . . . .	K110	P-RKF 40-330-*/14.75/NPT . . . . .	K58	P-RKF 55-328-*/M20 . . . . .	K139
P-FS 5.1-*/*14.75/NPT . . . . .	K110	P-RKF 40-330-*/M20 . . . . .	K60	P-RKF 56-*/*14.5/NPT . . . . .	K149
P-FS 5.1-*/*M20 . . . . .	K110	P-RKF 40-949-*/14.5/NPT . . . . .	K56	P-RKF 56-*/*14.75/NPT . . . . .	K153
P-FS 5.1-108-*/14.5/NPT . . . . .	K106	P-RKF 40-949-*/14.75/NPT . . . . .	K58	P-RKF 56-*/*M20 . . . . .	K157
P-FS 5.1-108-*/14.75/NPT . . . . .	K106	P-RKF 40-949-*/M20 . . . . .	K60	P-RKF 60-*/*14.5/NPT . . . . .	K149
P-FS 5.1-108-*/M20 . . . . .	K106	P-RKF 40-950-*/14.5/NPT . . . . .	K56	P-RKF 60-*/*14.75/NPT . . . . .	K153
P-FS 5.3-*/*14.5/NPT . . . . .	K112	P-RKF 40-950-*/14.75/NPT . . . . .	K58	P-RKF 60-*/*M20 . . . . .	K157
P-FS 5.3-*/*14.75/NPT . . . . .	K112	P-RKF 40-950-*/M20 . . . . .	K60	P-RKF 60-025-*/14.5/NPT . . . . .	K132
P-FS 5.3-*/*M20 . . . . .	K112	P-RKF 40D-* . . . . .	K65	P-RKF 60-025-*/14.75/NPT . . . . .	K136
P-FS 5.3-095-*/14.5/NPT . . . . .	K108	P-RKF 40D-*/*14.5/NPT . . . . .	K67	P-RKF 60-025-*/M20 . . . . .	K140
P-FS 5.3-095-*/14.75/NPT . . . . .	K108	P-RKF 40D-*/*14.75/NPT . . . . .	K69	P-RKF 60D-* . . . . .	K147
P-FS 5.3-095-*/M20 . . . . .	K108	P-RKF 40D-*/*M20 . . . . .	K71	P-RKF 60D-*/*14.5/NPT . . . . .	K149
PKZMO-* . . . . .	C49, C53	P-RKF 44-*/*14.5/NPT . . . . .	K149	P-RKF 60D-*/*14.75/NPT . . . . .	K153
PKZMO-X*M*2 . . . . .	C53	P-RKF 44-*/*14.75/NPT . . . . .	K153	P-RKF 60D-*/*M20 . . . . .	K157
PKZMO-XDM12 . . . . .	C49	P-RKF 44-*/*M20 . . . . .	K157	P-RKF 63-* . . . . .	K147
PKZMO-XDM32 . . . . .	C49	P-RKF 442-* . . . . .	K147	P-RKF 63-*/*14.5/NPT . . . . .	K149
P-RKF 100-*/*14.5/NPT . . . . .	K150	P-RKF 442-*/*14.5/NPT . . . . .	K149	P-RKF 63-*/*14.75/NPT . . . . .	K153
P-RKF 100-*/*14.75/NPT . . . . .	K154	P-RKF 442-*/*14.75/NPT . . . . .	K153	P-RKF 63-*/*M . . . . .	K147
P-RKF 100-*/*M20 . . . . .	K158	P-RKF 442-*/*M20 . . . . .	K157	P-RKF 63-030-*/*14.5/NPT . . . . .	K132
P-RKF 30-* . . . . .	K65	P-RKF 442-*/*M . . . . .	K147	P-RKF 63-030-*/*14.75/NPT . . . . .	K136
P-RKF 30-*/*14.5/NPT . . . . .	K67	P-RKF 45-* . . . . .	K147	P-RKF 63-030-*/*M20 . . . . .	K140
P-RKF 30-*/*14.75/NPT . . . . .	K69	P-RKF 45-*/*14.5/NPT . . . . .	K149	P-RKF 63-233-*/*14.5/NPT . . . . .	K132
P-RKF 30-*/*M20 . . . . .	K71	P-RKF 45-*/*14.75/NPT . . . . .	K153	P-RKF 63-233-*/*14.75/NPT . . . . .	K136
P-RKF 30-026-*/*14.5/NPT . . . . .	K56	P-RKF 45-*/*M20 . . . . .	K157	P-RKF 63-233-*/*M20 . . . . .	K140

# Process Automation



## Index

P-RKF 63-233-*/M20 . . . . .	K140	P-RKG 4T-330-* . . . . .	K15	P-RSF 30D-* . . . . .	K66
P-RKF 66-318-*/14.5/NPT . . . . .	K132	P-RKG 4T-949-* . . . . .	K15	P-RSF 30D-* /14.5/NPT . . . . .	K68
P-RKF 66-318-*/14.75/NPT . . . . .	K136	P-RKG 4T-950-* . . . . .	K15	P-RSF 30D-* /14.75/NPT . . . . .	K70
P-RKF 66-318-*/M20 . . . . .	K140	P-RKG 5.1T-108-* . . . . .	K101	P-RSF 30D-* /M20 . . . . .	K72
P-RKF 70-* /14.5/NPT . . . . .	K150	P-RKG 5.3T-095-* . . . . .	K101	P-RSF 30D-*M . . . . .	K66
P-RKF 70-* /14.75/NPT . . . . .	K154	P-RKM 30-026-*M . . . . .	K47	P-RSF 321-* . . . . .	K66
P-RKF 70-* /M20 . . . . .	K158	P-RKM 321-880-*M . . . . .	K121	P-RSF 321-* /14.5/NPT . . . . .	K68
P-RKF 71-219-*/14.5/NPT . . . . .	K132	P-RKM 33-187-*M . . . . .	K121	P-RSF 321-* /14.75/NPT . . . . .	K70
P-RKF 71-219-*/14.75/NPT . . . . .	K136	P-RKM 40-162-*M . . . . .	K47	P-RSF 321-* /M20 . . . . .	K72
P-RKF 71-219-*/M20 . . . . .	K140	P-RKM 40-330-*M . . . . .	K48	P-RSF 321-880-* /14.5/NPT . . . . .	K133
P-RKF 71-329-*/14.5/NPT . . . . .	K132	P-RKM 40-949-*M . . . . .	K47	P-RSF 321-880-* /14.75/NPT . . . . .	K137
P-RKF 71-329-*/14.75/NPT . . . . .	K136	P-RKM 40-950-*M . . . . .	K48	P-RSF 321-880-* /M20 . . . . .	K141
P-RKF 71-329-* /M20 . . . . .	K140	P-RKM 40A-947-*M . . . . .	K48	P-RSF 33-187-* /14.5/NPT . . . . .	K133
P-RKF 80-* /14.5/NPT . . . . .	K150	P-RKM 442A-041-*M . . . . .	K121	P-RSF 33-187-* /14.75/NPT . . . . .	K137
P-RKF 80-* /14.75/NPT . . . . .	K154	P-RKM 45-098-*M . . . . .	K47	P-RSF 33-187-* /M20 . . . . .	K141
P-RKF 80-* /M20 . . . . .	K158	P-RKM 45-327-*M . . . . .	K48	P-RSF 40-* . . . . .	K66
P-RKVF 30 EX-* /14.5/NPT . . . . .	K73	P-RKM 461-124-*M . . . . .	K48	P-RSF 40-* /14.5/NPT . . . . .	K68
P-RKVF 30 EX-* /14.75/NPT . . . . .	K75	P-RKM 46-124-*M . . . . .	K48	P-RSF 40-* /14.75/NPT . . . . .	K70
P-RKVF 30D EX-* /14.5/NPT . . . . .	K73	P-RKM 51-108-*M . . . . .	K121	P-RSF 40-* /M20 . . . . .	K72
P-RKVF 30D EX-* /14.75/NPT . . . . .	K75	P-RKM 52-972-*M . . . . .	K121	P-RSF 40-162-* /14.5/NPT . . . . .	K57
P-RKVF 40 EX-* /14.5/NPT . . . . .	K73	P-RKM 55-099-*M . . . . .	K121	P-RSF 40-162-* /14.75/NPT . . . . .	K59
P-RKVF 40 EX-* /14.75/NPT . . . . .	K75	P-RKM 55-328-*M . . . . .	K121	P-RSF 40-162-* /M20 . . . . .	K61
P-RKVF 40D EX-* /14.5/NPT . . . . .	K73	P-RKM 60-025-*M . . . . .	K122	P-RSF 40-330-* /14.5/NPT . . . . .	K57
P-RKVF 40D EX-* /14.75/NPT . . . . .	K75	P-RKM 63-030-*M . . . . .	K122	P-RSF 40-330-* /14.75/NPT . . . . .	K59
P-RKVF 44 EX-* /14.5/NPT . . . . .	K161	P-RKM 63-233-*M . . . . .	K122	P-RSF 40-330-* /M20 . . . . .	K61
P-RKVF 44 EX-* /14.75/NPT . . . . .	K165	P-RKM 66-318-*M . . . . .	K122	P-RSF 40-949-* /14.5/NPT . . . . .	K57
P-RKVF 45 EX-* /14.5/NPT . . . . .	K161	P-RKM 71-219-*M . . . . .	K122	P-RSF 40-949-* /14.75/NPT . . . . .	K59
P-RKVF 45 EX-* /14.75/NPT . . . . .	K165	P-RKM 71-329-*M . . . . .	K122	P-RSF 40-949-* /M20 . . . . .	K61
P-RKVF 52 EX-* /14.5/NPT . . . . .	K161	P-RKR 4A-993-* . . . . .	K19	P-RSF 40-950-* /14.5/NPT . . . . .	K57
P-RKVF 52 EX-* /14.75/NPT . . . . .	K165	P-RKV 100-183-*M . . . . .	K199	P-RSF 40-950-* /14.75/NPT . . . . .	K59
P-RKVF 55 EX-* /14.5/NPT . . . . .	K161	P-RKV 100-189-*M . . . . .	K199	P-RSF 40-950-* /M20 . . . . .	K61
P-RKVF 55 EX-* /14.75/NPT . . . . .	K165	P-RKV 40-180-*M . . . . .	K198	P-RSF 40D-* . . . . .	K66
P-RKVF 56 EX-* /14.5/NPT . . . . .	K161	P-RKV 40-181-*M . . . . .	K198	P-RSF 40D-* /14.5/NPT . . . . .	K68
P-RKVF 56 EX-* /14.75/NPT . . . . .	K165	P-RKV 40-188-*M . . . . .	K198	P-RSF 40D-* /14.75/NPT . . . . .	K70
P-RKVF 60 EX-* /14.5/NPT . . . . .	K162	P-RKV 56-964-*M . . . . .	K198	P-RSF 40D-* /M20 . . . . .	K72
P-RKVF 60 EX-* /14.75/NPT . . . . .	K166	P-RKV 70-182-*M . . . . .	K199	P-RSF 44-* /14.5/NPT . . . . .	K151
P-RKVF 60D EX-* /14.5/NPT . . . . .	K162	P-RKV 80-073-*M . . . . .	K199	P-RSF 44-* /14.75/NPT . . . . .	K155
P-RKVF 60D EX-* /14.75/NPT . . . . .	K166	P-RKV 80-158-*M . . . . .	K199	P-RSF 44-* /M20 . . . . .	K159
P-RKVF 63 EX-* /14.5/NPT . . . . .	K162	P-RSF 100-* /14.5/NPT . . . . .	K152	P-RSF 442-* . . . . .	K148
P-RKVF 63 EX-* /14.75/NPT . . . . .	K166	P-RSF 100-* /14.75/NPT . . . . .	K156	P-RSF 442-* /14.5/NPT . . . . .	K151
P-RKVF 65 EX-* /14.5/NPT . . . . .	K162	P-RSF 100-* /M20 . . . . .	K160	P-RSF 442-* /14.75/NPT . . . . .	K155
P-RKVF 65 EX-* /14.75/NPT . . . . .	K166	P-RSF 30-* . . . . .	K66	P-RSF 442-* /M20 . . . . .	K159
P-RKVF 66 EX-* /14.5/NPT . . . . .	K162	P-RSF 30-* /14.5/NPT . . . . .	K68	P-RSF 45-* . . . . .	K148
P-RKVF 66 EX-* /14.75/NPT . . . . .	K166	P-RSF 30-* /14.75/NPT . . . . .	K70	P-RSF 45-* /14.5/NPT . . . . .	K151
P-RKG 4.4T-698-* . . . . .	K101	P-RSF 30-* /M20 . . . . .	K72	P-RSF 45-* /14.75/NPT . . . . .	K155
P-RKG 4.61T-124-* . . . . .	K15	P-RSF 30-026-* /14.5/NPT . . . . .	K57	P-RSF 45-* /M20 . . . . .	K159
P-RKG 4.6T-124-* . . . . .	K15	P-RSF 30-026-* /14.75/NPT . . . . .	K59	P-RSF 45-*M . . . . .	K148
P-RKG 4T-162-* . . . . .	K15	P-RSF 30-026-* /M20 . . . . .	K61	P-RSF 45-098-* /14.5/NPT . . . . .	K57

# TURCK

## Process Automation Products

### Index

P-RSF 45-098-*/14.75/NPT . . . . .	K59	P-RSF 66-318-*/14.5/NPT . . . . .	K134	P-RSFV RKFV-40EX-*/M20 . . . . .	K78
P-RSF 45-098-*/M20 . . . . .	K61	P-RSF 66-318-*/14.75/NPT . . . . .	K138	P-RSFV RKFV-44EX-*/14.5/NPT . . . . .	K169
P-RSF 461-124-*/14.5/NPT . . . . .	K57	P-RSF 66-318-*/M20 . . . . .	K142	P-RSFV RKFV-44EX-*/14.75/NPT . . . . .	K170
P-RSF 461-124-*/14.75/NPT . . . . .	K59	P-RSF 70-*/14.5/NPT . . . . .	K152	P-RSFV RKFV-44EX-*/M20 . . . . .	K170
P-RSF 461-124-*/M20 . . . . .	K61	P-RSF 70-*/14.75/NPT . . . . .	K156	P-RSG 4.4T-698-*	K102
P-RSF 46-124-*/14.5/NPT . . . . .	K57	P-RSF 70-*/M20 . . . . .	K160	P-RSG 4.61T-124-*	K17
P-RSF 46-124-*/14.75/NPT . . . . .	K59	P-RSF 71-219-*/14.5/NPT . . . . .	K134	P-RSG 4.6T-124-*	K17
P-RSF 46-124-*/M20 . . . . .	K61	P-RSF 71-219-*/14.75/NPT . . . . .	K138	P-RSG 4T-162-*	K17
P-RSF 51-108-*/14.5/NPT . . . . .	K133	P-RSF 71-219-*/M20 . . . . .	K142	P-RSG 4T-330-*	K17
P-RSF 51-108-*/14.75/NPT . . . . .	K137	P-RSF 71-329-*/14.5/NPT . . . . .	K134	P-RSG 4T-949-*	K17
P-RSF 51-108-*/M20 . . . . .	K141	P-RSF 71-329-*/14.75/NPT . . . . .	K138	P-RSG 4T-950-*	K17
P-RSF 52-* . . . . .	K148	P-RSF 71-329-*/M20 . . . . .	K142	P-RSG 5.1T-108-*	K102
P-RSF 52-* /14.5/NPT . . . . .	K151	P-RSF 80-*/14.5/NPT . . . . .	K152	P-RSG 5.3T-095-*	K102
P-RSF 52-* /14.75/NPT . . . . .	K155	P-RSF 80-*/14.75/NPT . . . . .	K156	P-RSM 30-026-*M . . . . .	K51
P-RSF 52-* /M20 . . . . .	K159	P-RSF 80-*/M20 . . . . .	K160	P-RSM 321-880-*M . . . . .	K123
P-RSF 52-972-*/14.5/NPT . . . . .	K133	P-RSFV 30 EX-*/14.5/NPT . . . . .	K74	P-RSM 33-187-*M . . . . .	K123
P-RSF 52-972-*/14.75/NPT . . . . .	K137	P-RSFV 30 EX-*/14.75/NPT . . . . .	K76	P-RSM 40-162-*M . . . . .	K51
P-RSF 52-972-*/M20 . . . . .	K141	P-RSFV 30D EX-*/14.5/NPT . . . . .	K74	P-RSM 40-330-*M . . . . .	K52
P-RSF 55-099-*/14.5/NPT . . . . .	K133	P-RSFV 30D EX-*/14.75/NPT . . . . .	K76	P-RSM 40-949-*M . . . . .	K51
P-RSF 55-099-*/14.75/NPT . . . . .	K137	P-RSFV 40 EX-*/14.5/NPT . . . . .	K74	P-RSM 40-950-*M . . . . .	K52
P-RSF 55-099-*/M20 . . . . .	K141	P-RSFV 40 EX-*/14.75/NPT . . . . .	K76	P-RSM 40A-947-*M . . . . .	K52
P-RSF 55-328-*/14.5/NPT . . . . .	K133	P-RSFV 40D EX-*/14.5/NPT . . . . .	K74	P-RSM 442A-041-*M . . . . .	K123
P-RSF 55-328-*/14.75/NPT . . . . .	K137	P-RSFV 40D EX-*/14.75/NPT . . . . .	K76	P-RSM 45-098-*M . . . . .	K51
P-RSF 55-328-*/M20 . . . . .	K141	P-RSFV 44 EX-*/14.5/NPT . . . . .	K163	P-RSM 45-327-*M . . . . .	K52
P-RSF 56-* /14.5/NPT . . . . .	K151	P-RSFV 44 EX-*/14.75/NPT . . . . .	K167	P-RSM 461-124-*M . . . . .	K52
P-RSF 56-* /14.75/NPT . . . . .	K155	P-RSFV 45 EX-*/14.5/NPT . . . . .	K163	P-RSM 46-124-*M . . . . .	K52
P-RSF 56-* /M20 . . . . .	K159	P-RSFV 45 EX-*/14.75/NPT . . . . .	K167	P-RSM 51-108-*M . . . . .	K123
P-RSF 60-* /14.5/NPT . . . . .	K151	P-RSFV 52 EX-*/14.5/NPT . . . . .	K163	P-RSM 52-972-*M . . . . .	K123
P-RSF 60-* /14.75/NPT . . . . .	K155	P-RSFV 52 EX-*/14.75/NPT . . . . .	K167	P-RSM 55-099-*M . . . . .	K123
P-RSF 60-* /M20 . . . . .	K159	P-RSFV 55 EX-*/14.5/NPT . . . . .	K163	P-RSM 55-328-*M . . . . .	K123
P-RSF 60-025-* /14.5/NPT . . . . .	K134	P-RSFV 55 EX-*/14.75/NPT . . . . .	K167	P-RSM 60-025-*M . . . . .	K124
P-RSF 60-025-* /14.75/NPT . . . . .	K138	P-RSFV 56 EX-*/14.5/NPT . . . . .	K163	P-RSM 63-030-*M . . . . .	K124
P-RSF 60-025-* /M20 . . . . .	K142	P-RSFV 56 EX-*/14.75/NPT . . . . .	K167	P-RSM 63-233-*M . . . . .	K124
P-RSF 60D-* . . . . .	K148	P-RSFV 60 EX-*/14.5/NPT . . . . .	K164	P-RSM 66-318-*M . . . . .	K124
P-RSF 60D-* /14.5/NPT . . . . .	K151	P-RSFV 60 EX-*/14.75/NPT . . . . .	K168	P-RSM 71-219-*M . . . . .	K124
P-RSF 60D-* /14.75/NPT . . . . .	K155	P-RSFV 60D EX-*/14.5/NPT . . . . .	K164	P-RSM 71-329-*M . . . . .	K124
P-RSF 60D-* /M20 . . . . .	K159	P-RSFV 60D EX-*/14.75/NPT . . . . .	K168	P-RSR 4A-993-*	K19
P-RSF 63-* . . . . .	K148	P-RSFV 63 EX-*/14.5/NPT . . . . .	K164	P-RSV 100-183-*M . . . . .	K203
P-RSF 63-* /14.5/NPT . . . . .	K151	P-RSFV 63 EX-*/14.75/NPT . . . . .	K168	P-RSV 100-189-*M . . . . .	K203
P-RSF 63-* /14.75/NPT . . . . .	K155	P-RSFV 65 EX-*/14.5/NPT . . . . .	K164	P-RSV 40-180-*M . . . . .	K202
P-RSF 63-* /M20 . . . . .	K159	P-RSFV 65 EX-*/14.75/NPT . . . . .	K168	P-RSV 40-181-*M . . . . .	K202
P-RSF 63-*M . . . . .	K148	P-RSFV 66 EX-*/14.5/NPT . . . . .	K164	P-RSV 40-188-*M . . . . .	K202
P-RSF 63-030-* /14.5/NPT . . . . .	K134	P-RSFV 66 EX-*/14.75/NPT . . . . .	K168	P-RSV 56-964-*M . . . . .	K202
P-RSF 63-030-* /14.75/NPT . . . . .	K138	P-RSFV RKFV-40BEX-*/14.5/NPT . . . . .	K77	P-RSV 70-182-*M . . . . .	K203
P-RSF 63-030-* /M20 . . . . .	K142	P-RSFV RKFV-40BEX-*/14.75/NPT . . . . .	K78	P-RSV 80-073-*M . . . . .	K203
P-RSF 63-233-* /14.5/NPT . . . . .	K134	P-RSFV RKFV-40BEX-*/M20 . . . . .	K78	P-RSV 80-158-*M . . . . .	K203
P-RSF 63-233-* /14.75/NPT . . . . .	K138	P-RSFV RKFV-40EX-*/14.5/NPT . . . . .	K77	PS.../S1733 . . . . .	M32
P-RSF 63-233-* /M20 . . . . .	K142	P-RSFV RKFV-40EX-*/14.75/NPT . . . . .	K78	PS001R-401-2UP8X-H1141 . . . . .	M19

# Process Automation



## Index

PS001R-401-LI2UPN8X-H1141 . . . . . M13	PS01VR-401-LI2UPN8X-H1141 . . . . . M13	PS250R-401-LI2UPN8X-H1141 . . . . . M13
PS001R-401-LIUP8X-H1141 . . . . . M19	PS01VR-401-LIUP8X-H1141 . . . . . M19	PS250R-401-LIUP8X-H1141 . . . . . M19
PS001R-401-LUUP8X-H1141 . . . . . M19	PS01VR-401-LUUP8X-H1141 . . . . . M19	PS250R-401-LUUP8X-H1141 . . . . . M19
PS001R-403-2UP8X-H1141 . . . . . M17	PS01VR-403-2UP8X-H1141 . . . . . M17	PS250R-403-2UP8X-H1141 . . . . . M17
PS001R-403-LI2UPN8X-H1141 . . . . . M13	PS01VR-403-LI2UPN8X-H1141 . . . . . M13	PS250R-403-LI2UPN8X-H1141 . . . . . M13
PS001R-403-LIUP8X-H1141 . . . . . M17	PS01VR-403-LIUP8X-H1141 . . . . . M17	PS250R-403-LIUP8X-H1141 . . . . . M17
PS001R-403-LUUP8X-H1141 . . . . . M17	PS01VR-403-LUUP8X-H1141 . . . . . M17	PS250R-403-LUUP8X-H1141 . . . . . M17
PS001R-503-2UP8X-H1141 . . . . . M15	PS01VR-503-2UP8X-H1141 . . . . . M15	PS250R-503-2UP8X-H1141 . . . . . M15
PS001R-503-LI2UPN8X-H1141 . . . . . M13	PS01VR-503-LI2UPN8X-H1141 . . . . . M13	PS250R-503-LI2UPN8X-H1141 . . . . . M13
PS001R-503-LIUP8X-H1141 . . . . . M15	PS01VR-503-LIUP8X-H1141 . . . . . M15	PS250R-503-LIUP8X-H1141 . . . . . M15
PS001R-503-LUUP8X-H1141 . . . . . M15	PS01VR-503-LUUP8X-H1141 . . . . . M15	PS250R-503-LUUP8X-H1141 . . . . . M15
PS003R-401-2UP8X-H1141 . . . . . M19	PS025R-401-2UP8X-H1141 . . . . . M19	PS-30VDC-3PH BW1676 . . . . . G96
PS003R-401-LI2UPN8X-H1141 . . . . . M13	PS025R-401-LI2UPN8X-H1141 . . . . . M13	PS-30VDC-4A-C1D2 BW1597 . . . . . G95
PS003R-401-LIUP8X-H1141 . . . . . M19	PS025R-401-LIUP8X-H1141 . . . . . M19	PS-30VDC-8A BW1593 . . . . . G95
PS003R-401-LUUP8X-H1141 . . . . . M19	PS025R-401-LUUP8X-H1141 . . . . . M19	PS-30VDC-8A-C1D2 BW1598 . . . . . G95
PS003R-403-2UP8X-H1141 . . . . . M17	PS025R-403-2UP8X-H1141 . . . . . M17	PS400R-401-2UP8X-H1141 . . . . . M19
PS003R-403-LI2UPN8X-H1141 . . . . . M13	PS025R-403-LI2UPN8X-H1141 . . . . . M13	PS400R-401-LI2UPN8X-H1141 . . . . . M13
PS003R-403-LIUP8X-H1141 . . . . . M17	PS025R-403-LIUP8X-H1141 . . . . . M17	PS400R-401-LIUP8X-H1141 . . . . . M19
PS003R-403-LUUP8X-H1141 . . . . . M17	PS025R-403-LUUP8X-H1141 . . . . . M17	PS400R-401-LUUP8X-H1141 . . . . . M19
PS003R-503-2UP8X-H1141 . . . . . M15	PS025R-503-2UP8X-H1141 . . . . . M15	PS400R-403-2UP8X-H1141 . . . . . M17
PS003R-503-LI2UPN8X-H1141 . . . . . M13	PS025R-503-LI2UPN8X-H1141 . . . . . M13	PS400R-403-LI2UPN8X-H1141 . . . . . M13
PS003R-503-LIUP8X-H1141 . . . . . M15	PS025R-503-LIUP8X-H1141 . . . . . M15	PS400R-403-LIUP8X-H1141 . . . . . M17
PS003R-503-LUUP8X-H1141 . . . . . M15	PS025R-503-LUUP8X-H1141 . . . . . M15	PS400R-403-LUUP8X-H1141 . . . . . M17
PS010R-401-2UP8X-H1141 . . . . . M19	PS040R-401-2UP8X-H1141 . . . . . M19	PS400R-503-2UP8X-H1141 . . . . . M15
PS010R-401-LI2UPN8X-H1141 . . . . . M13	PS040R-401-LI2UPN8X-H1141 . . . . . M13	PS400R-503-LI2UPN8X-H1141 . . . . . M13
PS010R-401-LIUP8X-H1141 . . . . . M19	PS040R-401-LIUP8X-H1141 . . . . . M19	PS400R-503-LIUP8X-H1141 . . . . . M15
PS010R-401-LUUP8X-H1141 . . . . . M19	PS040R-401-LUUP8X-H1141 . . . . . M19	PS400R-503-LUUP8X-H1141 . . . . . M15
PS010R-403-2UP8X-H1141 . . . . . M17	PS040R-403-2UP8X-H1141 . . . . . M17	PS416-ZBX-405 . . . . . C62
PS010R-403-LI2UPN8X-H1141 . . . . . M13	PS040R-403-LI2UPN8X-H1141 . . . . . M13	PS-COVER . . . . . M35
PS010R-403-LIUP8X-H1141 . . . . . M17	PS040R-403-LIUP8X-H1141 . . . . . M17	PSD24EX . . . . . D21
PS010R-403-LUUP8X-H1141 . . . . . M17	PS040R-403-LUUP8X-H1141 . . . . . M17	PT.../S1733 . . . . . M32
PS010R-503-2UP8X-H1141 . . . . . M15	PS040R-503-2UP8X-H1141 . . . . . M15	PT0.5R-11-LI3-H1131 . . . . . M27
PS010R-503-LI2UPN8X-H1141 . . . . . M13	PS040R-503-LI2UPN8X-H1141 . . . . . M13	PT001A-11-LI3-H1131 . . . . . M27
PS010R-503-LIUP8X-H1141 . . . . . M15	PS040R-503-LIUP8X-H1141 . . . . . M15	PT001R-11-LI3-H1131 . . . . . M27
PS010R-503-LUUP8X-H1141 . . . . . M15	PS040R-503-LUUP8X-H1141 . . . . . M15	PT001R-11-LU2-H1131 . . . . . M27
PS016R-401-2UP8X-H1141 . . . . . M19	PS100R-401-2UP8X-H1141 . . . . . M19	PT001R-13-LI3-H1131 . . . . . M25
PS016R-401-LI2UPN8X-H1141 . . . . . M13	PS100R-401-LI2UPN8X-H1141 . . . . . M13	PT001R-13-LU2-H1131 . . . . . M25
PS016R-401-LIUP8X-H1141 . . . . . M19	PS100R-401-LIUP8X-H1141 . . . . . M19	PT002A-11-LI3-H1131 . . . . . M27
PS016R-401-LUUP8X-H1141 . . . . . M19	PS100R-401-LUUP8X-H1141 . . . . . M19	PT002R-11-LI3-H1131 . . . . . M27
PS016R-403-2UP8X-H1141 . . . . . M17	PS100R-403-2UP8X-H1141 . . . . . M17	PT002R-11-LU2-H1131 . . . . . M27
PS016R-403-LI2UPN8X-H1141 . . . . . M13	PS100R-403-LI2UPN8X-H1141 . . . . . M13	PT002R-13-LI3-H1131 . . . . . M25
PS016R-403-LIUP8X-H1141 . . . . . M17	PS100R-403-LIUP8X-H1141 . . . . . M17	PT002R-13-LU2-H1131 . . . . . M25
PS016R-403-LUUP8X-H1141 . . . . . M17	PS100R-403-LUUP8X-H1141 . . . . . M17	PT003A-11-LI3-H1131 . . . . . M27
PS016R-503-2UP8X-H1141 . . . . . M15	PS100R-503-2UP8X-H1141 . . . . . M15	PT003R-11-LI3-H1131 . . . . . M27
PS016R-503-LI2UPN8X-H1141 . . . . . M13	PS100R-503-LI2UPN8X-H1141 . . . . . M13	PT003R-11-LU2-H1131 . . . . . M27
PS016R-503-LIUP8X-H1141 . . . . . M15	PS100R-503-LIUP8X-H1141 . . . . . M15	PT003R-13-LI3-H1131 . . . . . M25
PS016R-503-LUUP8X-H1141 . . . . . M15	PS100R-503-LUUP8X-H1141 . . . . . M15	PT003R-13-LU2-H1131 . . . . . M25
PS01VR-401-2UP8X-H1141 . . . . . M19	PS250R-401-2UP8X-H1141 . . . . . M19	PT004R-11-LI3-H1131 . . . . . M27

# TURCK

## Process Automation Products

### Index

PT004R-11-LU2-H1131 . . . . .	M27	PT200psig-13-LU2-H1131 . . . . .	M23	P-VBMV 40-978-*/C . . . . .	K113
PT004R-13-LI3-H1131 . . . . .	M25	PT250R-11-LI3-H1131 . . . . .	M27	P-VBMV 40-CSV12 . . . . .	K41
PT004R-13-LU2-H1131 . . . . .	M25	PT250R-11-LU2-H1131 . . . . .	M27	P-VBMV 40-CSV12/C . . . . .	K41
PT006R-11-LI3-H1131 . . . . .	M27	PT250R-13-LI3-H1131 . . . . .	M25	P-VBMV 80-416-*/C . . . . .	K37
PT006R-11-LU2-H1131 . . . . .	M27	PT250R-13-LU2-H1131 . . . . .	M25	P-VBMV 80-959-* . . . . .	K37
PT006R-13-LI3-H1131 . . . . .	M25	PT3000psig-13-LI3-H1131 . . . . .	M23	P-VBMV 80-977-* . . . . .	K113
PT006R-13-LU2-H1131 . . . . .	M25	PT3000psig-13-LU2-H1131 . . . . .	M23	P-VBMV 80-977-*/C . . . . .	K113
PT010R-11-LI3-H1131 . . . . .	M27	PT300psig-13-LI3-H1131 . . . . .	M23	P-VBMV 80-CSV19 . . . . .	K41
PT010R-11-LU2-H1131 . . . . .	M27	PT300psig-13-LU2-H1131 . . . . .	M23	P-VBMV 80-CSV19/C . . . . .	K41
PT010R-13-LI3-H1131 . . . . .	M25	PT-30HG-13-LI3-H1131 . . . . .	M23	P-VBMV 84-CSV12 . . . . .	K115
PT010R-13-LU2-H1131 . . . . .	M25	PT-30HG-13-LU2-H1131 . . . . .	M23	P-VBMV 84-CSV12/C . . . . .	K115
PT016R-11-LI3-H1131 . . . . .	M27	PT30psig-13-LI3-H1131 . . . . .	M23	P-WKE 4.4T-698-* . . . . .	K103
PT016R-11-LU2-H1131 . . . . .	M27	PT30psig-13-LU2-H1131 . . . . .	M23	P-WKE 4.61T-124-* . . . . .	K16
PT016R-13-LI3-H1131 . . . . .	M25	PT400R-11-LI3-H1131 . . . . .	M27	P-WKE 4.6T-124-* . . . . .	K16
PT016R-13-LU2-H1131 . . . . .	M25	PT400R-11-LU2-H1131 . . . . .	M27	P-WKE 4T-162-* . . . . .	K16
PT01VR-11-LI3-H1131 . . . . .	M27	PT400R-13-LI3-H1131 . . . . .	M25	P-WKE 4T-330-* . . . . .	K16
PT01VR-11-LU2-H1131 . . . . .	M27	PT400R-13-LU2-H1131 . . . . .	M25	P-WKE 4T-949-* . . . . .	K16
PT01VR-13-LI3-H1131 . . . . .	M25	PT5000psig-13-LI3-H1131 . . . . .	M23	P-WKE 4T-950-* . . . . .	K16
PT01VR-13-LU2-H1131 . . . . .	M25	PT5000psig-13-LU2-H1131 . . . . .	M23	P-WKE 5.1T-108-* . . . . .	K103
PT025R-11-LI3-H1131 . . . . .	M27	PT500psig-13-LI3-H1131 . . . . .	M23	P-WKE 5.3T-095-* . . . . .	K103
PT025R-11-LU2-H1131 . . . . .	M27	PT500psig-13-LU2-H1131 . . . . .	M23	P-WKM 30-026-*M . . . . .	K49
PT025R-13-LI3-H1131 . . . . .	M25	PT600R-11-LI3-H1131 . . . . .	M27	P-WKM 321-880-*M . . . . .	K125
PT025R-13-LU2-H1131 . . . . .	M25	PT600R-11-LU2-H1131 . . . . .	M27	P-WKM 33-187-*M . . . . .	K125
PT040R-11-LI3-H1131 . . . . .	M27	PT600R-13-LI3-H1131 . . . . .	M25	P-WKM 40-162-*M . . . . .	K49
PT040R-11-LU2-H1131 . . . . .	M27	PT600R-13-LU2-H1131 . . . . .	M25	P-WKM 40-330-*M . . . . .	K50
PT040R-13-LI3-H1131 . . . . .	M25	PT60psig-13-LI3-H1131 . . . . .	M23	P-WKM 40-949-*M . . . . .	K49
PT040R-13-LU2-H1131 . . . . .	M25	PT60psig-13-LU2-H1131 . . . . .	M23	P-WKM 40-950-*M . . . . .	K50
PT060R-11-LI3-H1131 . . . . .	M27	PT7500psig-13-LI3-H1131 . . . . .	M23	P-WKM 45-098-*M . . . . .	K49
PT060R-11-LU2-H1131 . . . . .	M27	PT7500psig-13-LU2-H1131 . . . . .	M23	P-WKM 45-327-*M . . . . .	K50
PT060R-13-LI3-H1131 . . . . .	M25	PT750psig-13-LI3-H1131 . . . . .	M23	P-WKM 461-124-*M . . . . .	K50
PT060R-13-LU2-H1131 . . . . .	M25	PT750psig-13-LU2-H1131 . . . . .	M23	P-WKM 46-124-*M . . . . .	K50
PT1000psig-13-LI3-H1131 . . . . .	M23	P-VBM 40-415-*/C . . . . .	K37	P-WKM 51-108-*M . . . . .	K125
PT1000psig-13-LU2-H1131 . . . . .	M23	P-VBM 40-960-* . . . . .	K37	P-WKM 52-972-*M . . . . .	K125
PT100psig-13-LI3-H1131 . . . . .	M23	P-VBM 40-978-* . . . . .	K113	P-WKM 55-099-*M . . . . .	K125
PT100psig-13-LU2-H1131 . . . . .	M23	P-VBM 40-978-*/C . . . . .	K113	P-WKM 55-328-*M . . . . .	K125
PT100R-11-LI3-H1131 . . . . .	M27	P-VBM 40-CS12 . . . . .	K41	P-WKM 60-025-*M . . . . .	K126
PT100R-11-LU2-H1131 . . . . .	M27	P-VBM 40-CS12/C . . . . .	K41	P-WKM 63-030-*M . . . . .	K126
PT100R-13-LI3-H1131 . . . . .	M25	P-VBM 80-416-*/C . . . . .	K37	P-WKM 63-233-*M . . . . .	K126
PT100R-13-LU2-H1131 . . . . .	M25	P-VBM 80-959-* . . . . .	K37	P-WKM 66-318-*M . . . . .	K126
PT15psig-13-LI3-H1131 . . . . .	M23	P-VBM 80-977-* . . . . .	K113	P-WKM 71-219-*M . . . . .	K126
PT15psig-13-LU2-H1131 . . . . .	M23	P-VBM 80-977-*/C . . . . .	K113	P-WKM 71-329-*M . . . . .	K126
PT160R-11-LI3-H1131 . . . . .	M27	P-VBM 80-CS19 . . . . .	K41	P-WKV 100-183-*M . . . . .	K201
PT160R-11-LU2-H1131 . . . . .	M27	P-VBM 80-CS19/C . . . . .	K41	P-WKV 100-189-*M . . . . .	K201
PT160R-13-LI3-H1131 . . . . .	M25	P-VBM 84-CS12 . . . . .	K115	P-WKV 40-180-*M . . . . .	K200
PT160R-13-LU2-H1131 . . . . .	M25	P-VBM 84-CS12/C . . . . .	K115	P-WKV 40-181-*M . . . . .	K200
PT2000psig-13-LI3-H1131 . . . . .	M23	P-VBMV 40-415-*/C . . . . .	K37	P-WKV 40-188-*M . . . . .	K200
PT2000psig-13-LU2-H1131 . . . . .	M23	P-VBMV 40-960-* . . . . .	K37	P-WKV 56-964-*M . . . . .	K200
PT200psig-13-LI3-H1131 . . . . .	M23	P-VBMV 40-978-* . . . . .	K113	P-WKV 70-182-*M . . . . .	K201

# Process Automation



## Index

P-WKV 80-073-*M . . . . .	K201	RB50672-*M . . . . .	H52	RB51235-*M . . . . .	J85
P-WKV 80-158-*M . . . . .	K201	RB50683-*M . . . . .	H52	RB51240-*M . . . . .	G142
P-WSE 4.4T-698-* . . . . .	K104	RB50692-*M . . . . .	H52	RB51241-*M . . . . .	G142
P-WSE 4.61T-124-* . . . . .	K18	RB50693-*M . . . . .	E5	RB51242-*M . . . . .	G142
P-WSE 4.6T-124-* . . . . .	K18	RB50708-*M . . . . .	H52	RB51259-*M . . . . .	H52
P-WSE 4T-162-* . . . . .	K18	RB50721-*M . . . . .	J85	RB51296-*M . . . . .	J84
P-WSE 4T-330-* . . . . .	K18	RB50764-*M . . . . .	J84	RB51300-*M . . . . .	E6
P-WSE 4T-949-* . . . . .	K18	RB50782-*M . . . . .	G142	RB51305-*M . . . . .	F17
P-WSE 4T-950-* . . . . .	K18	RB50783-*M . . . . .	E5	RB51306-*M . . . . .	F31
P-WSE 5.1T-108-* . . . . .	K104	RB50784-*M . . . . .	E5	REP-ASI BW1273 . . . . .	G77
P-WSE 5.3T-095-* . . . . .	K104	RB50785-*M . . . . .	H68	REP-ASI BW1855 . . . . .	G75
P-WSM 30-026-*M . . . . .	K53	RB50785-*M . . . . .	E6	REP-ASI-C1D2 BW1712 . . . . .	G77
P-WSM 321-880-*M . . . . .	K127	RB50786-*M . . . . .	H68	REP-DN . . . . .	J51
P-WSM 33-187-*M . . . . .	K127	RB50786-*M . . . . .	E5	REP-DP-0002 . . . . .	H38
P-WSM 40-162-*M . . . . .	K53	RB50787-*M . . . . .	J93	RE-Q21 . . . . .	L45
P-WSM 40-330-*M . . . . .	K54	RB50791-*M . . . . .	G112	RJ11S RJ11S 4412-*M . . . . .	F49
P-WSM 40-949-*M . . . . .	K53	RB50793-*M . . . . .	J86	RJ45 44x-*M . . . . .	F32
P-WSM 40-950-*M . . . . .	K54	RB50803-*M . . . . .	E5	RJ45 84x-*M . . . . .	F18
P-WSM 45-098-*M . . . . .	K53	RB50852-*M . . . . .	G112	RJ45 FKFD 84x-*M . . . . .	F18
P-WSM 45-327-*M . . . . .	K54	RB50856-*M . . . . .	F17	RJ45 FKFD 44x-*M . . . . .	F32
P-WSM 461-124-*M . . . . .	K54	RB50859-*M . . . . .	J85	RJ45 FSFD 84x-*M . . . . .	F18
P-WSM 46-124-*M . . . . .	K54	RB50860-*M . . . . .	H68	RJ45 FSFDD 44x-*M . . . . .	F32
P-WSM 51-108-*M . . . . .	K127	RB50874-*M . . . . .	E5	RJ45 RJ45 44x-*M . . . . .	F32
P-WSM 52-972-*M . . . . .	K127	RB50875-*M . . . . .	H52	RJ45 RJ45 84x-*M . . . . .	F18
P-WSM 55-099-*M . . . . .	K127	RB50876-*M . . . . .	J85	RJ45S 44x-*M . . . . .	F33
P-WSM 55-328-*M . . . . .	K127	RB50877-*M . . . . .	J85	RJ45S 84x-*M . . . . .	F19
P-WSM 60-025-*M . . . . .	K128	RB50881-*M . . . . .	H52	RJ45S FKSDE 84x-*M . . . . .	F19
P-WSM 63-030-*M . . . . .	K128	RB50884-*M . . . . .	F17	RJ45S FKSDED 44x-*M . . . . .	F33
P-WSM 63-233-*M . . . . .	K128	RB50891-*M . . . . .	E6	RJ45S FSSDE 84x-*M . . . . .	F19
P-WSM 66-318-*M . . . . .	K128	RB50893-*M . . . . .	F17	RJ45S FSSDED 44x-*M . . . . .	F33
P-WSM 71-219-*M . . . . .	K128	RB50894-*M . . . . .	F17	RJ45S RJ45S 44x-*M . . . . .	F33
P-WSM 71-329-*M . . . . .	K128	RB50929-*M . . . . .	H68	RJ45S RJ45S 84x-*M . . . . .	F19
P-WSV 100-183-*M . . . . .	K205	RB50952-*M . . . . .	H68	RK 4.21T-* . . . . .	K179
P-WSV 100-189-*M . . . . .	K205	RB50962-*M . . . . .	G112	RK 4.21T-* / S90 . . . . .	K179
P-WSV 40-180-*M . . . . .	K204	RB50966-*M . . . . .	G112	RK 4.41T-* . . . . .	K179
P-WSV 40-181-*M . . . . .	K204	RB50994-*M . . . . .	J84	RKC 25x-*M . . . . .	G114
P-WSV 40-188-*M . . . . .	K204	RB51038-*M . . . . .	J86	RKC 2RSC 25 . . . . .	G139
P-WSV 56-964-*M . . . . .	K204	RB51057-*M . . . . .	H52	RKC 57x-*M . . . . .	J88
P-WSV 70-182-*M . . . . .	K205	RB51100-*M . . . . .	F17	RKC 6T-* / S90 / CS10476 . . . . .	K179
P-WSV 80-073-*M . . . . .	K205	RB51106-*M . . . . .	J86	RKC 84x-*M . . . . .	F18
P-WSV 80-158-*M . . . . .	K205	RB51178-*M . . . . .	G112	RKC BK52C 57x-*M . . . . .	J90
RB21603-*M . . . . .	G142	RB51179-*M . . . . .	G112	RKC CBC5 57x-*M . . . . .	J90
RB21605-*M . . . . .	G142	RB51210-*M . . . . .	F31	RKC FKFD 25x-*M . . . . .	G114
RB50603-*M . . . . .	J84	RB51211-*M . . . . .	F31	RKC FKFD 57x-*M . . . . .	J88
RB50629-*M . . . . .	J84	RB51212-*M . . . . .	F31	RKC FKFD 84x-*M . . . . .	F18
RB50633-*M . . . . .	J86	RB51213-*M . . . . .	F31	RKC FSFD 25x-*M . . . . .	G114
RB50651-*M . . . . .	J84	RB51225-*M . . . . .	H52	RKC FSFD 57x-*M . . . . .	J88
RB50652-*M . . . . .	J86	RB51231-*M . . . . .	J86	RKC FSFD 84x-*M . . . . .	F18

## Index

RKC RJ45 84x-*M . . . . .	F18	RKFB-CC . . . . .	K230	RKM RSC 57x-*M . . . . .	J87
RKC RKC 25x-*M . . . . .	G114	RKFB-MC . . . . .	K230	RKM RSFP 25x-*M . . . . .	G114
RKC RKC 57x-*M . . . . .	J88	RKFV-CC . . . . .	K230	RKM RSFP 57x-*M . . . . .	J88
RKC RKC 84x-*M . . . . .	F18	RKFV-MC . . . . .	K230	RKM WKC 25x-*M . . . . .	G114
RKC RKFP 25x-*M . . . . .	G114	RKF-CC . . . . .	K229	RKM WKC 57x-*M . . . . .	J88
RKC RKFP 57x-*M . . . . .	J88	RKFC-CC . . . . .	K231	RKM WKM 25x-*M . . . . .	G113
RKC RSFP 25x-*M . . . . .	G114	RKFC-MC . . . . .	K231	RKM WKM 57x-*M . . . . .	J87
RKC RSFP 57x-*M . . . . .	J88	RKFCV-CC . . . . .	K231	RKM WSC 25x-*M . . . . .	G114
RKC WKC 25x-*M . . . . .	G114	RKFCV-MC . . . . .	K231	RKM WSC 57x-*M . . . . .	J88
RKC WKC 57x-*M . . . . .	J88	RKF-MC . . . . .	K229	RKMB-CC . . . . .	K230
RK-CC . . . . .	K232	RKFP 25x-*M . . . . .	G114	RKMBV-CC . . . . .	K230
RKCD 44x-*M . . . . .	F32	RKFP 57x-*M . . . . .	J88	RK-MC . . . . .	K233
RKCD FKFDD 44x-*M . . . . .	F32	RKFP BK52C 57x-*M . . . . .	J90	RKM-CC . . . . .	K229
RKCD FSFDD 44x-*M . . . . .	F32	RKFP CBC5 57x-*M . . . . .	J90	RKMC-CC . . . . .	K231
RKCD RJ45 44x-*M . . . . .	F32	RKFV 48x-*M . . . . .	H70	RKMCV-CC . . . . .	K231
RKCD RKCD 44x-*M . . . . .	F32	RKFV 49x-*M . . . . .	E18	RKMV-CC . . . . .	K229
RKCN 5T-* . . . . .	K179	RKFV 48-*M . . . . .	H96	RKS 84x-*M . . . . .	F19
RKCV 48x-*M . . . . .	H70	RKFV 48-*M/14.5 . . . . .	H96	RKS FKSDE 84-*M . . . . .	F19
RKCV 49x-*M . . . . .	E18	RKFV 48-*M/14.75 . . . . .	H96	RKS RJ45S 84x-*M . . . . .	F19
RKCV FKFDV 48x-*M . . . . .	H70	RKFV 48-*M/M20 . . . . .	H96	RKS RKS 84x-*M . . . . .	F19
RKCV FKFDV 49x-*M . . . . .	E18	RKFV 48-*M/NPT . . . . .	H96	RKSD 44x-*M . . . . .	F33
RKCV FSFDV 48x-*M . . . . .	H70	RKFV 49-*M . . . . .	E60	RKSD FKSDED 44x-*M . . . . .	F33
RKCV FSFDV 49x-*M . . . . .	E18	RKFV 49-*M/14.5 . . . . .	E60	RKSD FSSDED 44x-*M . . . . .	F33
RKCV RKCV 48x-*M . . . . .	H70	RKFV 49-*M/14.75 . . . . .	E60	RKSD RJ45S 44x-*M . . . . .	F33
RKCV RKCV 49x-*M . . . . .	E18	RKFV 49-*M/M20 . . . . .	E60	RKSD RKSD 44x-*M . . . . .	F33
RKCV RKFPV 48x-*M . . . . .	H70	RKFV 49-*M/NPT . . . . .	E60	RKSS FSSDE 84x-*M . . . . .	F19
RKCV RKFPV 49x-*M . . . . .	E18	RKFV-CC . . . . .	K229	RKSW . . . . .	H60
RKCV RSFPV 48x-*M . . . . .	H70	RKFV-MC . . . . .	K229	RKSW 2RSSW 45 . . . . .	H62
RKCV RSFPV 49x-*M . . . . .	E18	RKGV-49x-*M . . . . .	E21	RKSW 2RSSW 45-0001 . . . . .	H62
RKCV WKCV 48x-*M . . . . .	H70	RKK-CC . . . . .	K233	RKSW 45x-*M . . . . .	H53
RKCV WKCV 49x-*M . . . . .	E18	RKM 25x-*M . . . . .	G113	RKSW D9S RKS 45x-*M-*M . . . . .	H56
RKE 57-TR2 . . . . .	J95	RKM 57-TR2 . . . . .	J95	RKSW D9S/T 45x-*M . . . . .	H55
RKF 25-*M . . . . .	G144	RKM 57x-*M . . . . .	J87	RKSW D9SM/T 45x-*M . . . . .	H55
RKF 25-*M/14.5 . . . . .	G144	RKM BK52C 57x-*M . . . . .	J89	RKSW RKS 45x-*M . . . . .	H53
RKF 25-*M/14.75 . . . . .	G144	RKM CBC5 57x-*M . . . . .	J89	RKSW SD9S RKS 45x-*M-*M . . . . .	H56
RKF 25-*M/M20 . . . . .	G144	RKM FKFD 25x-*M . . . . .	G114	RKSW WKS 45x-*M . . . . .	H53
RKF 25-*M/NPT . . . . .	G144	RKM FKFD 57x-*M . . . . .	J88	RKV 48x-*M . . . . .	H69
RKF 40-IDC . . . . .	J94	RKM FSFD 25x-*M . . . . .	G114	RKV 49x-*M . . . . .	E17
RKF 40-IDC ET . . . . .	J94	RKM FSFD 57x-*M . . . . .	J88	RKV FKFDV 48x-*M . . . . .	H70
RKF 57 . . . . .	J134	RKM RKC 25x-*M . . . . .	G114	RKV FKFDV 49x-*M . . . . .	E18
RKF 57 PCB . . . . .	J134	RKM RKC 57x-*M . . . . .	J88	RKV FSFDV 48x-*M . . . . .	H70
RKF 57-*M . . . . .	J131	RKM RKFP 25x-*M . . . . .	G114	RKV FSFDV 49x-*M . . . . .	E18
RKF 57-*M/14.5 . . . . .	J131	RKM RKFP 57x-*M . . . . .	J88	RKV RKCV 48x-*M . . . . .	H70
RKF 57-*M/14.75 . . . . .	J131	RKM RKM 25 . . . . .	G140	RKV RKCV 49x-*M . . . . .	E18
RKF 57-*M/M20 . . . . .	J131	RKM RKM 25x-*M . . . . .	G113	RKV RKFPV 48x-*M . . . . .	H70
RKF 57-*M/NPT . . . . .	J131	RKM RKM 57 . . . . .	J128	RKV RKFPV 49x-*M . . . . .	E18
RKF 57-IDC . . . . .	J94	RKM RKM 57x-*M . . . . .	J87	RKV RKV 48 . . . . .	H92
RKF 57-IDC ET . . . . .	J94	RKM RSC 25x-*M . . . . .	G113	RKV RKV 48x-*M . . . . .	H69

# Process Automation



## Index

RKV RKV 49 . . . . .	E56	RS-CC . . . . .	K232	RSFBV-CC . . . . .	K230
RKV RKV 49x-*M . . . . .	E17	RSCD 44x-*M . . . . .	F32	RSFBV-MC . . . . .	K230
RKV RSCV 48x-*M . . . . .	H69	RSCD FKFD 44x-*M . . . . .	F32	RSF-CC . . . . .	K229
RKV RSCV 49x-*M . . . . .	E17	RSCD FSFD 44x-*M . . . . .	F32	RSFC-CC . . . . .	K231
RKV RSFPV 48x-*M . . . . .	H70	RSCD RJ45 44x-*M . . . . .	F32	RSFC-MC . . . . .	K231
RKV RSFPV 49x-*M . . . . .	E18	RSCD RKCD 44x-*M . . . . .	F32	RSFCV-CC . . . . .	K231
RKV WKCV 48x-*M . . . . .	H70	RSCD RSCD 44x-*M . . . . .	F32	RSFCV-MC . . . . .	K231
RKV WKCV 49x-*M . . . . .	E18	RSCN 5T-* . . . . .	K180	RSF-MC . . . . .	K229
RKV WKV 48x-*M . . . . .	H69	RSCS 2RKCS 48 . . . . .	H91	RSFP 25x-*M . . . . .	G114
RKV WKV 49x-*M . . . . .	E17	RSCV 2RKCV 25 . . . . .	G139	RSFP 57x-*M . . . . .	J88
RKV WSCV 48x-*M . . . . .	H70	RSCV 2RKCV 49 . . . . .	E55	RSFP BK52C 57x-*M . . . . .	J90
RKV WSCV 49x-*M . . . . .	E18	RSCV 48x-*M . . . . .	H69	RSFP CBC5 57x-*M . . . . .	J90
RKV-CC . . . . .	K232	RSCV 49x-*M . . . . .	E17	RSFPV 48x-*M . . . . .	H70
RKV-MC . . . . .	K233	RSCV FKFDV 48x-*M . . . . .	H70	RSFPV 49x-*M . . . . .	E18
RP-Q21 . . . . .	L46	RSCV FKFDV 49x-*M . . . . .	E18	RSFV 48-*M . . . . .	H95
RS 4.21T-* . . . . .	K180	RSCV FSFDV 48x-*M . . . . .	H70	RSFV 48-*M/14.5 . . . . .	H95
RS 4.21T-* /S90 . . . . .	K180	RSCV FSFDV 49x-*M . . . . .	E18	RSFV 48-*M/14.75 . . . . .	H95
RS 4.41T-* . . . . .	K180	RSCV RKCV 48x-*M . . . . .	H70	RSFV 48-*M/M20 . . . . .	H95
RSC 25x-*M . . . . .	G113	RSCV RKCV 49x-*M . . . . .	E18	RSFV 49-*M . . . . .	E59
RSC 2RKC 57 . . . . .	J127	RSCV RKFPV 48x-*M . . . . .	H70	RSFV 49-*M/14.5 . . . . .	E59
RSC 2RKC 57/KS . . . . .	J127	RSCV RKFPV 49x-*M . . . . .	E18	RSFV 49-*M/14.75 . . . . .	E59
RSC 57x-*M . . . . .	J87	RSCV RSCV 48x-*M . . . . .	H69	RSFV 49-*M/M20 . . . . .	E59
RSC 6T-* /S90/CS10476 . . . . .	K180	RSCV RSCV 49x-*M . . . . .	E17	RSFV 49-*M/NPT . . . . .	E59
RSC 84x-*M . . . . .	F18	RSCV RSFPV 48x-*M . . . . .	H70	RSFV RKFV 48/22 . . . . .	H74
RSC BK52C 57x-*M . . . . .	J89	RSCV RSFPV 49x-*M . . . . .	E18	RSFV RKFV 49/22 . . . . .	E23
RSC CBC5 57x-*M . . . . .	J89	RSCV WKCV 48x-*M . . . . .	H70	RSFV-CC . . . . .	K229
RSC FKFD 25x-*M . . . . .	G114	RSCV WKCV 49x-*M . . . . .	E18	RSFV-MC . . . . .	K229
RSC FKFD 57x-*M . . . . .	J88	RSCV WSCV 48x-*M . . . . .	H70	RSGV-49x-*M . . . . .	E21
RSC FKFD 84x-*M . . . . .	F18	RSCV WSCV 49x-*M . . . . .	E18	RSK-CC . . . . .	K233
RSC FSFD 25x-*M . . . . .	G114	RSE 57-TR2 . . . . .	J95	RSM 25-FK 4.5 . . . . .	G153
RSC FSFD 57x-*M . . . . .	J88	RSEV 48-TR . . . . .	H73	RSM 25x-*M . . . . .	G113
RSC FSFD 84x-*M . . . . .	F18	RSEV 49-TR . . . . .	E22	RSM 2RKM 57 . . . . .	J124
RSC RJ45 84x-*M . . . . .	F18	RSF 25-*M . . . . .	G143	RSM 2RKM 57 DGT . . . . .	J125
RSC RKC 25x-*M . . . . .	G114	RSF 25-*M/14.5 . . . . .	G143	RSM 2RKM 57-KF . . . . .	J124
RSC RKC 57x-*M . . . . .	J88	RSF 25-*M/14.75 . . . . .	G143	RSM 2RKM 57-KM . . . . .	J124
RSC RKC 84x-*M . . . . .	F18	RSF 25-*M/M20 . . . . .	G143	RSM 48-FK 4.5 . . . . .	H105
RSC RKFP 25x-*M . . . . .	G114	RSF 25-*M/NPT . . . . .	G143	RSM 49-FK 4.5 . . . . .	E69
RSC RKFP 57x-*M . . . . .	J88	RSF 48-*M/NPT . . . . .	H95	RSM 57-FK 4.5 . . . . .	J129
RSC RSC 25x-*M . . . . .	G113	RSF 57 . . . . .	J134	RSM 57-TR2 . . . . .	J95
RSC RSC 57x-*M . . . . .	J87	RSF 57 PCB . . . . .	J134	RSM 57-TR2/VM . . . . .	J95
RSC RSC 84x-*M . . . . .	F18	RSF 57-*M . . . . .	J130	RSM 57x-*M . . . . .	J87
RSC RSFP 25x-*M . . . . .	G114	RSF 57-*M/14.5 . . . . .	J130	RSM BK52C 57x-*M . . . . .	J89
RSC RSFP 57x-*M . . . . .	J88	RSF 57-*M/14.75 . . . . .	J130	RSM CBC5 57x-*M . . . . .	J89
RSC WKC 25x-*M . . . . .	G114	RSF 57-*M/M20 . . . . .	J130	RSM FKFD 25x-*M . . . . .	G114
RSC WKC 57x-*M . . . . .	J88	RSF 57-*M/NPT . . . . .	J130	RSM FKFD 57x-*M . . . . .	J88
RSC WSC 25x-*M . . . . .	G114	RSF RKF 57/22 . . . . .	J96	RSM FSFD 25x-*M . . . . .	G114
RSC WSC 57x-*M . . . . .	J88	RSFB-CC . . . . .	K230	RSM FSFD 57x-*M . . . . .	J88
RSC-8VBRK-RKC-5724-DCL . . . . .	J148	RSFB-MC . . . . .	K230	RSM RKC 25x-*M . . . . .	G114

## Index

RSM RKC 57x-*M . . . . .	J88	RSSW D9S RKSW 45x-*M-*M . . . . .	H56	RSV-CC . . . . .	K232
RSM RKC 57x-*M RKM 57 . . . . .	J126	RSSW D9S RSSW 45x-*M-*M . . . . .	H56	RSV-MC . . . . .	K233
RSM RKFP 25x-*M . . . . .	G114	RSSW D9S/T 45x-*M . . . . .	H55	Sanitary Diaphragm S1593 . . . . .	M31
RSM RKFP 57x-*M . . . . .	J88	RSSW D9SM/T 45x-*M . . . . .	H55	Sanitary Diaphragm S1689 . . . . .	M30
RSM RKM 25x-*M . . . . .	G113	RSSW RKSW 45x-*M . . . . .	H53	Sanitary Diaphragm S1691 . . . . .	M29
RSM RKM 57 WSM 40 PST . . . . .	J125	RSSW RSSW 45x-*M . . . . .	H53	Sanitary Diaphragm S1692 . . . . .	M29
RSM RKM 57x-*M . . . . .	J87	RSSW SD9S RKSW 45x-*M-*M . . . . .	H56	Sanitary Diaphragm S1694 . . . . .	M30
RSM RSC 25x-*M . . . . .	G113	RSSW SD9S RSSW 45x-*M-*M . . . . .	H56	Sanitary Diaphragm S1695 . . . . .	M30
RSM RSC 57x-*M . . . . .	J87	RSSW WKSW 45x-*M . . . . .	H53	Sanitary Diaphragm S1701 . . . . .	M32
RSM RSFP 25x-*M . . . . .	G114	RSSW WSSW 45x-*M . . . . .	H53	Sanitary Diaphragm S1704 . . . . .	M33
RSM RSFP 57x-*M . . . . .	J88	RSV 2RKV 25 . . . . .	G139	Sanitary Diaphragm S1705 . . . . .	M33
RSM RSM 25 . . . . .	G140	RSV 2RKV 48 . . . . .	H91	SA-Q21 . . . . .	L45
RSM RSM 25x-*M . . . . .	G113	RSV 2RKV 49 . . . . .	E55	SC12-EX . . . . .	D23
RSM RSM 57 . . . . .	J128	RSV 48-TR . . . . .	H73	SCH-1-WINBLOC . . . . .	C62
RSM RSM 57x-*M . . . . .	J87	RSV 48x-*M . . . . .	H69	SD9S 45x-*M . . . . .	H56
RSM WKC 25x-*M . . . . .	G114	RSV 49-TR . . . . .	E22	SE-44M-E924 . . . . .	F41
RSM WKC 57x-*M . . . . .	J88	RSV 49x-*M . . . . .	E17	SE-44X-E524 . . . . .	F37
RSM WKM 25x-*M . . . . .	G113	RSV FKFDV 48x-*M . . . . .	H70	SE-44X-E924 . . . . .	F37
RSM WKM 57x-*M . . . . .	J87	RSV FKFDV 49x-*M . . . . .	E18	SE-44X-E524 . . . . .	F37
RSM WSC 25x-*M . . . . .	G114	RSV FKV RKV 25 . . . . .	G139	SE-44X-E924 . . . . .	F37
RSM WSC 57x-*M . . . . .	J88	RSV FKV RKV 48 . . . . .	H91	SE-84ST-E524/C1165 . . . . .	F39
RSM WSM 25x-*M . . . . .	G113	RSV FKV RKV 49 . . . . .	E55	SE-84ST-E924/C1165 . . . . .	F39
RSM WSM 57x-*M . . . . .	J87	RSV FSFDV 48x-*M . . . . .	H70	SE-84ST-E924/C1190 . . . . .	F39
RSMB-CC . . . . .	K230	RSV FSFDV 49x-*M . . . . .	E18	SE-84X-E524 . . . . .	F23
RSMBV-CC . . . . .	K230	RSV RKCV 48x-*M . . . . .	H70	SE-84X-E924 . . . . .	F23
RS-MC . . . . .	K233	RSV RKCV 49x-*M . . . . .	E18	SE-84X-E524 . . . . .	F23
RSM-CC . . . . .	K229	RSV RKFPV 48x-*M . . . . .	H70	SE-84X-E924 . . . . .	F23
RSMC-CC . . . . .	K231	RSV RKFPV 49x-*M . . . . .	E18	SM-Q21 . . . . .	L45
RSMCV-CC . . . . .	K231	RSV RKV 48 SS . . . . .	H93	SPTC1 . . . . .	J145
RSM-FKM-RKM 57 . . . . .	J126	RSV RKV 48x-*M . . . . .	H69	SPTC2 . . . . .	J145
RSMV-CC . . . . .	K229	RSV RKV 49 SS . . . . .	E57	SPTT1 . . . . .	J145
RSS 84x-*M . . . . .	F19	RSV RKV 49x-*M . . . . .	E17	SPTT1-A25 . . . . .	G141
RSS FKSDE 84x-*M . . . . .	F19	RSV RSCV 48x-*M . . . . .	H69	SPTT1-A48 . . . . .	H94
RSS FSSDE 84x-*M . . . . .	F19	RSV RSCV 49x-*M . . . . .	E17	SPTT1-A49 . . . . .	E24
RSS RJ45S 84x-*M . . . . .	F19	RSV RSFPV 48x-*M . . . . .	H70	SPTTM13-A25 . . . . .	G141
RSS RKS 84x-*M . . . . .	F19	RSV RSFPV 49x-*M . . . . .	E18	SPTTM13-A48 . . . . .	H94
RSS RSS 84x-*M . . . . .	F19	RSV RSV 48 . . . . .	H92	SPTTM13-A49 . . . . .	E24
RSSD 44x-*M . . . . .	F33	RSV RSV 48x-*M . . . . .	H69	TB2-LDT . . . . .	L46
RSSD FKSDED 44x-*M . . . . .	F33	RSV RSV 49 . . . . .	E56	TB2-LDT-LI . . . . .	L46
RSSD FSSDED 44x-*M . . . . .	F33	RSV RSV 49x-*M . . . . .	E17	TB-R16S . . . . .	M117
RSSD RJ45S 44x-*M . . . . .	F33	RSV WKCV 48x-*M . . . . .	H70	TC01-G1/2A4P-2AP8X-H1140 . . . . .	M101
RSSD RKSD 44x-*M . . . . .	F33	RSV WKCV 49x-*M . . . . .	E18	TC01-G1/2A4P-LIAP8X-H1140 . . . . .	M101
RSSD RSSD 44x-*M . . . . .	F33	RSV WKV 48x-*M . . . . .	H69	TC01-N1/2A4P-2AP8X-H1140 . . . . .	M101
RSSW 456SP-1M . . . . .	H57	RSV WKV 49x-*M . . . . .	E17	TC01-N1/2A4P-LIAP8X-H1140 . . . . .	M101
RSSW 456SP-2M . . . . .	H57	RSV WSCV 48x-*M . . . . .	H70	TC-R16-S . . . . .	M117
RSSW 456SP-5M . . . . .	H57	RSV WSCV 49x-*M . . . . .	E18	THW-3-N1/2-A4-L050 . . . . .	M94
RSSW 45-TR . . . . .	H60	RSV WSV 48x-*M . . . . .	H69	THW-3-N1/2-A4-L100 . . . . .	M94
RSSW 45x-*M . . . . .	H53	RSV WSV 49x-*M . . . . .	E17	THW-3-N1/2-A4-L150 . . . . .	M94

# Process Automation



## Index

THW-3-N1/2-A4-L250 . . . . .	M94	TS-400-LUUP8X-H1141 . . . . .	M87	WKC RKFP 57x-*M . . . . .	J88
THW-3-N1/4-A4-L050 . . . . .	M94	TS-500-2UN8X-H1141 . . . . .	M87	WKC RSFP 25x-*M . . . . .	G114
THW-3-N1/4-A4-L100 . . . . .	M94	TS-500-2UP8X-H1141 . . . . .	M87	WKC RSFP 57x-*M . . . . .	J88
THW-3-N1/4-A4-L150 . . . . .	M94	TS-500-LI2UPN8X-H1141 . . . . .	M87	WKC WKC 25x-*M . . . . .	G114
THW-3-N1/4-A4-L200 . . . . .	M94	TS-500-LIUN8X-H1141 . . . . .	M87	WKC WKC 57x-*M . . . . .	J88
THW-3-N1/8-A4-L050 . . . . .	M94	TS-500-LIUP8X-H1141 . . . . .	M87	WKCN 5T-* . . . . .	K181
THW-3-N1/8-A4-L100 . . . . .	M94	TS-500-LUUN8X-H1141 . . . . .	M87	WKCV 48x-*M . . . . .	H70
THW-3-N1/8-A4-L150 . . . . .	M94	TS-500-LUUP8X-H1141 . . . . .	M87	WKCV 49x-*M . . . . .	E18
THW-3-N1/8-A4-L200 . . . . .	M94	UB-Q21 . . . . .	L46	WKCV FKFDV 48x-*M . . . . .	H70
THW-3-TRI3/4-A4-L035 . . . . .	M94	UB-Q21 (2/bag) . . . . .	L46	WKCV FKFDV 49x-*M . . . . .	E18
THW-3-TRI3/4-A4-L050 . . . . .	M94	VB 40.5N-* . . . . .	K189	WKCV FSFDV 48x-*M . . . . .	H70
THW-3-TRI3/4-A4-L100 . . . . .	M94	VB 40.5N-CS12 . . . . .	K189	WKCV FSFDV 49x-*M . . . . .	E18
THW-3-TRI3/4-A4-L150 . . . . .	M94	VB 40N-* . . . . .	K187	WKCV RKFPV 48x-*M . . . . .	H70
THW-3-TRI3/4-A4-L250 . . . . .	M94	VB 40N-H1151 . . . . .	K187	WKCV RKFPV 49x-*M . . . . .	E18
THW-6-N1/2-A4-L050 . . . . .	M95	VB 4X1.5N-* . . . . .	K189	WKCV RSFPV 48x-*M . . . . .	H70
THW-6-N1/2-A4-L100 . . . . .	M95	VB 4X1.5N-CS16 . . . . .	K189	WKCV RSFPV 49x-*M . . . . .	E18
THW-6-N1/2-A4-L150 . . . . .	M95	VB 4X1N-* . . . . .	K187	WKCV WKCV 48x-*M . . . . .	H70
THW-6-N1/2-A4-L250 . . . . .	M95	VB 4X1N-CS12 . . . . .	K187	WKCV WKCV 49x-*M . . . . .	E18
THW-6-TRI3/4-A4-L050 . . . . .	M95	VB2/FSW/FKW/FSW 45 . . . . .	H62	WKM 25x-*M . . . . .	G113
THW-6-TRI3/4-A4-L100 . . . . .	M95	VB2-FKM/FKM/FSM 57 . . . . .	J119	WKM 57x-*M . . . . .	J87
THW-6-TRI3/4-A4-L150 . . . . .	M95	VB2-FKM/RKC RSC 57x-*M/*M . . . . .	J119	WKM BK52C 57x-*M . . . . .	J89
THW-6-TRI3/4-A4-L250 . . . . .	M95	VB2-FSM 4.41/2FKM 4.21 . . . . .	K183	WKM CBC5 57x-*M . . . . .	J89
TI40EX . . . . .	D17	VB2-FSM 4.41/2RK 4.21T-*/* . . . . .	K183	WKM FKFD 25x-*M . . . . .	G114
TMF 12-G . . . . .	L51	VB2-RKC 57x-*M-FKM FSM . . . . .	J119	WKM FKFD 57x-*M . . . . .	J88
TMF 18-G . . . . .	L51	VB2-RS 4.41T-*/2FKM 4.21 . . . . .	K183	WKM FSFD 25x-*M . . . . .	G114
TMF 18-MS . . . . .	L51	VB2-RS 4.41T-*/2RK 4.21T-*/* . . . . .	K183	WKM FSFD 57x-*M . . . . .	J88
TMF 30-G . . . . .	L51	VB2-SP1 . . . . .	M109	WKM RKC 25x-*M . . . . .	G114
TMF 30-MS . . . . .	L51	VBRS 4.41-2RK 4.21T-*/* . . . . .	K185	WKM RKC 57x-*M . . . . .	J88
TP-104A-TRI3/4-H1141-L100 . . . . .	M91	VZ3 (8/BAG) . . . . .	K233	WKM RKFP 25x-*M . . . . .	G114
TP-104A-TRI3/4-H1141-L035 . . . . .	M91	VZ3-RED (8/BAG) . . . . .	K233	WKM RKFP 57x-*M . . . . .	J88
TP-203A-CF-H1141-L100 . . . . .	M91	WCC-1138 . . . . .	M123	WKM RSC 25x-*M . . . . .	G113
TP-203A-CF-H1141-L150 . . . . .	M91	WCT-2 . . . . .	M123	WKM RSC 57x-*M . . . . .	J87
TP-203A-CF-H1141-L200 . . . . .	M91	WFS 57 PCB . . . . .	J136	WKM RSFP 25x-*M . . . . .	G114
TP-203A-CF-H1141-L250 . . . . .	M91	WFS 84 PCB . . . . .	F28	WKM RSFP 57x-*M . . . . .	J88
TP-203A-CF-H1141-L300 . . . . .	M91	WFSW 45 PCB . . . . .	H64	WKM WKC 25x-*M . . . . .	G114
TP-206A-CF-H1141-L100 . . . . .	M91	WK 4.21T-* . . . . .	K181	WKM WKC 57x-*M . . . . .	J88
TP-206A-CF-H1141-L150 . . . . .	M91	WK 4.21T-* / S90 . . . . .	K181	WKM WKM 25x-*M . . . . .	G113
TP-206A-CF-H1141-L200 . . . . .	M91	WK 4.41T-* . . . . .	K181	WKM WKM 57x-*M . . . . .	J87
TP-206A-CF-H1141-L300 . . . . .	M91	WKC 25x-*M . . . . .	G114	WKM WSC 25x-*M . . . . .	G114
TP-306A-CF-H1141-L1000 . . . . .	M92	WKC 57x-*M . . . . .	J88	WKM WSC 57x-*M . . . . .	J88
TP-306A-CF-H1141-L2000 . . . . .	M92	WKC 6T-* / S90 / CS10476 . . . . .	K181	WK-R16 Weight Kit . . . . .	M118
TP-306A-CF-H1141-L5000 . . . . .	M92	WKC BK52C 57x-*M . . . . .	J90	WKS WKS 45x-*M . . . . .	H53
TS-400-2UN8X-H1141 . . . . .	M87	WKC CBC5 57x-*M . . . . .	J90	WKS D9S WKS 45x-*M-*M . . . . .	H56
TS-400-2UP8X-H1141 . . . . .	M87	WKC FKFD 25x-*M . . . . .	G114	WKS D9S/T 45x-*M . . . . .	H55
TS-400-LI2UPN8X-H1141 . . . . .	M87	WKC FKFD 57x-*M . . . . .	J88	WKS D9SM/T 45x-*M . . . . .	H55
TS-400-LIUN8X-H1141 . . . . .	M87	WKC FSFD 25x-*M . . . . .	G114	WKS SD9S WKS 45x-*M-*M . . . . .	H56
TS-400-LIUP8X-H1141 . . . . .	M87	WKC FSFD 57x-*M . . . . .	J88	WKS WKS 45x-*M . . . . .	H53
TS-400-LUUN8X-H1141 . . . . .	M87	WKC RKFP 25x-*M . . . . .	G114	WKV 48x-*M . . . . .	H69

# TURCK

## Process Automation Products

### Index

WKV 49x-*M . . . . .	E17	WSCV FSFDV 49x-*M . . . . .	E18	WSSW WSSW 45x-*M . . . . .	H53
WKV FKFDV 48x-*M . . . . .	H70	WSCV RKCV 48x-*M . . . . .	H70	WSV 48x-*M . . . . .	H69
WKV FKFDV 49x-*M . . . . .	E18	WSCV RKCV 49x-*M . . . . .	E18	WSV 49x-*M . . . . .	E17
WKV FSFDV 48x-*M . . . . .	H70	WSCV RKFPV 48x-*M . . . . .	H70	WSV FKFDV 48x-*M . . . . .	H70
WKV FSFDV 49-*M . . . . .	E18	WSCV RKFPV 49x-*M . . . . .	E18	WSV FKFDV 49x-*M . . . . .	E18
WKV RKCV 48x-*M . . . . .	H70	WSCV RSFPV 48x-*M . . . . .	H70	WSV FSFDV 48x-*M . . . . .	H70
WKV RKCV 49x-*M . . . . .	E18	WSCV RSFPV 49x-*M . . . . .	E18	WSV FSFDV 49x-*M . . . . .	E18
WKV RKFPV 48x-*M . . . . .	H70	WSCV WKCV 48x-*M . . . . .	H70	WSV RKCV 48x-*M . . . . .	H70
WKV RKFPV 49x-*M . . . . .	E18	WSCV WKCV 49x-*M . . . . .	E18	WSV RKCV 49x-*M . . . . .	E18
WKV RSCV 48x-*M . . . . .	H69	WSCV WSCV 48x-*M . . . . .	H70	WSV RKFPV 48x-*M . . . . .	H70
WKV RSCV 49x-*M . . . . .	E17	WSCV WSCV 49x-*M . . . . .	E18	WSV RKFPV 49x-*M . . . . .	E18
WKV RSFPV 48x-*M . . . . .	H70	WSM 25x-*M . . . . .	G113	WSV RKV 48 . . . . .	H92
WKV RSFPV 49x-*M . . . . .	E18	WSM 57x-*M . . . . .	J87	WSV RKV 48x-*M . . . . .	H69
WKV WKCV 48x-*M . . . . .	H70	WSM BK52C 57x-*M . . . . .	J89	WSV RKV 49 . . . . .	E56
WKV WKCV 49x-*M . . . . .	E18	WSM CBC5 57x-*M . . . . .	J89	WSV RKV 49x-*M . . . . .	E17
WKV WKV 48x-*M . . . . .	H69	WSM FKFD 25x-*M . . . . .	G114	WSV RSCV 48x-*M . . . . .	H69
WKV WKV 49x-*M . . . . .	E17	WSM FKFD 57x-*M . . . . .	J88	WSV RSCV 49x-*M . . . . .	E17
WKV WSCV 48x-*M . . . . .	H70	WSM FSFD 25x-*M . . . . .	G114	WSV RSFPV 48x-*M . . . . .	H70
WKV WSCV 49x-*M . . . . .	E18	WSM FSFD 57x-*M . . . . .	J88	WSV RSFPV 49x-*M . . . . .	E18
WS 4.21T-* . . . . .	K182	WSM RKC 25x-*M . . . . .	G114	WSV WKCV 48x-*M . . . . .	H70
WS 4.21T-* /S90 . . . . .	K182	WSM RKC 57x-*M . . . . .	J88	WSV WKCV 49x-*M . . . . .	E18
WS 4.41T-* . . . . .	K182	WSM RKFP 25x-*M . . . . .	G114	WSV WKV 48x-*M . . . . .	H69
WSC 25x-*M . . . . .	G114	WSM RKFP 57x-*M . . . . .	J88	WSV WKV 49x-*M . . . . .	E17
WSC 57x-*M . . . . .	J88	WSM RKM 25 . . . . .	G140	WSV WSCV 48x-*M . . . . .	H70
WSC 6T-* /S90/CS10476 . . . . .	K182	WSM RKM 25x-*M . . . . .	G113	WSV WSCV 49x-*M . . . . .	E18
WSC BK52C 57x-*M . . . . .	J90	WSM RKM 57 . . . . .	J128	WSV WSV 48x-*M . . . . .	H69
WSC CBC5 57x-*M . . . . .	J90	WSM RKM 57x-*M . . . . .	J87	WSV WSV 49x-*M . . . . .	E17
WSC FKFD 25x-*M . . . . .	G114	WSM RSC 25x-*M . . . . .	G113	XN-ABPL . . . . .	C62
WSC FKFD 57x-*M . . . . .	J88	WSM RSC 57x-*M . . . . .	J87	XN-ANBZ-BL . . . . .	C61
WSC FSFD 25x-*M . . . . .	G114	WSM RSFP 25x-*M . . . . .	G114	XN-ANBZ-BR . . . . .	C61
WSC FSFD 57x-*M . . . . .	J88	WSM RSFP 57x-*M . . . . .	J88	XN-ANBZ-GN . . . . .	C61
WSC RKC 25x-*M . . . . .	G114	WSM WKC 25x-*M . . . . .	G114	XN-ANBZ-RT . . . . .	C61
WSC RKC 57x-*M . . . . .	J88	WSM WKC 57x-*M . . . . .	J88	XN-ANBZ-SW . . . . .	C61
WSC RKFP 25x-*M . . . . .	G114	WSM WKM 25x-*M . . . . .	G113	XN-ANBZ-WS . . . . .	C61
WSC RKFP 57x-*M . . . . .	J88	WSM WKM 57x-*M . . . . .	J87	XN-KLBU/S (10/PKG) . . . . .	C62
WSC RSFP 25x-*M . . . . .	G114	WSM WSC 25x-*M . . . . .	G114	XN-KLBU/T (10/PKG) . . . . .	C62
WSC RSFP 57x-*M . . . . .	J88	WSM WSC 57x-*M . . . . .	J88	XN-KO/10 . . . . .	C61
WSC WKC 25x-*M . . . . .	G114	WSM WSM 25x-*M . . . . .	G113	XN-KO/11 . . . . .	C61
WSC WKC 57x-*M . . . . .	J88	WSM WSM 57x-*M . . . . .	J87	XN-KO/12 . . . . .	C61
WSC WSC 25x-*M . . . . .	G114	WSSW 45x-*M . . . . .	H53	XN-KO/13 . . . . .	C61
WSC WSC 57x-*M . . . . .	J88	WSSW D9S WKS45x-*M-*M . . . . .	H56	XN-KO/14 . . . . .	C61
WSC-2VWK-WKC-57-DCL . . . . .	J147	WSSW D9S WSSW 45x-*M-*M . . . . .	H56	XN-KO/16 . . . . .	C61
WSCN 5T-* . . . . .	K182	WSSW D9S/T 45x-*M . . . . .	H55	XN-KO/17 . . . . .	C61
WSCV 48x-*M . . . . .	H70	WSSW D9S/T 45x-*M . . . . .	H55	XN-KO/2 . . . . .	C61
WSCV 49x-*M . . . . .	E18	WSSW RKS45x-*M . . . . .	H53	XN-KO/6 . . . . .	C61
WSCV FKFDV 48x-*M . . . . .	H70	WSSW SD9S WKS45x-*M-*M . . . . .	H56	XN-KO/8 . . . . .	C61
WSCV FKFDV 49x-*M . . . . .	E18	WSSW SD9S WSSW 45x-*M-*M . . . . .	H56	XN-KO/9 . . . . .	C61
WSCV FSFDV 48x-*M . . . . .	H70	WSSW WKS45x-*M . . . . .	H53	XN-PS2-CABLE . . . . .	C62

## Index

XN-QV/1 . . . . .	C61
XN-QV/2 . . . . .	C61
XN-QV/3 . . . . .	C61
XN-QV/4 . . . . .	C61
XN-QV/5 . . . . .	C61
XN-QV/6 . . . . .	C61
XN-QV/7 . . . . .	C61
XN-QV/8 . . . . .	C61
XN-WEW-35/2-SW . . . . .	C62
ZBW5-2 . . . . .	C62

**TURCK**  
**Process Automation Products**

**REGISTRATION INSTRUCTIONS**

(TO BE COMPLETED BY THE END USER OF THE SENSORS)  
THIS INFORMATION WILL BE KEPT IN STRICT CONFIDENCE

STEP 1: Please make a Photocopy of this form.

STEP 2: Fill in all information below.

STEP 3: Line 13 (to put this warranty into effect, it must be validated by the signature of the End-User and an authorized **TURCK** Distributor or Representative.

STEP 4: Return this Registration to **TURCK** (keep a copy for your records).

Date: \_\_\_\_\_

**LIFETIME WARRANTY REGISTRATION**

(INDUCTIVE, INDUCTIVE MAGNET & CAPACITIVE SENSORS ONLY)

Please Print

End User

1. Company Name: \_\_\_\_\_

2. Division: \_\_\_\_\_ Dept: \_\_\_\_\_

3. Address: \_\_\_\_\_

4. City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

5. Phone: (      ) \_\_\_\_\_ Your Name: \_\_\_\_\_

Your Title: \_\_\_\_\_

6. Industry (Type of Product Manufactured or Service Performed at this Location):  
\_\_\_\_\_  
\_\_\_\_\_

7. Approx. Date Purchased: \_\_\_\_\_

8. Approx. Date Installed: \_\_\_\_\_

9. What is the General Application for this Product?  
\_\_\_\_\_  
\_\_\_\_\_

10. Which OEM Supplied the Mechanical Equipment on which the Sensors are Installed?

Name: \_\_\_\_\_ Location: \_\_\_\_\_

11. **TURCK** Sensors Installed:  
Catalog Number  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Approx.  
Quantity  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

12. Why were **TURCK** Sensors Specified for this Application?  
\_\_\_\_\_  
\_\_\_\_\_

13. Distributor or Representative Signature: \_\_\_\_\_

Company Name: \_\_\_\_\_ Date: \_\_\_\_\_

End User Signature: \_\_\_\_\_ Date: \_\_\_\_\_

14. **Return to USA:**

**TURCK Inc.**  
3000 Campus Drive  
Minneapolis, MN. 55441  
Attn: Warranty Department  
Phone: (763) 553-7300  
Fax: (763) 553-0708

**Return to Canada:**

**CHARTWELL ELECTRONICS, INC.**  
140 Duffield Drive  
Markham, Ontario  
Canada, L6G 1B5  
Phone: (905) 513-7100  
Fax: (905) 513-7101



## Warranty Terms and Conditions

### RISK OF LOSS

Delivery of the equipment to a common carrier shall constitute delivery to the Purchaser and the risk of loss shall transfer at that time to Purchaser. Should delivery be delayed due to an act or omission on the part of the Purchaser, risk of loss shall transfer to the Purchaser upon notification by **TURCK Inc.** that the order is complete and ready for shipment.

### WARRANTIES

**TURCK INC.** (hereinafter "**TURCK**") offers five (5) WARRANTIES to cover all products sold. They are as follows:

- 1) The **12-MONTH WARRANTY** is available for the products listed - generally those not covered by **LIFETIME, 5-YEAR, 24-MONTH or 18-MONTH** warranty. No registration required.
- 2) The **18-MONTH WARRANTY** is available for the products listed - generally those not covered by **LIFETIME or 5-YEAR WARRANTY**. No registration is required.
- 3) The **24-MONTH WARRANTY** is available for the products listed - generally those not covered by **LIFETIME, 5-YEAR or 18-MONTH**. No registration is required.
- 4) The **5-YEAR WARRANTY** is available generally for the products listed. No registration is required.
- 5) A **LIFETIME WARRANTY** is available for the products listed. It becomes effective when the accompanying **TURCK LIFETIME WARRANTY REGISTRATION** is completed and returned to **TURCK**.

### GENERAL TERMS AND CONDITIONS FOR ALL WARRANTIES

- **12-MONTH STANDARD WARRANTY**
- **18-MONTH STANDARD WARRANTY**
- **24-MONTH STANDARD WARRANTY**
- **5-YEAR WARRANTY**
- **LIFETIME WARRANTY**

**TURCK** warrants the Products covered by the respective WARRANTY AGREEMENTS to be free from defects in material and workmanship under normal and proper usage for the respective time periods listed above from the date of shipment from **TURCK**. In addition, certain specific terms apply to the various WARRANTIES.

**THESE EXPRESS WARRANTIES ARE IN LIEU OF AND EXCLUDE ALL OTHER REPRESENTATIONS MADE - BOTH EXPRESSED AND IMPLIED. THERE ARE NO WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE FOR PRODUCTS COVERED BY THESE TERMS AND CONDITIONS.**

**TURCK** warrants that the goods sold are as described, but no promise, description, affirmation of fact, sample model or representation, oral or written shall be part of an order, unless set forth in these terms and conditions, or are in writing and signed by an authorized representative of **TURCK**. These WARRANTIES do not apply to any Product which has been subject to misuse, negligence, or accident - or to any Product which has been modified or repaired, improperly installed, altered, or disassembled -except according to **TURCK's** written instructions.

These WARRANTIES are subject to the following conditions:

- 1) These WARRANTIES are limited to the electronic and mechanical performance only, as expressly detailed in the Product specifications and NOT to cosmetic performance.
- 2) These WARRANTIES shall not apply to any cables attached to, or integrated with the Product. However, the **18-MONTH WARRANTY** shall apply to cables sold separately by **TURCK**.
- 3) These WARRANTIES shall not apply to any Products which are stored, or utilized, in harsh environmental or electrical conditions outside **TURCK's** written specifications.
- 4) The WARRANTIES are applicable only to Products shipped from **TURCK** subsequent to January 1, 1988.

### ADDITIONAL SPECIFIC TERMS FOR -

**(12-MONTH STANDARD WARRANTY)** for Linear Displacement Transducers and RFID products.

**(18-MONTH STANDARD WARRANTY)** for Ultrasonic Sensors, Cables and all Non-Sensing Products sold by **TURCK INC.** including Multi-Safe, Multi-Modul, Multi-Cart and related Amplifier Products, Relays and Timers.

**(24-MONTH STANDARD WARRANTY)** for Encoders.

**5-YEAR WARRANTY FOR INDUCTIVE AND CAPACITIVE PROXIMITY SENSORS:** The periods covered for the above WARRANTIES and Products shall be 12 MONTHS, 18-MONTHS, 24-MONTHS and 5-YEARS, respectively, from the date of shipment from **TURCK**.

# TURCK

## Process Automation Products

### Warranty Terms and Conditions

#### ADDITIONAL SPECIFIC TERMS FOR - (continued)

LIFETIME WARRANTY (OPTIONAL - REGISTRATION REQUIRED) FOR INDUCTIVE, INDUCTIVE MAGNET OPERATED AND CAPACITIVE PROXIMITY SENSORS SOLD TO THE ORIGINAL PURCHASER FOR THE LIFETIME OF THE ORIGINAL APPLICATION.

#### The following terms apply to the LIFETIME WARRANTY in addition to the General Terms:

- 1) This WARRANTY shall be effective only when the LIFETIME WARRANTY REGISTRATION has been completed, signed by the End User and an authorized **TURCK** Representative or Distributor and has been received by **TURCK** no later than six (6) months after installation in the End User's Plant, or two (2) years from the date product was shipped from **TURCK**, whichever is sooner.
- 2) This warranty is available only to **TURCK's** authorized Representatives, Distributors and to the Original User. (The term "Original User" means that person, firm, or corporation which first uses the Product on a continuous basis in connection with the operation of a production line, piece of machinery, equipment, or similar device.) In the event the ownership of the product is transferred to a person, firm or corporation other than the Original User, this WARRANTY shall terminate.
- 3) This WARRANTY is applicable only to the Original Application. In the event the machinery, equipment, or production line to which the Product is connected, or on which it is installed, is substituted, changed, moved or replaced, the WARRANTY shall terminate.
- 4) This WARRANTY shall be valid only if the Product was purchased by the Original User from **TURCK**, or from an authorized **TURCK** Distributor, or was an integral part of a piece of machinery and equipment obtained by the Original user from an Original Equipment Manufacturer, which itself, was purchased directly from **TURCK** or from an authorized Distributor.

#### PURCHASER'S REMEDIES

This Remedy shall apply to all WARRANTIES. If a **TURCK** Distributor desires to make a WARRANTY Claim, the Distributor shall, if requested by **TURCK**, ship the Product to **TURCK's** factory in Minneapolis, Minnesota, postage or freight prepaid. If the User desires to make a WARRANTY Claim, they shall notify the authorized **TURCK** Distributor from whom it was purchased or, if such Distributor is unknown, shall notify **TURCK**. **TURCK** shall, at its option, take any of the following two courses of action for any products which **TURCK** determines are defective in materials or workmanship.

- 1) Repair or replace the Product and ship the Product to the Original Purchaser or to the authorized **TURCK** Distributor, postage or freight prepaid; or
- 2) Repay to the Original Purchaser that price paid by the Original Purchaser; provided that if the claim is made under the LIFETIME WARRANTY, and such Product is not then being manufactured by **TURCK**, then the amount to be repaid by **TURCK** to the Original Purchaser shall be reduced according to the following schedule:

<u>Number of Years Since Date of Purchase by Original Purchaser</u>	<u>Percent of Original Purchase Price To Be Paid by TURCK</u>
10	50%
15	25%
20	10%
More than 20	5%

**PURCHASER'S REMEDIES SHALL BE LIMITED EXCLUSIVELY TO THE RIGHT OF REPLACEMENT, REPAIR OR REPAYMENT AS PROVIDED AND DOES NOT INCLUDE ANY LABOR COST OR REPLACEMENT AT ORIGINAL PURCHASER'S SITE. TURCK SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF ANY WARRANTY, EXPRESSED OR IMPLIED, APPLICABLE TO THE PRODUCT, INCLUDING WITHOUT LIMITATION, ANY DAMAGES RESULTING FROM PROPERTY DAMAGE, PERSONAL INJURY OR BUSINESS INTERRUPTION.**

#### CONSIDER SAFETY AND PROTECTION PRECAUTIONS

**TURCK** takes great care to design and build reliable and dependable products, however, some products can fail eventually. You must take precautions to design your equipment to prevent property damage and personal injury in the unlikely event of failure. As a matter of policy, **TURCK** does NOT recommend the installation of electronic controls as the sole device FOR THE PROTECTION OF PERSONNEL in connection with power driven presses, brakes, shears and similar equipment and, therefore, the customer should build in redundancy or dual control using approved safety devices for these applications.

#### GOVERNING LAW

The sale and purchase of Products covered hereby and all terms and conditions hereof shall be governed by the law of the State of Minnesota.

# TURCK

**PROCESS  
AUTOMATION**


**THE ASSET  
MANAGEMENT  
PRODUCT  
COMPANY**



**TURCK** products enable active management of the physical layer in a modern Asset Management System. In other words, the administration of the infrastructure for the connection of fieldbus devices and control systems is made possible. **TURCK** was involved from the very start in the FDT/DTM concept. And today all significant physical layer components feature DTM's. This includes the classic point-to-point wiring (interface technology), the point-to-bus wiring (remote I/O) as well as bus-to-bus communication (fieldbus technology).



The DPC system (Diagnostic Power Conditioner) supports the commissioning of a fieldbus system and detects creeping changes within individual fieldbus segments over a long period of time. Provided with a suitable alarm function, interferences and even down times can be prevented. The DPC system monitors FF-H1 segments, but it also implements self-diagnostics and diagnostics of the FF-High-Speed-Ethernet. This data can be displayed via standard FF function blocks or graphically via a DTM.

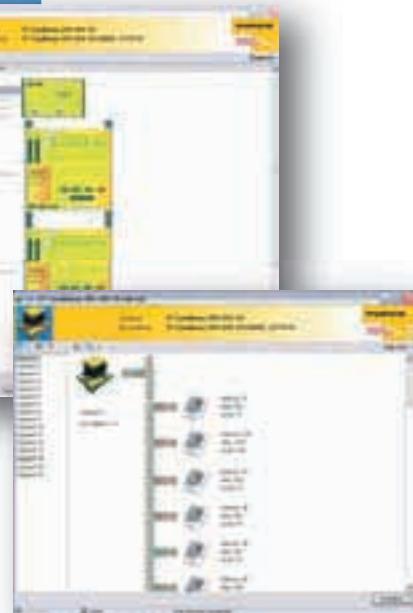

Call us with your next application:  
**1-800-553-0016**  
email: [process@turck.com](mailto:process@turck.com)  
[www.turck.com/process](http://www.turck.com/process)

.....Sense It!.....Connect It!.....Bus It!

## **TURCK USA**

TURCK Inc.  
3000 Campus Drive  
Minneapolis, MN 55441  
Phone: (763) 553-7300  
Fax: (763) 553-0708  
Application Support:  
1-800-544-7769

## **TURCK Mexico**

TURCK MEXICO S. DE R.L. DE C.V.  
Carr. Saltillo-Zacatecas km 4.5 s/n  
Parque Industrial "La Angostura"  
Saltillo, COAH. C.P. 25070  
MEXICO  
Phone: +52 (844) 411-6647/46  
Fax: +52 (844) 482-6926  
Toll free: 01-800-01-88725 (Mexico only)  
E-mail: ventasmexico@turck.com

## **TURCK Canada**

CHARTWELL  
ELECTRONICS, INC.  
140 Duffield Drive  
Markham, Ontario  
Canada, L6G 1B5  
Phone: (905) 513-7100  
Fax: (905) 513-7101  
Toll Free: 1-877-513-7769

## **TURCK**

### **World Headquarters**

Hans TURCK GmbH & Co. KG  
Witzlebenstrasse 7  
D-45472 Muelheim an der Ruhr  
Federal Republic of Germany  
Phone: (+49) 208-49 52-0  
Fax: (+49) 208-49 52 264

**.....Sense It!.....Connect It!.....Bus It!**