



MALE END VIEW




- 1 = BARE (SHIELD)
- 2 = RED (+ VOLTAGE)
- 3 = BLACK (- VOLTAGE)
- 4 = WHITE (CAN_H)
- 5 = BLUE (CAN_L)



SPECIFICATIONS

MOLDED BODY MATERIAL\COLOR	TPU\CLEAR
CONTACT CARRIER MATERIAL\COLOR	TPU\BLUE-GRAY
CONTACT MATERIAL\PLATING	BRASS/GOLD
COUPLING NUT MATERIAL\PLATING	BRASS/NICKEL
RATED VOLTAGE [V]	24 V (7.6 VDC MAX. ON PINS WITH RESISTOR)
INTERNAL TERMINATING RESISTOR	120Ω, 1/2 W
VOLTAGE MONITORING (BUS POWER)	GREEN: CORRECT POLARITY RED: REVERSED POLARITY
TEMPERATURE RATING	-40°C to +80°C (-40°F to +170°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

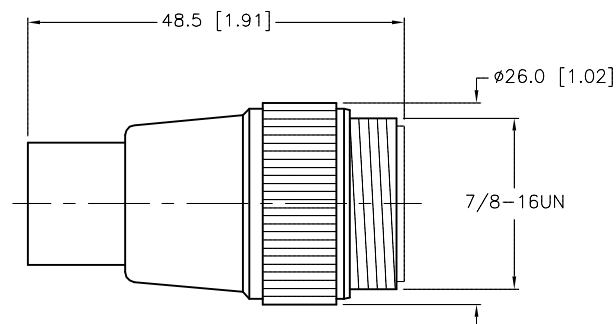

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	DF	DATE	07/23/02
		APVD	DF	SCALE	1=1.0
		UNIT OF MEASUREMENT		DESCRIPTION	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]		RSM 57-TR2/VM	
FINISH		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	U0102-101
				REV	C
C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971	
REV	DESCRIPTION	BY	DATE	ECO NO.	
				FILE: U0102-101	SHEET 1 OF 1