


FEMALE END VIEW




1 = BROWN
2 = BLUE
3 = BLACK
4 = WHITE



SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	TPU/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

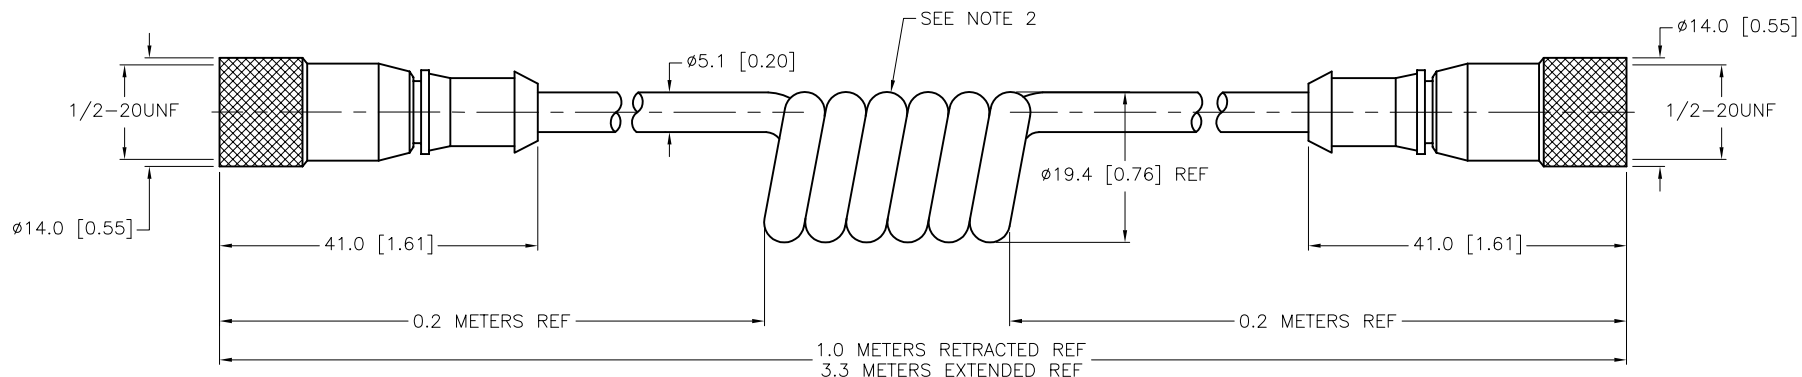

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
2. NUMBER OF COILS IS REFERENCE ONLY.
3. "/S727" DESIGNATES SPECIAL WIRE COLORS FOR AC FLOW SENSOR.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
		DRFT	RWC	DATE	02/19/07	DESCRIPTION KB 4T-3.3-KB 4T/S90-SP/S727		
		APVD		SCALE	1=1.0			
		MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U2473-36	
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION							
	DO NOT SCALE THIS DRAWING			FILE: U2473-36				
				SHEET 1 OF				

F	UPDATE COIL DIAMETER	KMY	07/23/12	38999
REV	DESCRIPTION	BY	DATE	ECO NO.