


FEMALE END VIEW




- 1 = WHITE/BLUE
2 = WHITE/BROWN
3 = BROWN
4 = ORANGE (-TX)
5 = WHITE/GREEN (+RX)
6 = WHITE/ORANGE (+TX)
7 = BLUE
8 = GREEN (-RX)






Ethernet

BOARD LAYOUT


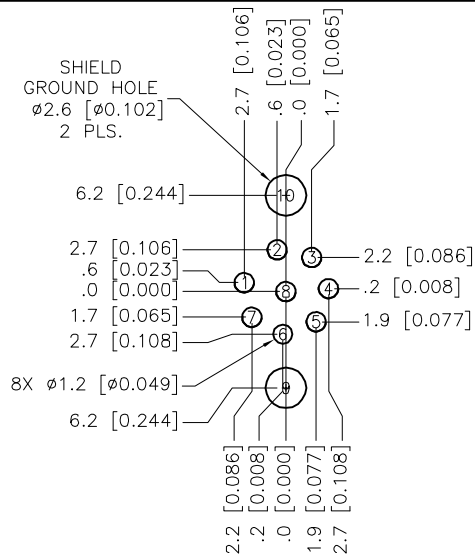


SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON/BLUE
CONTACT MATERIAL/PLATING	BRASS/GOLD
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
HOUSING MATERIAL/PLATING	BRASS/NICKEL
CONDUCTORS	PCB PINS
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

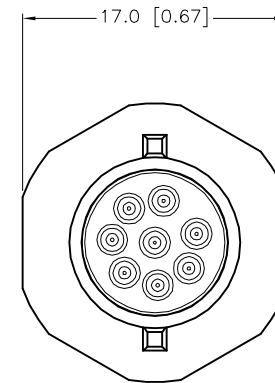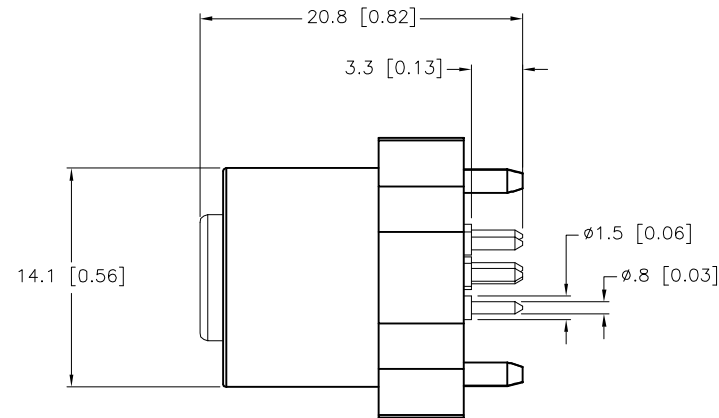

SOURCE DRAWING – FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 9-RDV-147 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS	DATE 01/03/02	DESCRIPTION FK 84-PCB				
APVD GC			SCALE 2=1.0						
FINISH			UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING	IDENTIFICATION NO. U8612		REV E			
			FILE: U8612			SHEET 1 OF 1			