






J1 CONNECTORS	TERMINAL BLOCK PLUGS	SPECIFICATIONS	
 1 = DRAIN 2 = + VOLTAGE 3 = - VOLTAGE 4 = CAN_H 5 = CAN_L 	 1 = - VOLTAGE 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = + VOLTAGE 	HOUSING MATERIAL/COLOR	NYLON 66 - 33% GLASS FILLED/BLACK
		RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		CONTACT CARRIERS/COLOR	TPU/BLUE
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		OPERATING VOLTAGE	40 V
		OPERATING CURRENT	8 A
		OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION
		PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
		OPERATING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)

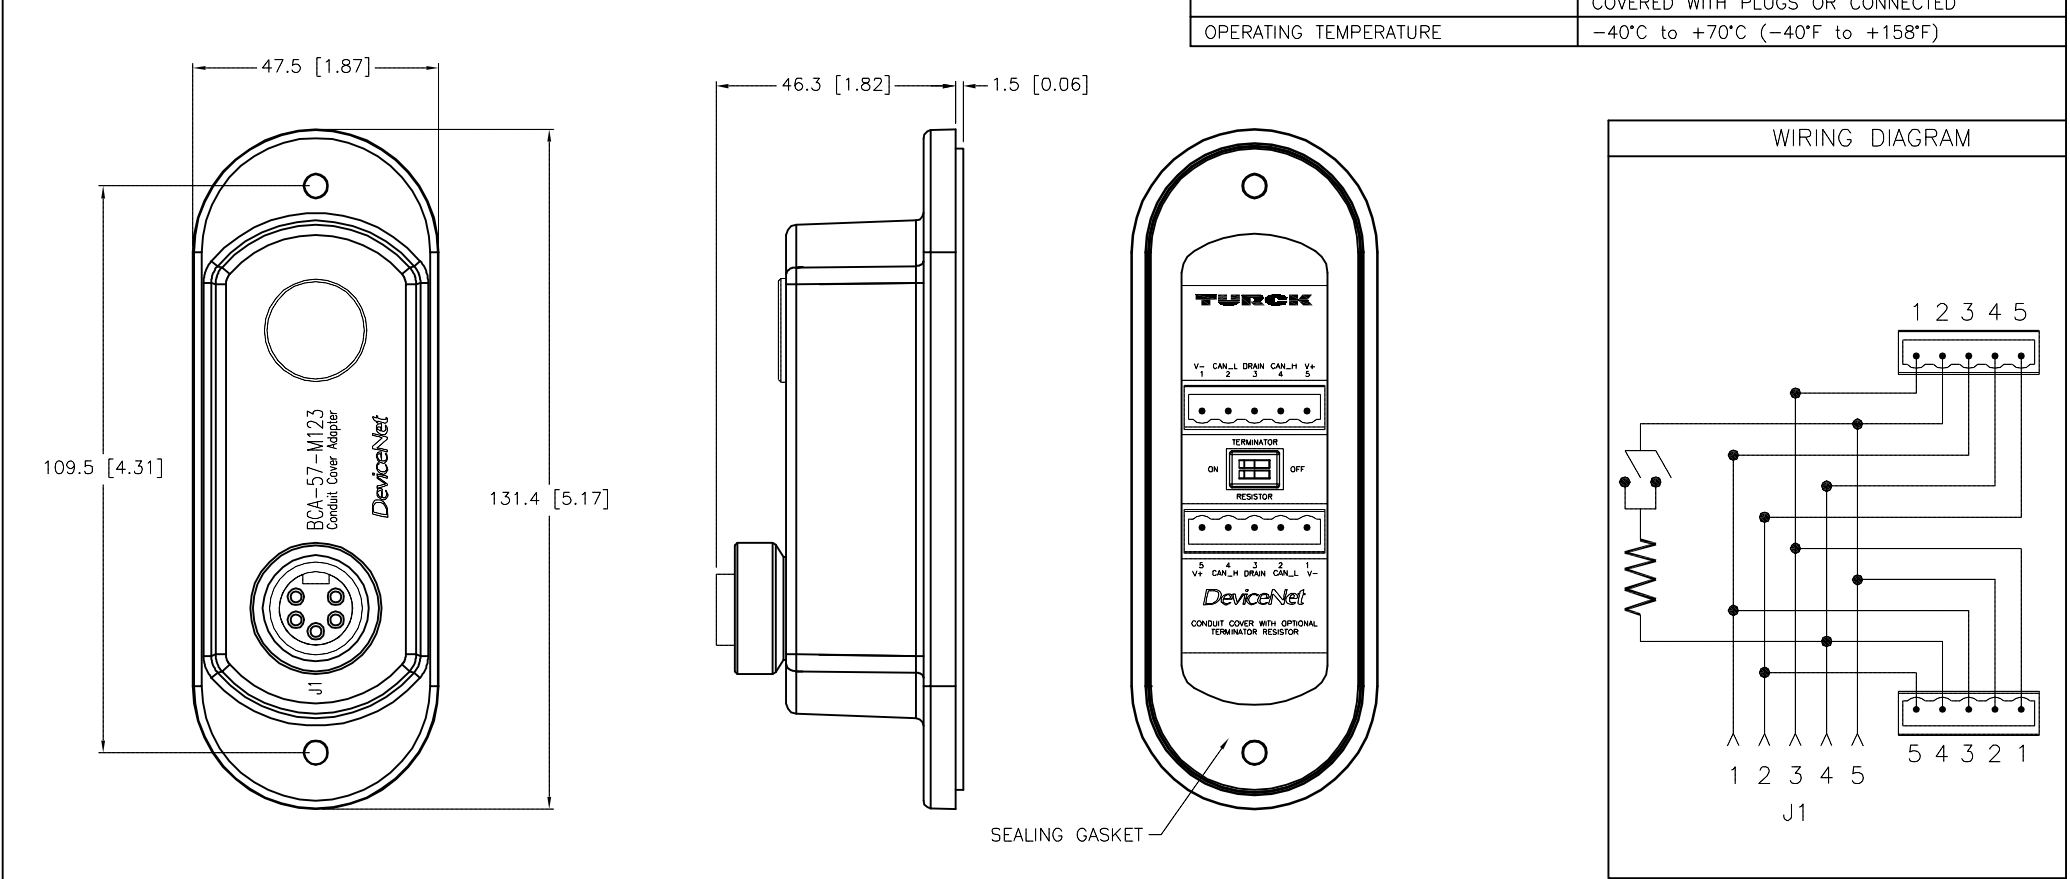


COVER SCREWS INCLUDED



FORM 8 CONDUIT BODIES:
10-24 SCREWS




MARK 9 CONDUIT BODIES:
8-32 SCREWS



F	ADD THICKER GASKET	RDS	09/12/13	42993				
REV	DESCRIPTION	BY	DATE	ECO NO.				

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC <i>High Technology Sensors and Automation Controls</i>			
	MATERIAL FINISH	DRFT RDS APVD DF	DATE 01/30/02 SCALE 1=1.5	DESCRIPTION BCA-57-M123			
CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U8632-1		REV F	
		DO NOT SCALE THIS DRAWING		FILE: U8632-1		SHEET 1 OF 1	