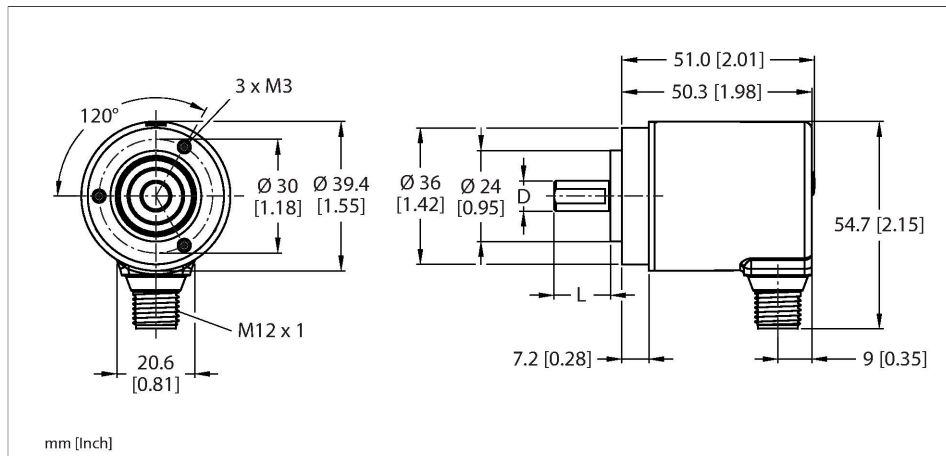


# RES-192S6C-IOL14B-H1141

## Absolute Rotary Encoder - Singleturn – IO-Link Industrial Line



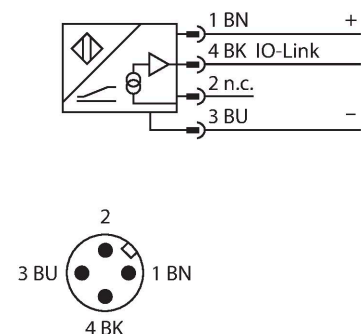
### Technical data

Type	RES-192S6C-IOL14B-H1141
ID	100020141
Measuring principle	Magnetic
<b>General data</b>	
Max. rotational speed	4000 rpm
Starting torque	< 0.01 Nm
Measuring range	0...360 °
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute singleturn
Resolution singleturn	14 Bit
<b>Electrical data</b>	
Operating voltage U <sub>B</sub>	18...30 VDC
No-load current	≤ 30 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	IO-Link
IO-Link specification	V 1.1
Programming	FDT/DTM
<b>Mechanical data</b>	
Flange type	Clamping flange
Flange diameter	Ø 36 mm
Shaft Type	Solid shaft

### Features

- Clamping flange, Ø 36 mm
- Solid shaft, Ø 6 mm × 12.5 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- IP67 rated on the shaft side
- -40...+85 °C
- Max. 4000 rev/min
- 10-30 VDC
- SSI (Binary Code)
- M12 connection, 8-pin
- 360° resolved in 14 bit (16384 positions)









### Wiring diagram



## Technical data

Shaft diameter D (mm)	6
Shaft Length L [mm]	12.5
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
<b>Environmental conditions</b>	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s <sup>2</sup> , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s <sup>2</sup> , 6 ms
Protection class	IP67
Protection class shaft	IP67

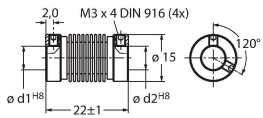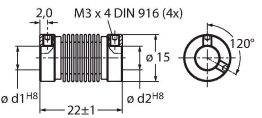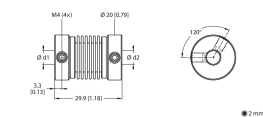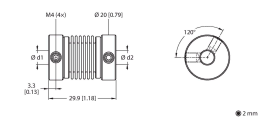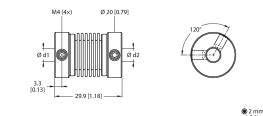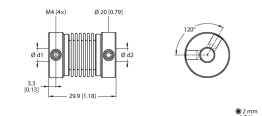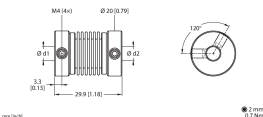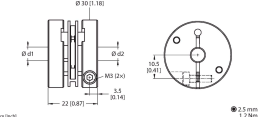
## Accessories

<p>RCS-15-08-06 1545361</p> <p>Bellows coupling, outer diameter: 15 mm, bore diameter: 8 mm/6 mm</p> 	<p>RCS-15-06-06 1545362</p> <p>Bellows coupling, outer diameter: 15 mm, bore diameter: 6 mm/6 mm</p> 
<p>RA-BC-20-06-06 100048777</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 6 mm</p> 	<p>RA-BC-20-06-08 100048778</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 8 mm</p> 
<p>RA-BC-20-06-10 100048779</p> <p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm</p> 	<p>RA-BC-E-20-06-06 100048785</p> <p>Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 6 mm</p> 
<p>RA-BC-E-20-06-10 100048786</p> <p>Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm</p> 	<p>RA-SDC-30-06-10 100048791</p> <p>Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 10 mm</p> 

RA-SDC-30-06-06

100048790

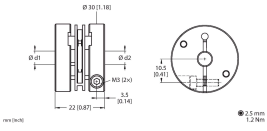
Spring disc coupling  $\varnothing$  30 mm; d1 = 6 mm, d2 = 6 mm



RA-HC-25-06-06

100048794

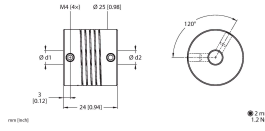Aluminum helix coupling  $\varnothing$  25 mm; d1 = 6 mm, d2 = 6 mm



RA-HC-25-06-10

100048795

Aluminum helix coupling  $\varnothing$  25 mm; d1 = 6 mm, d2 = 10 mm

