


RES-192S6S-IOL14B-H1141

Absolute Rotary Encoder - Singleturn – IO-Link


Industrial Line

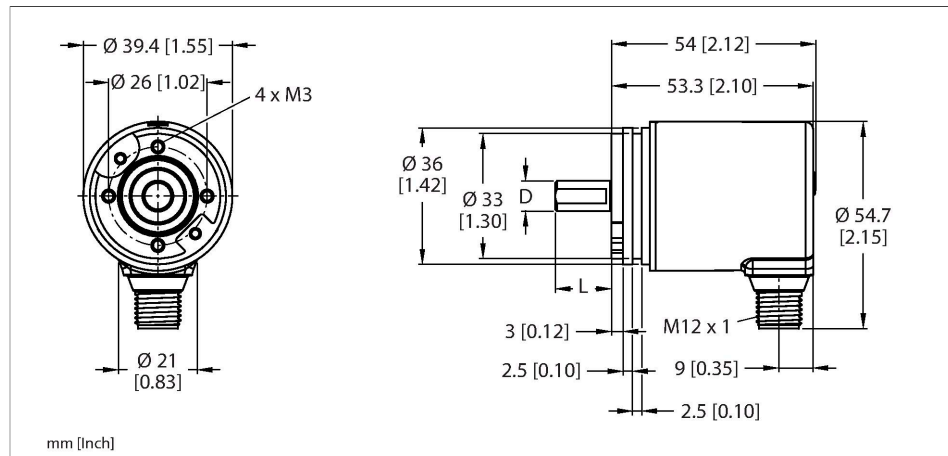

Features

- Synchro flange, Ø 36 mm
- Solid shaft, Ø 6 mm × 12.5 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- IP67 rated on the shaft side
- -40...+85 °C
- Max. 4000 rev/min
- 10-30 VDC
- SSI (Binary Code)
- M12 connection, 8-pin
- 360° resolved in 14 bit (16384 positions)

Wiring diagram

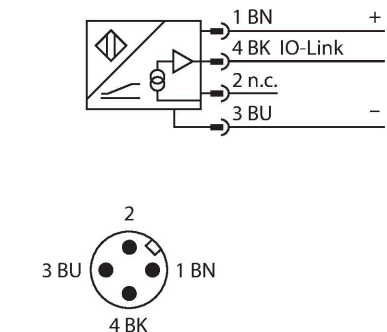

Technical data


Type	RES-192S6S-IOL14B-H1141
ID	100020145
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Starting torque	< 0.01 Nm
Measuring range	0...360 °
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute singleturn
Resolution singleturn	14 Bit
Electrical data	
Operating voltage U _B	18...30 VDC
No-load current	≤ 30 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	IO-Link
IO-Link specification	V 1.1
Programming	FDT/DTM
Mechanical data	
Flange type	Synchro flange
Flange diameter	Ø 36 mm
Shaft Type	Solid shaft

Technical data


Shaft diameter D (mm)	6
Shaft Length L [mm]	12.5
	Shaft with surface
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories


RCS-15-06-06 1545362
Bellows coupling, outer diameter:
15 mm, bore diameter: 6 mm/6 mm




RCS-15-08-06 1545361
Bellows coupling, outer diameter:
15 mm, bore diameter: 8 mm/6 mm




RA-BC-20-06-06 100048777
Bellows coupling with aluminum hub
Ø 20 mm; d1 = 6 mm, d2 = 6 mm




RA-BC-20-06-08 100048778
Bellows coupling with aluminum hub
Ø 20 mm; d1 = 6 mm, d2 = 8 mm




RA-BC-20-06-10 100048779
Bellows coupling with aluminum hub
Ø 20 mm; d1 = 6 mm, d2 = 10 mm




RA-BC-E-20-06-06 100048785
Stainless steel bellows coupling Ø
20 mm; d1 = 6 mm, d2 = 6 mm



RA-BC-E-20-06-10 100048786
Stainless steel bellows coupling Ø
20 mm; d1 = 6 mm, d2 = 10 mm




RA-SDC-30-06-10 100048791
Spring disc coupling Ø 30 mm; d1 =
6 mm, d2 = 10 mm



RA-SDC-30-06-06

100048790


Spring disc coupling \varnothing 30 mm; d1 = 6 mm, d2 = 6 mm



RA-HC-25-06-06

100048794

Aluminum helix coupling \varnothing 25 mm; d1 = 6 mm, d2 = 6 mm



RA-HC-25-06-10

100048795

Aluminum helix coupling \varnothing 25 mm; d1 = 6 mm, d2 = 10 mm

