


REM-101S8S-9F32B-H1151

Absolute Rotary Encoder - Multiturn

Industrial Line

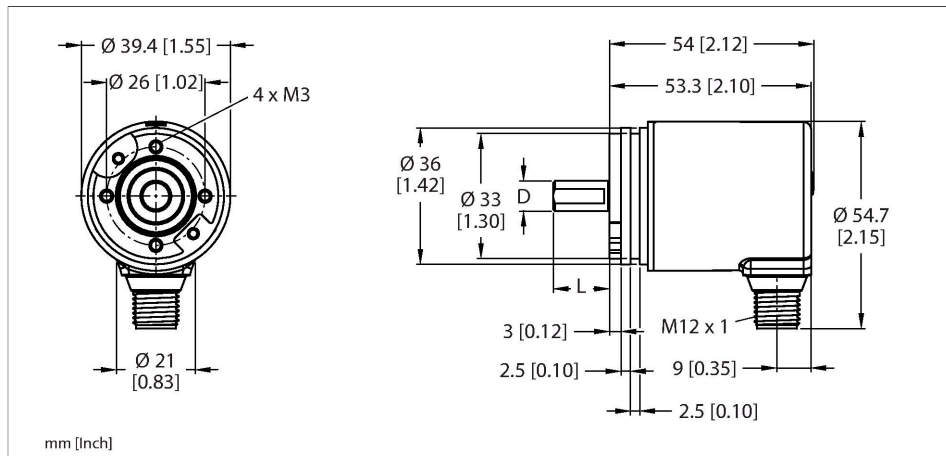



Features

- Synchro flange, Ø 36 mm
- Solid shaft, Ø 8 mm × 15 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+80 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- 10-30 VDC
- SAE J1939
- M12 connection, 5-pin
- Singleturn resolution 14 bit scalable, default 14 bit
- Multiturn resolution scalable up to 29 bit over total resolution, default 18 bit
- Total resolution 32 bit scalable, default: 32 bit

Technical data

Type	REM-101S8S-9F32B-H1151
ID	100023544
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Starting torque	< 0.01 Nm
Repetition accuracy	± 0.2 ° At 25 °C
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage U_b	10...30 VDC
No-load current	≤ 80 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Communication protocol	SAE J1939
Interface	SAE J1939
Mechanical data	
Flange type	Synchro flange
Flange diameter	Ø 36 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	8
Shaft Length L [mm]	15
	Shaft with surface

Wiring diagram



Technical data

Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N
Environmental conditions	
Ambient temperature	-40...+80 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

Accessories

<p>RA-BC-20-06-08</p> <p>2 mm 1.5 Nm</p>	100048778	<p>RA-BC-20-08-08</p> <p>2 mm 1.5 Nm</p>	100048780
<p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 8 mm</p>		<p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 8 mm</p>	
<p>RA-BC-20-08-10</p> <p>2 mm 1.5 Nm</p>	100048781	<p>RA-BC-20-08-12</p> <p>2 mm 1.5 Nm</p>	100049106
<p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 10 mm</p>		<p>Bellows coupling with aluminum hub Ø 20 mm; d1 = 8 mm, d2 = 12 mm</p>	

Wiring accessories

Dimension drawing	Type	ID	
	RKC5701-5M	6931034	<p>Bus cable for CAN (DeviceNet, -CANopen), M12 female connector, straight, cable length: 5 m, jacket material: PUR, anthracite; cULus approval</p>