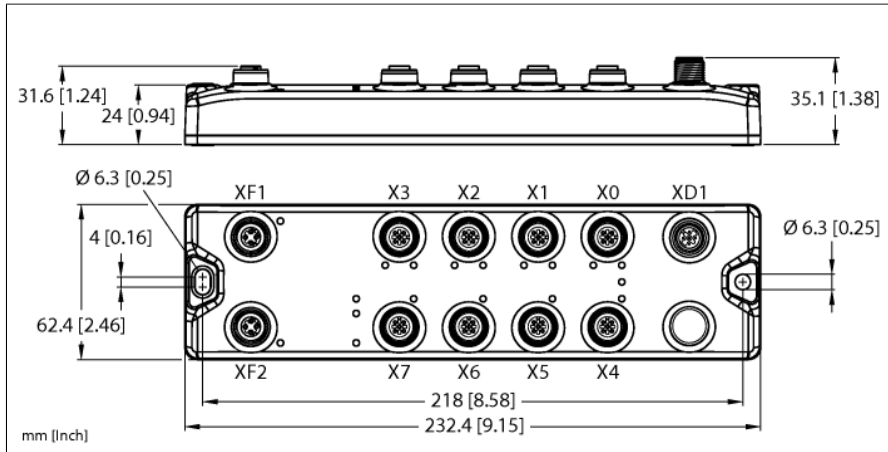


Compact multiprotocol I/O module for Ethernet

8 IO-Link Master Channels

12 Universal Digital PNP Channels, Channel Diagnostics

TBEN-ELAE-8IOLA



ID	100053318
Supply	
Supply voltage	24 VDC
Admissible range	18...30 VDC Pass-through current XD1–XD2 max. 16 A per voltage group Total current max. 9 A per voltage group V1
Voltage supply connection	M12, L-coded
Operating current	V1: max. 200 mA, min. 120 mA
Sensor/actuator supply	Supply from V1 Short-circuit proof, max. 1 A per port
Electrical isolation	galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC
System data	
Fieldbus transmission rate	10/100 Mbps
Fieldbus connection technology	2 x M12, 4-pin, D-coded
Protocol detection	automatic
Service interface	Ethernet via XF1 or XF2
Modbus TCP	
Addressing	Static IP, DHCP
Supported function codes	FC3, FC4, FC6, FC16, FC23
Number of TCP connections	8
Input register start address	0 (0x0000 hex)
Output register start address	2048 (0x0800 hex)

- Efficiency Line
- PROFINET device, EtherNet/IP device, Modbus TCP server, CC-Link IE field basic
- Integrated Ethernet switch
- Supports 10 Mbps/100 Mbps
- 2 x M12, 4-pin, D-coded, Ethernet fieldbus connection
- PROFINET S2 system redundancy
- Shock and vibration tested
- IO connector - molded into housing
- Protection class IP67
- M12, 4-pin, A-coded male connector for power supply
- Galvanically isolated voltage groups support passive safety
- 5-pin M12 ports for IO-Link master
- IO-Link master port class A
- IO-Link protocol 1.1

Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Quick Connect (QC)	< 150 ms
min. RPI	2 ms
Device Level Ring (DLR)	supported
Class 3 connections (TCP)	3
Class 1 connections (CIP)	10
Input Assembly Instance	101
Output Assembly Instance	102
Configuration Assembly Instance	106

PROFINET	
Version	2.35
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
System redundancy	S2
Netload class	3

CC-Link	
Interface	CC-Link IE Field Basic
Type	Intelligent device station
Message Transmission	Yes
Profile specification	CSP+
Max. occupied stations	4
IP change mechanism	Yes
Acyclic SLMP communication	Yes








Digital inputs	
Number of channels	4 DXP + 8 SIO
Connectivity inputs	M12, 5-pin
Input type	PNP
Type of input diagnostics	Channel diagnostics
Switching threshold	SIO: EN 61131-2 type 1, PNP DXP: EN 61131-2 type 3, PNP
Low-level signal voltage	< 5 V
High level signal voltage	> 11 V
Low level signal current	< 1.5 mA
High level signal current	> 2 mA
Input delay	0.05 ms
Electrical isolation	Galvanic isolation from the fieldbus Voltages up to 500 DAC

Digital outputs	
Number of channels	4 DXP + 8 SIO
Connectivity outputs	M12, 5-pin
Output type	PNP
Type of output diagnostics	Channel diagnostics
Output voltage	24 VDC from potential group
Output current per channel	DXP: 1 A, short-circuit proof SIO: 0.25 A, short-circuit proof

IO-Link	
Number of channels	8
IO-Link	Pin 4 in IOL mode
IO-Link specification	V 1.1
IO-Link port type	Class A
Frame type	Supports all specified frame types
Supported devices	Max. 32 bytes in/32 bytes out per port
Transmission rate	4.8 kbps (COM 1)/38.4 kbps (COM 2)/230 kbps (COM 3)

Standard/Directive conformity	
Vibration test	Acc. to EN 60068-2-6 Acceleration up to 15 g
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	Acc. to EN 61131-2
Approvals and certificates	CE UKCA cULus
UL Certificate	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.

General Information	
Dimensions (W x L x H)	62.4 x 232.4 x 35.1 mm
Ambient temperature	-25...+60 °C
Storage temperature	-40...+85 °C
Altitude	Max. 5000 m
Protection class	IP67
	Not assessed by UL
MTTF	200 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	Polycarbonate
Housing color	Black
Connector material	Nickel-plated brass
Material screw	303 stainless steel
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 6.3 mm

		Ethernet, M12 × 1  XF1  XF2
	Accessories Accessories: Connection cable , 2-channel (example): RK 4.4T-2-RS 4.4T Ident no. U2445 Splitter, 1-channel (example): YB2-FSM 4.5-2FKM 4.5 Ident no. U0875-78	I/O slot, M12 × 1 (X0...X3)  X0...X3
	Accessories Accessories: Connection cable , 2-channel (example): RK 4.4T-2-RS 4.4T Ident no. U2445 Splitter, 1-channel (example): YB2-FSM 4.5-2FKM 4.5 Ident no. U0875-78	I/O slot, M12 × 1 (X4...X7)  X4...X7
		M12 power supply, A-coded  XD1

Module Status LED

LED	Color	Status	Description
L/A	Green	On	Ethernet link (100 Mbps)
		Flashing	Ethernet communication (100 Mbps)
	Yellow	On	Ethernet link (10 Mbps)
		Flashing	Ethernet communication (10 Mbps)
		Off	No Ethernet link
BUS	Green	On	Active connection to a client
		Flashing	Steady flashing: ready for operation Sequence of 3 flashes in 2 seconds: FLC/ARGE active
	Red	On	IP address conflict or Restore mode or Modbus timeout
		Flashing	Blink/Wink command active
	Green/red	Alternating	Autonegotiation and/or waiting for DHCP/Boot-P addressing
		Off	Power off
ERR	Green	On	No diagnostics available
	Red	On	Diagnostics available
			Undervoltage diagnosis response is parameter-dependent
PWR	Green	On	V _I power supply OK
		Off	V _I power supply off or V _I undervoltage


LED Status I/O

LED	Color	Status	Description
LED 0, 2, 4, 6, 8, 10, 12, 14 IO-Link port 1–8 (X0 – X7) IO-Link mode	Green	Flashing	IO-Link communication, process data valid
	Red	Flashing	IO-Link communication, process data invalid
		On	IO-Link power supply OK, no IO-Link communication
		Off	Port inactive
LED 0, 2, 4, 6, 8, 10, 12, 14 IO-Link port 1–8 (X0 – X7) SIO mode	Green	On	Digital input signal is present
	Red	On	Output active in overload/short circuit
		Off	Port inactive
LED 1, 3, 5, 7 DXP channel (X0 – X3)	Green	On	Digital input or output active
	Red	On	Output active with overload/short circuit
		Flashing	V _{AUX} supply overload
		Off	Input or output inactive

Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

Function accessories

Type code	Ident-No.		Dimension drawing
TBIL-M1-16DXP	6814102	16-channel I/O-hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)	
TBIL-EMN-16DXP	100051094	16-channel I/O hub for the connection of 16 digital PNP signals to an IO-Link master (input/output freely selectable per channel)	