


RI-02C6S3-2D1000-C

Incremental Encoder

Industrial Line

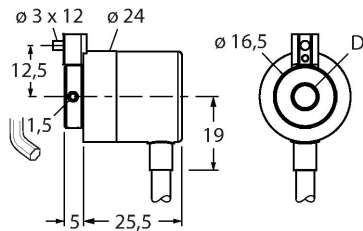

Features

- Flange with torque stop, Ø 24 mm
- Blind hole hollow shaft, Ø 6 mm
- Maximum plug-in depth, 14 mm
- Optical measuring principle
- Shaft material: brass
- Protection class IP50 on shaft side
- -20...+85 °C
- Max. 12000 rpm
- 5...24 VDC
- Cable connection, 8-pin
- Push-pull 7272, with inversion
- Pulse frequency max. 160 kHz
- 1000 pulses per revolution

Technical data

Type	RI-02C6S3-2D1000-C
ID	1545919
Measuring principle	Optical
General data	
Max. rotational speed	12,000 rpm
Moment of inertia of the rotor	$0.1 \times 10^{-6} \text{ kgm}^2$
Starting torque	< 0.01 Nm
Output type	Incremental
Resolution incremental	1000 ppr
Electrical data	
Operating voltage U_s	5...24 VDC
No-load current	$\leq 50 \text{ mA}$
Output current	$\leq 50 \text{ mA}$
Short-circuit protection	yes
Pulse frequency max.	160 kHz
Signal level high	min. $U_s - 2.5 \text{ V}$
Signal level low	max. 0.5 V
Output function	8-wire, Push-Pull/HTL, with inverted signals
Mechanical data	
Flange type	Flange with torque stop
Flange diameter	Ø 24 mm
Shaft Type	Blind hole shaft

Technical data

Shaft diameter D (mm)	6
	Blind hole hollow shaft, max. plug-in depth 14 mm
Shaft material	Brass
Housing material	Aluminium
Electrical connection	Cable
	radial
cable length	2 m
Axial shaft load	20 N
Radial shaft load	10 N
Environmental conditions	
Ambient temperature	-20...+85 °C
Vibration resistance (EN 60068-2-6)	100 m/s ² , 55...2000 Hz
Shock resistance (EN 60068-2-27)	1000 m/s ² , 6 ms
Protection class housing	IP64
Protection class shaft	IP50
Included in delivery	Pin for torque support