


EFSBT-A8.600.4-0.2

Actuator and Sensor Receptacle – Front Mount




Features

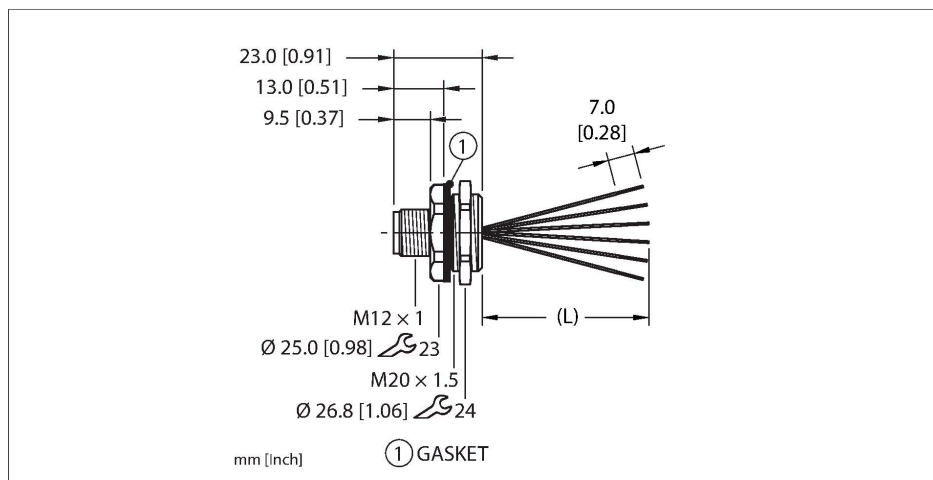


- M12, Female, Receptacle, Front-mount, 6-pin
- Mounting thread: M20 × 1.5

Contact assignment


Connector A



Circuit Diagram



Mounting hole - Through

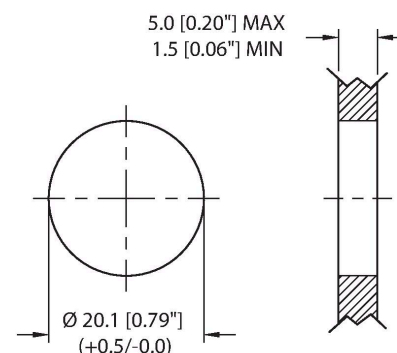


Technische Daten

Type	EFSBT-A8.600.4-0.2
ID	200004618
Replaces	FS 8.6-x/M20
Connector A	Male, M12 × 1, A-code
Design specification	Acc. to IEC 61076-2-101
Number of contacts	8
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Housing material/finish	Brass, CuZn, Nickel-plated
Tightening torque (range)	0.4 ... 1.8 Nm (note max. torque of mating connector!)
Mounting orientation	Front mount
Panel seal	Gasket, NBR
Mounting thread	M20 × 1.5
Locknut	Brass, CuZn, Nickel-plated
Receptacle mounting torque	3.5...9.6 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class (When coupled)	IP67, IP68, IP69, IP69K NEMA: 1, 3, 4, 6P, 12
Conductor data	
Total number of conductors	6
Length (L)	0.2 m, (+50mm or 4% of length/-0.0, Whichever is greater)


Technische Daten

Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	24 AWG [Similar to 0.25 mm²]
Conductor colors	WH, GN, YE, GY, BN, BU
Electrical properties at +20 °C	
Rated voltage	60 V _{AC} /75 V _{DC}
Current	2 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40...+105 °C
Approvals	UL 2238 CSA C22.2 No. 182.3 CE UKCA RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	

Mounting hole - Threaded

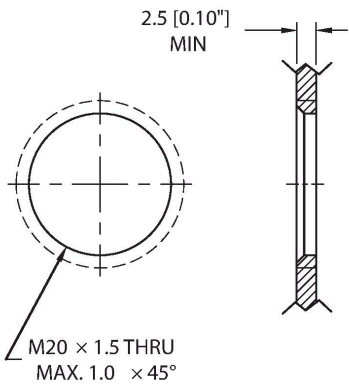

Front panel mounting

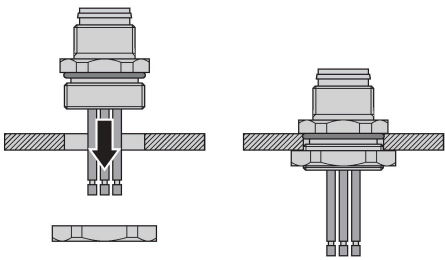

Montagezubehör

DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1) **100008955**



1 decal sticker containing 9 different color sets of 11 decals to color code a sensor, junction block port, cable end, or receptacle. 5ct 4x9mm rectangles, 4ct 8x19mm rectangles, 1ct 27mm ID ring, 1ct 20mm ID ring.

Montagezubehör

LOCKNUT-M20-BRASS-(10/BAG) **A3118**

M12-GASKET-M20,1/2NPT-(10/BAG) **100024930**