


FOUNDATION fieldbus


IP67 junction box, 6-channel

JBBS-49-T615/3G

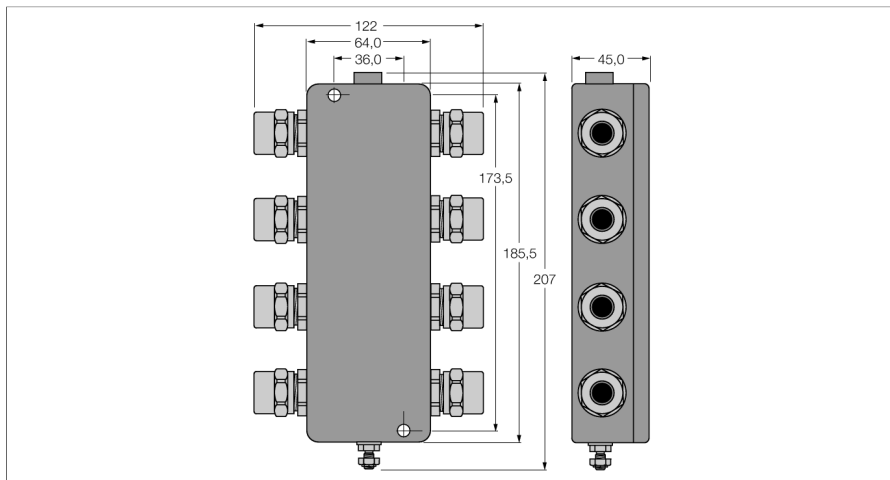

- Junction box for wall mounting with PVC cable glands M20 x 1.5
- Integrated terminating resistor (activatable)
- Cable shielding: Capacitive or direct connection to housing potential selectable via switch
- Isolated support terminal for optional protective conductor incorporated in cable
- Powder-coated die-cast aluminium housing
- Pressure compensation element protects against condensation
- Connection of the housing potential via M5 x 1 bolt
- Entity and FISCO compliant according to IEC 60079-11

ID	6611446
Textmodule for individual datasheets!!! Don't translate!!!	The 6-channel junction box JBBS-49-T615/3G is designed for FOUNDATION™ fieldbus systems.
Textmodule for individual datasheets!!! Don't translate!!!	The housing is made of powder-coated die-cast aluminium and is IP67 rated.
Textmodule for individual datasheets!!! Don't translate!!!	The junction box is equipped with an activatable terminating resistor for the bus. The switch is integrated in the housing on the board.
Textmodule for individual datasheets!!! Don't translate!!!	Condensation in the housing is prevented by a breather.
Textmodule for individual datasheets!!! Don't translate!!!	Shielding and housing can be connected directly via a second switch which is also located on the board.
Textmodule for individual datasheets !!! Don't translate!!!	Note: It must be ensured that there is sufficient equipotential bonding in the system. The device is connected to the equipotential bonding via the housing's M5 x 1 grounding bolt.

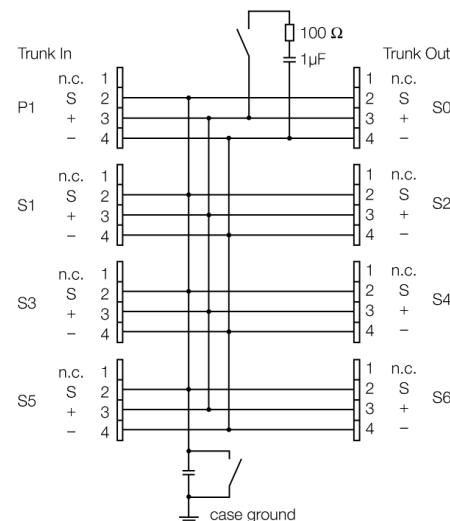

Fieldbus standard	IEC 61158-2
Operating voltage	9...32 VDC
Ex approval acc. to conformity certificate	TURCK Ex-13016H X
Device designation	Ex II 3 G Ex nA II T4 Gc
Device designation	Ex II 3 G Ex ic IIC T4 Gc
	FISCO / Entity field device
Electrical connection	Cable gland
Segment IN	1 x M20 x 1.5 (Ø 7...13 mm)
Segment OUT	1 x M20 x 1.5 (Ø 7...13 mm)
Spur line	6 x M20 x 1.5 (Ø 7...13 mm)
Terminal cross-section	0.2...2.5 mm² (AWG: 24...14)
Earthing bolt	M5 x 1

Protection class	IP67
MTTF	705 acc. to SN 29500 (Ed. 99) 40 °C
Ambient temperature	-25...+70 °C
Housing material	Powder-coated die-cast aluminium, Black/yellow
Dimensions	64 x 150 x 45 mm
Connection mode	Wall mounting