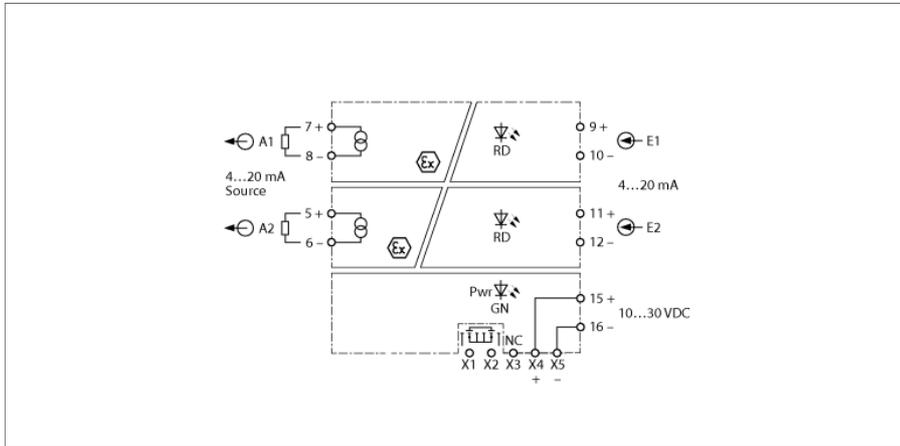


Analog Signal Isolator

2-channel

IMX12-AO01-2I-2I-HPR/24VDC/CC



The 2-channel IMX12-AO01-2I-2I-HPR/24VDC/CC signal isolator is designed to transmit the normalized current signal galvanically isolated 1:1 from the non-Ex area to the Ex area. In addition to the analog signal, digital HART® communication signals can also be transmitted bidirectionally. Typical applications are for example the control of I/P converters or indicators in the Ex area.

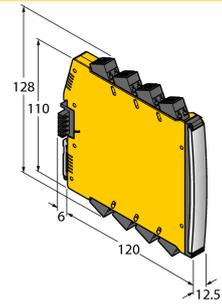
The green LED indicates operational readiness. The device can detect a wire break or short circuit on the field side, the input then switches to a high impedance state and the common alarm output switches to conductive. An error in the input circuit causes the red LED to flash according to NE44.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of NE21. It is equipped with removable spring type terminals. The device can be powered from a power bridge that also transmits a collective fault signal.

The device is equipped with removable spring-type terminals.

- Output circuits monitored for wire-break and short-circuit
- Complete galvanic isolation
- HART transparent
- Removable spring type terminals
- Power bridge (connector incl. in delivery)
- ATEX, IECEx, cFM, cUL, NEPSI, IN-METRO, Kosha, TR CU EAC CMI, TIIS, Russia Pattern Approval
- Installation in zone 2
- SIL 2






Dimensions



ID	7580406
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	≤ 2.2 W
Power dissipation, typical	≤ 1.31 W
Input current	$2 \times 4...20$ mA
Reference temperature	23 °C
Output circuits	
Output current	$2 \times 4...20$ mA
Load resistance current output	≤ 0.8 k Ω
Minimum load	≥ 50 Ω
Short-circuit	At a load resistance of < 30 Ω , the input current is < 500 μ A
Wire break	at a load resistance of > 30 k Ω the input current is < 500 μ A
Power-Bridge common alarm output	MOSFET, $U_{max} = 30$ V, $I_{max} = 100$ mA
Response characteristic	
Rise time (10...90 %)	≤ 10 ms
Fall time (90...10 %)	≤ 10 ms
Measuring accuracy (including linearity, hysteresis and repeatability)	≤ 0.05 % of full scale
Reference temperature	23 °C
Temperature drift	≤ 0.002 % of full scale/K
Galvanic isolation	
Test voltage	2.5 kV RMS
Input 1 to output 1	375 V peak value acc. to EN 60079-11
Input 2 to output 2	375 V peak value acc. to EN 60079-11
Input 1 to supply	150 V RMS according to EN 50178 and EN 61010-1
Input 2 to supply	150 V RMS according to EN 50178 and EN 61010-1
Output 1 to supply	375 V peak value acc. to EN 60079-11
Output 2 to supply	375 V peak value acc. to EN 60079-11
Output 1 to output 2	50 V RMS according to EN 50178 and EN 61010-1
Input 1 to input 2	150 V RMS acc. to EN 50178 and EN 61010-1
Important note	The values provided below indicate the relevant markings associated with the product's Ex certificates.
Ex approval acc. to conformity certificate	TÜV 15 ATEX 153600 X
Application area	II (1) G, II (1) D
Ignition protection category	[Ex ia Ga] IIC; [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex nA [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Displays/Operating elements	
Operational readiness	Green
Error indication	red

Mechanical data			
Protection class	IP20		
Flammability class acc. to UL 94	V-0		
Ambient temperature	-25...+70 °C		
Storage temperature	-40...+80 °C		
Dimensions	120 x 12.5 x 128 mm		
Weight	172 g		
Mounting instructions	DIN rail (NS35)		
Housing material	Plastic, Polycarbonate/ABS		
Electrical connection	Removable spring-type terminals, 2-pin		
Connection variant	Power bridge with collective fault signal		
Terminal cross-section	0.2...2.5 mm ² (AWG: 24...14)		
Environmental conditions	Operating height	Up to 2000 m above sea level	
	Pollution degree	II	
	Surge/Overvoltage category	II (EN 61010-1)	
	Standards used		
	Voltage resistance and insulation		EN 50178
			EN 61010-1
			EN 50155
			GL VI-7-2
	Shock		EN 61373 class B
			EN 50155
			GL VI-7-2
			EN 60068-2-6
			EN 60068-2-27
	Temperature		EN 60068-2-1 Ad
			EN 50155
			GL VI-7-2
			EN 60068-2-2 Bd
			EN 60068-2-1
	Air humidity		EN 60068-2-38
	EMC		EN 50155
			GL VI-7-2
			NE21
			EN 61326-1
			EN 61326-3-1
			EN 61000-4-2
			EN 61000-4-3
			EN 61000-4-4
			EN 61000-4-5
		EN 61000-4-6	
		EN 61000-4-11	
		EN 61000-4-29	
		EN 55011	
		EN 55016	
		EN 50121-3-2	
	EN 61000-6-2		

Accessories

Type code	Ident-No.		Dimension drawing
IMC 1.5/ 5-ST-3.81 BK	7580954	Power Bridge Connection Terminal	
MCVR 1.5/ 5-ST-3.81 BK	7580955	Power Bridge Connection Terminal	
MC 1.5/ 5-ST-3.81 BK	7580956	Power Bridge Connection Terminal	
E/ME TBUS NS35 BK	7580957	Power Bridge Connection Terminal	
IMX12-PS02-UI-UIR-PR/24VDC/CC	7580611	Power supply module power bridge; Collective fault signal via relay; Single and redundant power supply via terminals; Removable screw terminals	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	